UNIVERSUM VR 2131

MODEL

SERVICE MANUAL

AKAI SERVICE MANUAL

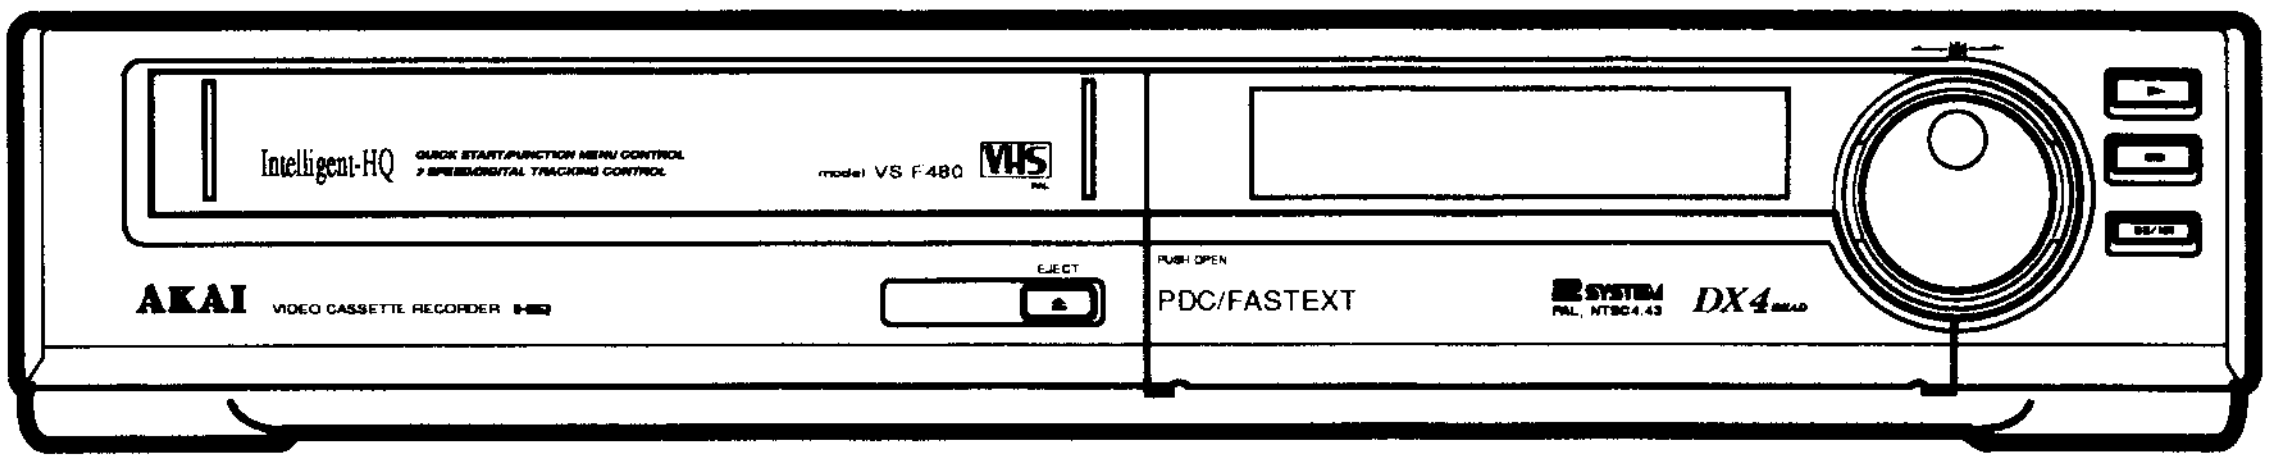
Intelligent-HQ
model VS F480
VHS
AKAI
VIDEO CASSETTE RECORDER
EJECT
PUSH OPEN
PDC/FASTEXT
DX4

MODEL VS-F480EK-V

HQ HIGH QUALITY

VHS PAL

VIDEO CASSETTE RECORDER

MODEL VS-F440 EA/EDG/EDI/EK/EM EO/EOG-V/EOH
MODEL VS-F441 EA
MODEL VS-F450 EOH
MODEL VS-F455 EOH
MODEL VS-F480 EK-V/EOG-V
MODEL VS-F490 EM/EO/EOH/ES
MODEL VS-F497 EOH

★SAFETY INSTRUCTIONS

PRECAUTIONS DURING SERVICING

1. Parts identified by the ⚠ (*) symbol are critical for safety. Replace them only with the parts number specified.
2. In addition to safety, other parts and assemblies are specified for conformance with such regulations as those applying to spurious radiation.
   These must also be replaced only with the specified replacements.
   Examples: RF converters, tuner units, antenna selector switches, RF cables, noise blocking capacitors, noise blocking filters, etc.
3. Use specified internal wiring. Note especially:
   1) Wires covered with PVC tubing
   2) Double insulated wires
   3) High voltage leads
4. Use specified insulating materials for hazardous live parts. Note especially:
   1) Insulation Tape
   2) PVC tubing
   3) Spacers (insulating barriers)
   4) Insulation sheets for transistors
   5) Plastic screws for fixing micro switches
5. When replacing AC primary side components (transformers, power cords, noise blocking capacitors, etc.), wrap the ends of the wires securely around the terminals before soldering.

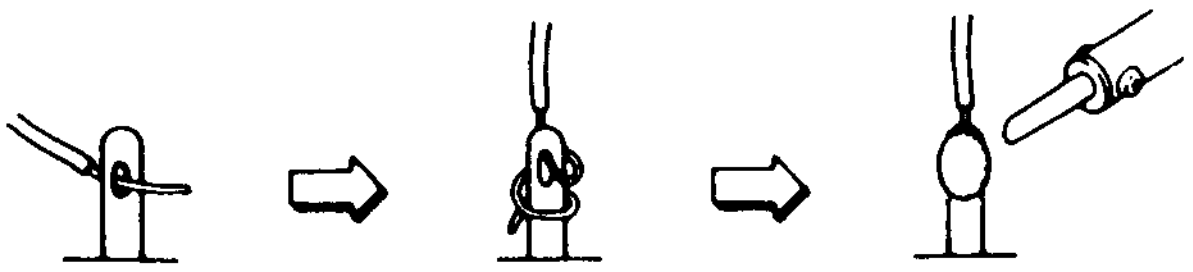

6. Make sure that wires do not contact heat producing parts (heat sinks, oxide metal film resistors, fusible resistors, etc.).
7. Check that replaced wires do not contact sharp edged or pointed parts.
8. Also check areas surrounding repaired locations.
9. Make sure that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

SAFETY CHECK AFTER SERVICING

After servicing, make measurements of leakage-current or resistance in order to determine that exposed parts are acceptably insulated from the supply circuit.
The leakage-current measurement should be done between accessible metal parts (such as chassis, ground terminal, microphone jacks, signal input/output connectors, etc.) and the earth ground through a resister of 1500 ohms paralleled with a 0.15 μF capacitor, under the unit's normal working conditions.
The leakage-current should be less than 0.5 mA rms AC.
The resistance measurement should be done between accessible exposed metal parts and power cord plug prongs with the power switch (if included) "ON". The resistance should be more than 2.2 M ohms.

MAKE YOUR CONTRIBUTION TO PROTECT THE ENVIRONMENT

Used batteries with the ISO symbol for recycling as well as small accumulators (rechargeable batteries), mini-batteries (cells) and starter batteries should not be thrown into the garbage can.
Please leave them at an appropriate depot. All other household batteries can be thrown out with the household waste.

TO PROTECT THE POWER SUPPLY CIRCUIT

Do not turn on the power while the flat cable in the power BLK is disconnected, as this will damage the power circuit.
Make sure that the flat cable is connected before turning on the power.

★SPECIFICATIONS

Format	
EA/EDI/EK/EK-V/ES	VHS standard
EDG/EM/EO/EOH/EOG-V	VHS standard (PAL, MESECAM)
Video recording system	Rotary, slant azimuth two-head helical scan system
Rotary heads	4 video heads
RF input	
EA	System B, G VHF ch 0 - 5, 5a, 6 - 11 UHF ch 21 - 69
EDG	System D, K VHF ch1 - 12, UHF ch 21 - 69 System B, G VHF ch 2 -12, UHF ch 21 - 69
EDI	System D,K,I VHF ch 1 -12 (China) UHF ch 21 - 69 (Hong Kong) ch 13 - 56 (China)
EK/EK-V	System I UHF ch 21 - 69
EM	System B, G (PAL, SECAM) VHF ch 2 -12, UHF ch 21 - 69
EO/EOG-V	System B, G (PAL, SECAM) VHF ch 2 - 4, 5 - 12, UHF ch 21 - 69 Cable ch S1' -S3', S1 - S20
EOH	System B, G (PAL, SECAM) VHF ch 2 - 4, 5 - 12, UHF ch 21 - 69 Cable ch S1'- S3', S1 - S41
ES	System I VHF ch A - J (Ireland) ch 4 - 13 (South Africa) UHF ch 21 - 69
RF output	
EA	System B type modulation VHF ch 0, 1 switchable (preset ch 1)
EDG	System K / G type modulation UHF ch 30 - 39 adjustable (preset ch 36)
EDI	System I / K type modulation UHF ch 30 - 39 adjustabie (preset ch 36)
EM	System B type modulation VHF ch 3,4 switchable (preset ch 4)
EK/EK-V/ES	System I type modulation UHF ch 30 - 39 adjustable (preset ch 36)
EO/EOG-V/EOH	System G type modulation UHF ch 30 - 39 adjustable (preset ch 36)
Recording (line input)	
EA/EK/ES	PAL
EDG/EDI/EK-V/EM/ EO/EOG-V/EOH	PAL, SECAM (recorded as MESECAM)
Playback (line output)	
EA/EK	PAL
EDG/EDI/EO/ EOG-V/EOH	PAL, SECAM (MESECAM Tape)
EM/F497EOH	PAL, SECAM (MESECAM tape) NTSC 4.43 (NTSC tape) Simulated PAL (NTSC tape playback only)
ES/EK-V	PAL NTSC 4.43 (NTSC tape) Simulated PAL (NTSC tape playback only)

Video	
Line input level	0.5 - 2.0 Vp-p/75 ohms, unbalanced
Line output level	1.0 Vp-p/75 ohms, unbalanced
S/N ratio	More than 45dB
Horizontal resolution	More than 250 lines
Audio	
Line input level	−6 dBs/50 k ohms, unbalanced
Line output level	−6 dBs/1 k ohms, unbalanced
S/N ratio	More than 40 dB
Frequency response	70 - 10,000 Hz
Recording/playback time	
SP mode	240 min. with E-240 cassette
LP mode	480 min. with E-240 cassette
NTSC playback only (EK-V/EM/ES/F497EOH)	
SP mode	160 min. with T-160 cassette
EP mode	480 min. with T-160 cassette
Tape speed	
SP mode	23.39 mm/sec.
LP mode	11.695 mm/sec.
NTSC playback only (EK-V/EM/ES/F497EOH)	
SP mode	33.35 mm/sec.
EP mode	11.12 mm/sec.
Quick finder	
SP mode (JFX-L type)	Approx. 9 times normal speed
LP mode (JFX-L type)	Approx. 5 times normal speed
SP mode (JFX type)	Approx. 5 or 13 times normal speed
LP mode (JFX type)	Approx. 3 or 7 times normal speed
NTSC playback only	
F440EM	
SP mode	Approx. 7 times normal speed
EP mode	Approx. 9 times normal speed
F480EK-V/ES, F490EM/EOH	
SP mode	Approx. 5 or 9 times normal speed
EP mode	Approx. 5 or 13 times normal speed
FF, REW time	Approx. 5 min. with E-180 cassette
Timer	
Program (JFX-L)	8 programmes / 1 year
Program (JFX)	8 Programmes / year and QUICK TIMER
Clock reference	Quartz crystal
Display	TV screen & FL (Tape counter, Timer etc.)
Power requirements	
EA/EK/EK-V	240 V AC, 50 Hz
EDG/EDI/ES	220 V AC, 50 Hz
EO/EOG-V/EOH	220-230 V AC, 50 Hz
EM	110-127/220-240 V AC, 50/60 Hz
Power consumption	
EA/EDG/EDI/EK/ EK-V//EM/ES	36 W
EO/F440EOG-V/EOH	37 W
F480EOG-V	38 W
Operating temperature	5°C - 40°C
Dimensions	
JFX-L	426(W) x 82(H) x 314(D) mm
F441EA	425(W) x 82(H) x 313(D) mm
JFX	426(W) x 82(H) x 323(D) mm
Weight	5.0 kg

Standard accessories

Antenna cable	1
Remote control unit	1
Batteries for remote control	2 (JFX-L)
Batteries for remote control	3 (JFX)
Operator's manual	1

0 dBs = 0.775 V

∗ For improvement purposes, specifications and design are subject to change without notice.

★INFORMATION

SYMBOLS OF MODEL NAMES FOR PRIMARY DESTINATION

The symbols below indicate the destination of each unit.

Symbol	Power Classification	Principal Destination	TV System	
			Color	Broadcast
EA	S	Australia	PAL	B,G
ED	E	China	PAL	D
EDG	E	East Europe	PAL	D,K
EDI	E	China, Hong Kong	PAL	D,K, I
EG	E	Spain, Nothern Europe, Other	PAL	B,G
	Y7	Saudi Arabia		
EK	B	U.K	PAL	I
	Y1	Hong Kong		
EM	E	Middle East	PAL	B,G
	Y7	Saudi Arabia		
EO	E	Holland, Switzerland, Nothern Europe	PAL	B,G
	V	Italy		
EOH	E	Holland, Belgium	PAL	B,G
	V	Italy		
EOG	V	Germany	PAL	B,G
ES	E	South Africa, Ireland, Hong kong	PAL	I
EV	E	South-East Asia	PAL	B,G
	U	Middle East, South -East Asia		
	Y1	New Zealand		
	Y7	Saudi Arabia		
EZ	S	New Zealand	PAL	B,G
EGN	E	Middle East	PAL,NTSC	B,G
	Y7	Saudi Arabia		
S	E	France	SECAM	L
SK	E	Latin America, Oceania, SECAM-OIRT	SECAM	K,K1
SEG	E	France, Switzerland	SECAM, PAL	L,B,G
U	A	U.S.A	NTSC	M
	C	Canada		
UM	U	Latin America	NTSC	M
J	J	Japan	NTSC	M

CATEGORY CODES USED IN THIS MANUAL

CATEGORY CODE	TYPE	MODEL NUMBER
JFX-L	4 VIDEO HEAD L-TYPE	VS-F440EA/EDG/EDI/EK/EM/EO /EOG-V/EOH VS-F441EA VS-F450EOH VS-F455EOH
JFX	4 VIDEO HEAD	VS-F480EK-V/EOG-V VS-F490EM/EO/EOH/ES VS-F497EOH

SAFETY LOCK SYSTEM

The play button on the VCR and remote control can be locked to prevent access by young children (this feature does not effect other functions of the VCR).
This feature can only be operated by the remote control.

To lock : Press and hold the remote control's stop button for approx. 8 seconds. As long as the play button is locked, safety lock indicator " L" will light on the FL display and "🔑" will flash on the TV screen any time the play button is pressed.

To unlock : Press and hold the remote control's play button for approx. 8 seconds. If a tape is loaded, the safety lock indicator will disappear from the FL display and TV screen, and playback will begin automatically.

MULTI-FUNCTION MENU MODE

This is an on-screen display of the various modes you can programme via the TV screen.

MODE : To select the AV MUTE and OSD modes and tape speed. (SP/LP SELECT)
SEARCH : To select the BLANK SEARCH and INTRO SCAN modes.
LANGUAGE : To select a language for the on-screen displays.
PS PRESET : To preset TV stations.
PS CANCEL : To cancel preset TV stations.
CLOCK SET : To set the clock.
VPT SET : To set the VPT (JFX only)
DEMO MODE : To demonstrate some of the modes available on this VCR.

If necessary, refer to the respective sections in the operator's manual for detailed information.

1. Press the "MENU" button on the remote control unit.
   The menu list screen will be displayed on the TV screen.
   The arrow indicator is automatically set to the "MODE" position.

(JFX-L ONLY)



MENU

→MODE
SEARCH
LANGUAGE
PS PRESET
PS CANCEL
CLOCK SET
DEMO MODE

(JFX ONLY)



MENU

→MODE
SEARCH
LANGUAGE
PS PRESET
PS CANCEL
CLOCK SET
VPT SET
DEMO MODE

2. Select the desired mode by setting the arrow indicator to the appropriate position with cursor "∨" button.
   The arrow indicator moves downwards each time the button is pressed. Pressing the cursor "∧" button will move the arrow indicator upwards.
3. Press the "OK" button.
   The selected function screen will be displayed on the TV screen.

* Press the "MENU" button again to return to the normal screen.

MANUAL TRACKING/PICTURE/STABILITY ADJUSTMENT

The VCR can be adjusted for tracking and picture sharpness anytime it is in the playback mode with the remote control unit.

- **Manual tracking control**
  Press the "<" or ">" cursor botton repeatedly until the picture is clear. During manual tracking adjustment, the tracking position is shown on the TV screen, this will disappear automatically after adjustment has been completed. Use this function when performing the A/C HEAD phase adjustment.

- **Picture sharpness control**
  Press the "∧" button repeatedly to sharpen the picture or press the "∨" button to soften the picture.

- **Stability adjustment**

1) To correct picture shake during the slow motion or still mode:
   Press "∧" or "∨" cursor button until the picture shake is corrected.
2) To correct tracking during the still mode:
   Press the "<" or ">" cursor button repeatedly until the picture is clear.

I. DISASSEMBLY

In case of trouble,etc. necessitating dismantling, please dismantle in the order shown in the illustrations. Reassemble in the reverse order.
When reattaching the FRONT PANEL, hold the cassette loading slot door in the upright (open) position.

1. Removal of UPPER COVER

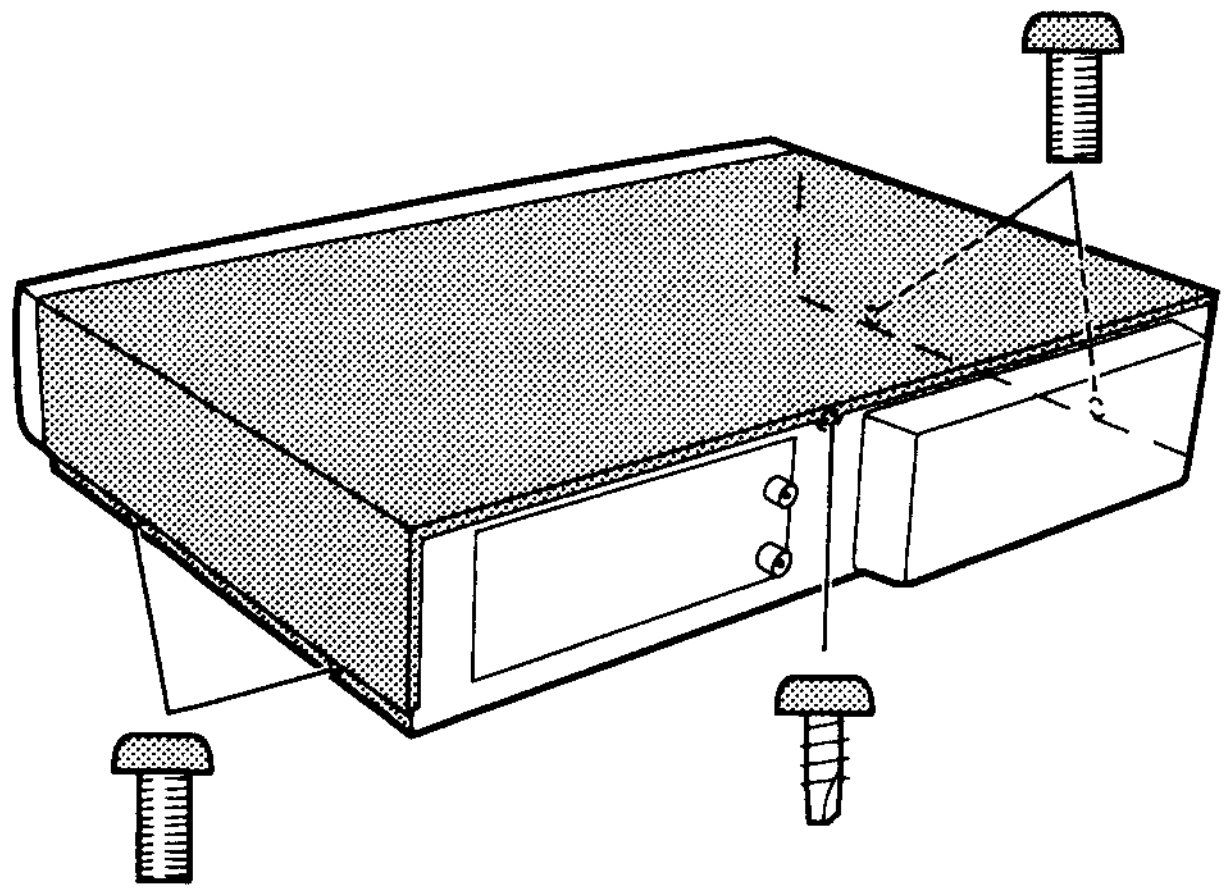

2. Removal of BOTTOM COVER

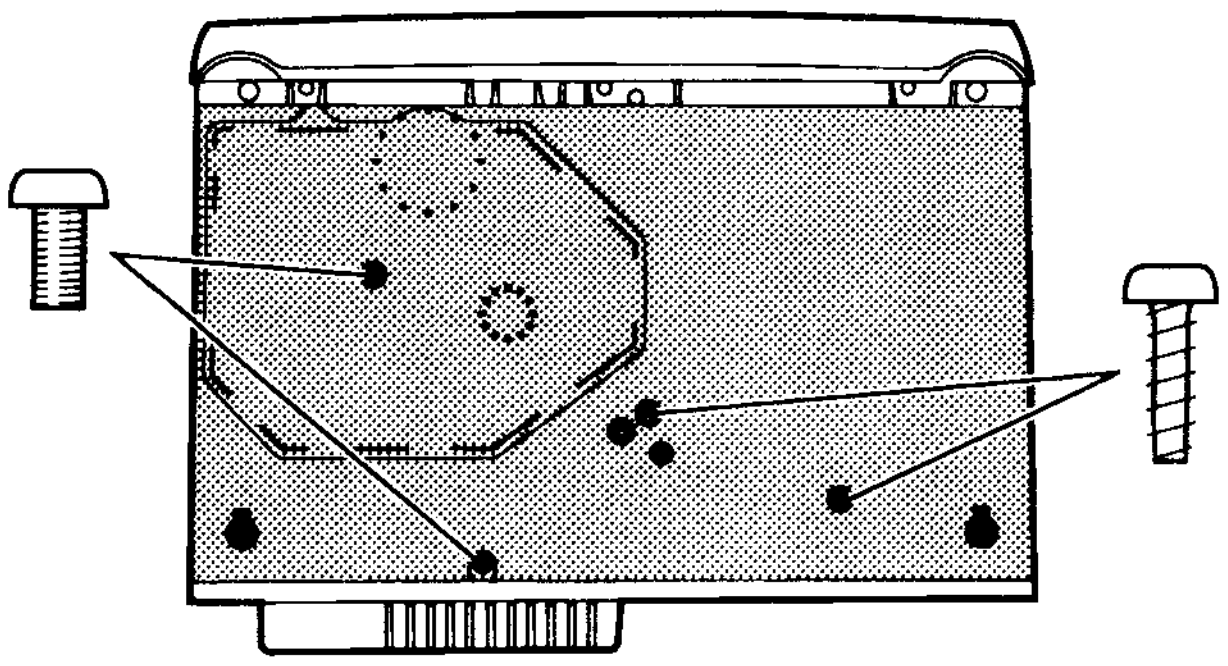

3. Removal of FRONT PANEL

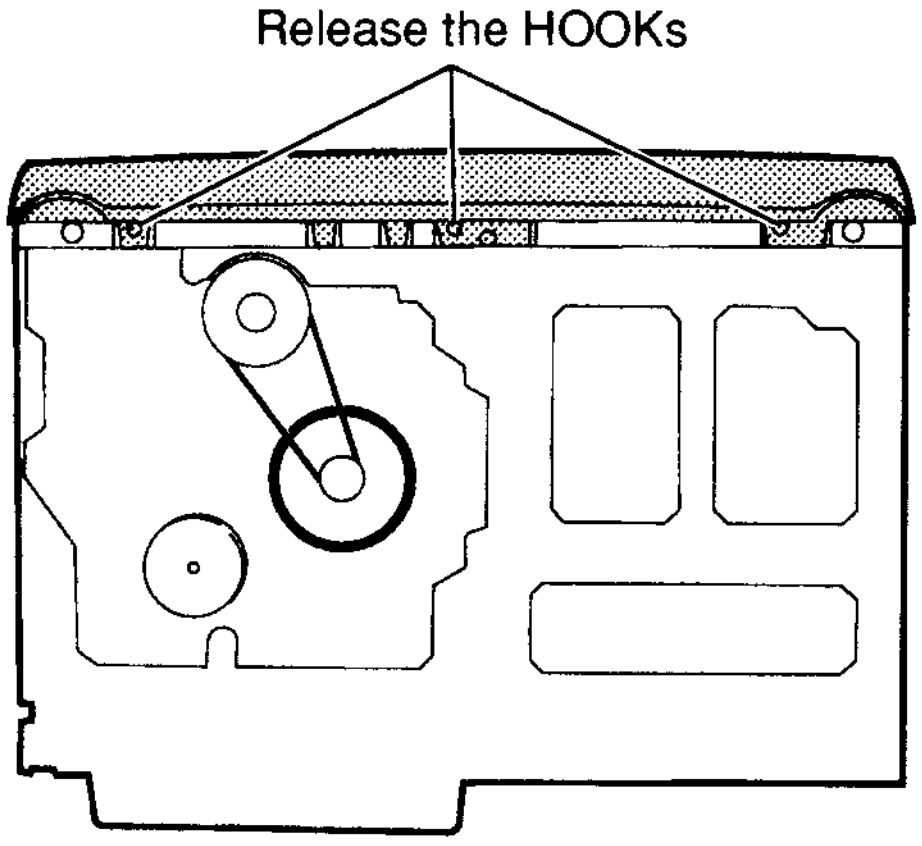
Release the HOOKs

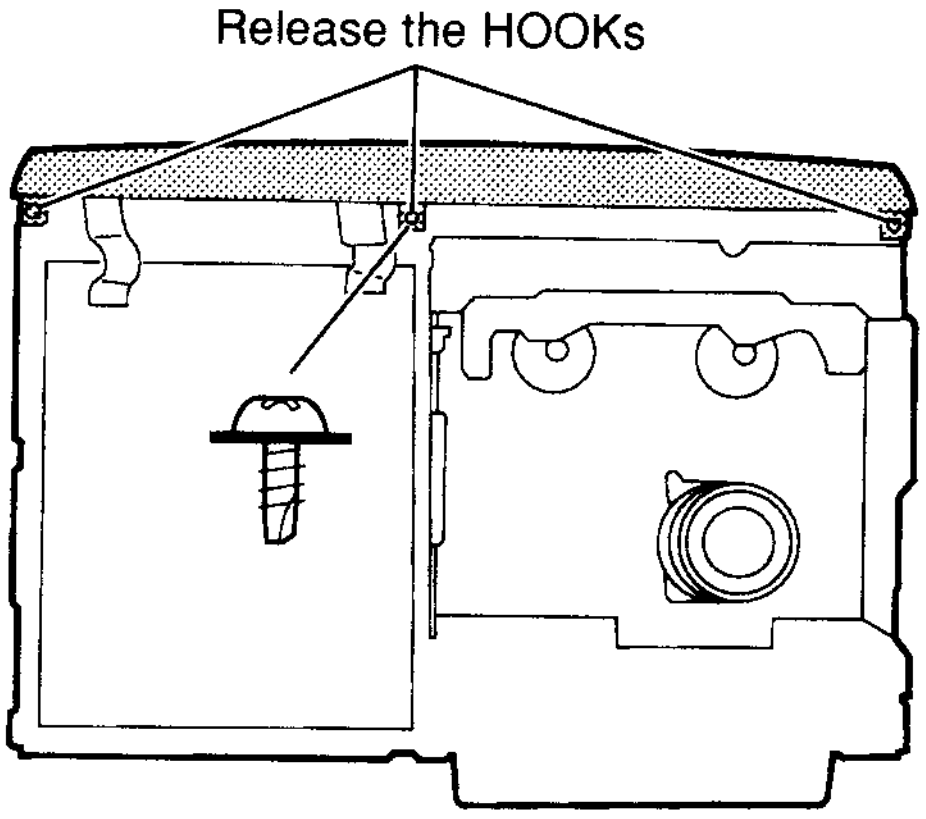
Release the HOOKs

4. Removal of TRANS COVER

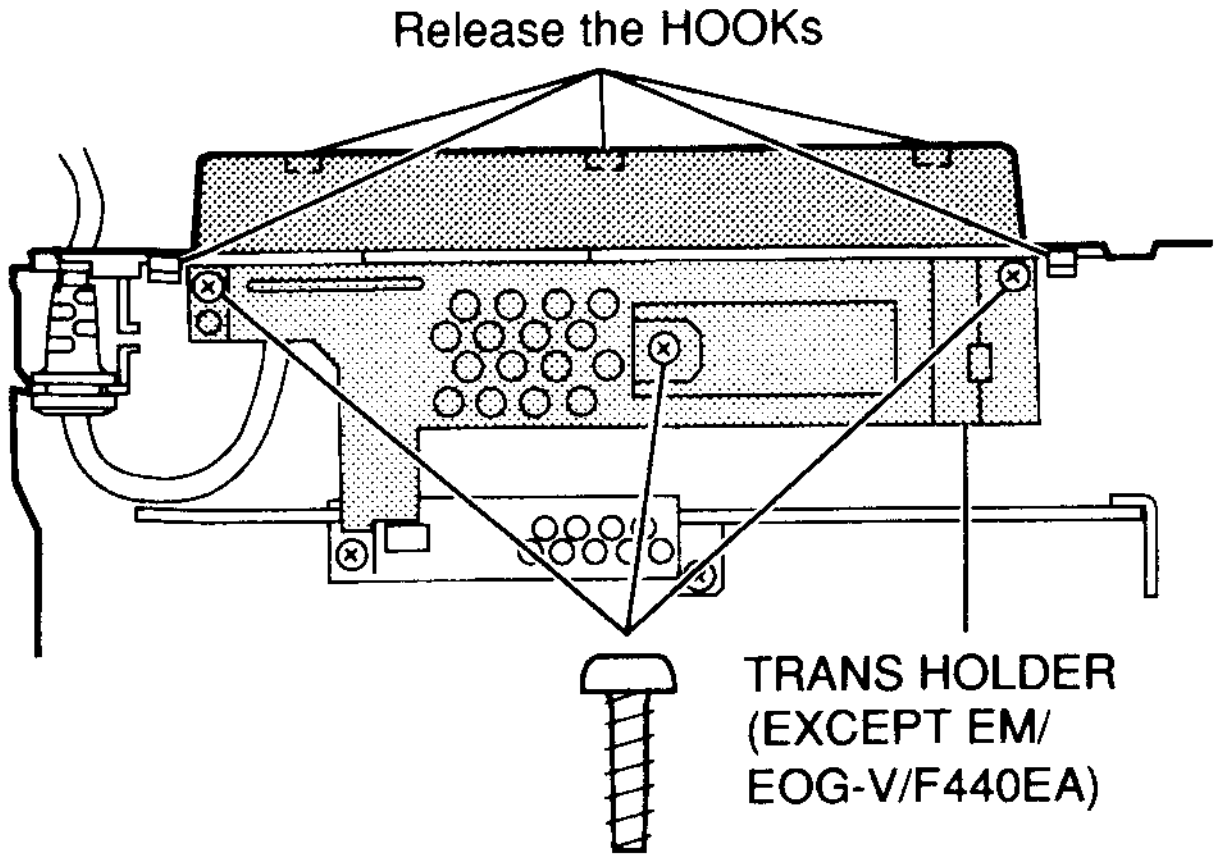
Release the HOOKs
TRANS HOLDER
(EXCEPT EM/
EOG-V/F440EA)

(JFX-L only)

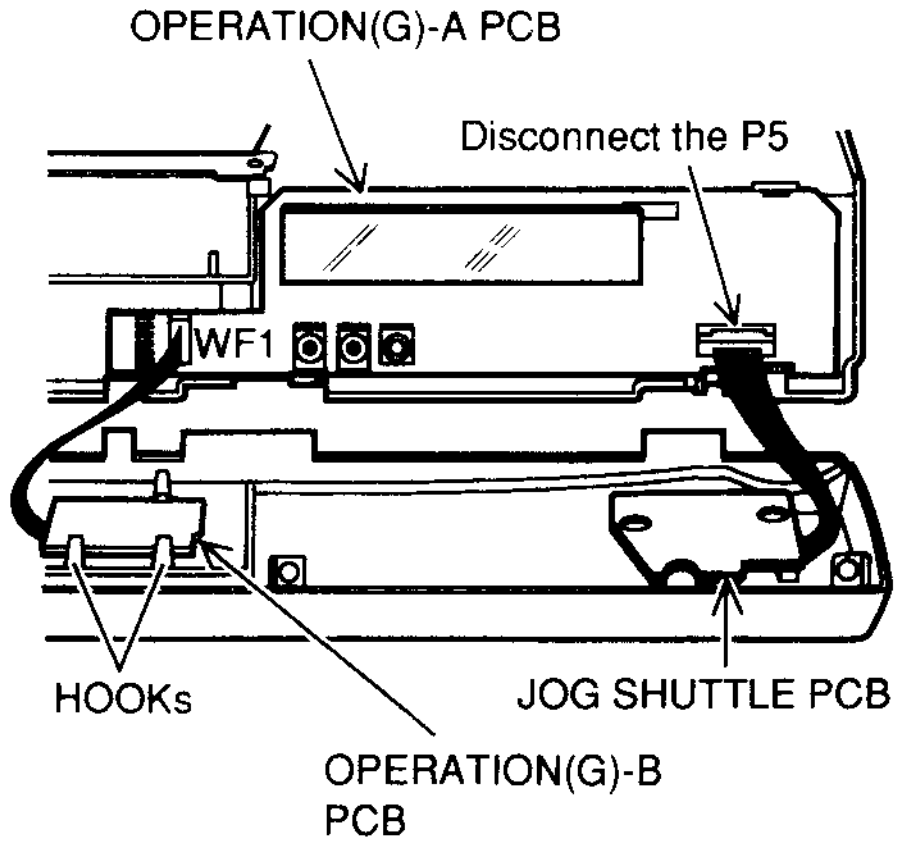
OPERATION(G)-A PCB
Disconnect the P5
WF1
HOOKs
JOG SHUTTLE PCB
OPERATION(G)-B
PCB

(JFX only)

While pressing the hooks outward, pull the operation (G)- B PCB upward to remove it.

II. PRINCIPAL PARTS LOCATION

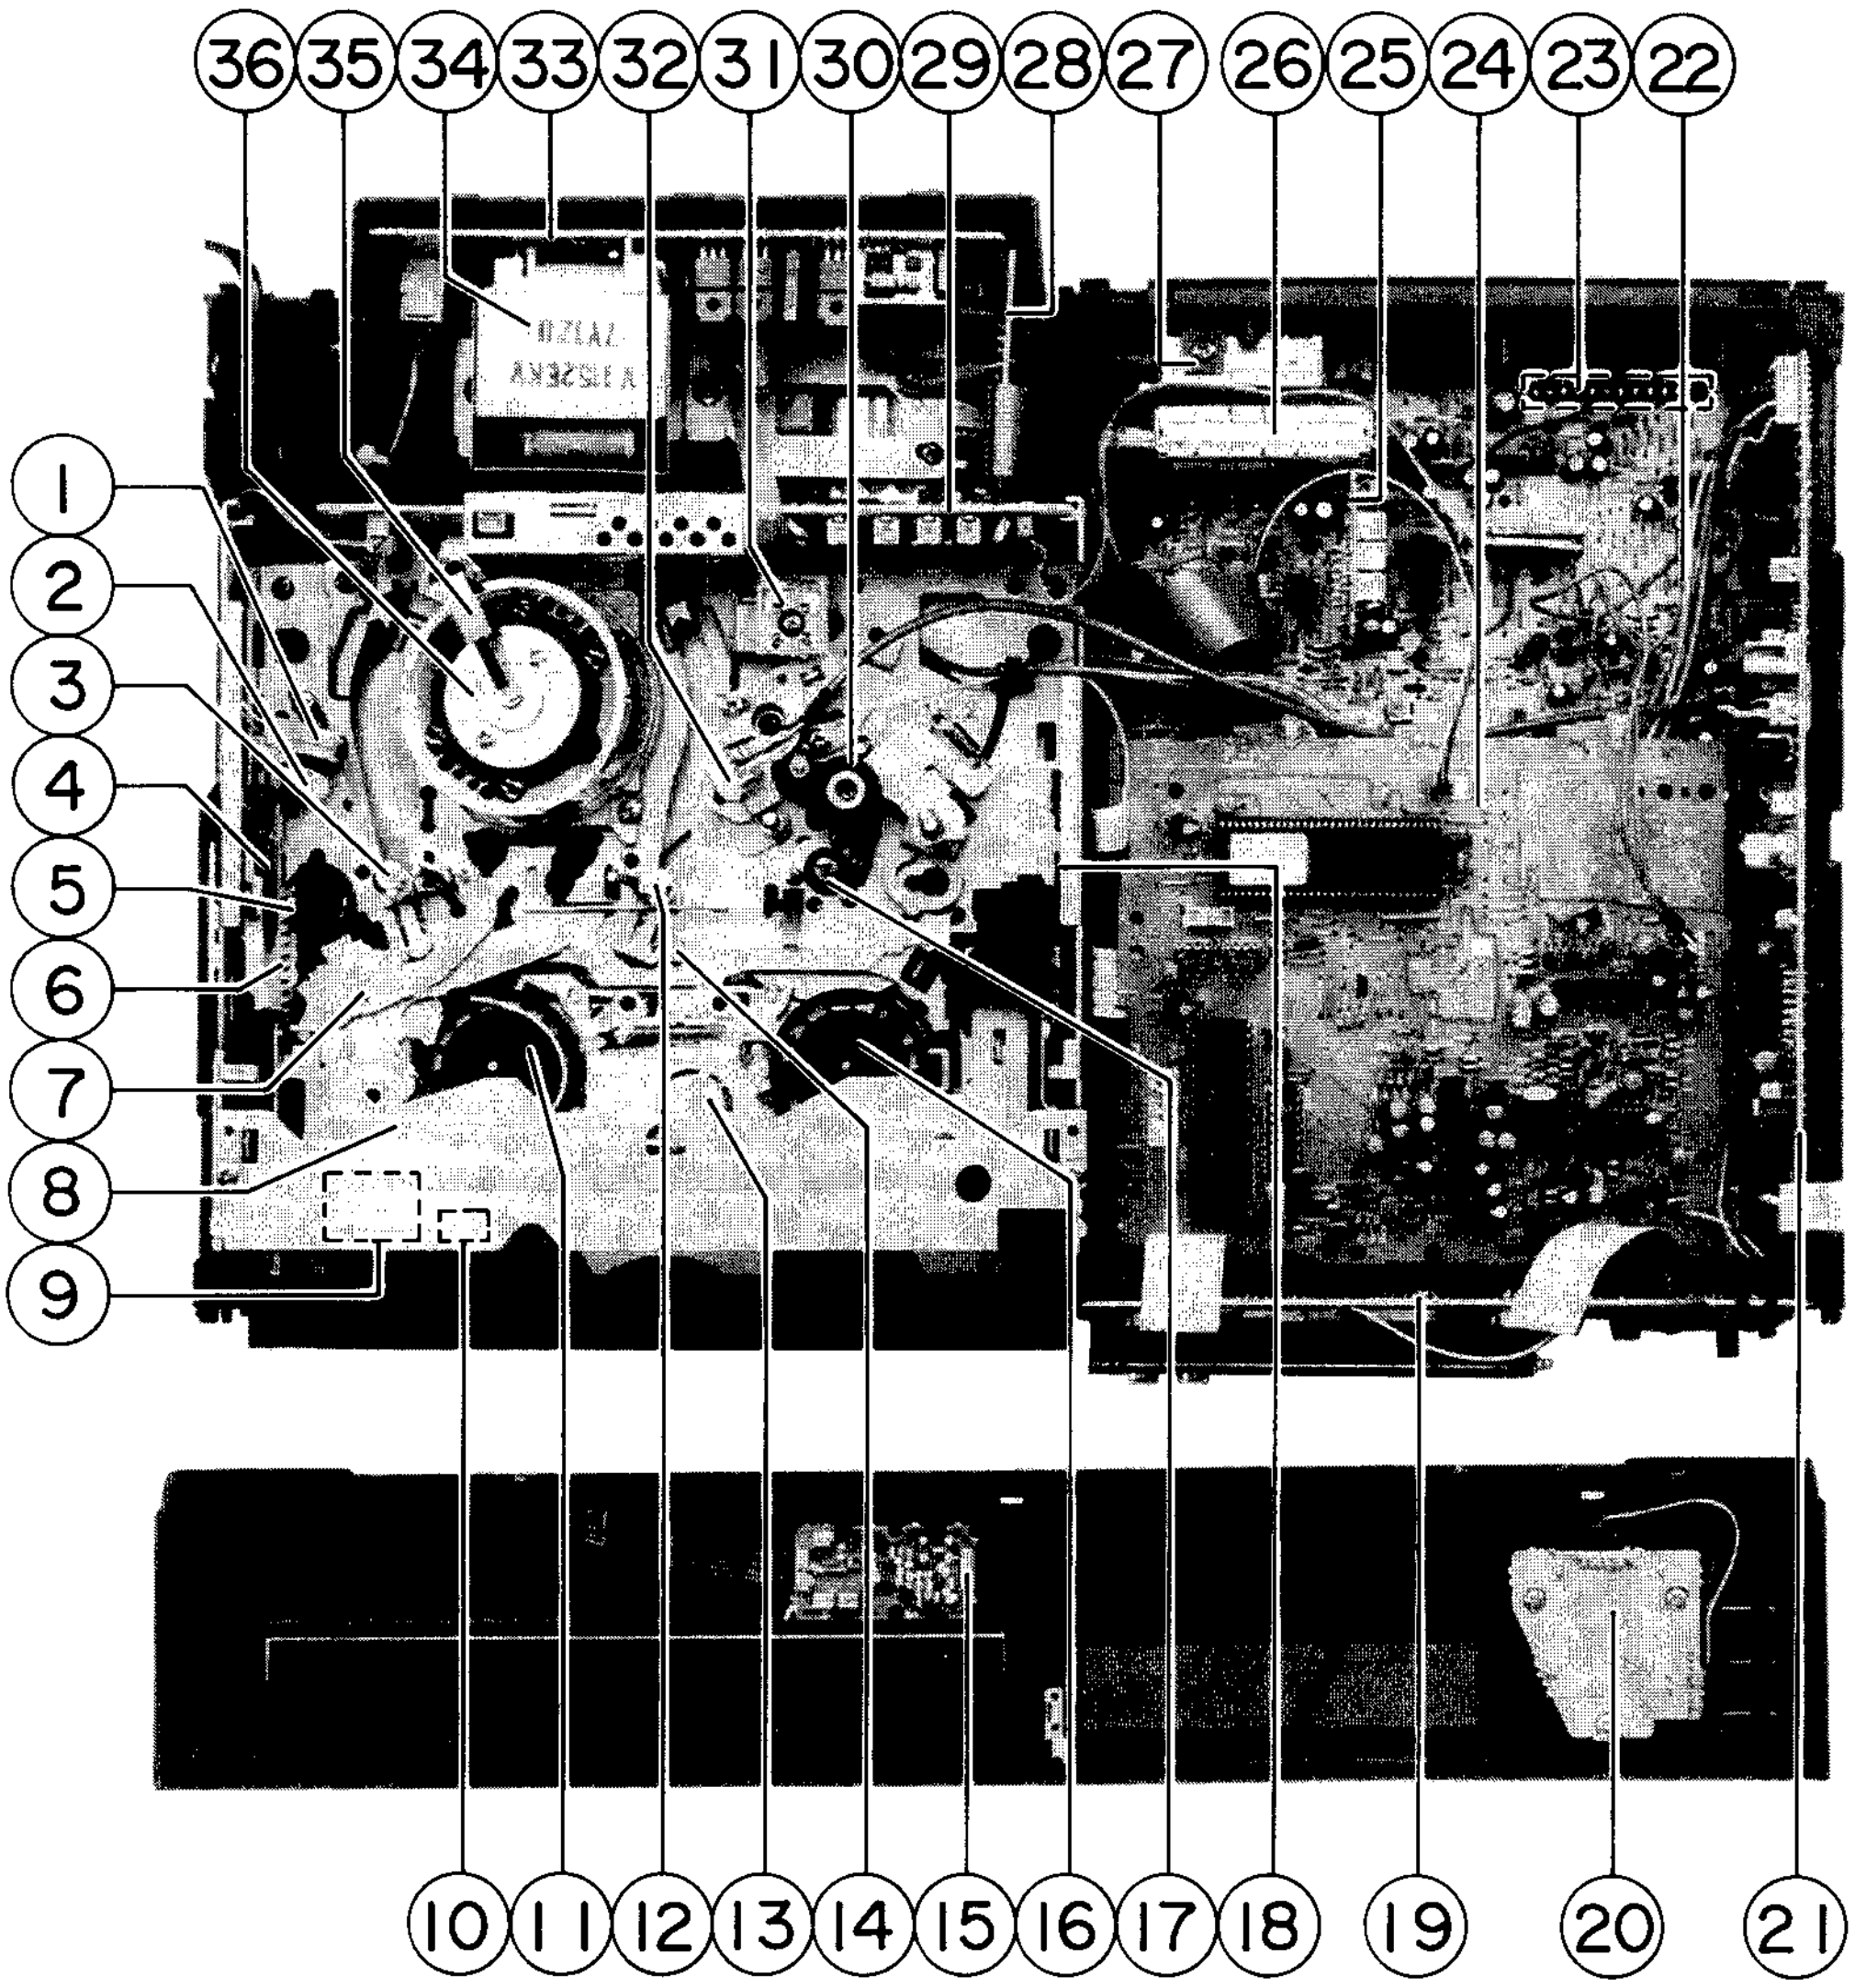

Fig. 2-1 Top view

1. FULL TRACK ERASE HEAD
2. SUPPLY TAPE GUIDE
3. SUPPLY LOADING LEADER
4. SENSOR (S) PCB (END SENSOR)
5. FRONT LOADING GEAR
6. FRONT LOADING SLIDER
7. TENSION ARM
8. CASSETTE LOAD BLK
9. LOADING MOTOR
10. REC SAFETY SWITCH
11. SUPPLY REEL TABLE
12. TAKE UP LOADING LEADER
13. IDLER PART
14. SENSOR LED
15. OPERATION (G)-B PCB (JFX ONLY)
16. TAKE UP REEL TABLE
17. CAPSTAN MOTOR
18. SENSOR (T) (START SENSOR)
19. OPERATION (G)-A PCB (JFX ONLY)
    OPERATION (A) PCB (JFX-L ONLY)
20. JOG SHUTTLE PCB (JFX only)
21. MAIN (B) PCB
22. MAIN (A) PCB
23. SUB PCB (EM only)
24. VPST/PDC PCB (EK-V/EOG-V only)
    PDC PCB (F440/F450/F490/F497EOH: OPTION)
25. VIF UNIT
26. TUNER UNIT
27. RF CONVERTOR UNIT
28. POWER SUPPLY (2) PCB (EM, EOG-V only)
29. PRE AMP PCB
30. PINCH ROLLER
31. DIODE PCB (EM, EO, EOG-V, EOH only)
32. AUDIO / CONTROL / S. ERASE HEAD
33. POWER SUPPLY (1) PCB (EM, EOG-V only)
    POWER SUPPLY PCB (except EM, EOG-V)
34. POWER TRANSFORMER
35. EARTH BRUSH
36. VIDEO HEAD DRUM BLOCK

*Photograph employed on this page is of model VS-F480EK-V

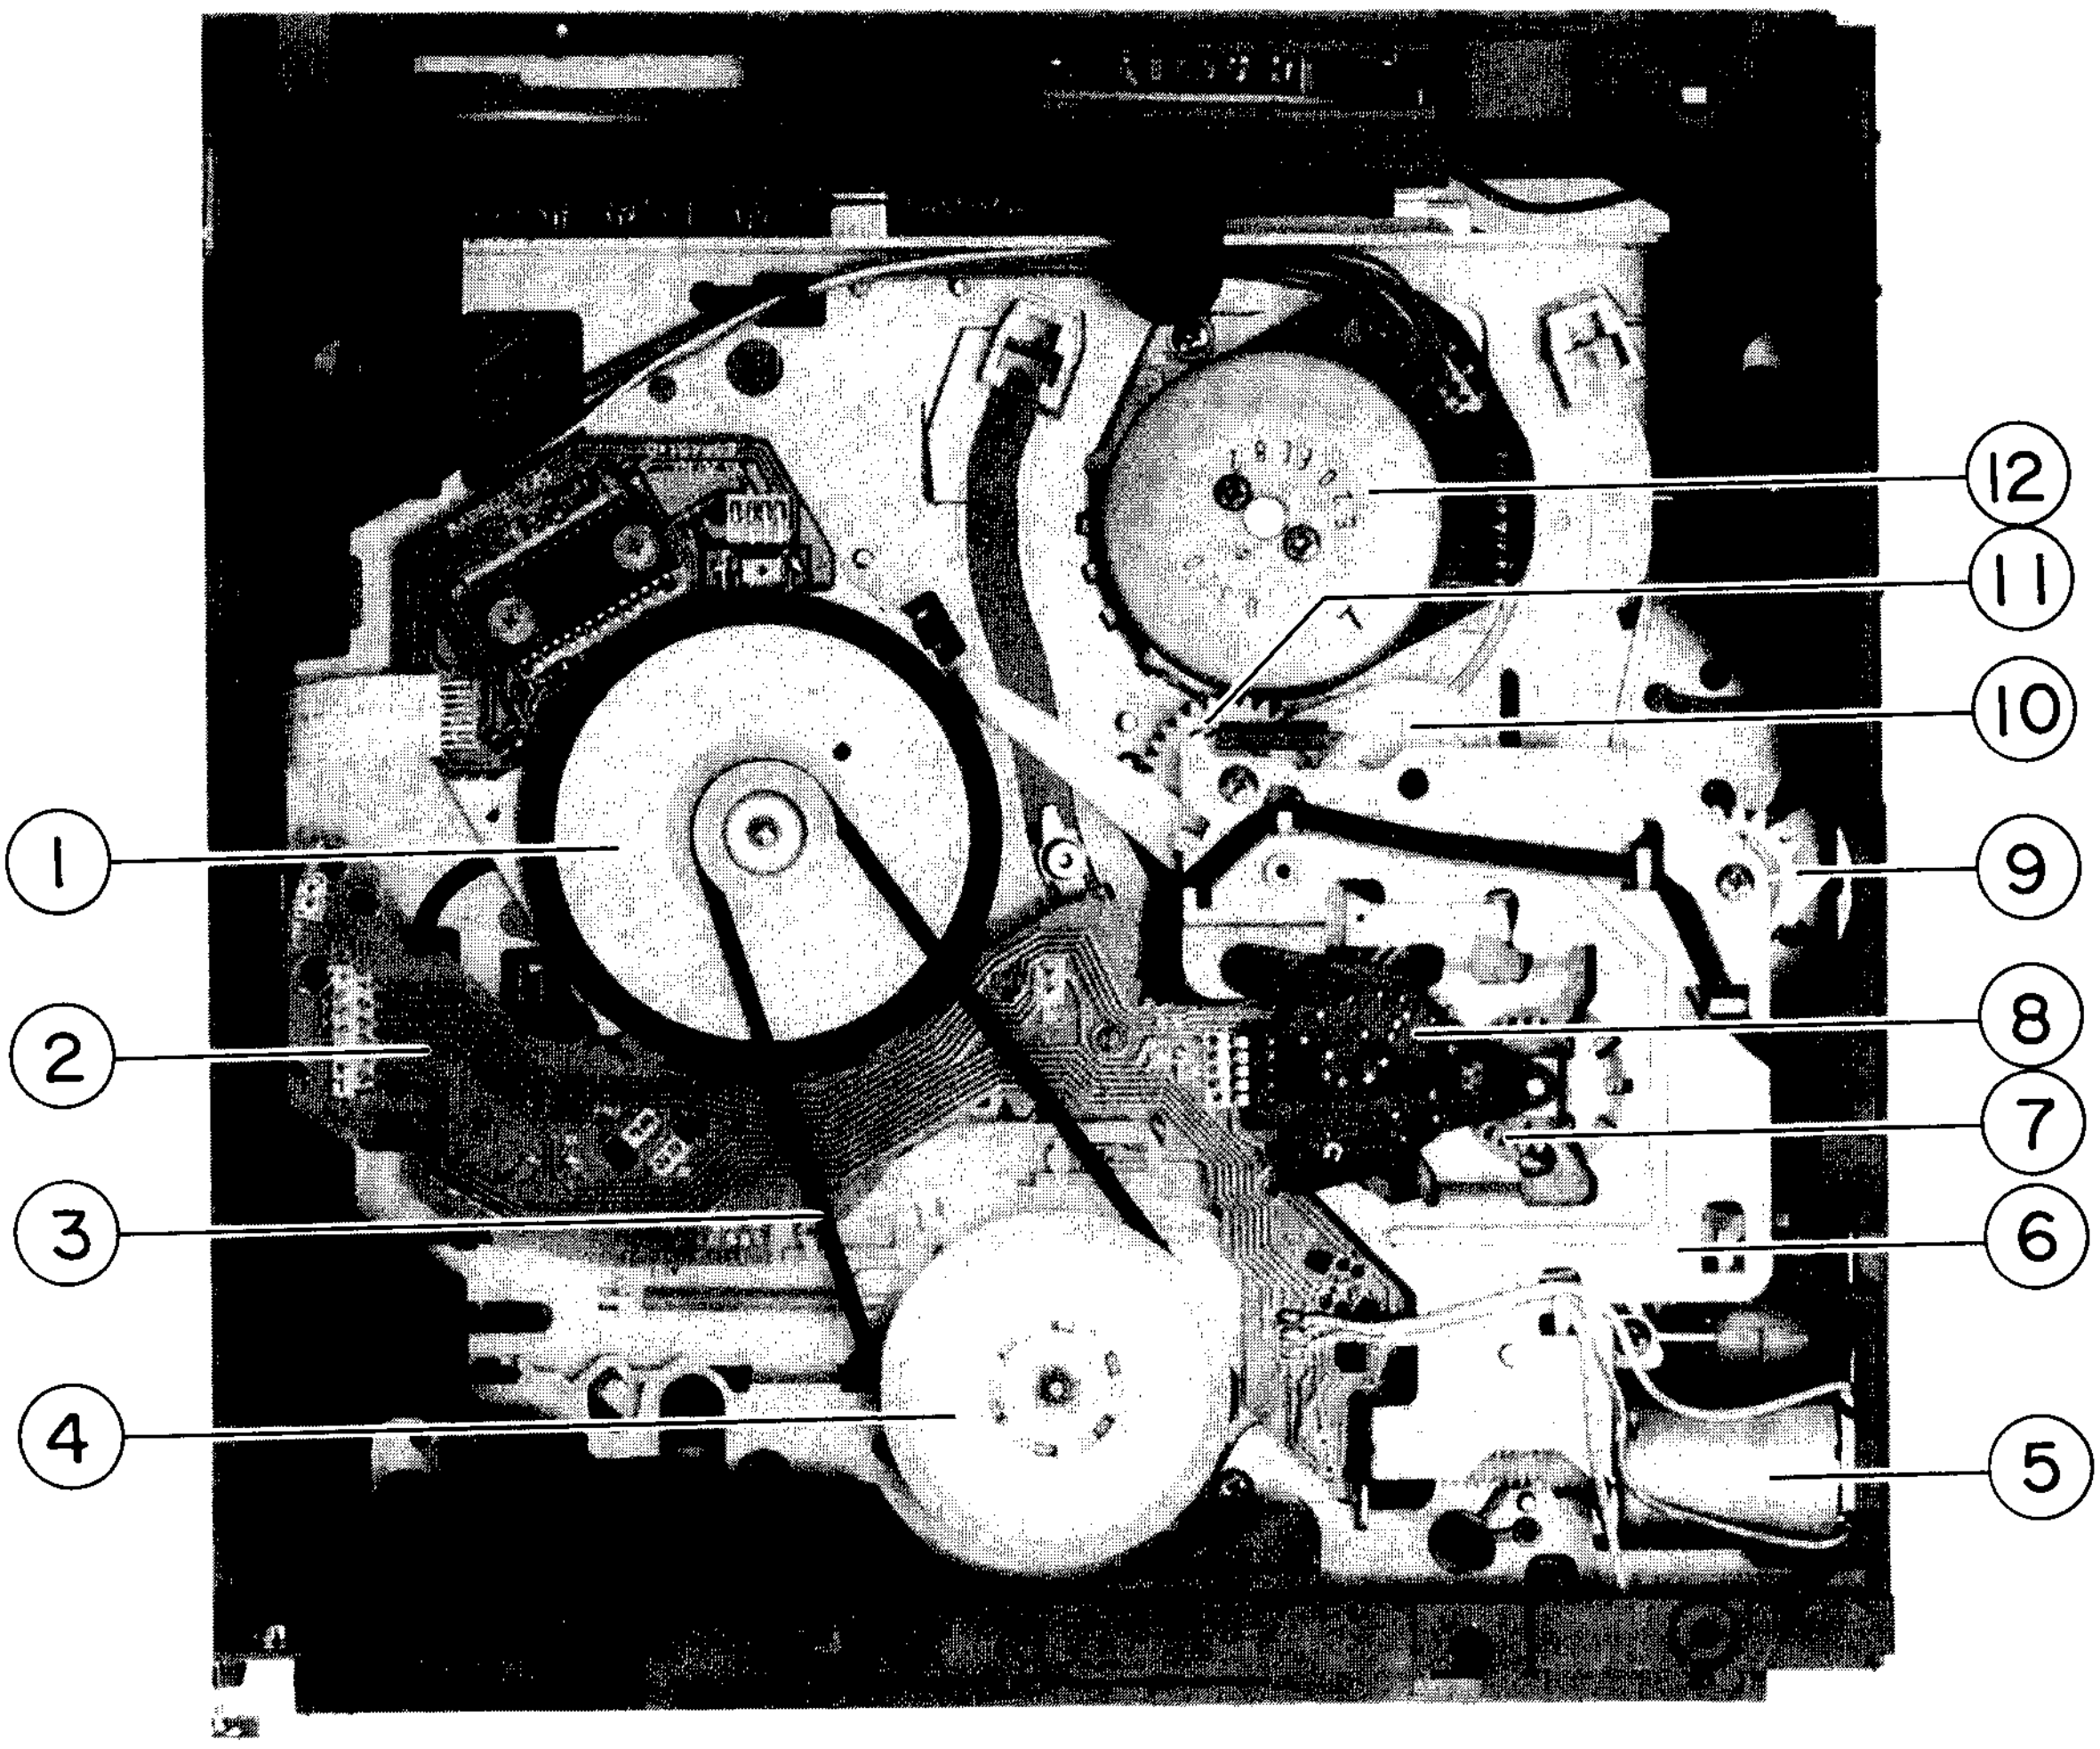

Fig. 2-2 Bottom view

1. CAPSTAN MOTOR BLOCK	7. CAM SLIDER GEAR
2. SENSOR PCB	8. MODE SELECT SWITCH
3. CAPSTAN BELT	9. FRONT LOADING GEAR
4. CLUTCH DISK PART	10. TOGGLE (S) GEAR BLOCK
5. LOADING MOTOR	11. TOGGLE (T) GEAR BLOCK
6. LOADING DRIVE BLOCK	12. DRUM MOTOR BLOCK

III. MAIN COMPONENTS REPLACEMENT

3-1.REMOVAL OF THE EJECTOR BLOCK

Set the loading mechanism to the "EJECT" position by pressing the EJECT button. Then disconnect the AC power plug from the AC socket before proceeding.

3-1-1. Removal of the CASSETTE LOAD BLK

1) Remove the two Ⓐ screws on the UPPER PLATE, as shown in Fig. 3-1 then remove the UPPER PLATE.
2) Lift up the FRONT GUIDE while pushing the CASSETTE LOAD BLK backwardS, then remove the FRONT GUIDE.
3) Gently lift up the front side of the CASSETTE LOAD BLK, then remove it. To avoid damaging the pins of the CASSETTE LOAD BLK and the groove of the MECHA. FRAME, do not use excessive force when removing the CASSETTE LOAD BLK.

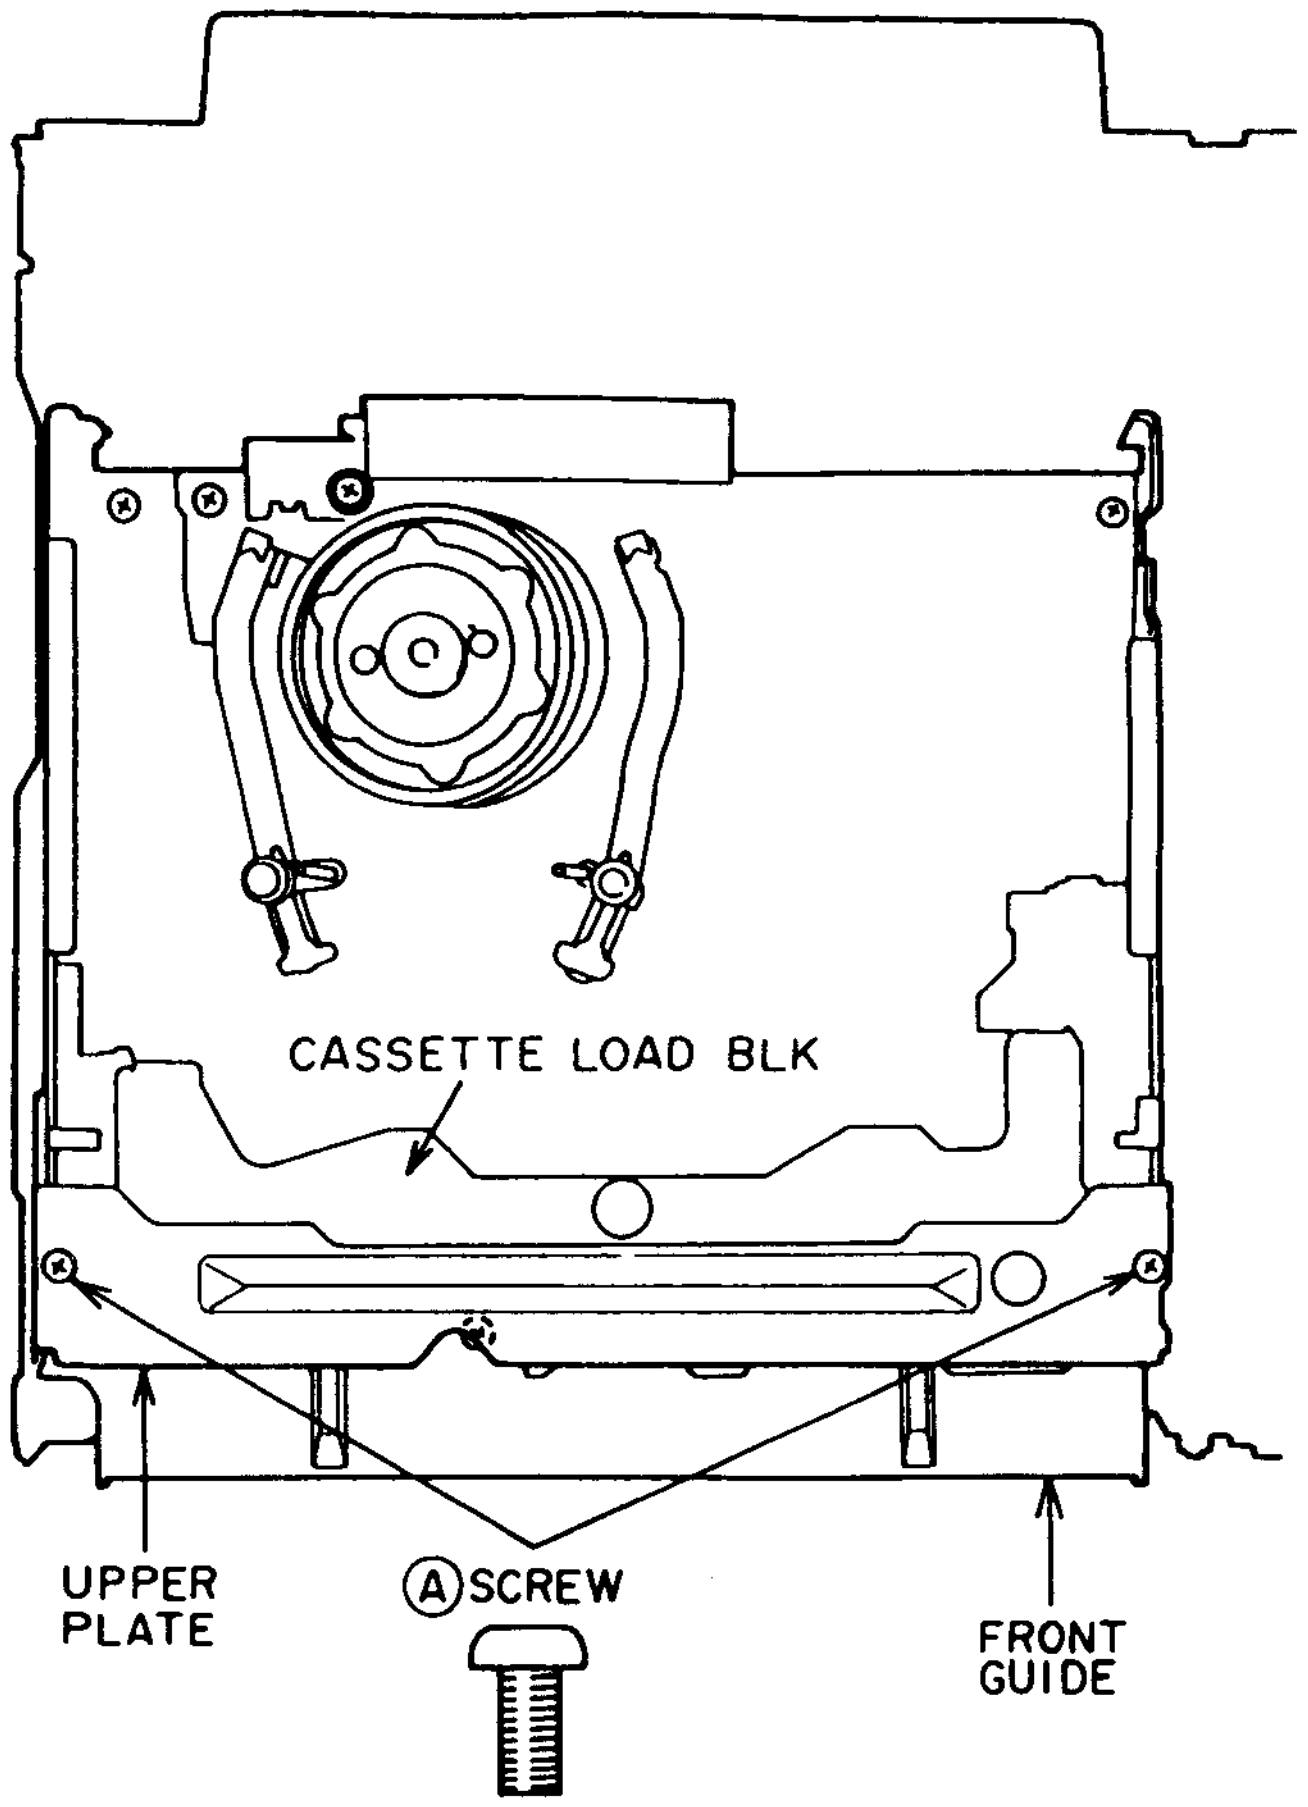
CASSETTE LOAD BLK
UPPER PLATE
ⒶSCREW
FRONT GUIDE

Fig. 3-1

3-1-2. Removal of the LOADING ARM BLK

1) Release the stopper on the right side end of the LOADING ARM BLK's shaft (Refer to Fig. 3-2) by pressing the stopper tab with a flat head (**—**) screwdriver. Then remove the shaft's right end from the bracket.

(JFX-L ONLY)

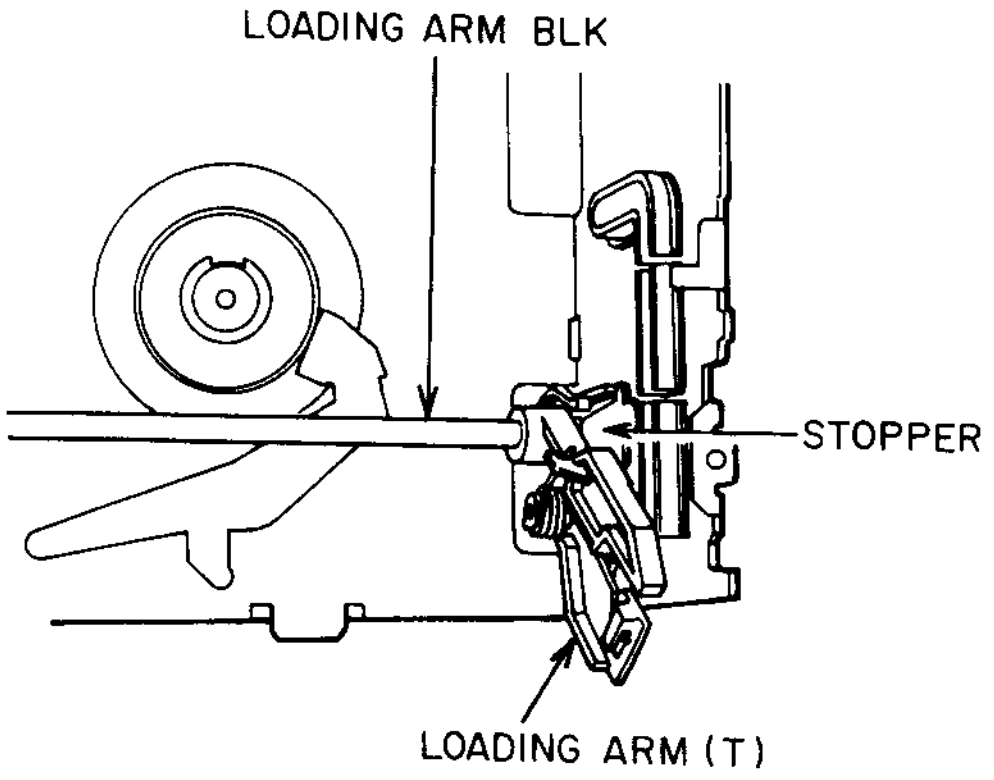
LOADING ARM BLK
STOPPER
LOADING ARM (T)

(JFX ONLY)

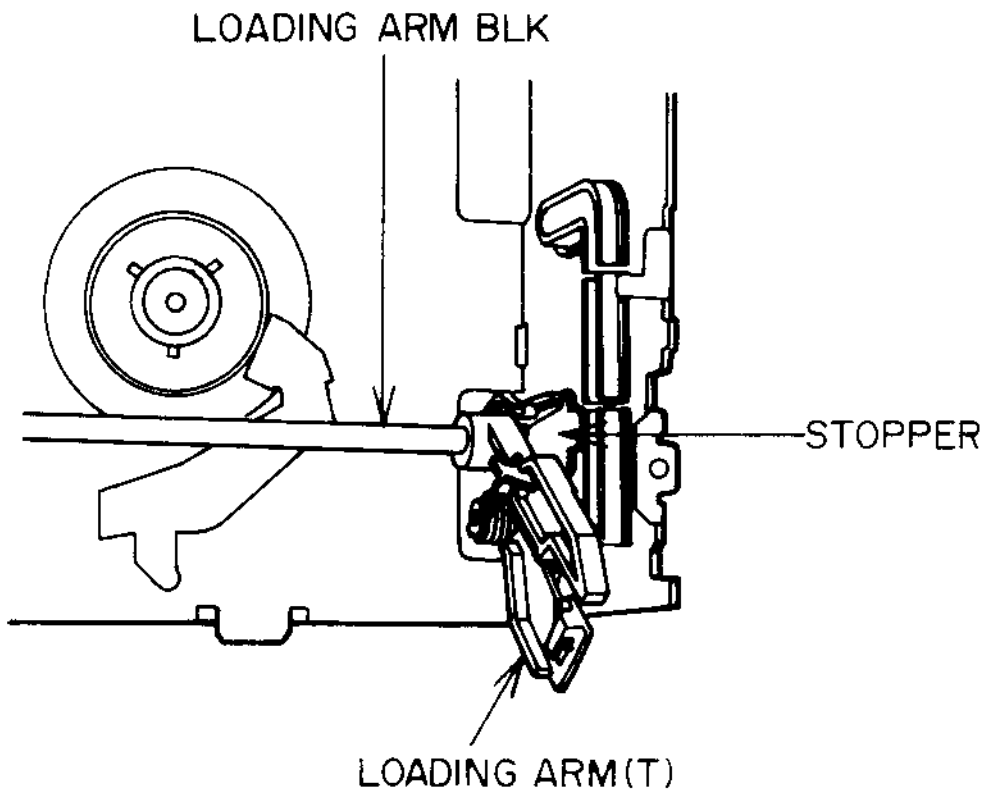
LOADING ARM BLK
STOPPER
LOADING ARM(T)

Fig. 3-2

2) Hold the LOADING ARM (T) and turn it 30 degrees clockwise, then pull out the shaft's left end from the bracket. Take special care when removing it to avoid damaging the JOINT and EJECT GEARs. (Refer Fig. 3-3)

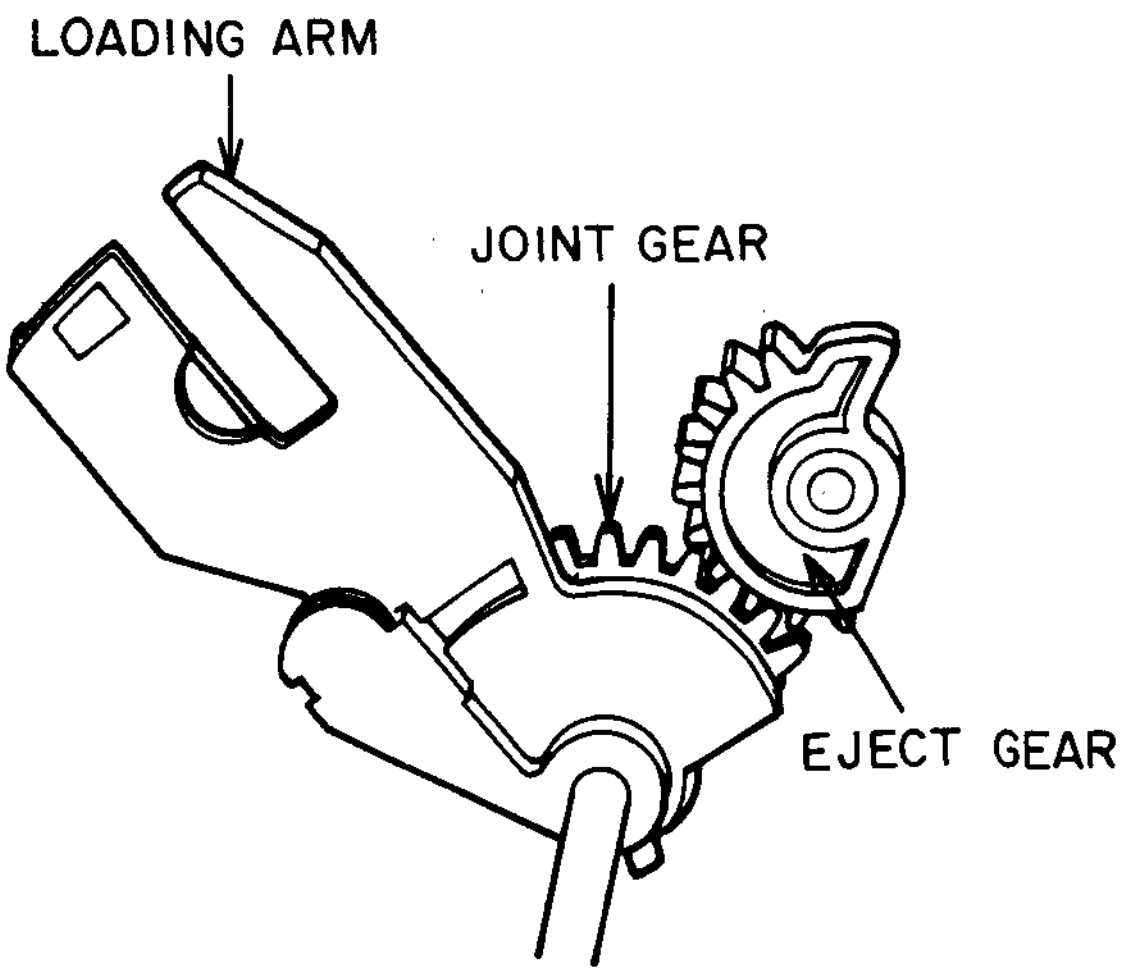
LOADING ARM
JOINT GEAR
EJECT GEAR

Fig. 3-3

3-2.REMOVAL OF THE SENSOR PC BOARD

* Before proceeding with removal of the SENSOR PCB, the loading mechanism must be set to the "unloaded" position (the position where the CAM SLIDER GEAR's groove mark is visible through the hole of the MODE SELECT SW.) as shown in Fig. 3-4.

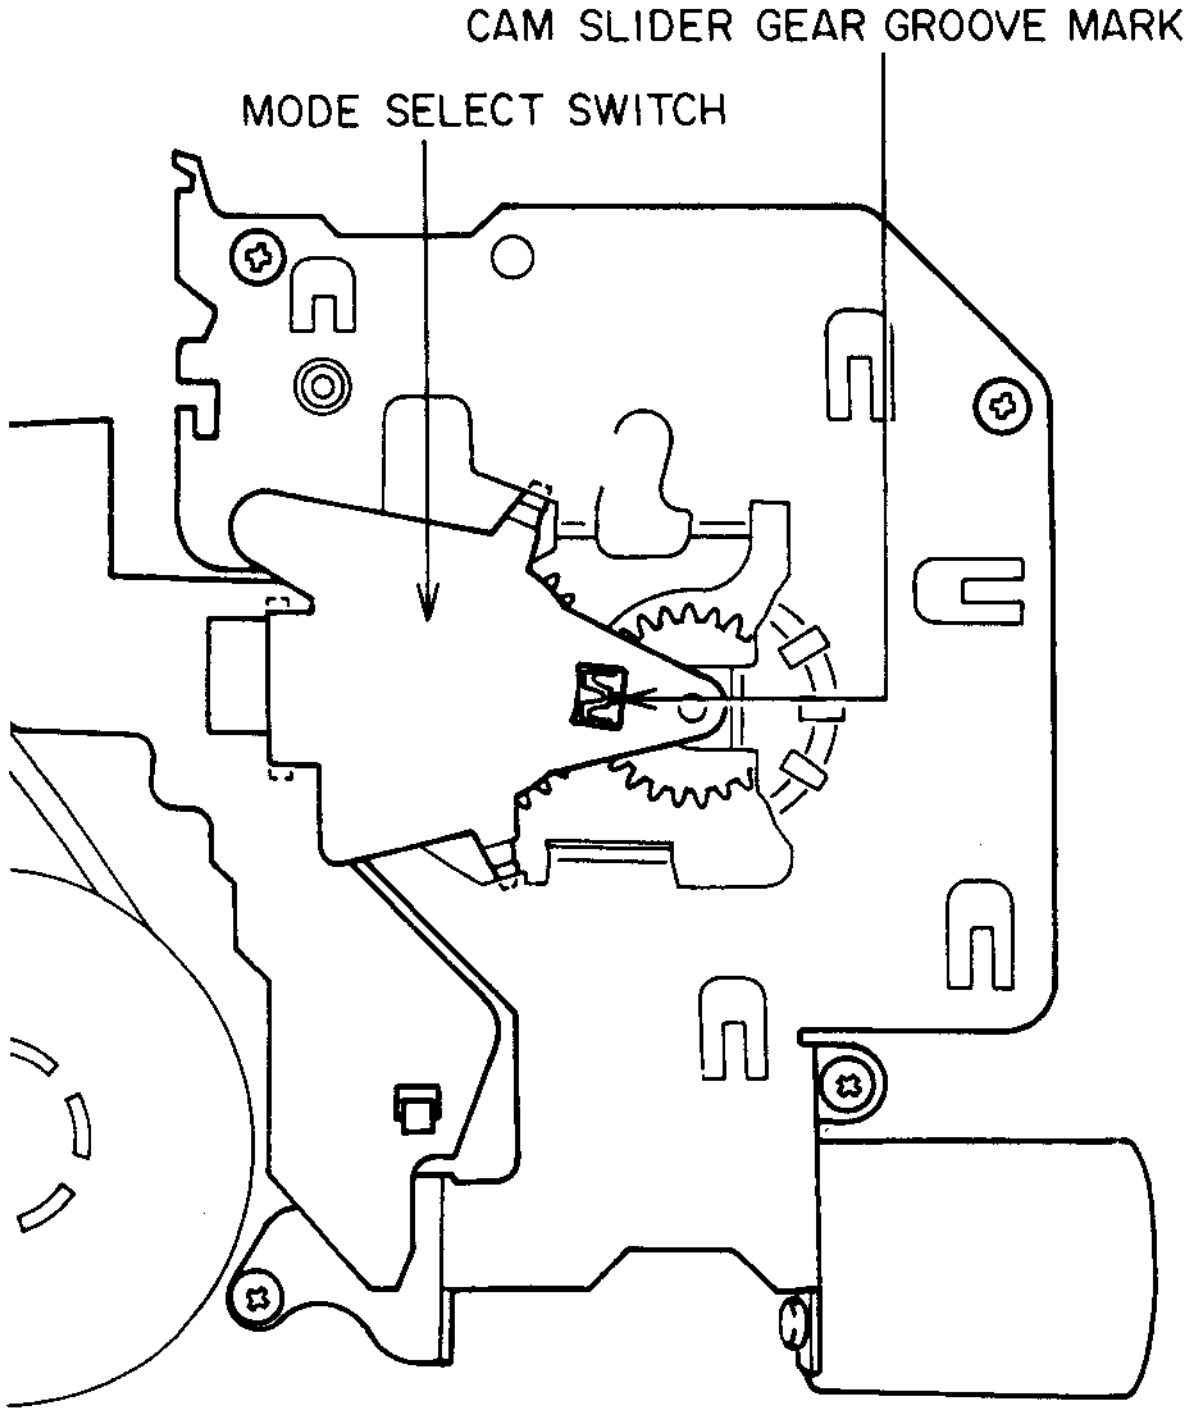

Fig. 3-4

To set the loading mechanism to the "unloaded" position, proceed with one of the following procedures.

1) Insert a video cassette tape which you no longer need. Once the tape has been loaded or has entered the "play" mode, press the POWER button to turn the power off. Disconnect the AC power plug from the AC socket after the cassette tape has been unloaded.
2) Remove the UPPER PLATE, FRONT GUIDE and CASSETTE LOAD BLK. (Refer to 3-1-1. Removal of the CASSETTE LOAD BLK.)
   Plug in the AC power cord. The LOADING ARM BLK will move backward and forward continuously. With your fingers, cover and hold both the SENSOR (S) and SENSOR (T) at the same time when the LOADING ARM BLK is in the backward position. The unit will enter the "play" mode without a cassette tape. Then release your fingers from both the sensors at the same time. After about 10 seconds (when the PINCH ROLLER is disengaged from the CAPSTAN and the SUPPLY REEL stops rotating, and the mechanism is set to "standby"), press the POWER button on the OPERATION (A) or (G)-A PCB.
   The mechanism will now be set to the "tape unloaded" position.
   Disconnect the AC power plug from the AC power socket.

3-2-1. Removal of the MODE SELECT SWITCH

1) Release the two Ⓐ stoppers as shown in Fig. 3-5.

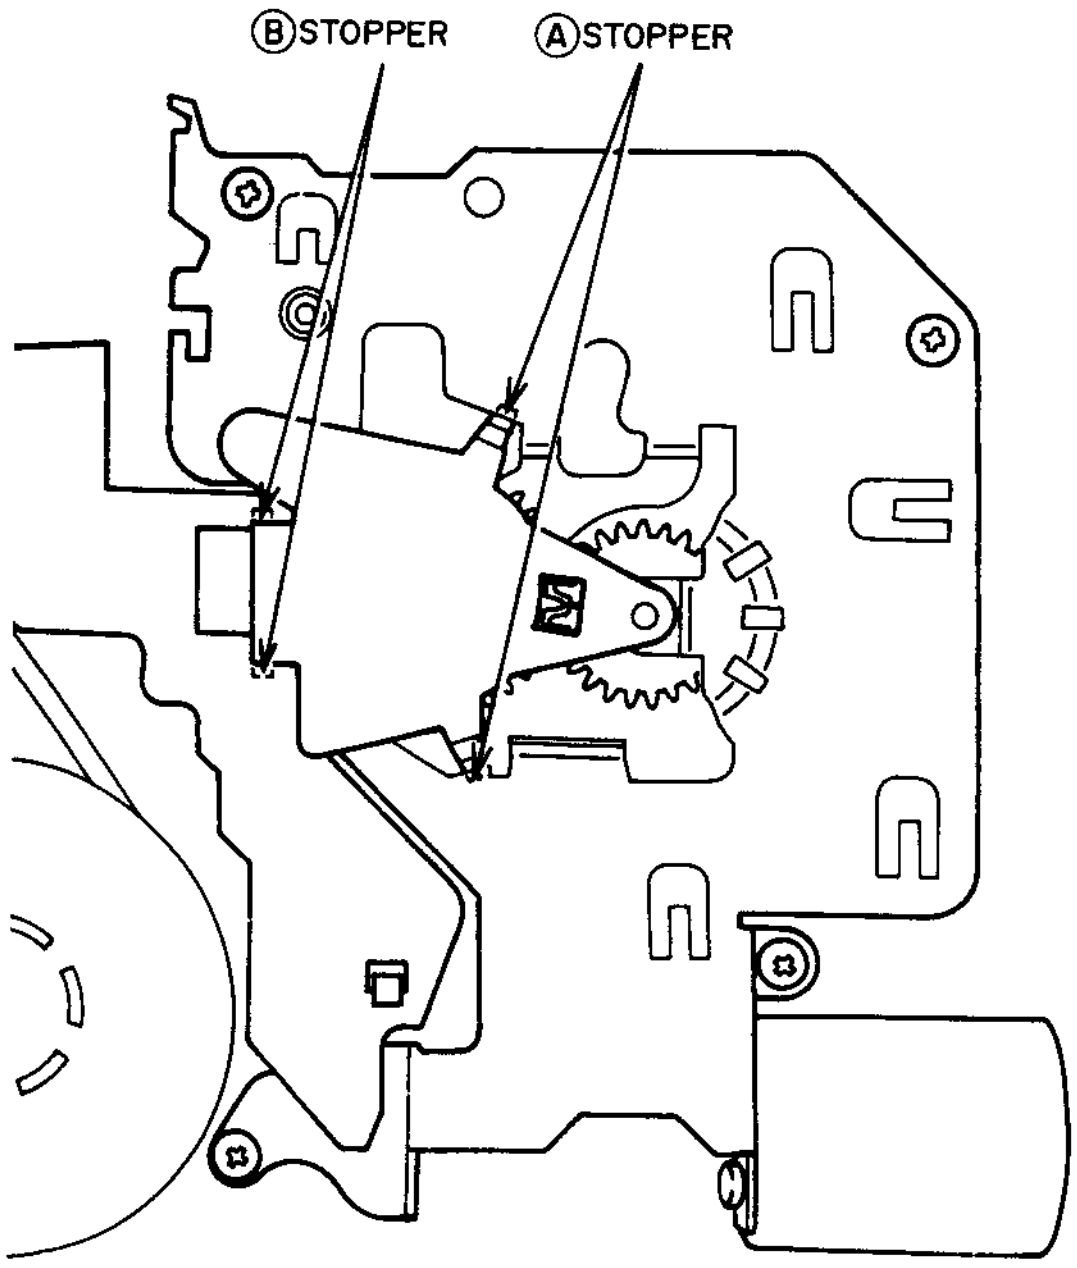

Fig. 3-5

2) Release the two Ⓑ stoppers carefully while pulling up the MODE SELECT SWITCH. Then remove the MODE SELECT SWITCH. (Do not damage the pins of the MODE SELECT SWITCH or the P1 connector on the SENSOR PCB).

3-2-2. Removal of the SENSOR PC Board

1) Disconnect the connector P303 on the MAIN (A) PCB.
2) Remove the capstan belt.
3) Release the Ⓐ, Ⓑ and Ⓒ stoppers as shown in Fig. 3-6. Then remove the SENSOR PCB.

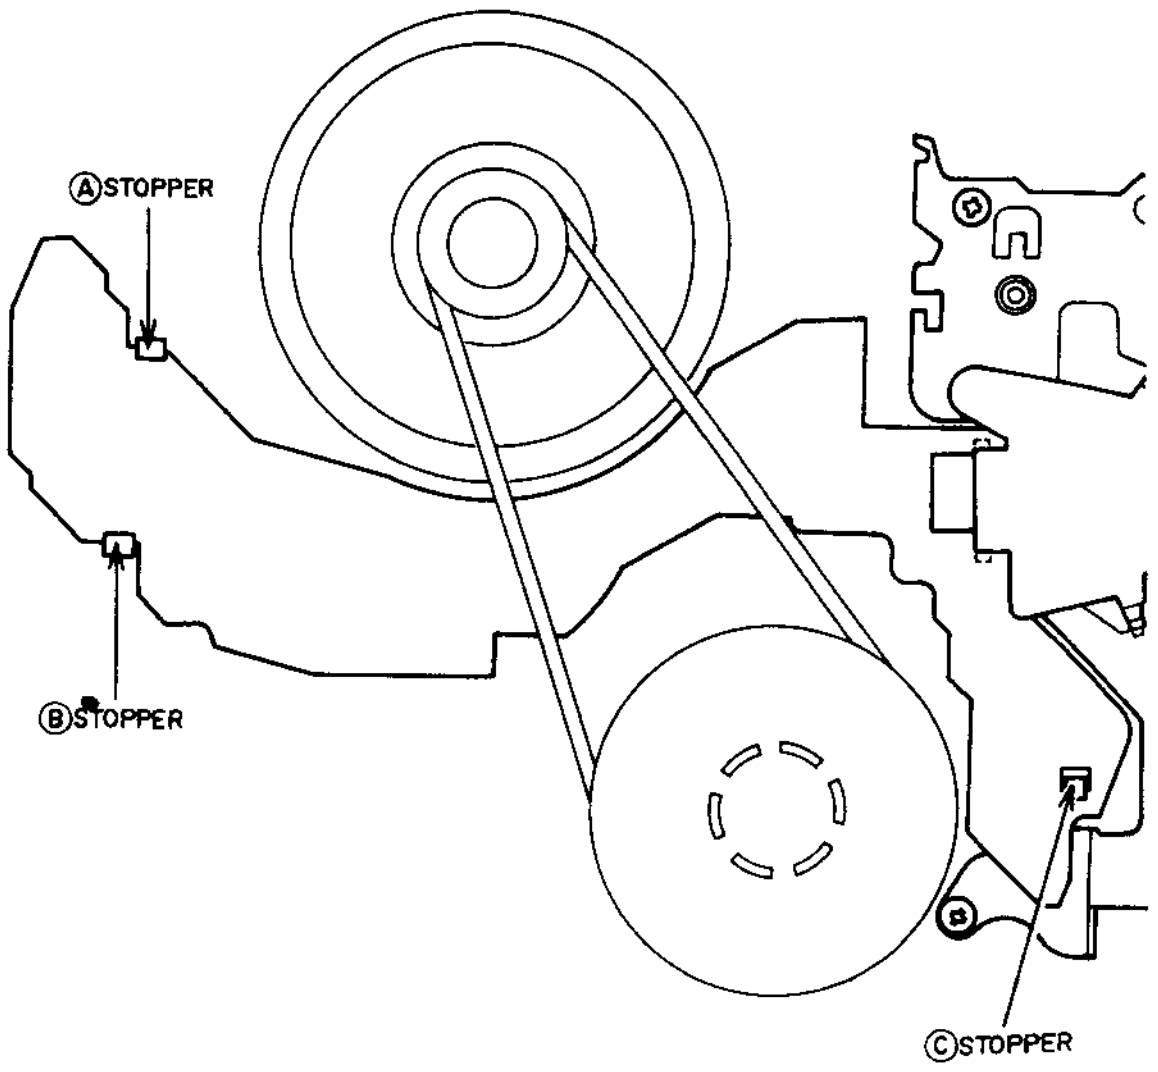

Fig. 3-6

3-3.REMOVAL OF THE LOADING DRIVE BLK

Set the loading mechanism to the "unloaded" position as well as 3-2 (REMOVAL OF THE SENSOR PC BOARD). However, this time, to avoid damaging the tape and mechanical parts, refer to 3-2, ＊ 2) only.

1) Remove the MODE SELECT SWITCH (refer to 3-2-1 Removal of the MODE SELECT SWITCH).
2) Unhook the five wires from each tab. Two wires from the SENSOR (S), two wires from the LOADING MOTOR and one wire from the REC SAFETY SWITCH.
3) Remove the Ⓐ, Ⓑ, Ⓒ and Ⓓ screws, then remove the LOADING DRIVE BLK as shown in Fig. 3-7.

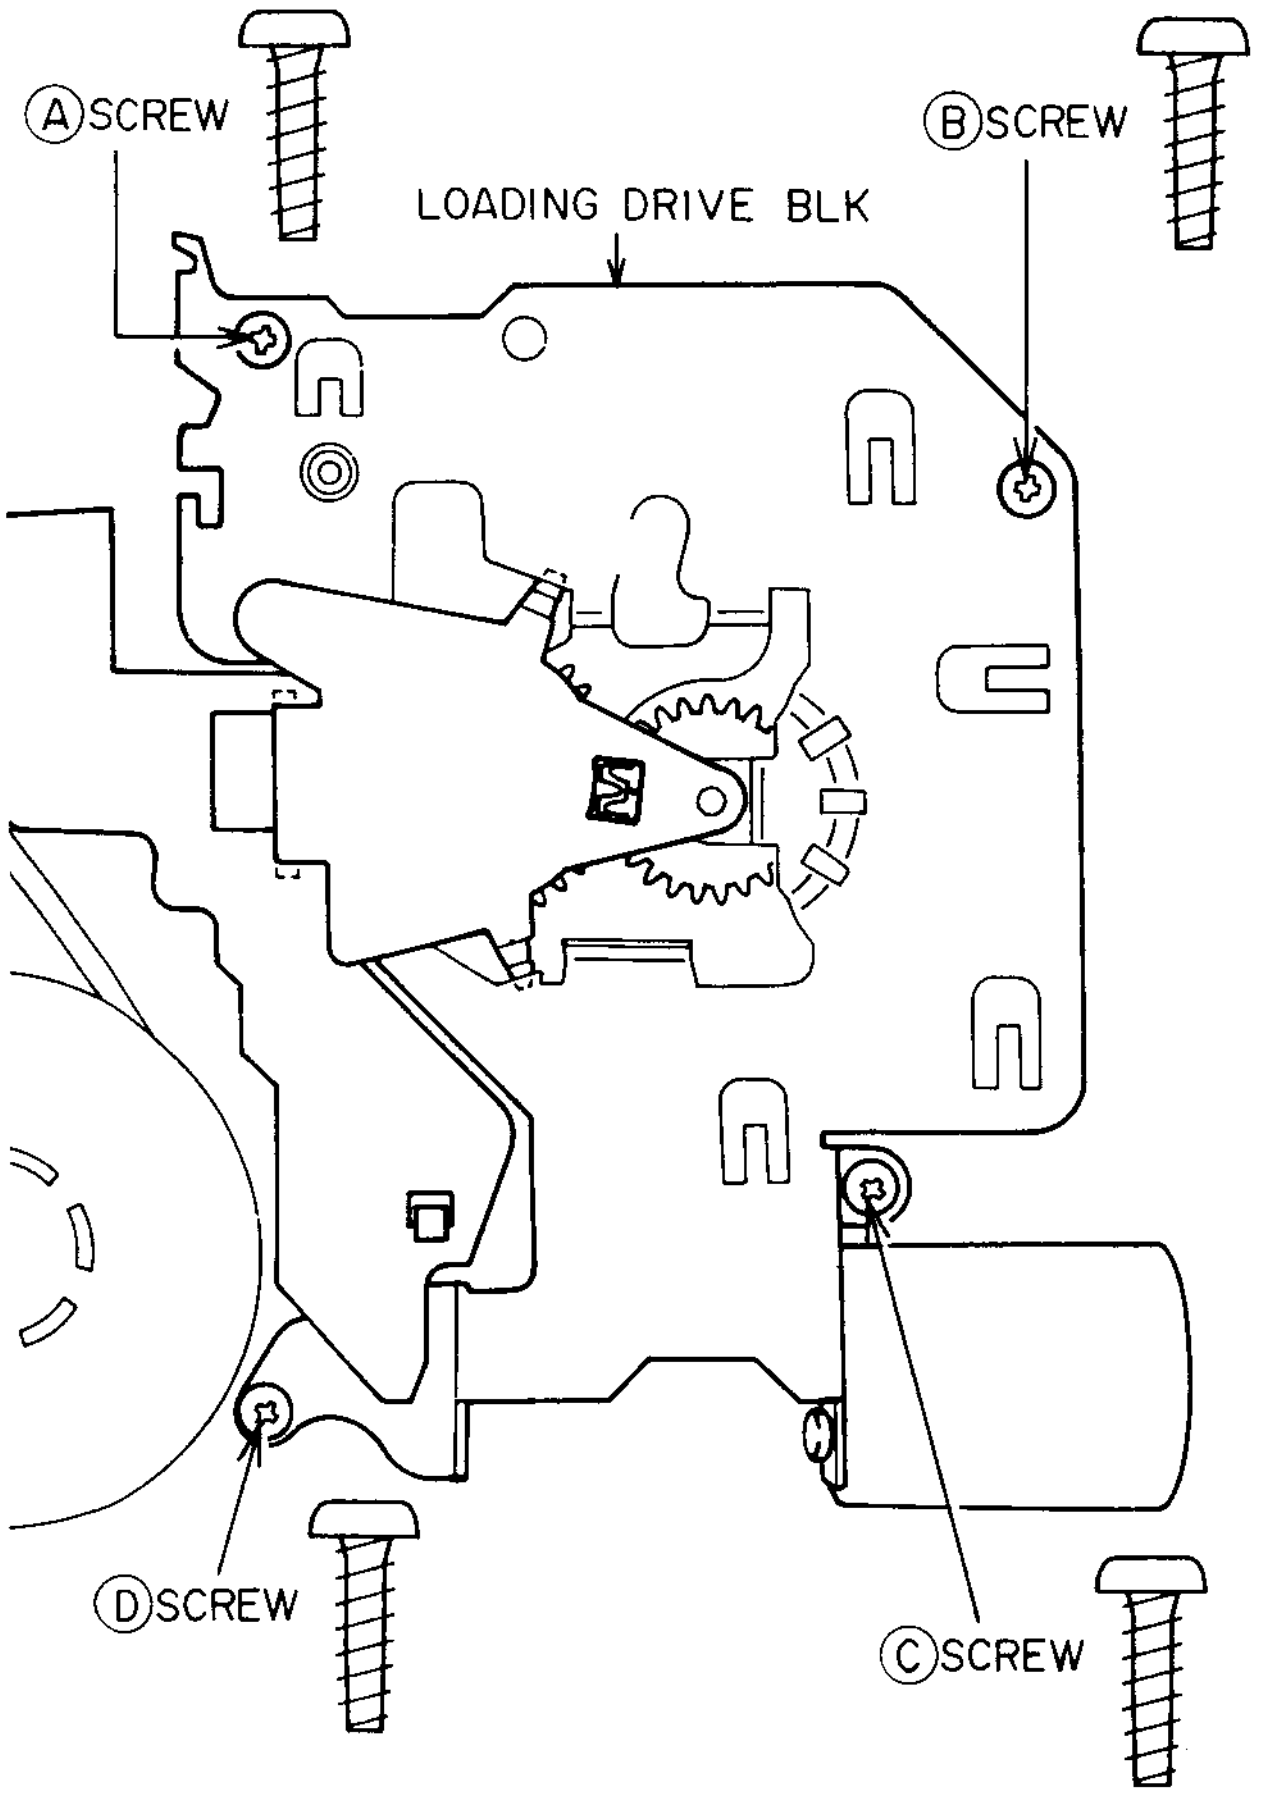
ⒶSCREW
ⒷSCREW
LOADING DRIVE BLK
ⒹSCREW
ⒸSCREW

Fig. 3-7

3-4.REASSEMBLY OF THE LOADING MECHANISM BLK

3-4-1. Position of the TOGGLE GEARs (T) and (S)

1) Set the TOGGLE GEARs (T) and (S) to the unloaded position with your fingers. Align the Ⓐ mark on TOGGLE GEAR (S) with the Ⓐ hole of TOGGLE GEAR (T) as shown in Fig. 3-8.

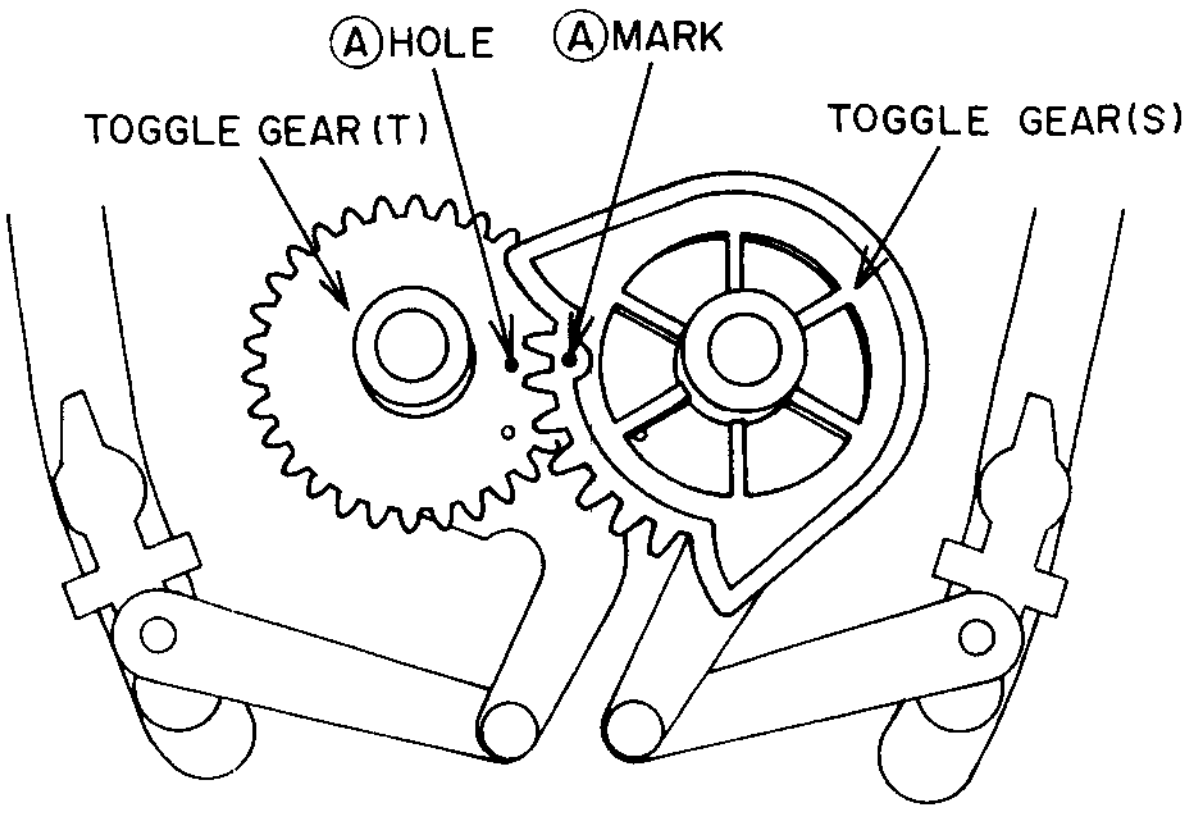
ⒶHOLE
ⒶMARK
TOGGLE GEAR(T)
TOGGLE GEAR(S)

Fig. 3-8

3-4-2. Installation of the CAM SLIDER GEAR & FRONT LOADING GEAR

1) Attach the WORM WHEEL GEAR as shown in Fig. 3-9.

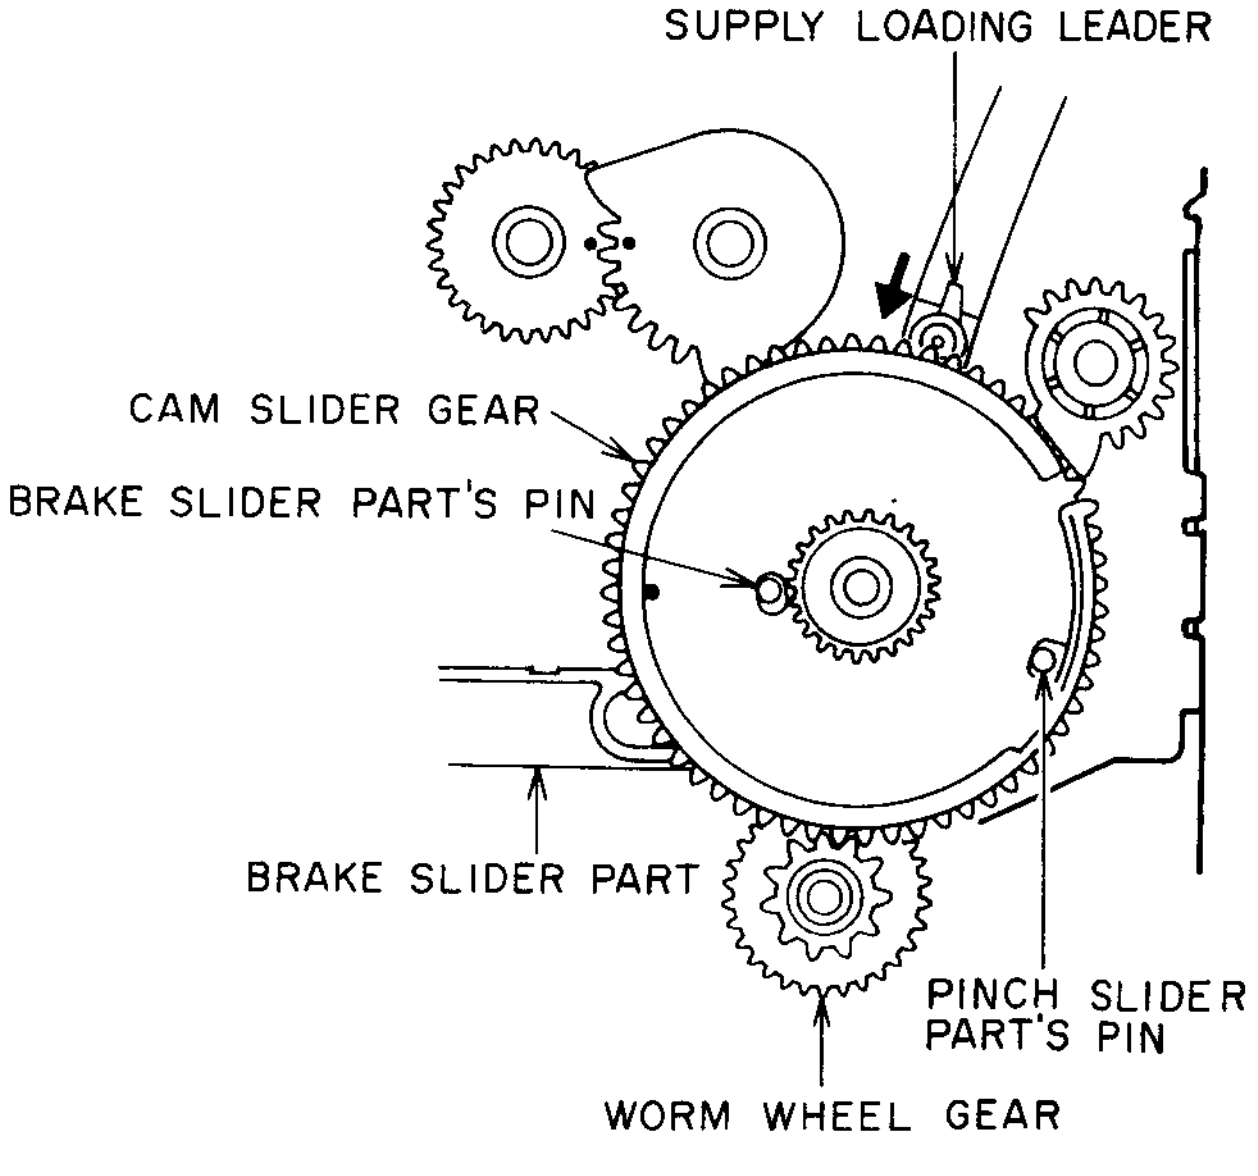
SUPPLY LOADING LEADER
CAM SLIDER GEAR
BRAKE SLIDER PART'S PIN
BRAKE SLIDER PART
PINCH SLIDER PART'S PIN
WORM WHEEL GEAR

Fig. 3-9

2) Set the CAM SLIDER GEAR and adjust the position of the BRAKE SLIDER PART and PINCH SLIDER PART so that both pins appear through the holes on the CAM SLIDER GEAR as shown in Fig. 3-9. When inserting the CAM SLIDER GEAR onto its shaft, press the SUPPLY LOADING LEADER slightly in the direction of the arrow to make installation easy.

3) Attach the FRONT LOADING GEAR as shown in Fig. 3-10 and align the Ⓑ mark on the FRONT LOADING GEAR with the Ⓑ hole of the FRONT LOADING SLIDER as shown in Fig. 3-11.

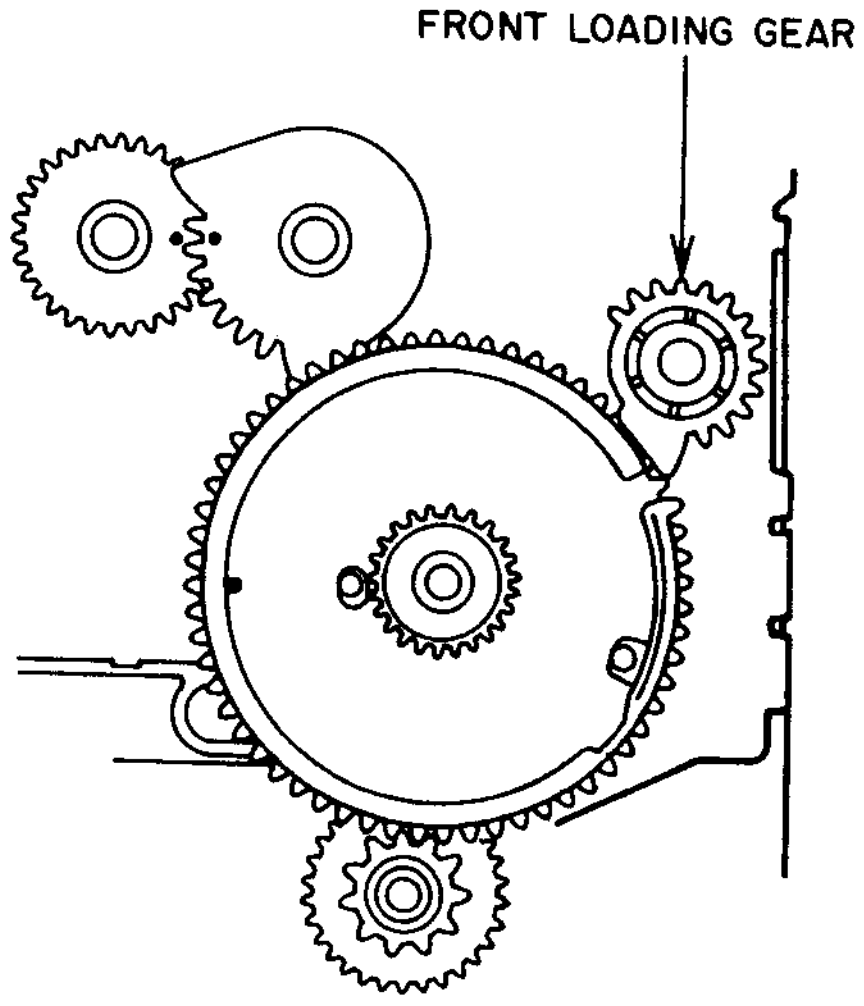
FRONT LOADING GEAR

Fig. 3-10

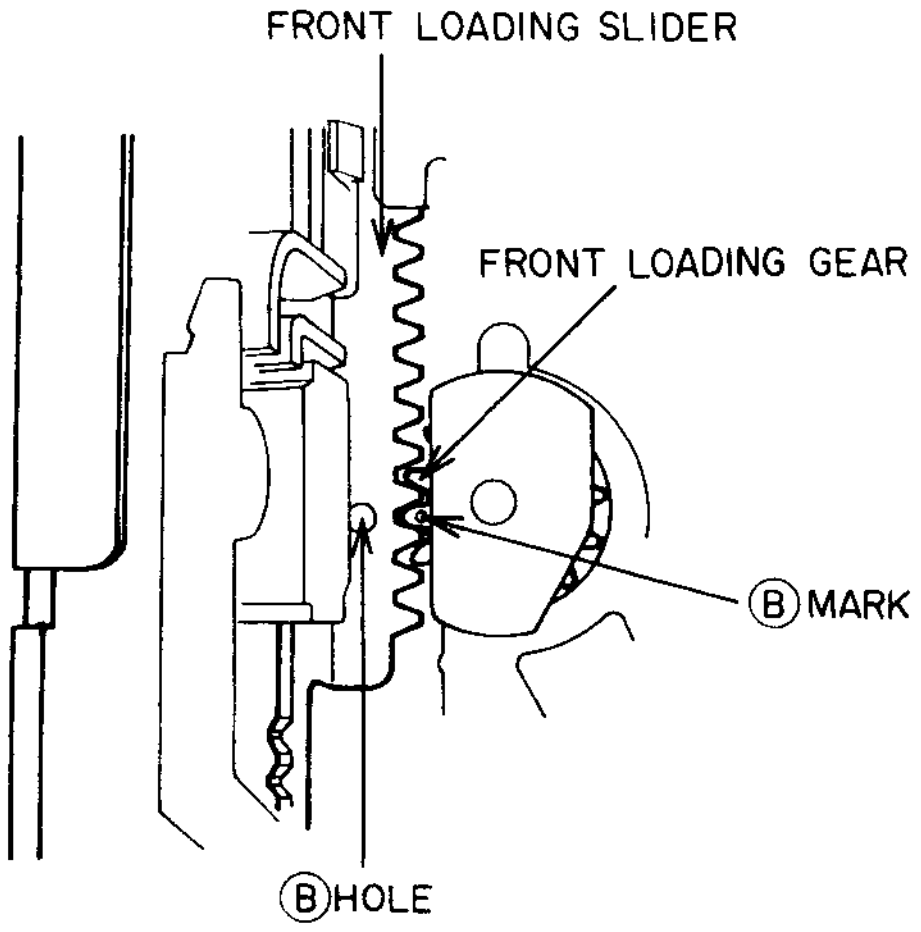
FRONT LOADING SLIDER
FRONT LOADING GEAR
ⒷMARK
ⒷHOLE

Fig. 3-11

3-4-3. Confirmation of the position of the EJECT GEAR

1) Confirm that the EJECT GEAR is in the correct position as shown in Fig. 3-12.

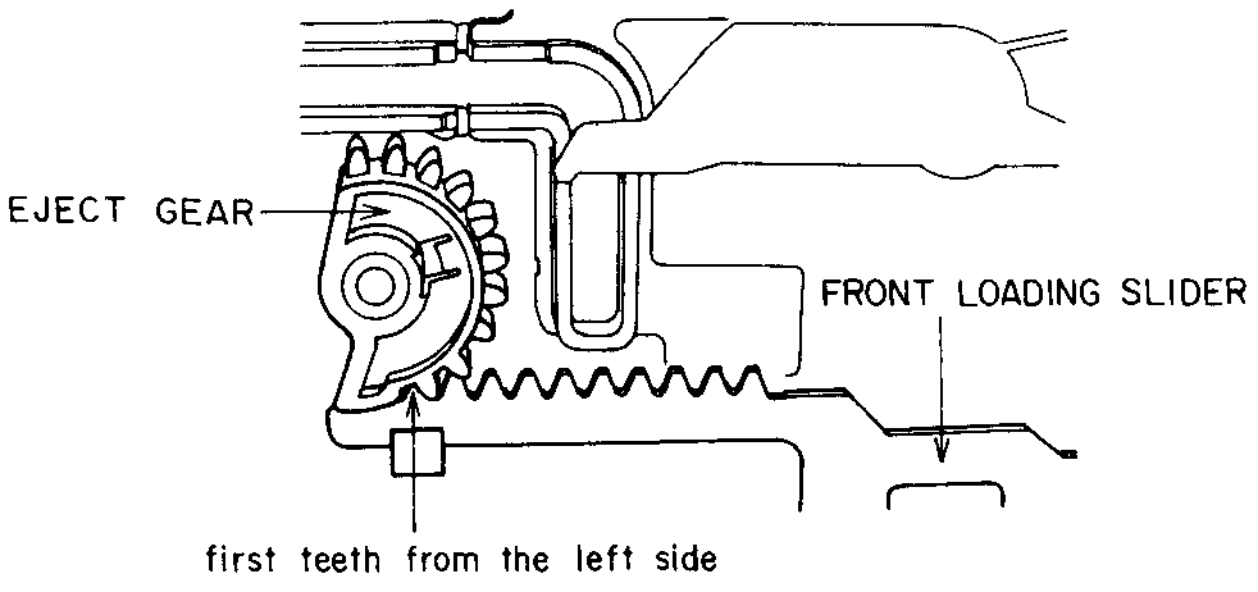
EJECT GEAR
FRONT LOADING SLIDER
first teeth from the left side

Fig. 3-12

2) Install the LOADING DRIVE BLK as shown in Fig.3-13.

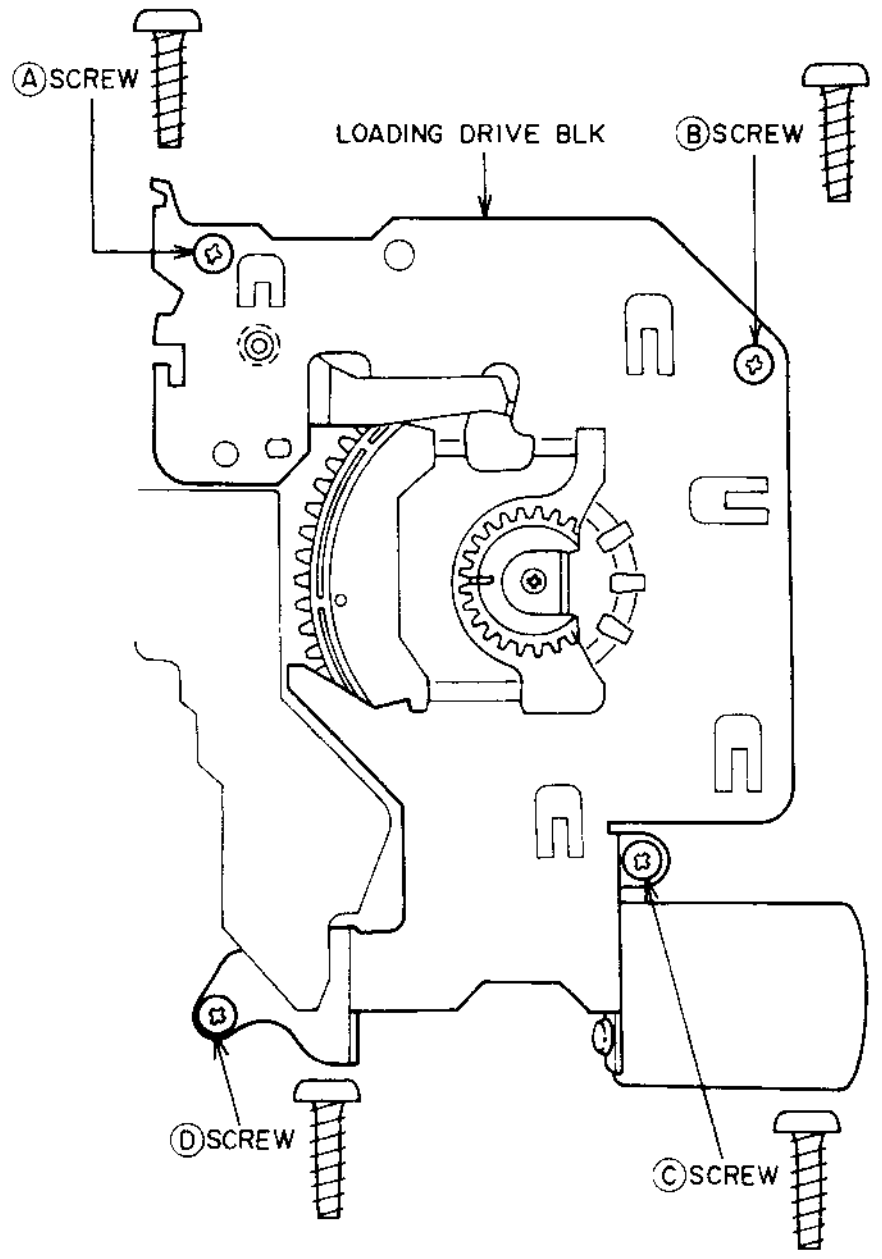
ⒶSCREW
LOADING DRIVE BLK
ⒷSCREW
ⒹSCREW
ⒸSCREW

Fig. 3-13

3-4-4. Installation of the MODE SELECT SWITCH

1) Set the MODE SELECT SWITCH's gear, so that the Ⓒ mark is in the center of the Ⓒ hole as shown in Fig. 3-14.

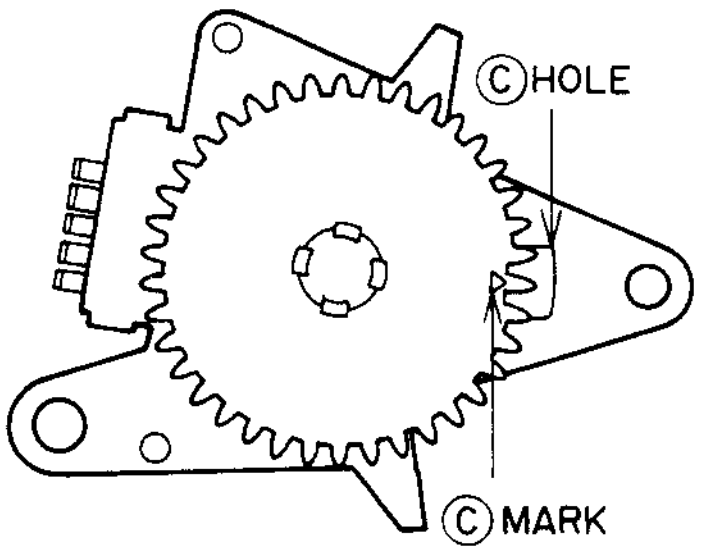

Fig. 3-14

2) Attach the MODE SELECT SWITCH to the LOADING DRIVE BLK and align the hollow of the gear's tooth (reverse side of the Ⓒ mark) with the Ⓒ groove of the CAM SLIDER GEAR as shown in Fig. 3-15.

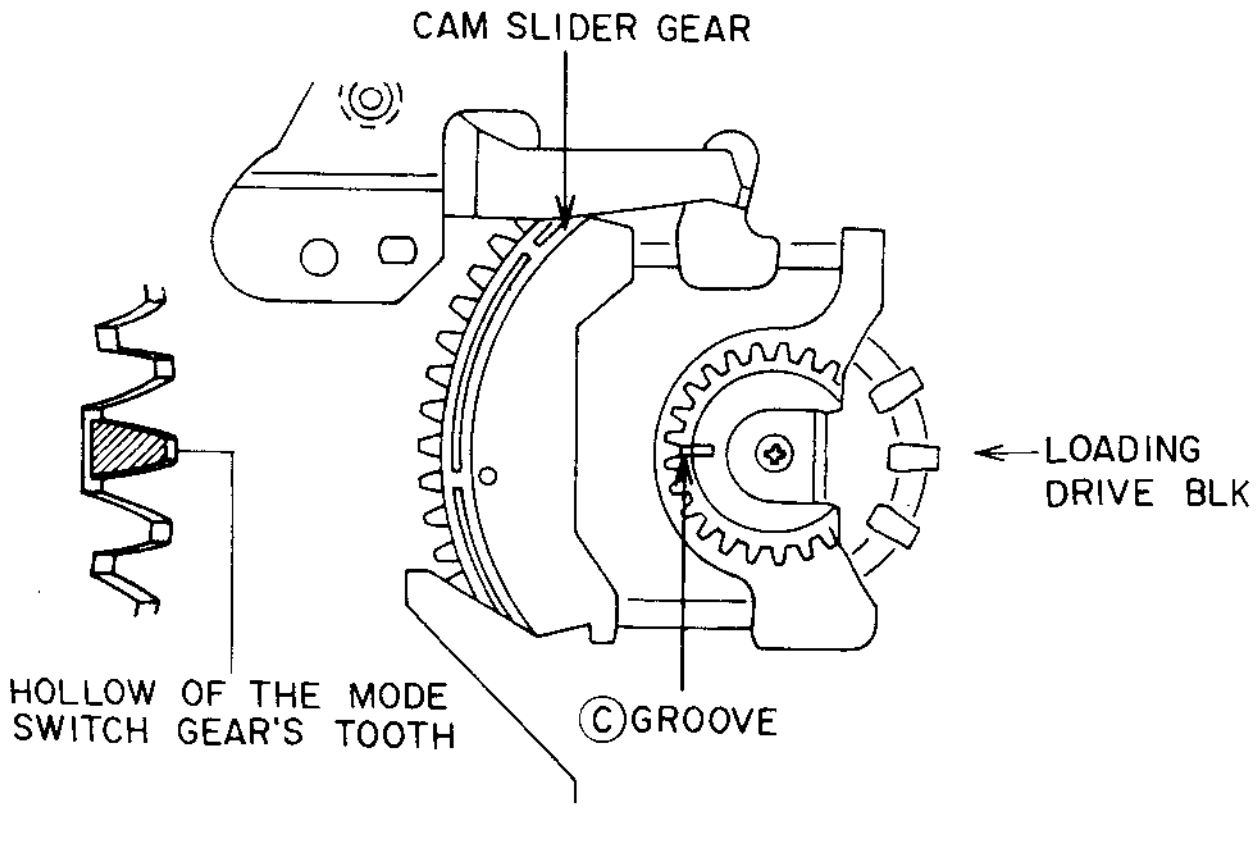
CAM SLIDER GEAR
LOADING DRIVE BLK
HOLLOW OF THE MODE SWITCH GEAR'S TOOTH
ⒸGROOVE

Fig. 3-15

3-4-5. Installation of the LOADING ARM BLK

1) While covering SENSOR (S) with your fingers, connect the AC power plug to the AC socket. The FRONT LOADING SLIDER will reach the "EJECT" position. Then disconnect the AC power plug from the AC socket before you release your fingers from SENSOR (S).
2) Install the LOADING ARM BLK in the reverse order of 3-1-2 (Removal of the LOADING ARM BLK). Position the EJECT GEAR and the JOINT GEAR as shown in Fig. 3-16.

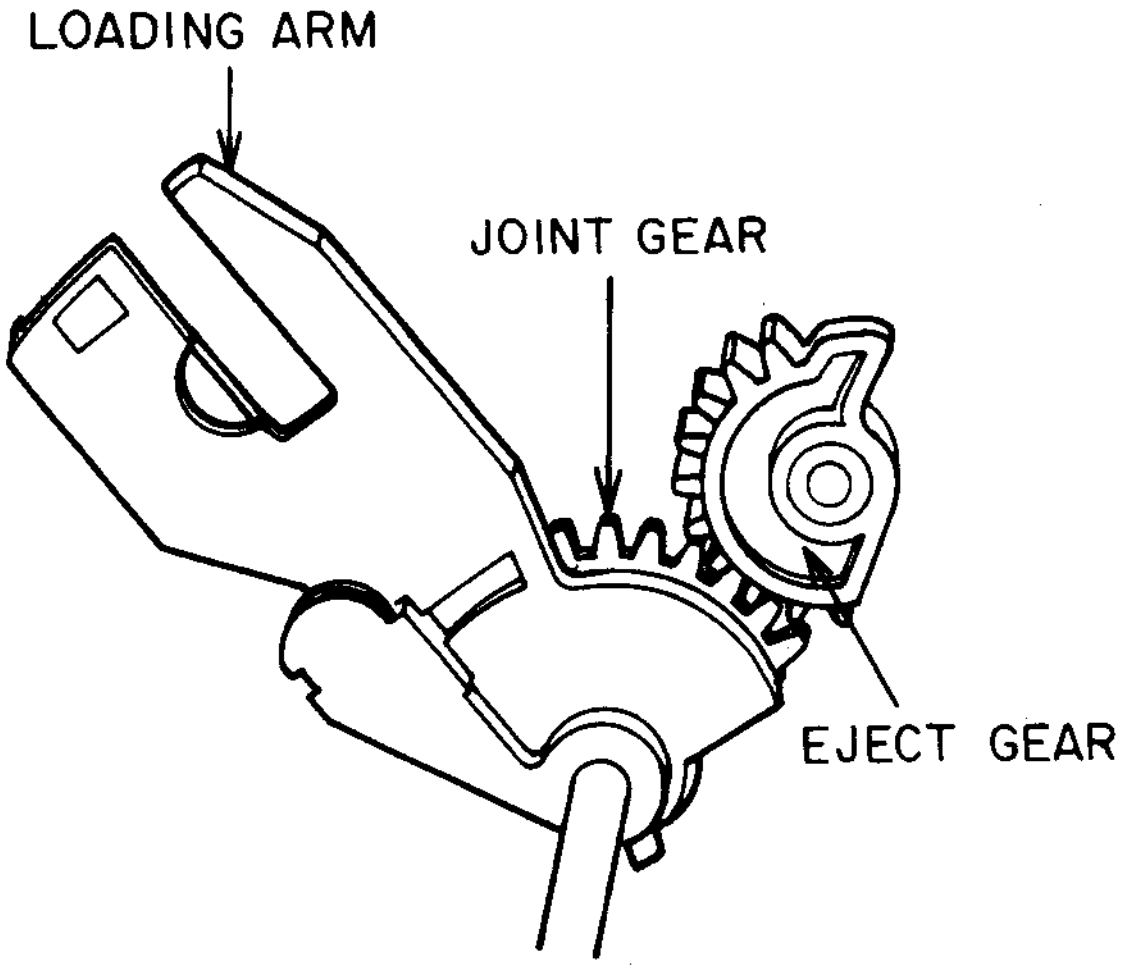

Fig. 3-16

3-4-6. Installation of the CASSETTE LOAD BLK, FRONT GUIDE and UPPER PLATE

1) Attach the CASSETTE LOAD BLK, FRONT GUIDE and UPPER PLATE in the reverse order of 3-1-1 (Removal of the CASSETTE LOAD BLK).
2) Insert a video cassette tape and confirm that the loading mechanism operates properly.

3-5. REPLACEMENT OF THE PINCH ROLLER PART

1) Remove the Ⓐ screw, then remove the PINCH ROLLER part, as shown in fig. 3-17
2) Set the pinch roller so that white plastic spacer side faces chassis when replacing. Then tighten the Ⓐ screw.

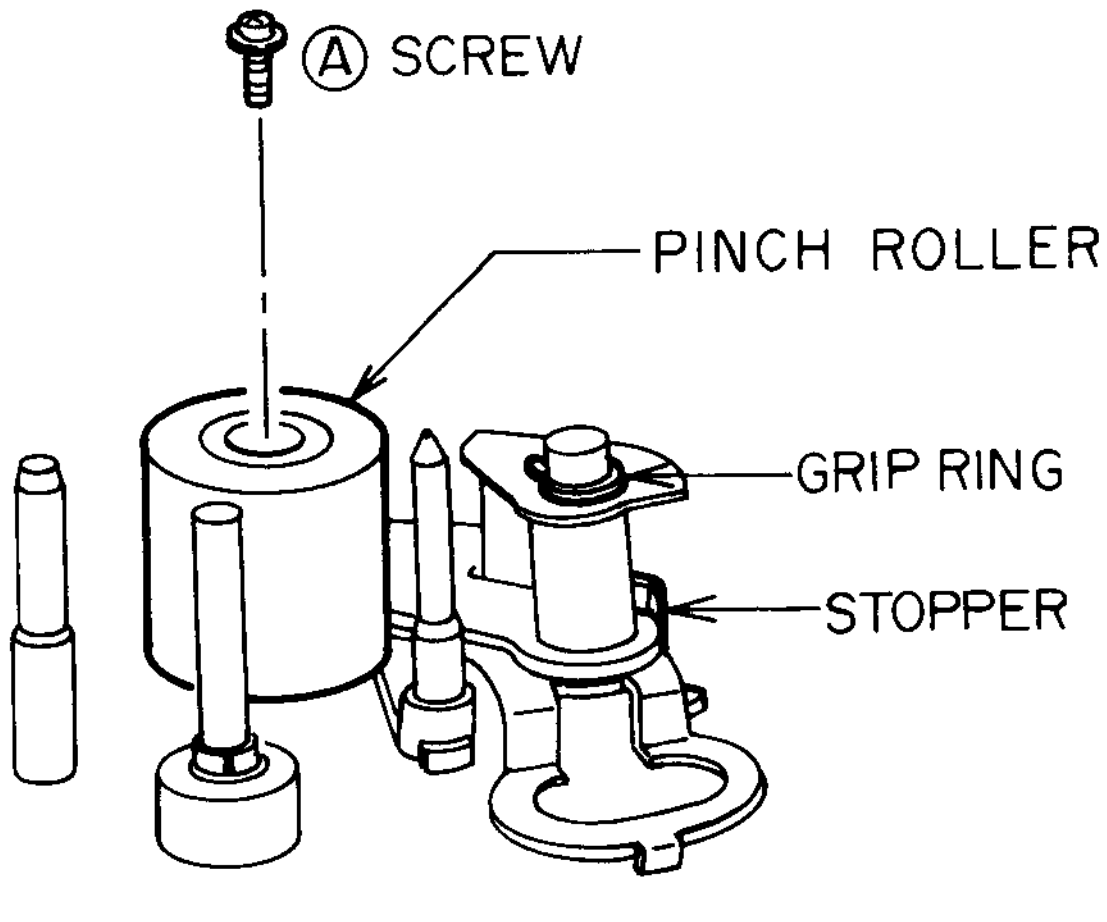

Fig. 3-17

3-6. REPLACEMENT OF THE IDLER PART AND REVIEW BRAKE PART (JFX-L only)

1) Remove the CASSETTE LOAD BLOCK & LOADING ARM BLK. (refer to 3-1, REMOVAL OF THE EJECTOR BLOCK).
2) Release the stopper of IDLER PART as shown in Fig. 3-18, then remove it.

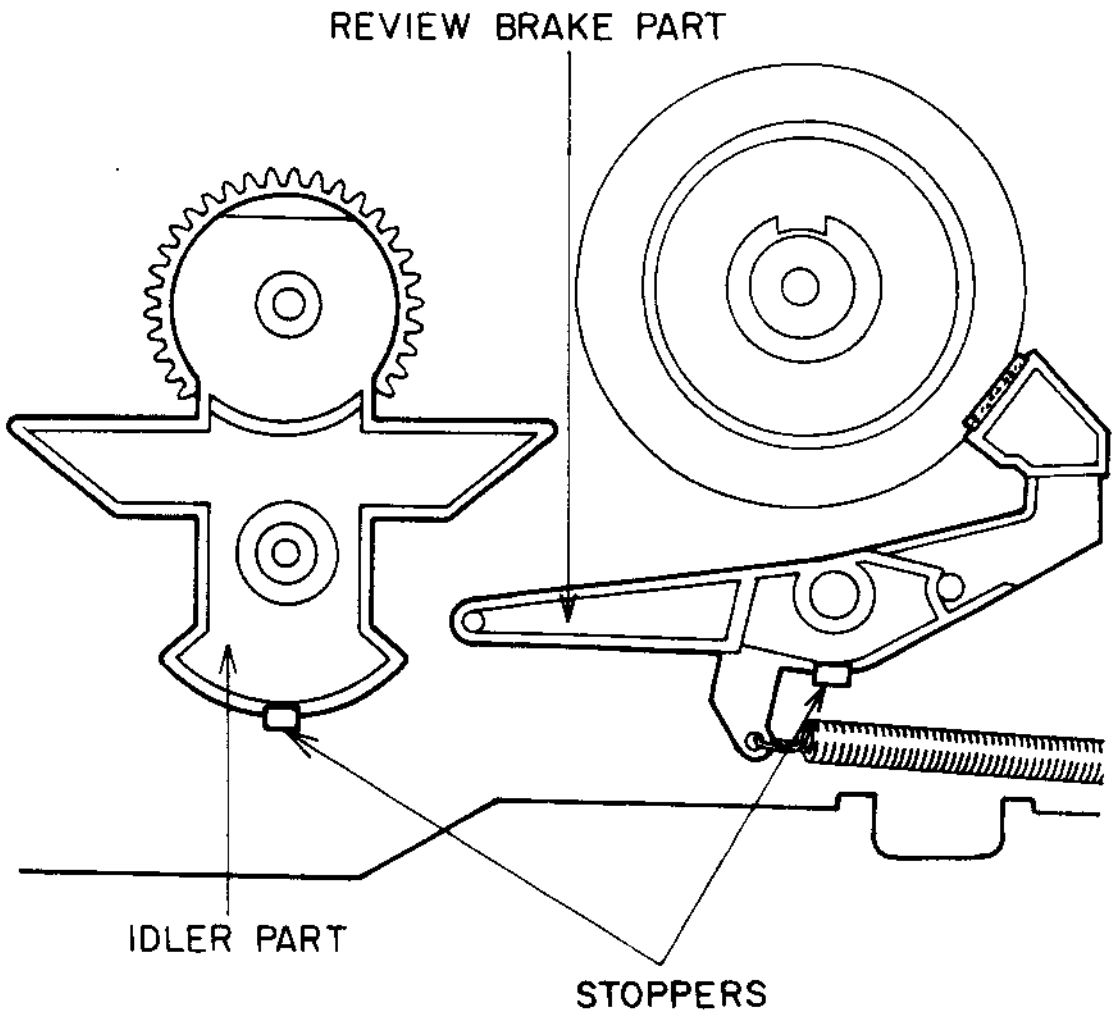

Fig. 3-18

3) Take off the review brake part spring, then release the stopper of the REVIEW BRAKE PART and remove it.
4) Reassemble the parts in the reverse order of steps 1) to 3).

3-7.REPLACEMENT OF THE IDLER PART (2) AND REVIEW BRAKE PART

(JFX ONLY)

1) Remove the CASSETTE LOAD BLK & LOADING ARM BLK. (Refer to 3-1, REMOVAL OF THE EJECTOR BLK.)
2) Release the stopper of the IDLER PART (2) as shown in Fig. 3-19, then remove it.

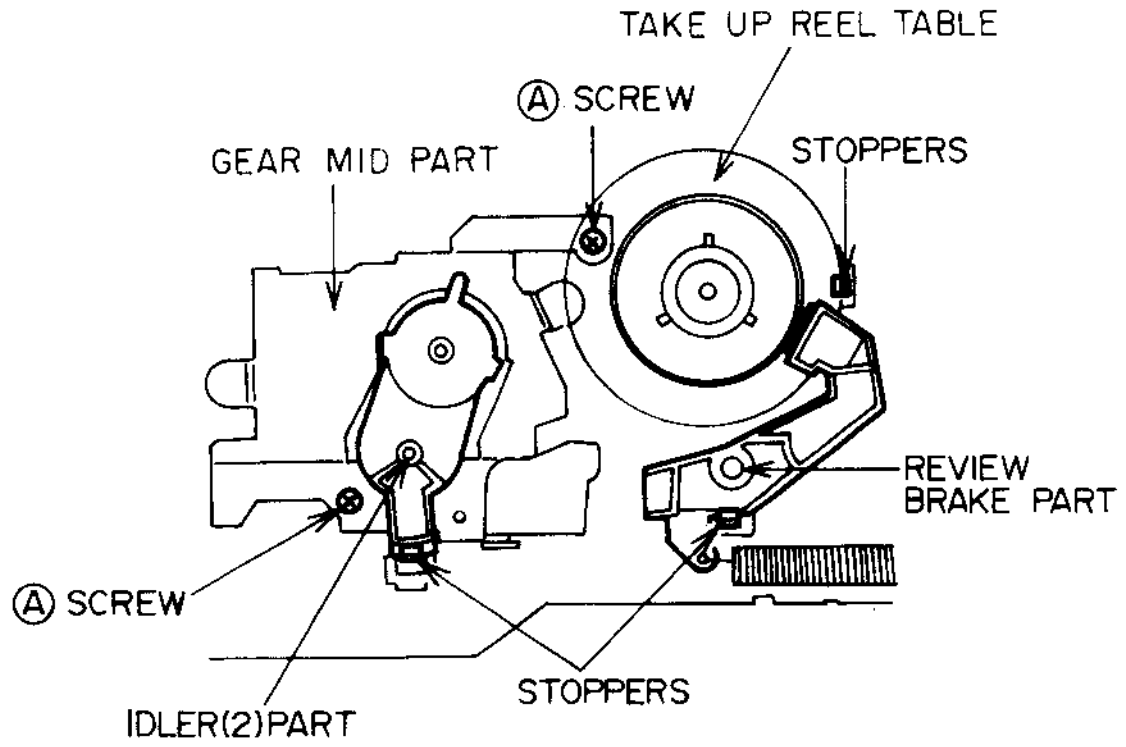
TAKE UP REEL TABLE
Ⓐ SCREW
GEAR MID PART
STOPPERS
REVIEW BRAKE PART
Ⓐ SCREW
STOPPERS
IDLER(2)PART

Fig. 3-19

3) Take off the review brake part spring, then release the stopper of the REVIEW BRAKE PART and remove it.
4) Reassemble these parts in the reverse order of 1) to 3).

3-8.REPLACEMENT OF THE GEAR MID PART (JFX ONLY)

1) Remove the REVIEW BRAKE PART and IDLER (2) PART with referring to the step 3-7.
2) Release the stopper of the TAKE UP REEL TABLE as shown in Fig. 3-20, then remove it.
3) Remove the two Ⓐ screws then replace the GEAR MID PART as shown in Fig. 3-20.
4) Reassemble in the reverse order.

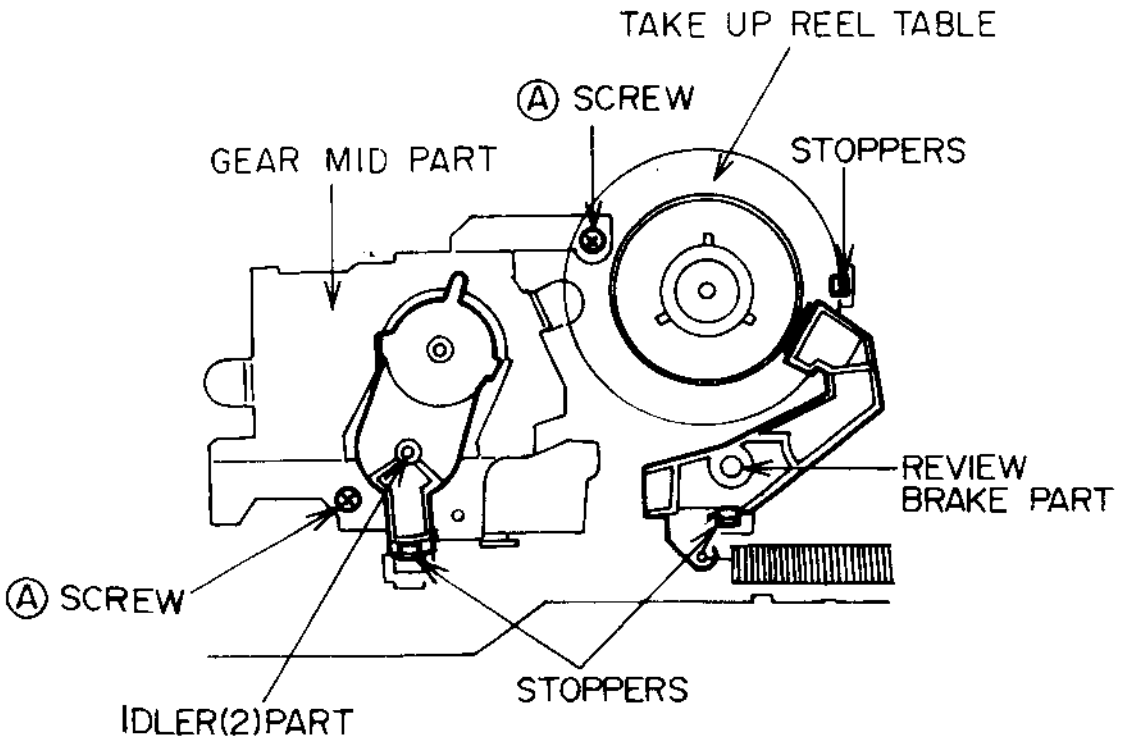
TAKE UP REEL TABLE
Ⓐ SCREW
GEAR MID PART
STOPPERS
REVIEW BRAKE PART
Ⓐ SCREW
STOPPERS
IDLER(2)PART

Fig. 3-20

3-9. REPLACEMENT OF THE UPPER DRUM

3-9-1. Removal of the UPPER DRUM

1) Remove one of the PRE AMP retaining screw and remove the EARTH BRUSH.
2) Unsolder the eight relay leads and remove the two upper drum fixing screws as shown in Fig. 3-21.
3) Gently lift and remove the UPPER DRUM.

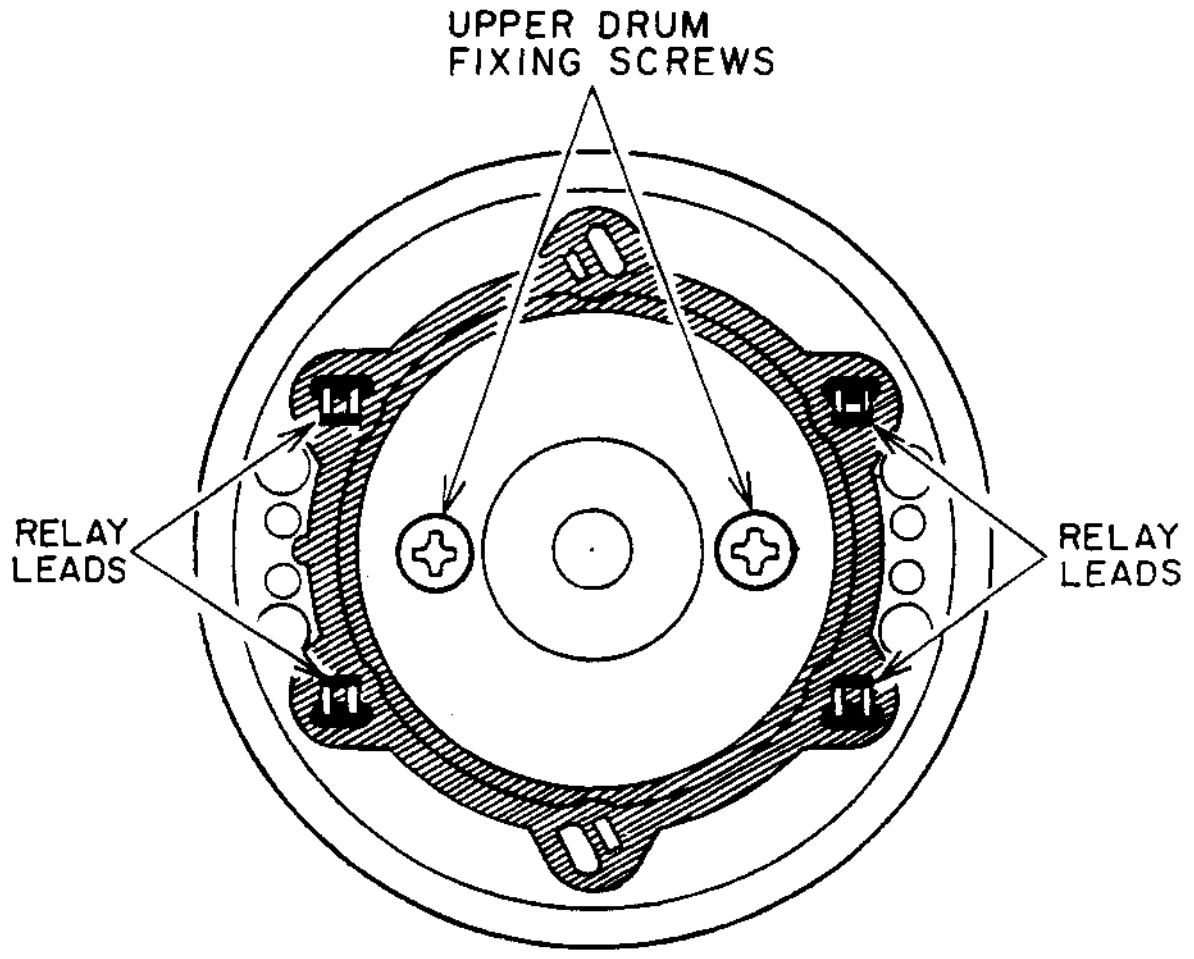
UPPER DRUM FIXING SCREWS
RELAY LEADS
RELAY LEADS

Fig. 3-21

3-9-2. Installation of the UPPER DRUM

1) Attach the UPPER DRUM to the LOWER DRUM ROTOR, so that the upper drum convex Ⓐ and lower drum rotor's GREEN PCB side line up, as shown in Fig. 3-22.

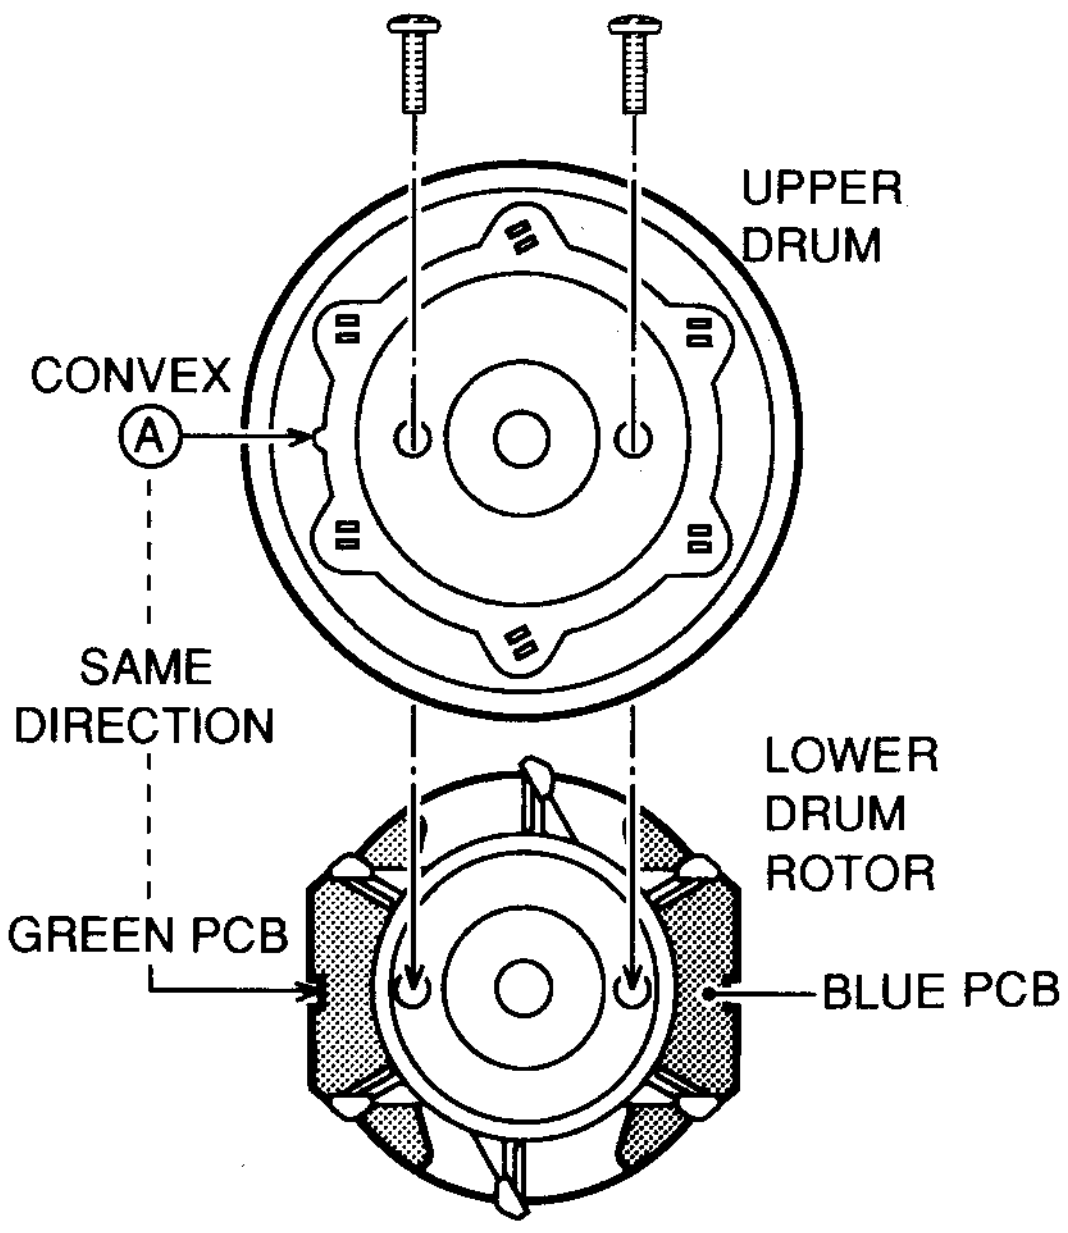
UPPER DRUM
CONVEX
Ⓐ
SAME DIRECTION
LOWER DRUM ROTOR
GREEN PCB
BLUE PCB

Fig. 3-22

NOTE: Because height precision is required for proper performance, and because head tips are fragile, the following points should be noted when replacing the UPPER DRUM BLOCK.

(a) Do not loosen the set screw on the collar preload.
(b) Before fixing, use alcohol to clean both surfaces where the upper drum and the rotary transformer meet.
(c) If the UPPER DRUM can not be inserted on to the shaft easily during installation, clean the hole in the UPPER DRUM with alcohol and put a little oil on the shaft.
(d) Make sure that the upper drum fixing screw holes, on the rotary transformer part, and the upper drum fixing screw penetration holes match exactly before inserting the fixing screws.
(e) Tighten the two upper drum fixing screws alternately and gradually.

3-9-3. After replacement

After replacement, the following adjustments are necessary for the proper performance.

1) Control head Phase adjustment (IV. MECHANICAL ADJUSTMENT 4-3-3.)
2) PB switching point adjustment. (V. ELECTRICAL ADJUSTMENT Step 1)
3) Video head REC current adjustment. (V. ELECTRICAL ADJUSTMENT Step 7)
4) ENV.DET (I-HQ) adjustment. (V.ELECTRICAL ADJUSTMENT Step 10)

3-10. DRUM MOTOR PC BOARD REPLACEMENT

1) Remove the two Ⓐ screws on the ROTARY PLATE and then remove it.
Then disconnect the connector on the DRUM MOTOR PCB as shown.

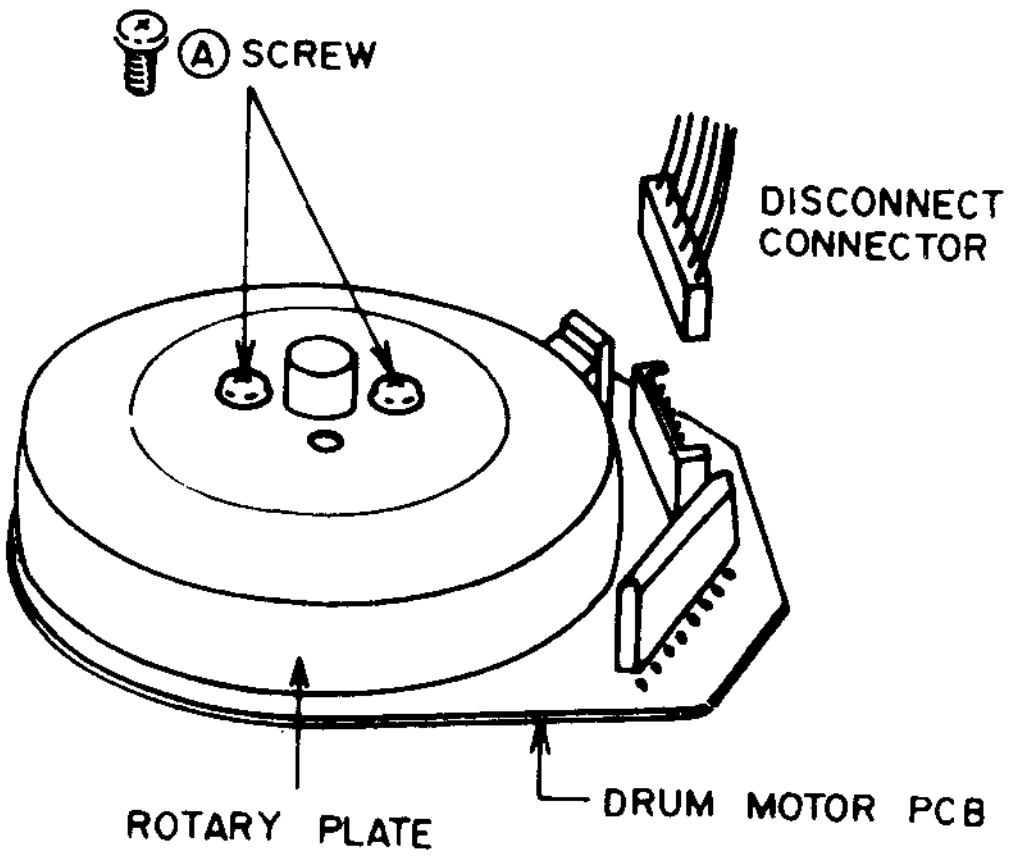

Fig. 3-23

2) Remove the three Ⓑ screws which retain the DRUM MOTOR PCB and replace it.

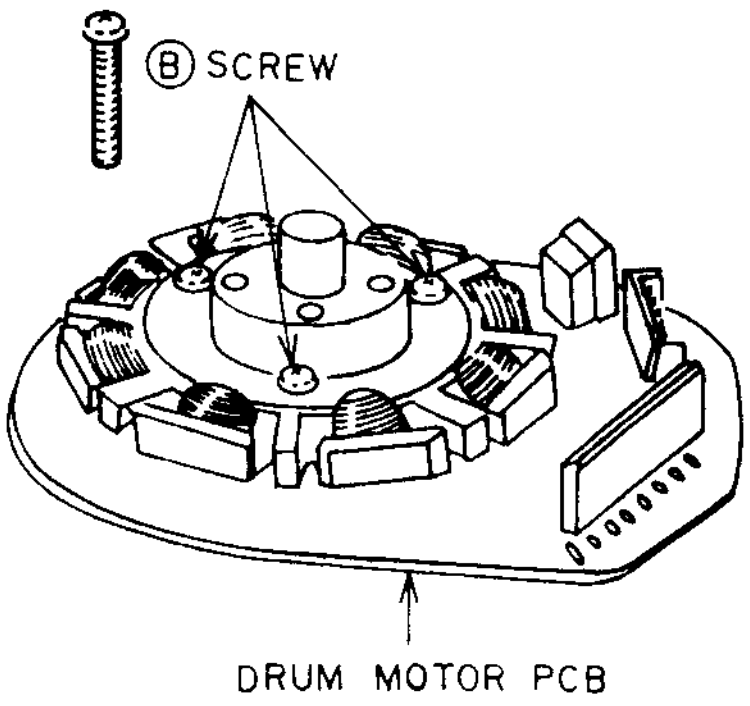

Fig. 3-24

3) Attach the ROTARY PLATE to the collar preload so that the rotary plate Ⓒ hole and collar preload Ⓓ hole line up.

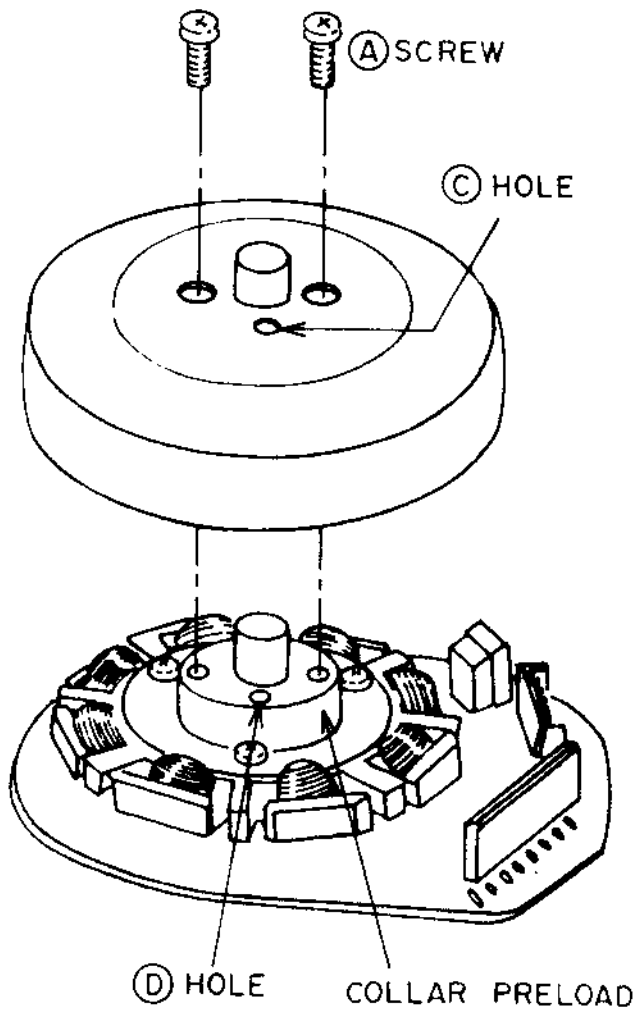

Fig. 3-25

3-11. REMOVAL OF THE MECHANISM BLOCK

3-11-1. Removal of the PRE AMP PC Board

1) Remove the Ⓐ screw and remove the EARTH BRUSH as shown in Fig. 3-26.

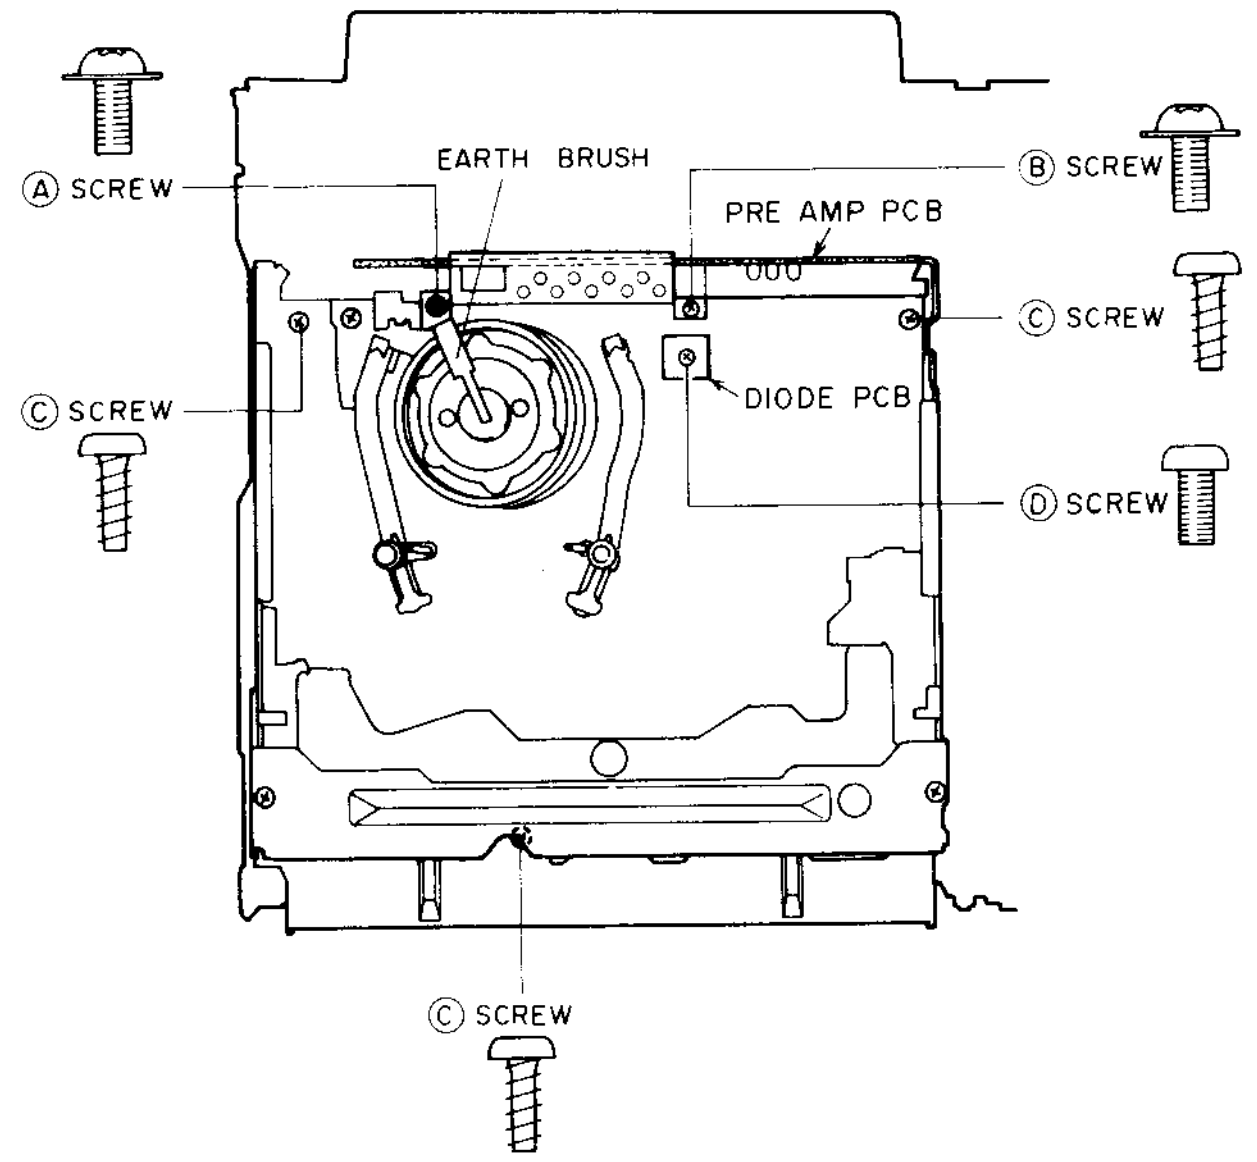

Fig. 3-26

2) Remove the Ⓓ screw on the DIODE PCB and remove the DIODE PCB.
3) Remove the Ⓑ screw then pull up the PRE AMP PCB carafully.

3-11-2. Removal of the MECHANISM BLK (MECHA. FRAME)

1) Disconnect the connectors P301, P302, P303 on the MAIN (A) PCB and P1 on the A/C HEAD PCB.
2) Disconnect the connector on the FULL TRACK ERASE HEAD.
3) Remove the three Ⓒ screws from the MECHA. FRAME as shown in Fig. 3-26.
4) Hold the rear side of the MECHA. FRAME then remove it by pulling it up backwards.
5) Reassemble in the reverse order for installation.

IV. MECHANICAL ADJUSTMENT

4-1. BACK TENSION ADJUSTMENT

1) Prepare a video cassette tape which you no longer needed. Remove both tape reels and the tape protection cover from the cassette tape. Then cover the video cassette's left and right side detection holes with black adhesive tape.
2) Play back the tapeless cassette which you prepared.
3) Confirm the distance between Ⓐ groove on the TENSION ARM and the Ⓐ mark on the MECHA. CHASSIS so that the distance should be within the value shown in Fig. 4-1.
4) If the result is not satisfactory, eject the tape and adjust the TENSION ADJUST repeatedly until the result is satisfactory.

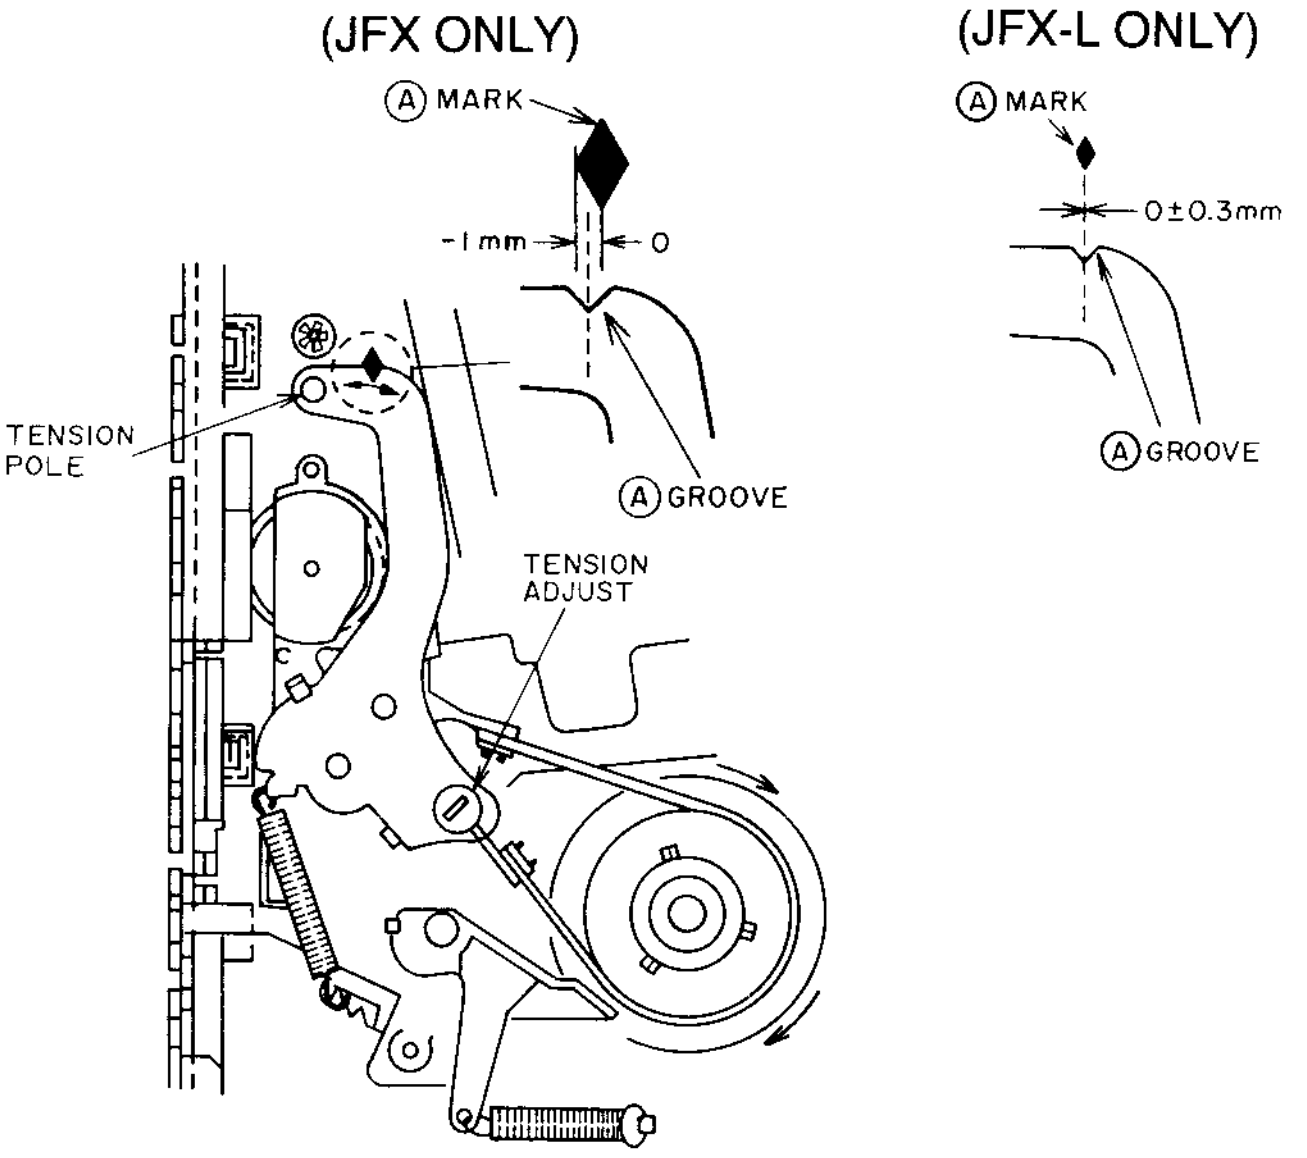
(JFX ONLY) (JFX-L ONLY)

Fig. 4-1

4-2. TAPE TRANSPORT ADJUSTMENTS

NOTE: The following adjustments are required only when an irregularity is found, since these adjustment are precisely set at the factory.

4-2-1. Tape curl adjustment at the TAKE-UP TAPE GUIDE

1) Play back a recorded tape which is no longer needed.
2) Turn the Ⓐ screw on the A/C HEAD BLK, until the edge of the tape barely touches the lower part of the TAKE UP TAPE GUIDE, without any curl or wrinkle.
3) Once the Ⓐ screw is adjusted, A/C HEAD height and azimuth adjustment is required. (Refer to 4-3. A/C HEAD POSITION ADJUSTMENT.)

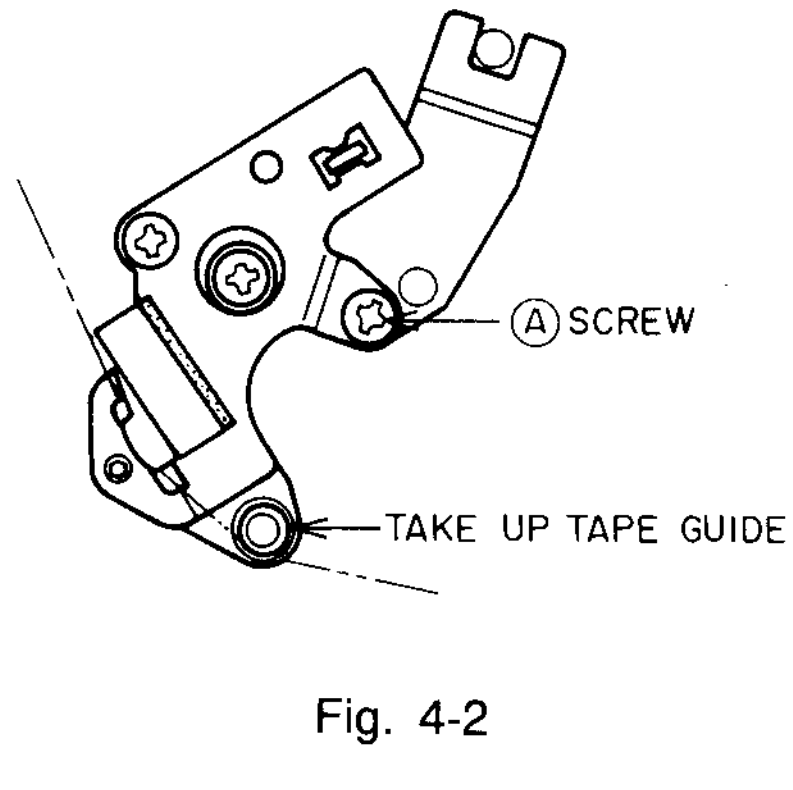

Fig. 4-2

(TAKE-UP TAPE GUIDE)

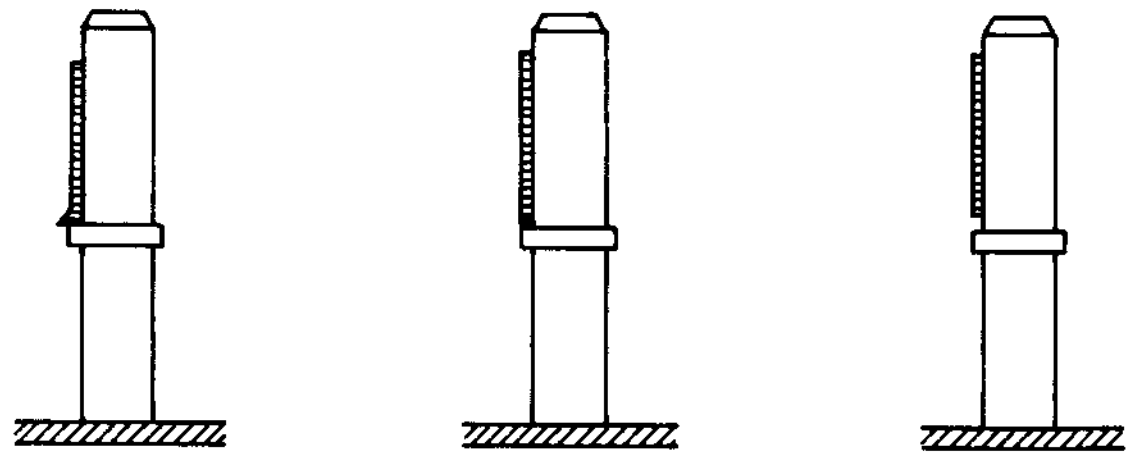
(a) INCORRECT (b) CORRECT (C) INCORRECT

Fig. 4-3

4-2-2. Confirmation of tape curl on the SUPPLY TAPE GUIDE

Confirm that the edge of the tape barely touches the lower part of the SUPPLY TAPE GUIDE, without any curl or wrinkle as shown in Fig. 4-4.

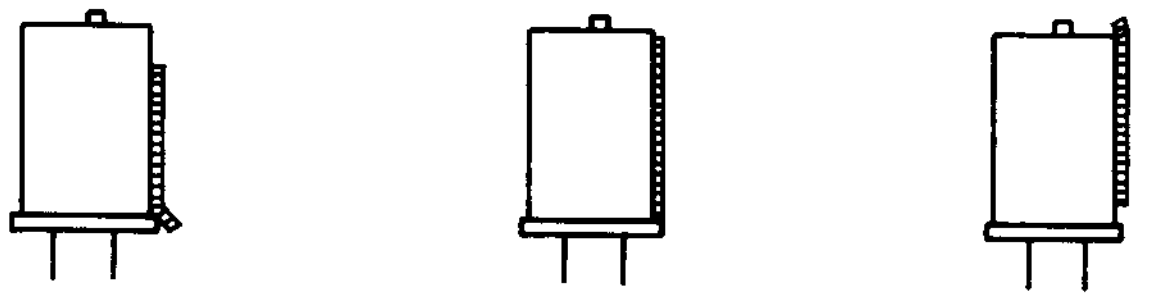
INCORRECT CORRECT INCORRECT

Fig. 4-4

4-2-3. REVIEW ARM height adjustment

1) Play back the beginning part of an E-240 tape and set the unit to the REVIEW mode by pressing the REW button. (Remove the tape protection cover to make the adjustment easier.)

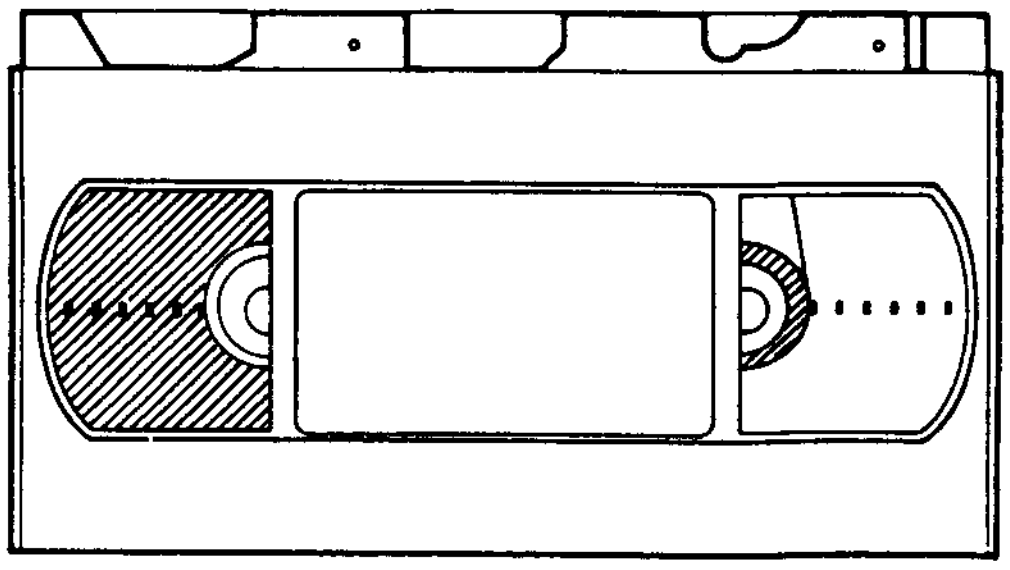

Fig. 4-5

2) Turn the REVIEW ARM height Ⓐ nut so that the edge of the tape barely touches the lower part of the TAKE-UP TAPE GUIDE, without any curl or wrinkle between the TAKE-UP TAPE GUIDE and the CAPSTAN SHAFT as shown in Fig. 4-6 to Fig. 4-8.

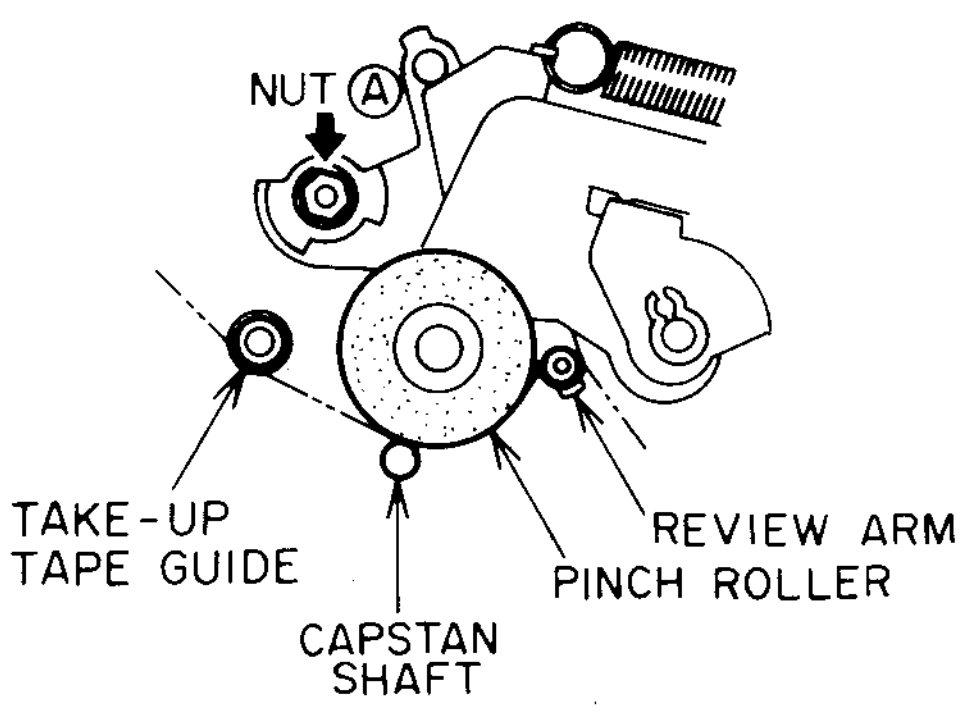
NUT Ⓐ
TAKE-UP TAPE GUIDE
CAPSTAN SHAFT
REVIEW ARM PINCH ROLLER

Fig. 4-6

(TAKE-UP TAPE GUIDE)

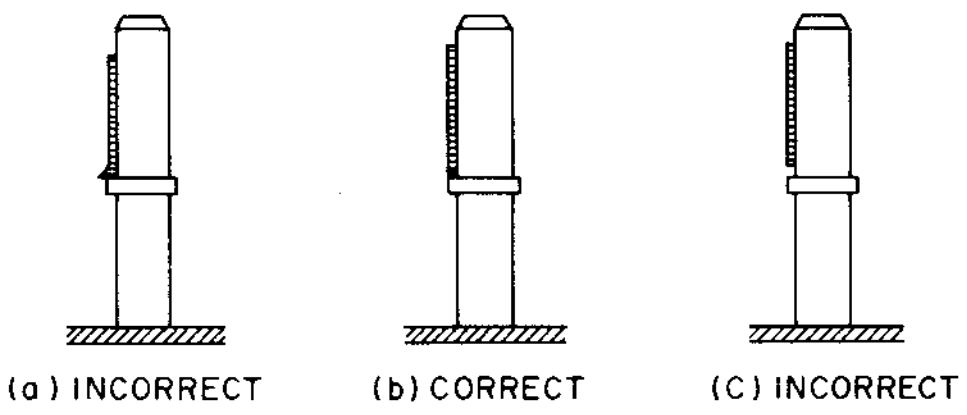
(a) INCORRECT
(b) CORRECT
(C) INCORRECT

Fig. 4-7

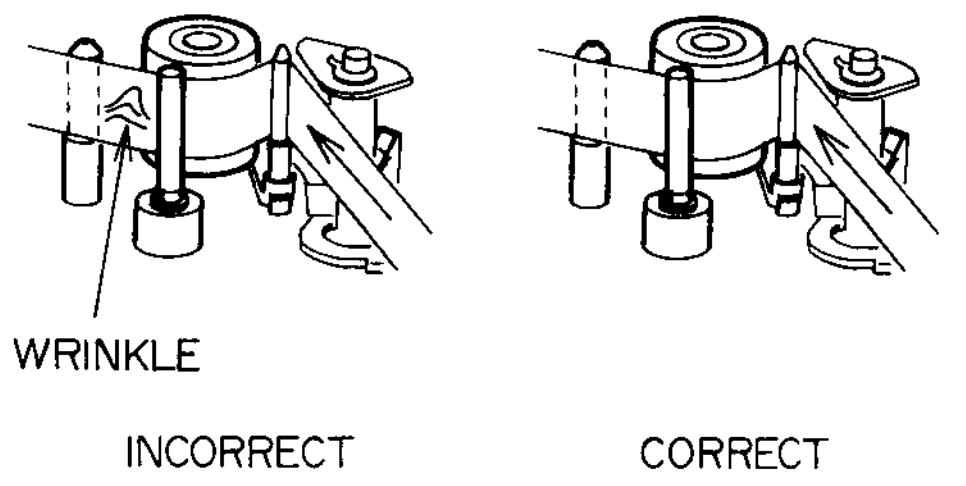
WRINKLE
INCORRECT
CORRECT

Fig. 4-8

3) Play back the beginning part of an E-240 tape and this time set the unit to the CUE mode by pressing the F.FWD button.

4) Confirm there is no curl or wrinkle near the REVIEW ARM's guide.
If curl or wrinkle of the tape occurs, slightly turn the Ⓐ nut (Shown in Fig. 4-6) until it disappears.

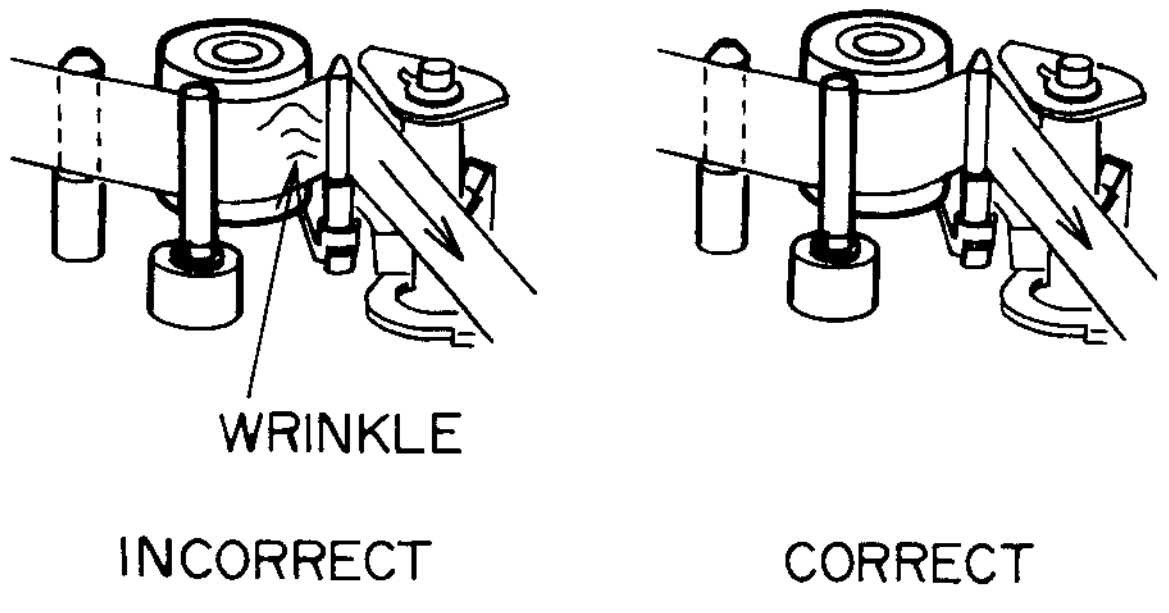
WRINKLE
INCORRECT
CORRECT

Fig. 4-9

5) Set the unit to the REVIEW mode again. Then confirm that there is no curl or wrinkle near the TAKE-UP TAPE GUIDE. (A small gap may appear after this adjustment, but this is allowable.)

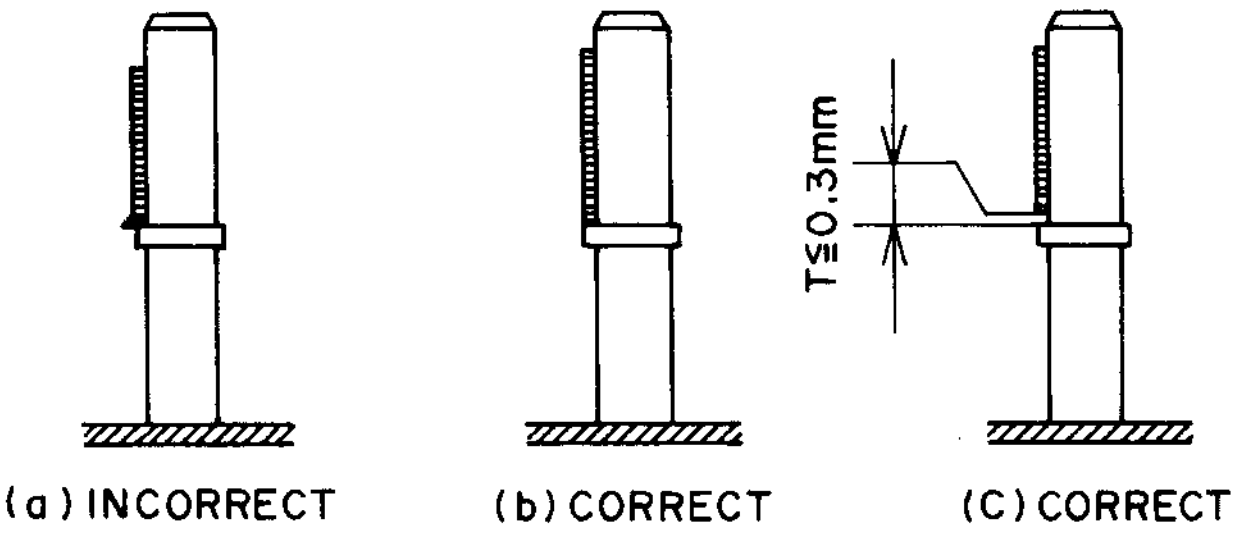
T≦0.3mm
(a) INCORRECT
(b) CORRECT
(C) CORRECT

Fig. 4-10

NOTE:
1. If the results are not satisfactory, repeat steps 2) to 5).
2. Always play an undamaged tape to obtain satisfactory adjustment.
3. Because an E-240 tape can be damaged easily, due of its thinness, a pre-adjustment with an E-180 tape is recommended.

4-2-4. LOADING LEADER height adjustments

1) Slightly loosen the set screw at the lower part of the LOADING LEADERs (L), (R) so that the LOADING LEADER can be adjusted with reasonable tightness. (Refer to Fig. 4-11.)

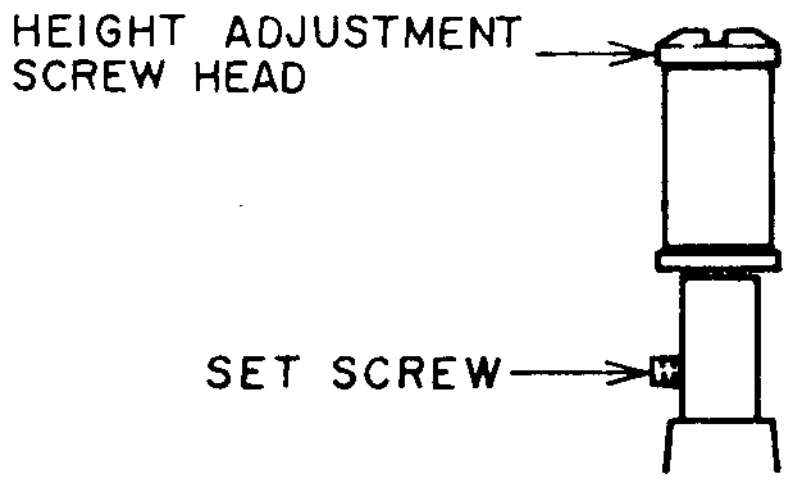
HEIGHT ADJUSTMENT SCREW HEAD
SET SCREW

Fig. 4-11

2) Play back the reference tape TF-530RFS (AT-751775).
3) Connect an oscilloscope's CH-1 to TR510 emitter (ENVE) on the MAIN (A) PCB and CH-2 to TP2 (V-SWP) on the PRE AMP PCB for triggering.
4) Turn the LOADING LEADER heads with a flat head (—) screwdriver to obtain a flat RF envelope as the ideal envelope, as shown in Fig. 4-12.
5) After adjustment is completed, tighten the loading leader set screws.

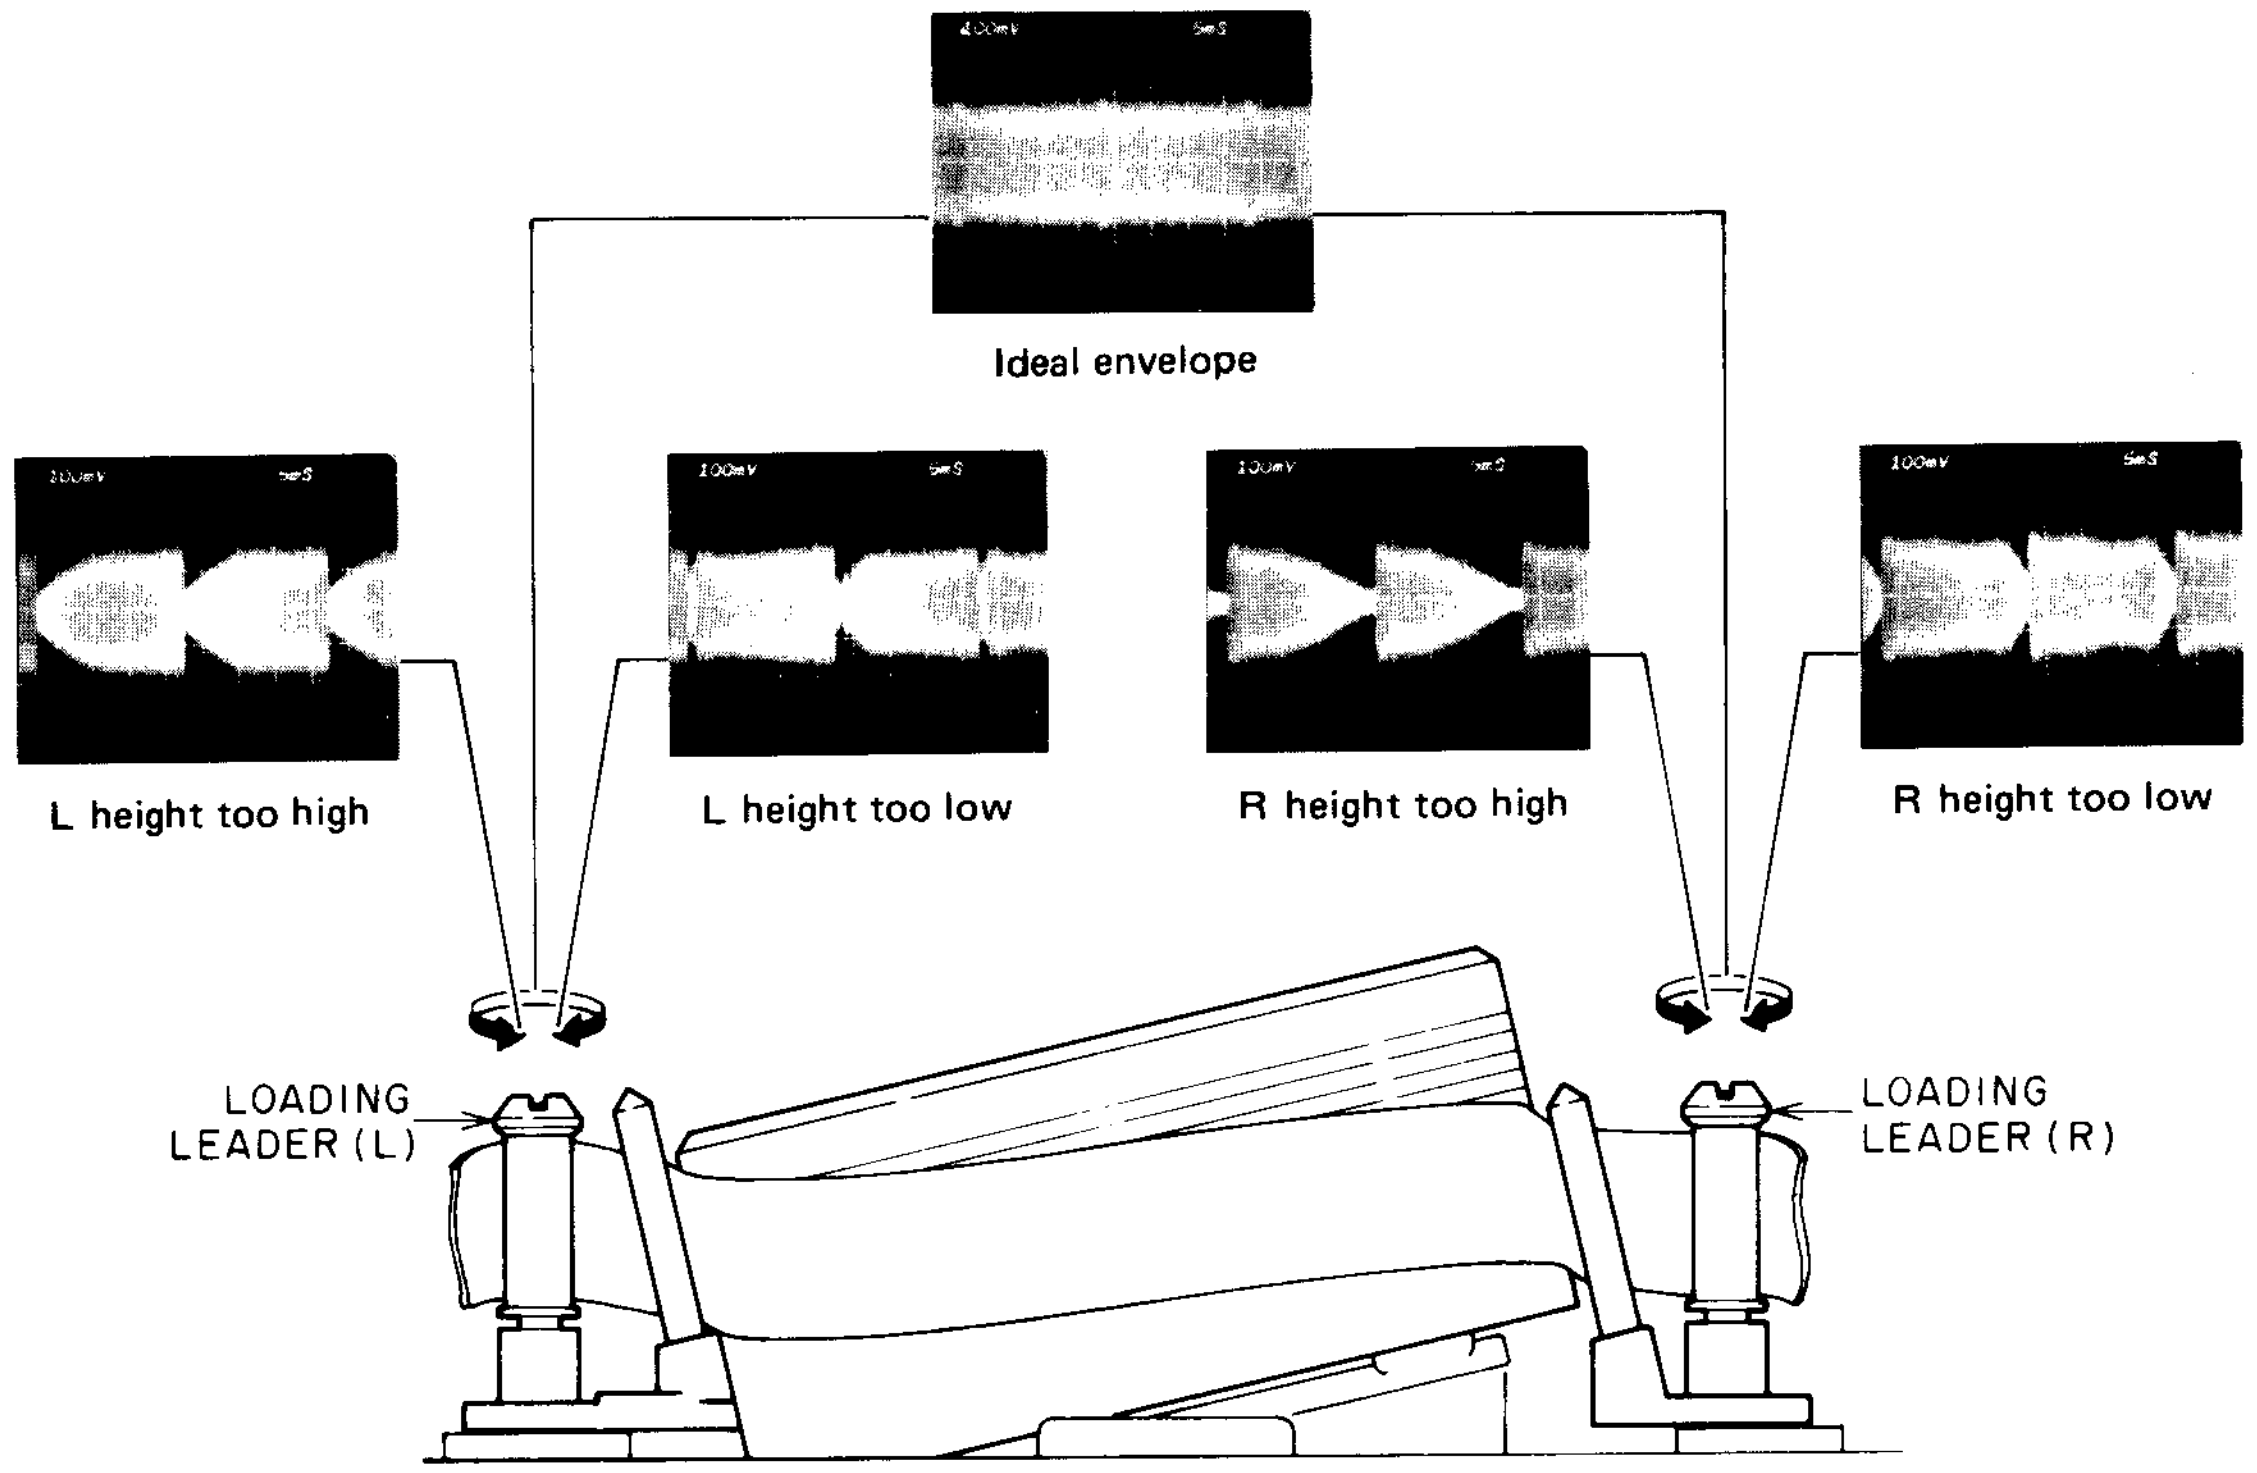
Ideal envelope
L height too high
L height too low
R height too high
R height too low
LOADING LEADER (L)
LOADING LEADER (R)

Fig. 4-12

4-3. A/C HEAD POSITION ADJUSTMENT

4-3-1. Azimuth adjustment

1) Connect an AC voltmeter or an oscilloscope to the AUDIO OUT terminal on the rear panel.
2) Play back the reference tape TF-530RFS (AT-751775).
3) Adjust the Ⓑ screw to obtain the maximum audio output.

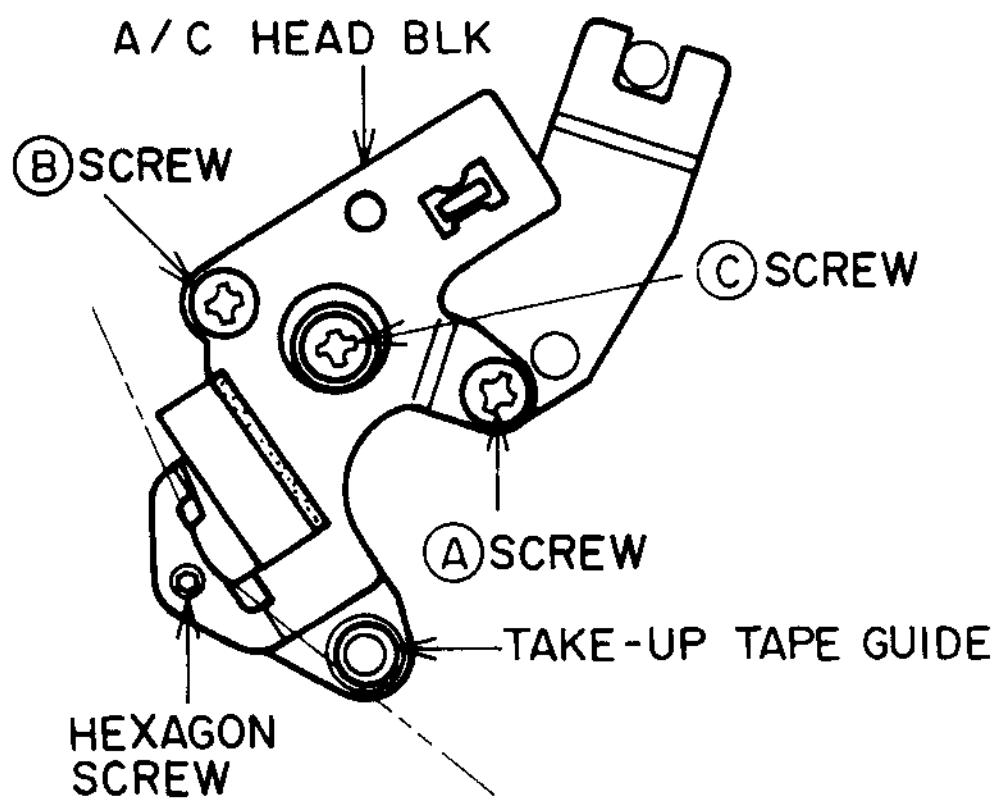
A/C HEAD BLK
ⒷSCREW
ⒸSCREW
ⒶSCREW
TAKE-UP TAPE GUIDE
HEXAGON SCREW

Fig. 4-13

4-3-2. Height adjustment

1) Play back test tape TF-526HH (AT-751788).
2) Connect an oscilloscope's CH-1 to the AUDIO OUT terminal on the rear panel and CH-2 to TP301 (CTL OUT) on the MAIN (A) PCB.
3) Turn the hexagon screw to obtain 1/2 of the output level of either CH-1 or CH-2, whichever has an output signal as shown in Fig. 4-14.
   Then set both of the oscilloscope's channels to 100 mV/div and finely adjust the hexagon screw until both signals of CH-1 and CH-2 are nearly the same level.
4) Slightly turn the Ⓐ screw until the tape edge barely touches the lower part of the TAKE-UP TAPE GUIDE without any curl or wrinkle as shown in Fig. 4-3.
5) Adjust the head azimuth again. (Turning the hexagon screw, or Ⓐ screw, will cause head azimuth mis-alignment. Refer to 4-3-1. Azimuth adjustment.)
6) Confirm that both signals of CH-1 and CH-2 are nearly the same level (confirm that neither of the CH-1 or CH-2 output levels exceed 100 mVp-p). If the result is not satisfactory, repeat steps 3) to 5).

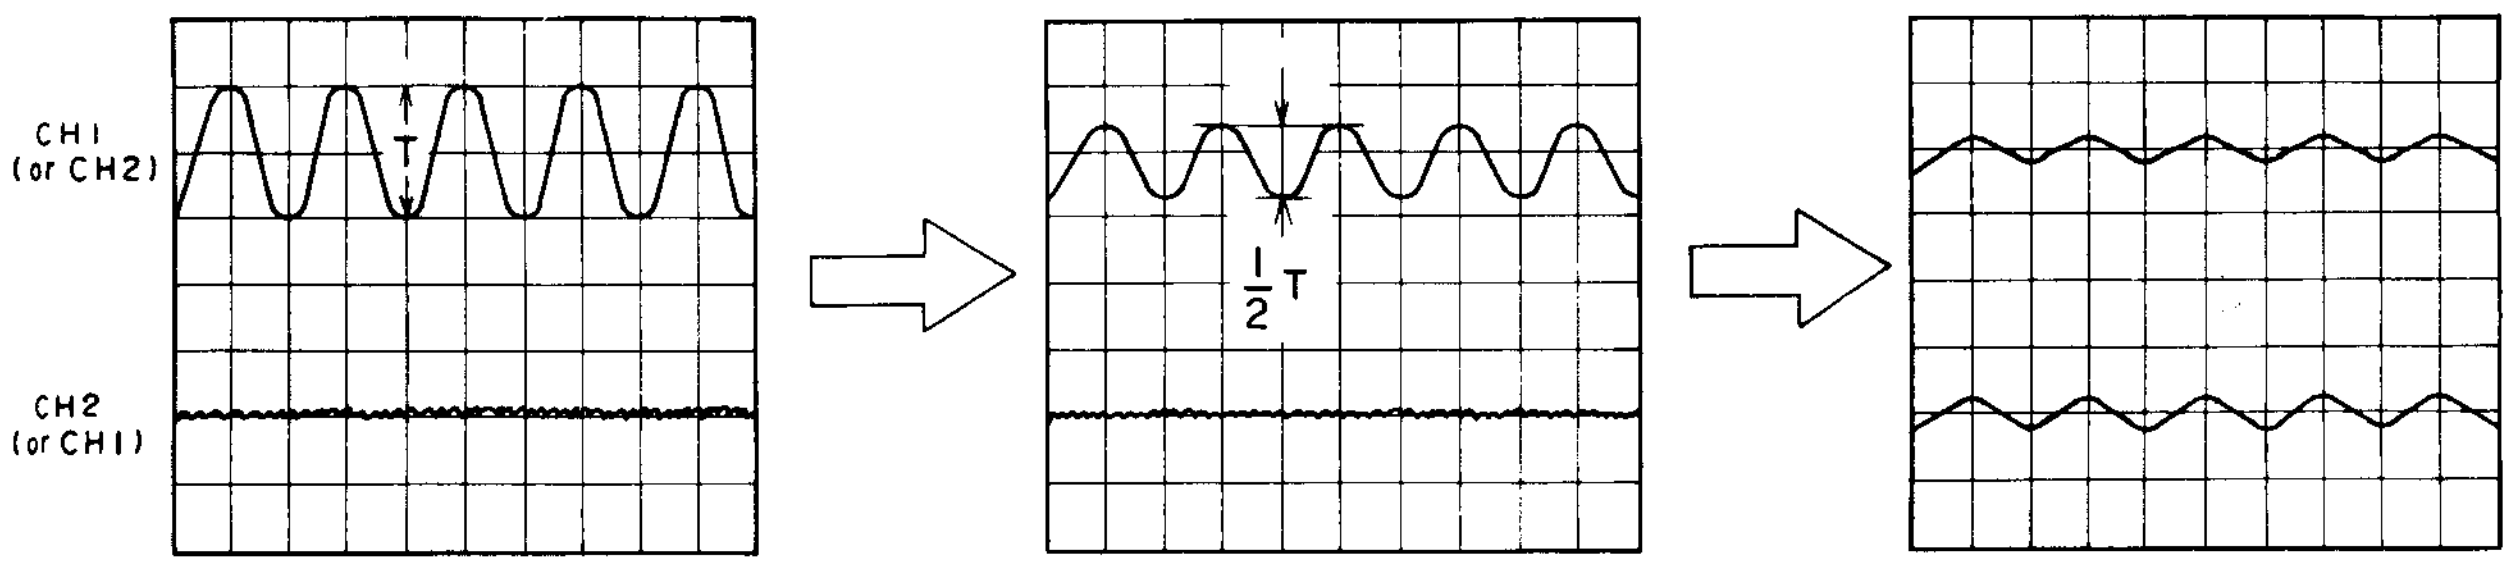

(a) CH1 = T (b) CH1 = $\frac{1}{2}$T (c) CH1 = CH2

Fig. 4-14

4-3-3. Phase adjustment

1) Connect an oscilloscope's CH-1 to the TR510 emitter (ENVE) on the MAIN (A) PCB and CH-2 to TP2 (V-SWP) on the PRE AMP PCB for triggering.
2) Play back the reference tape TF-530RFS (AT-751775).
3) Press the "<" or ">" cursor button on the remote control until the "X" mark can be seen in the center position of the tracking range on the TV screen as shown in Fig. 4-15.
4) Loosen the Ⓒ screw slightly so that the A/C HEAD PLATE can be moved with reasonable tightness.
5) Insert a sharp, flat head (—) screwdriver into the A/C HEAD BASE and Ⓐ hole as shown in Fig. 4-17.
6) Move the A/C HEAD BASE by moving a screwdriver in the direction of the arrow as shown in Fig. 4-17 to obtain the maximum RF output, then tighten the Ⓒ screw.



Fig. 4-15

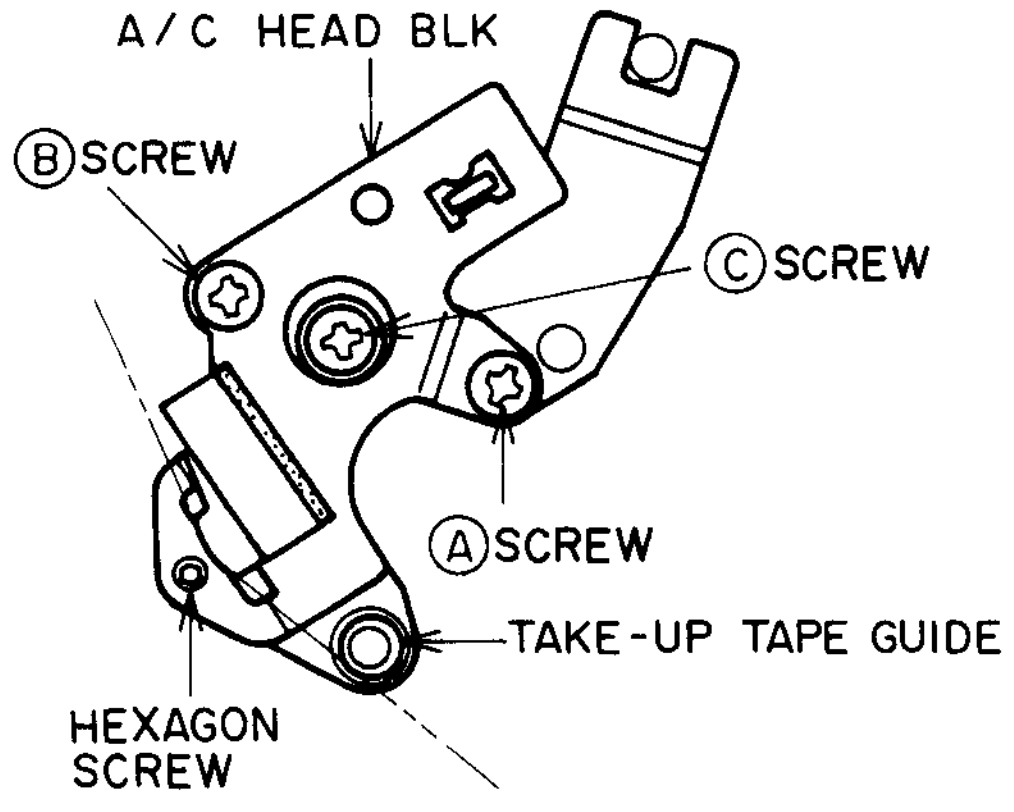
A/C HEAD BLK
ⒷSCREW
ⒸSCREW
ⒶSCREW
TAKE-UP TAPE GUIDE
HEXAGON SCREW

Fig. 4-16

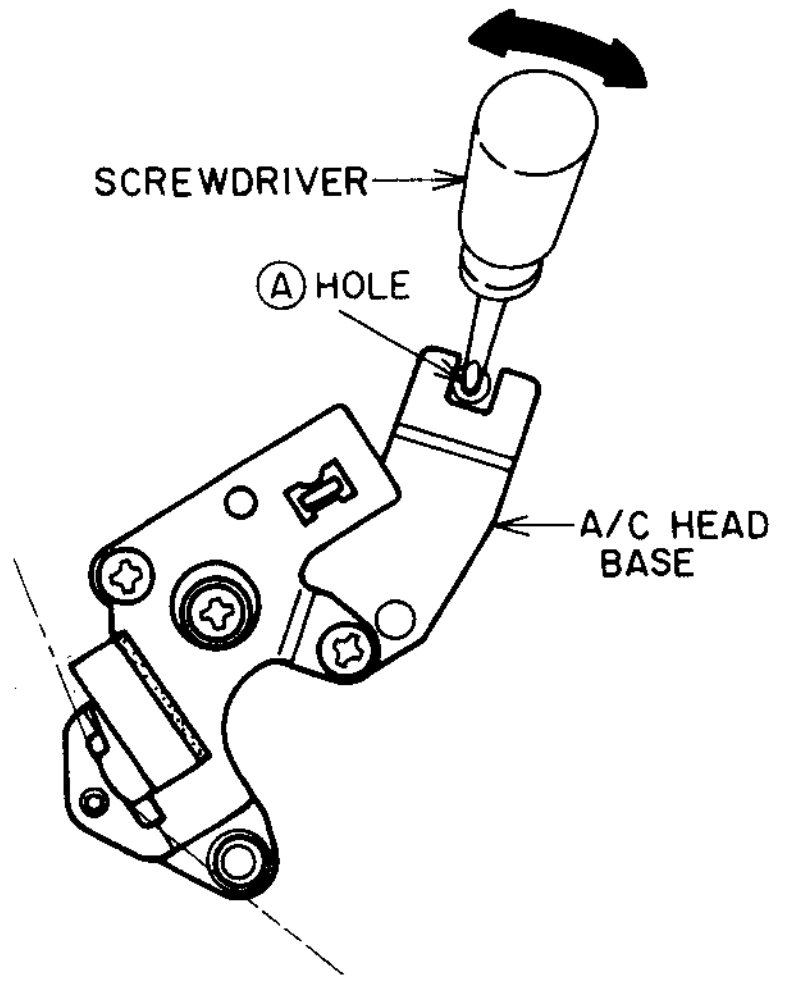
SCREWDRIVER
ⒶHOLE
A/C HEAD BASE

Fig. 4-17

V. ELECTRIAL ADJUSTMENT

Precautionary items prior to adjustments
1. The colour bar generator output should be 1.0 Vp-p.
2. The video output terminal should be terminated with 75 ohms (connect dummy load or 75 ohms input TV).

The following test tapes are required.

Test tape	Parts No.
TF-527BL	AT-711880
TF-530RFS	AT-751775
TF-532CBS	AT-751360
TF-553AT	AT-751785

STEP	ADJUSTMENT ITEM
1.	MODE and INPUT SIGNAL/TEST TAPE
2.	TEST POINT and ADJ part
3.	REMARKS (•) & RESULT (∗)

ADJ. part →

Test point - - →

6 VIDEO REC CURRENT (LP MODE)

1. "REC" (LP MODE), PAL colour bar signal
2. P2 (REC.CURR) ① pin, ② pin & VR1 (REC-CHROMA), VR2 (REC-Y)
3. • Connect an oscilloscope's CH-1 to P2 (REC.CURR) ① pin and CH-2 to ② pin.
   - • Set the oscilloscope's display mode to "ADD" mode and CH-2 polarity to "INVERTED". (Make sure to set the oscilloscope's "volt / div" SW position where the waveform is not distorted and CH-2 position should be the same as CH-1.)
   - • Turn the VR2 (REC-Y) fully, counterclockwise.
   - ∗ Adjust VR1 (REC-CHROMA) so that the chroma REC current becomes 28 mVp-p at the burst signal area.
   - ∗ Disconnect the input signal, then adjust VR2 (REC-Y) so that the Y REC current becomes 200 mVp-p.





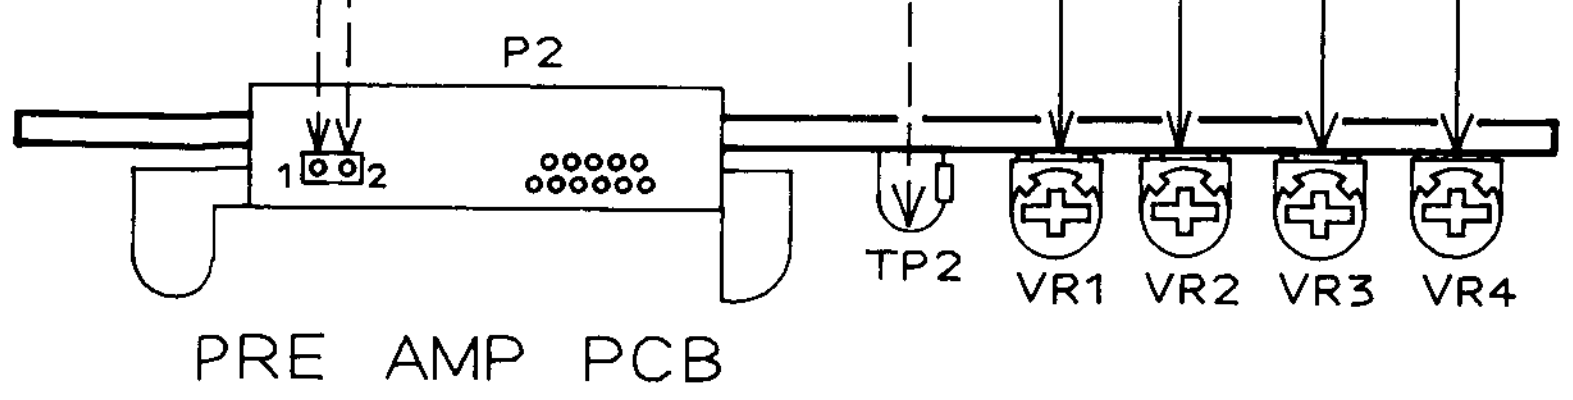

1 PB SWITCHING POINT

1. "PB", test tape TF-530RFS
2. TP2 (SWP), VIDEO OUT & VR301 (SW.POINT)
3. • Connect an oscilloscope's CH-1 to TP2 (SWP) for triggering and CH-2 to VIDEO OUT.
   - ∗ Adjust VR301 so that the switching point is positioned 6.5 H from the V-SYNC left edge as shown.



7 VIDEO PB LEVEL

1. "REC" → "PB", PAL colour bar signal
2. VIDEO OUT & VR404 (PB LEVEL)
3. • Connect an oscilloscope to VIDEO OUT
   - • Make a recording on the tape, then play it back
   - ∗ Adjust VR404 so that the PB level becomes 1.0 Vp-p



5 CARRIER SET & DEVIATION

1. "REC", PAL colour bar signal
2. TP401 (REC.Y) & VR402 (CARRIER), VR403 (DEVIATION)
3. • Connect an oscilloscope to TP401 (REC.Y)
   - ∗ VR402 (CARRIER) : 0.263 µs (3.8 MHz)
   - ∗ VR403 (DEVIATION): 0.208 µs (4.8 MHz)



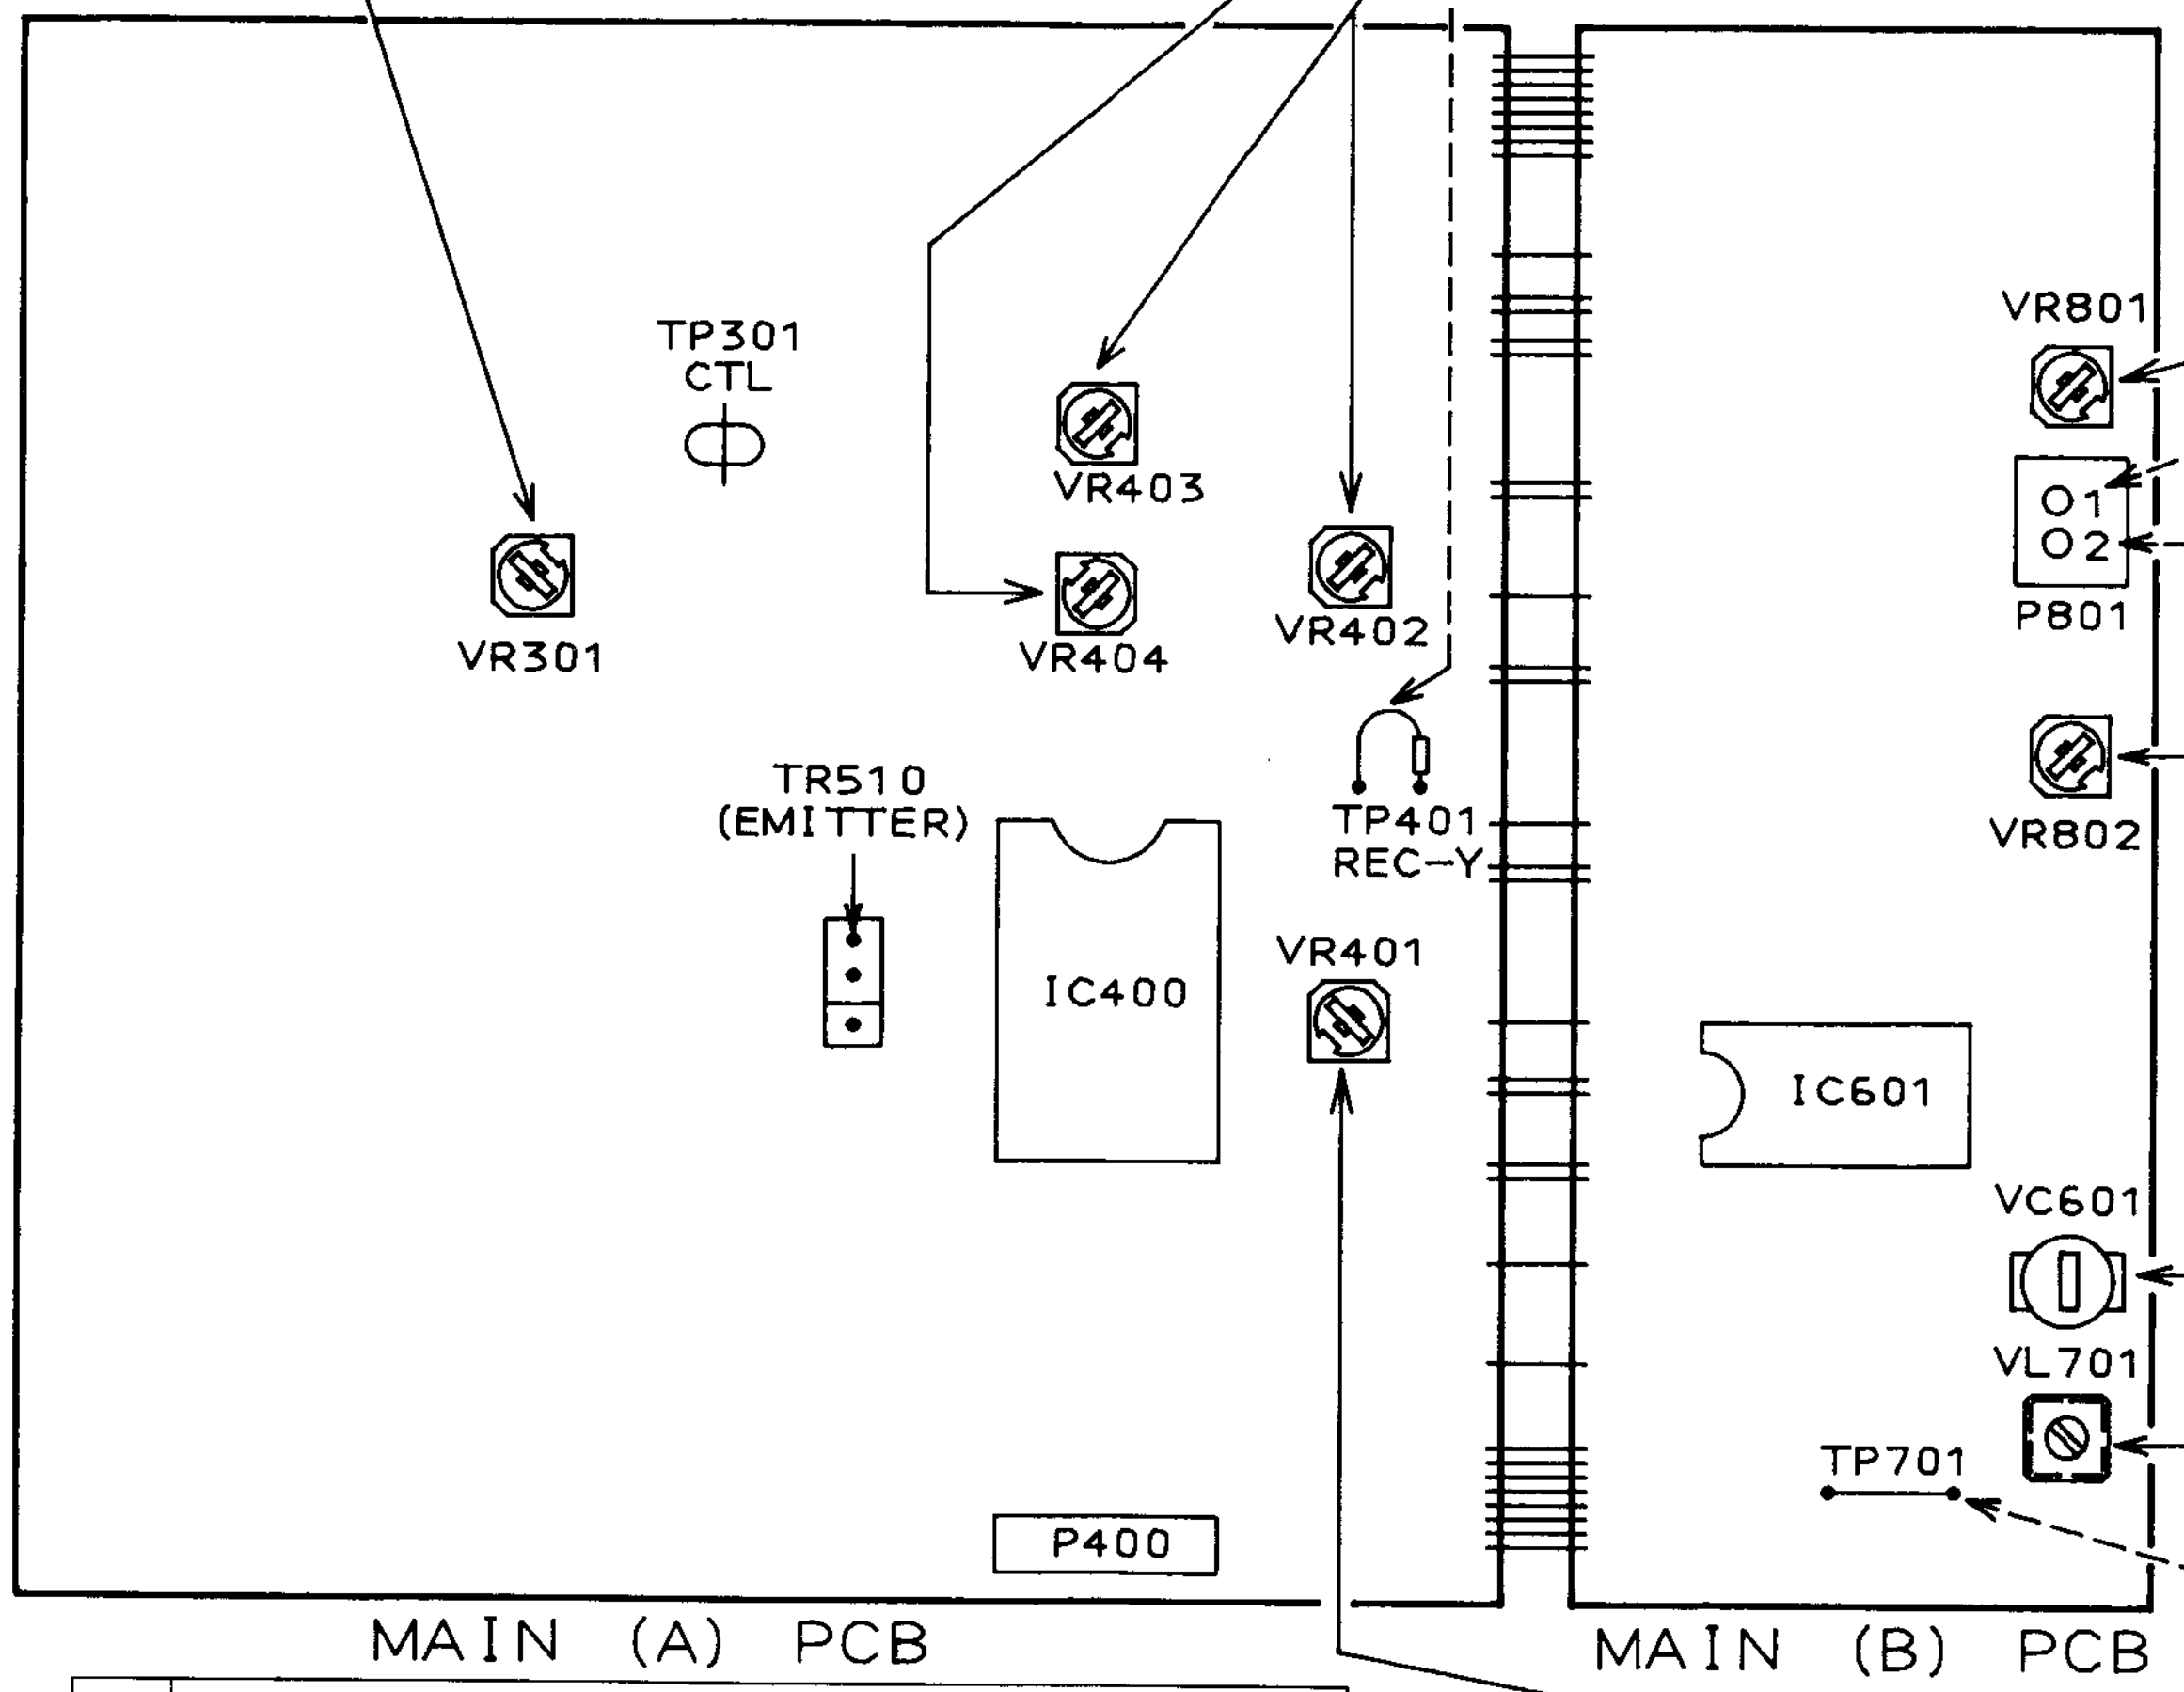

3 AUDIO REC BIAS

1. "REC", No signal input
2. P801 ① pin, ② pin & VR801
3. • Connect an AC voltmeter to P806 ① pin (GND side) and ② pin. (Never connect the AC voltmeter's GND to the VCR's ground.)
   - ∗ Adjust VR801 so that the reading on the AC voltmeter becomes 2.4 mV

2 AUDIO PB LEVEL

1. "PB", test tape TF-527BL
2. AUDIO OUT & VR802
3. • Connect AC voltmeter to AUDIO OUT
   - ∗ -5 dBs

8 CHARACTER POSITION

1. "E-E" (STOP mode), No signal input
2. VIDEO OUT, TV screen & VC601 (IMS)
3. • Press the "DISPLAY" button once on the remote control to display the elapsed tape counter.
   - • Connect an oscilloscope to VIDEO OUT
   - ∗ Adjust VC601 (IMS) so that the right end of the IMS signal becomes 49 us from the H-SYNC as shown.





ON THE TV SCREEN

9 P/S AUTO SENSITIVITY (EM/EDG/EOG-V ONLY)

1. "E-E"(STOP mode),SECAM colour bar signal
2. TP701 (P/S SENS), VL701 (P/S SENS)
3. • Connect an oscilloscope to TP701 (P/S SENS)
   - ∗ Adjust the VL701 so that the distorted point of the waveform becomes 1/3 from the bottom, as shown.



10 ENVELOPE DETECT (I-HQ)

(This adjustment should be performed in the "TEST" mode.) To set the VCR to the "TEST MODE", press and hold both the "POWER" and "EJECT" buttons on the front panel, then plug in the AC power cord.

The TEST MODE can be cancelled by disconnecting the AC power cord or simply by pressing the RESET button on the front panel.

1. "REC"→"PB", PAL colour bar signal
2. FL display & VR3, VR4
3. • Record the PAL colour bar signal on the test tape TF-553AT and then play it back.
   - • Observe the number which is displayed on the minute part of the FL display.
   - ∗ Adjust the VR3 so that the number displayed on the FL display becomes "8D". (SP MODE)
   - ∗ Adjust the VR4 so that the number displayed on the FL display becomes "8D". (LP MODE)

4 VIDEO E-E LEVEL

1. "E-E" (STOP mode), PAL colour bar signal
2. VIDEO OUT & VR401 (E-E LEVEL)
3. • Connect an oscilloscope to VIDEO OUT.
   - ∗ 1.0 Vp-p



VI. PARTS LIST

ATTENTION

1. When placing an order for parts, be sure to list Part No., Model No. and the description of eachpart. Otherwise, the non-delivery of the part or the delivery of a wrong part may result.

2. Please make sure that Part No. is correct when ordering. If not, a part different from the one you ordered may be delivered.

3. Since the parts shown in Parts List of Preliminary Service Manual may have been the subject of changes, please use this Parts List for all future reference.

HOW TO USE THIS PARTS LIST

1. This Parts List lists those parts which are considered necessary for repairs. Other common parts, such as resistors and capacitors, are listed in the "Common List for Service Parts" from which these parts should be selected and stocked.
2. The Recommended Spare Parts List shows those parts in the Parts List which are considered particularly important for service.
3. Parts not shown in the Parts List and "Common List for Service Parts" will not in principle be supplied.
4. How to read the Parts List.

a) Mechanism Block

2. HEAD BASE BLOCK

Ref.No.	Part No.	Description
1	BH-T2023A320A	HEAD BASE BLOCK
2	HP-H2206A010A	HEAD R/P PR4-8FU C
3	ZS-477876	PAN20×03STL CMT
4	ZS-536488	BID20×08STL CMT
5	ZG-402895	SP CS ANGLE ADJUST

SP (Service Parts) Classification

This number corresponds with the individual parts index number in that figure.

The available PC Board Blocks are listed separately.

b) PC Board

6. MAIN PC BOARD

Ref.No.	Part No.	Description
IC1	EI-324536	IC HD14049BP
IC2	EI-336801	IC MB8841-564M
C1A	EC-338399	C MMY V 223M 250AC [U,E,B,S]
C1B	EC-350949	C MMY V 223M 250DC [J]
C1C	EC-338397	C MMY V 223M 125AC [C,A]
X1	EI-318384	OSC X'TAL NC-18C

Symbols for primary destination

[A] : AAL (U.S.A) [S] : SAA (Australia)
[B] : BEAB (England) [U] : U/T (Universal Area)
[C] : CSA (Canada)
[E] : CEE (Europe) [V] : VDE (Germany)
[J] : JPN (Japan) [Y] : Custom Version

SP (Service Parts) Classification

These reference symbols correspond with component symbols in the Schematic Diagrams.

WARNING

⚠ (*) INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS.

AVERTISSEMENT

⚠ (*) IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉDE L'APPAREIL, NE REMPLACER QUE DES PIÉCES RECOMMANDEES PAR LÉ FABRICANT.

6-1. MODEL VS-F440EA/EDI/EM, F441EA, F490EM

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref.No.	Part No.	Description
1	AV-B1038A010A	REMOCON BLK RC-V250E [EXCEPT F490EM]
2	AV-B1043A010E	REMOCON BLK RC-V452E [F490EM]
3	BB-V1130A020H	MECHA DECK BLK F260EA
4	BB-V1130A020C	MECHA DECK BLK F410EK
5	BL-V1102A140A	ARM LOADING BLK 425EA
6	BL-387458J2	CAPSTAN BRAKE PART
7	BL-V1123A050A	TENSION ARM BLK F600EA
8	BL-V1102A050A	TENSION ARM BLK 425EA
9	BM-400682J1	MOTOR DFX-67B3VWB1 [CAPSTAN MOTOR]
10	BM-401296J1	MOTOR E20EL89 [DRUM MOTOR]
11	BM-387503J	MOTOR PART [LOADING MOTOR]
12	*BT-410487J	TRANS POW V1130 EA [EM]
13	*BT-410488J	TRANS POW V1130 EM [EM]
14	*BT-410489J	TRANS POW V1130 ES [EDI]
15	BV-V1102A150A	CASSETTE LOAD BLK 425EA
16	BV-V1102A070A	LEADER S BLK 425EA
17	BV-V1102A080A	LEADER T BLK 425EA
18	BV-V1123A410B	LOWER DRUM BLK X450EGN
19	BV-404007J	RF CONVERTER MDLK6E766A EDI [EDI]
20	BV-387610J	RF CONVERTER YAA21-0453 EA [EA]
21	BV-387611J	RF CONVERTER YAA21-0454 EV [EM]
22	BV-V1123A420B	UPPER DRUM BLK X450EGN
23	BV-403236J1	VIF UNIT KX EA [EA]
24	BV-403963J	VIF UNIT KX EDI [EDI]
25	BV-403239J1	VIF UNIT KX EM [EM]
26	EA-387496J	PC (#) SENSOR
27	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
28	EC-408376J	C EC V CUT KMG 102M 50.0DC
29	EC-408377J	C EC V CUT KMG 222M 50.0DC
30	EC-408426J	C EC V F05 LXF8 121M 50.0DC
31	EC-403880J	C EC V T05 LXF8 221M 25.0DC
32	EC-403878J	C EC V T05 LXF8 271M 16.0DC
33	EC-404197J	C EC V T05 SXE8 330M 80.0DC
34	ED-390011J	D LED GL451 INFRARED [D1]
35	ED-390012J	D LED GL4800 INFRARED [D2]
36	ED-401099J	D SCHOTTKY MA719 T26 40/0.5A
37	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
38	*ED-379298	D SILICON DBA20B 100/2.0A
39	ED-366443	D SILICON H MA700FA5 F10
40	ED-307572	D SILICON H 1SS131
41	ED-401046J	D SILICON RL104F-E T26 400/1A
42	ED-511907	D SILICON 1N4002 100/1.0A
43	ED-391005J	D ZENER H HZS12B1
44	ED-408807J	D ZENER H HZS12C3
45	ED-397233J	D ZENER H HZS5C3
46	ED-387919J	D ZENER H HZS6A1L
47	ED-405373J	D ZENER H MTZJ16A T26
48	ED-405247J	D ZENER H MTZJ2.7A T26 [F490EM]
49	ED-403267J	D ZENER H MTZJ3.3B T26
50	ED-405524J	D ZENER H MTZJ36A T26
51	ED-403724J	D ZENER H UTZJ10A
52	*ED-404029J	D ZENER H UTZJ10B T26
53	ED-405264J	D ZENER H UTZJ10C
54	ED-404031J	D ZENER H UTZJ11B T26
55	ED-403948J	D ZENER H UTZJ16C T26
56	ED-403947J	D ZENER H UTZJ22C T26
57	ED-405265J	D ZENER H UTZJ36C
58	ED-404032J	D ZENER H UTZJ39A
59	ED-403732J	D ZENER H UTZJ5.6A
60	ED-403729J	D ZENER H UTZJ5.6C
61	ED-403278J	D ZENER H UTZJ7.5B
62	ED-404086J	D ZENER H UTZJ7.5C
63	ED-403731J	D ZENER H UTZJ8.2C
64	ED-403279J	D ZENER H UTZJ9.1B
65	EE-408471J	TV TUNER ENV-77890F2 SK [EDI]
66	EE-408417J	TV TUNER VTSS6AZV EA [EA]
67	EE-405638J	TV TUNER VTSS6CZ EM [EM]
68	EH-394838J	DL ADL-FN1344Q [EM]
69	EH-390730J	DL EFD-JF124A13J
70	EH-368816	FILTER CE SAF38.0MZA70Z [EDI]
71	EH-730625J	FILTER CE SAF38.9MZW70Z [EM]
72	EH-780128	FILTER CE SFE 6.5MB [EDI]
73	EH-366894	FILTER CE SFE-4.16MB 4.16MHZ
74	EH-373920	FILTER CE SFE5.5MB
75	EH-381309J	FILTER CE SFS6.0MD 6.000MHZ [EDI]
76	EH-388287J	FILTER CE SFS6.5MX 6.500MHZ [EDI]
77	EH-729986J	FILTER CE TPS5.5MB2 [EM]
78	EH-368948	FILTER CE TPS5.5MW 5.5000MHZ [EA]
79	EH-373919	FILTER CE TPS6.0MB [EDI]
80	EH-376338	FILTER CE TPS6.5MB [EDI]
81	EH-714626	FILTER SAW SAF36.9MZ70Z [EA]
82	EI-373981J1	IC BA10393N
83	EI-373980	IC BA15218N
84	EI-386468J	IC BA3308 [F490EM]
85	*EI-381575J	IC BA6121
86	EI-353421	IC BA6229
87	EI-366892	IC BA7025L [EM]
88	EI-387586J	IC BA7244BS
89	EI-388360J	IC BA7765AS
90	EI-356457	IC BU4013B
91	EI-360586	IC LA6358S [F490EM]
92	EI-403234J1	IC LA7391A
93	EI-394856J	IC LC8992
94	EI-389622J	IC L5631
95	EI-403469J	IC MM1068XS
96	EI-408850J	IC MN675201 XDJ JFXSYP1 [F490EM]
97	EI-408849J	IC MN675201 XDL JFLSYP1 [EXCEPT F490EM]
98	EI-368809	IC M51496P
99	EI-400756J	IC NJM4558L-B
100	EI-373955	IC S-8053ALR
101	EI-408393J	IC ST24C01B1
102	EI-200573	IC TC4053BP [EM]
103	EI-310036	IC TC4066BP
104	EI-405722J	IC UPD6450CX-515
105	EI-408391J1	IC UPD75217CW-146 JBXOPP2
106	EI-408397J	IC UPD75217CW-147 JFXOPP1

Ref.No.	Part No.	Description
107	EI-394467J	IC X24C01P
108	EI-403467J	OSC CE CSB500F40 15.680KHZ
109	EI-368829	OSC CE CSB512P
110	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
111	EI-368825M	OSC X'TAL C-002RX 32.768KHZ
112	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
113	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
114	EI-381632J	OSC X'TAL 86686 4.433619MHZ
115	EM-401077J	IND FL FV496G CHARACTER
116	EM-403367J	IND FL FV506G CHARACTER
117	EO-408381J	COIL FIX 2 C-5344-40 560K
118	EO-388362J	COIL OSC 1 V1102 [EXCEPT F490EM]
119	EO-388363J	COIL OSC 1 V1105-1 [F490EM]
120	EO-388349J	COIL OSC 1 V1105-2 [F490EM]
121	EO-366893	COIL VARI 1 21D6 8.20MH [EM]
122	*EQ-400153J	RELAY POW AG2013 1TR 12V
123	*ER-401039J	R FUSE V T05 ERD2FCV 1/4W 4R7J
124	ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
125	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
126	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
127	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
128	ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
129	ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
130	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
131	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
132	ER-393768J	R OMF H S15 FS 2W 270J
133	ES-373099	SW LEAF MTS10110MPC1
134	ES-387465J	SW MODE SELECT MMS00070ZLBO [SW1]
135	ES-403377J	SW ROTARY ENCODER SRGPHJ
136	ES-408404J	SW TACT EVQ 235 07K T05 [EDI/EM,RESET]
137	ES-408405J	SW TACT EVQ 235 09K T05 [F440EA,RESET]
138	ES-349474	SW TACT SKHHAM004A
139	ET-381637J2	DETECTOR GP1U521X
140	ET-403420J	DETECTOR SG-105LF [PH1][PH2]
141	ET-713614	TR CHIP 2SA1235 E,F
142	ET-725820J	TR CHIP 2SC2735J
143	ET-356336	TR DTA114ES
144	ET-354415	TR DTA144ES
145	ET-373985	TR DTA144TS
146	ET-353897	TR DTC114ES
147	ET-360399	TR DTC114TS
148	ET-354364	TR DTC143TS
149	ET-354414	TR DTC144ES
150	ET-361490	TR PHOTO PN268 [TR1]
151	ET-390010J	TR PHOTO PT4800 [TR2]
152	ET-390009J	TR PHOTO PT493F [TR4]
153	ET-364040	TR UN421D
154	ET-353899	TR 2SA1317 S,T,U
155	ET-389803J	TR 2SA933S R,S
156	*ET-366365	TR 2SB1185 E,F
157	ET-388338J	TR 2SB1425 S,E
158	ET-356817	TR 2SB891 Q,R
159	ET-400218J	TR 2SC1740S R,S
160	ET-375777	TR 2SC2926S P,Q
161	ET-397160J	TR 2SC3330 R,S,T,U,V
162	*ET-404195J	TR 2SC4486 S,T T05
163	ET-366168	TR 2SD1292 Q,R
164	*ET-381175J	TR 2SD1856
165	ET-405622J	TR 2SD2061 E,F
166	ET-370819	TR.CHIP 2SC3052
167	EX-405691J	THERMISTOR NTH5D332KA
168	HE-390013J	HEAD E HVFME0020A
169	HR-405340J	HEAD COMBO HVMZA1121A
170	MB-387289J	BELT CAPSTAN
171	MB-407117J	BELT CAPSTAN (3)
172	MI-387294J	IDLER PART
173	MI-404552J	IDLER (2) PART
174	ML-391745J3	ARM DAMPER
175	ML-387350J1	ARM LID OPENER
176	ML-387423J	ARM LOADING BRAKE
177	ML-387277J3	ARM REVIEW PART
178	ML-387402J1	LEVER TRIGGER
179	ML-387316J	MAIN BRAKE (S) PART
180	ML-387318J	MAIN BRAKE (T) PART
181	ML-387321J	REVIEW BRAKE PART
182	ML-407119J	REVIEW BRAKE (3) PART
183	ML-387324J1	SLIDER BRAKE PART
184	ML-404567J1	SLIDER BRAKE (3) PART
185	ML-404944J	SLIDER TRIGGER (2)
186	MP-404852J	PINCH ROLLER (2) PART
187	MR-387406J	HOLDER THRUST WORM
188	MR-391968J	PULLEY TRIGGER (2)
189	MR-387286J1	ROLLER IMPEDANCE
190	MT-390954J1	DISK (2) PART
191	MT-404547J	DISK (3) PART
192	MZ-387298J3	DISK CLUTCH PART
193	MZ-404577J	DISK CLUTCH (2) PART
194	MZ-387331J	GEAR CAM SLIDER
195	MZ-404538J	GEAR CAM SLIDER (3)
196	MZ-387335J	GEAR EJECT
197	MZ-387333J	GEAR FRONT LOADING
198	MZ-404995J	GEAR MID PART
199	MZ-V1102A090A	GEAR TOGGLE (S) BLK 425EA
200	MZ-V1102A100A	GEAR TOGGLE (T) BLK 425EA
201	MZ-387332J	GEAR WORM WHEEL
202	MZ-401686J1	GEAR WORM (2)

- **ALL MODEL**

HEAD DRUM BLOCK

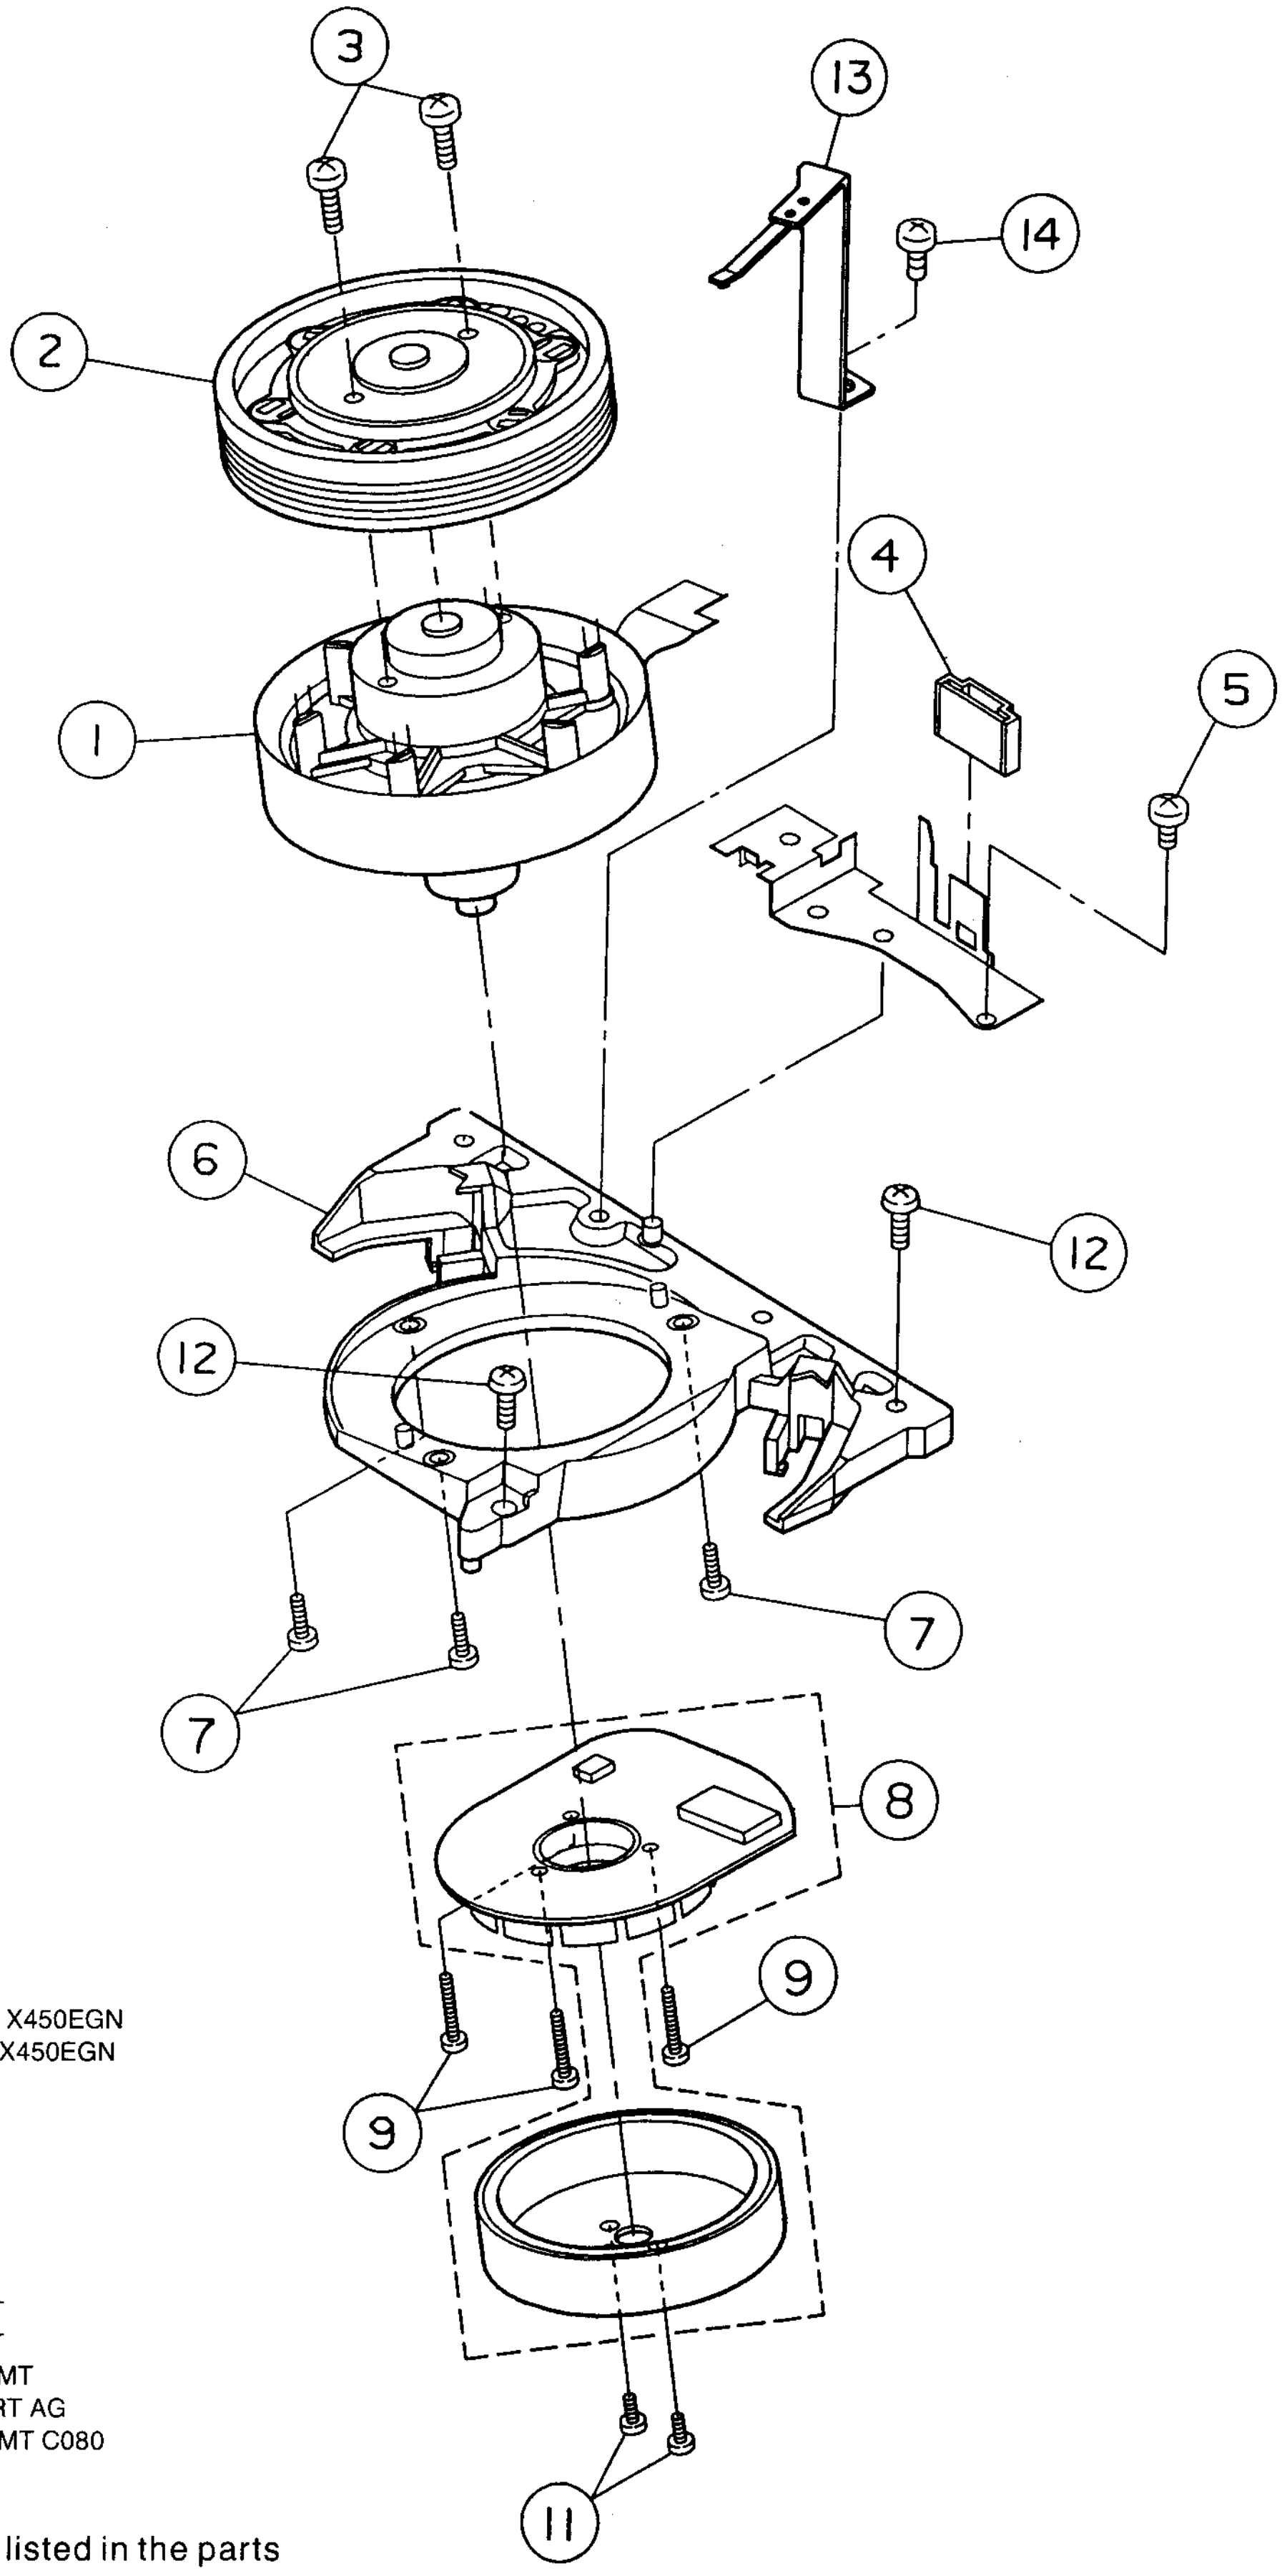

2. HEAD DRUM BLOCK

Ref.No.	Part No.	Description
1	BV-V1123A410B	LOWER DRUM BLK X450EGN
2	BV-V1123A420B	UPPER DRUM BLK X450EGN
3	ZS-321298	BID30X08STL CMT
4	SZ-387388J	HOLDER FPC
5	ZS-379405	BID30X06STL CMT
6	MA-387474J3	BASE DRUM
7	ZS-563444	BID26X08STL CMT
8	BM-401296J1	MOTOR E20EL89 [DRUM MOTOR]
9	ZS-467796	PAN26X12STL CMT
11	ZS-379350	PAN30X06STL CMT
12	ZS-336714	ST BID30X12STL CMT
13	VT-401282J	EARTH BRUSH PART AG
14	ZS-389853J	DT BID30X06STL CMT C080

NOTE:
Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

• MODEL VS-F440EA/EDG/EDI/EK/EM/EO/EOG-V/EOH, F441EA, F450EOH, F455EOH

JFX MECHA (1)

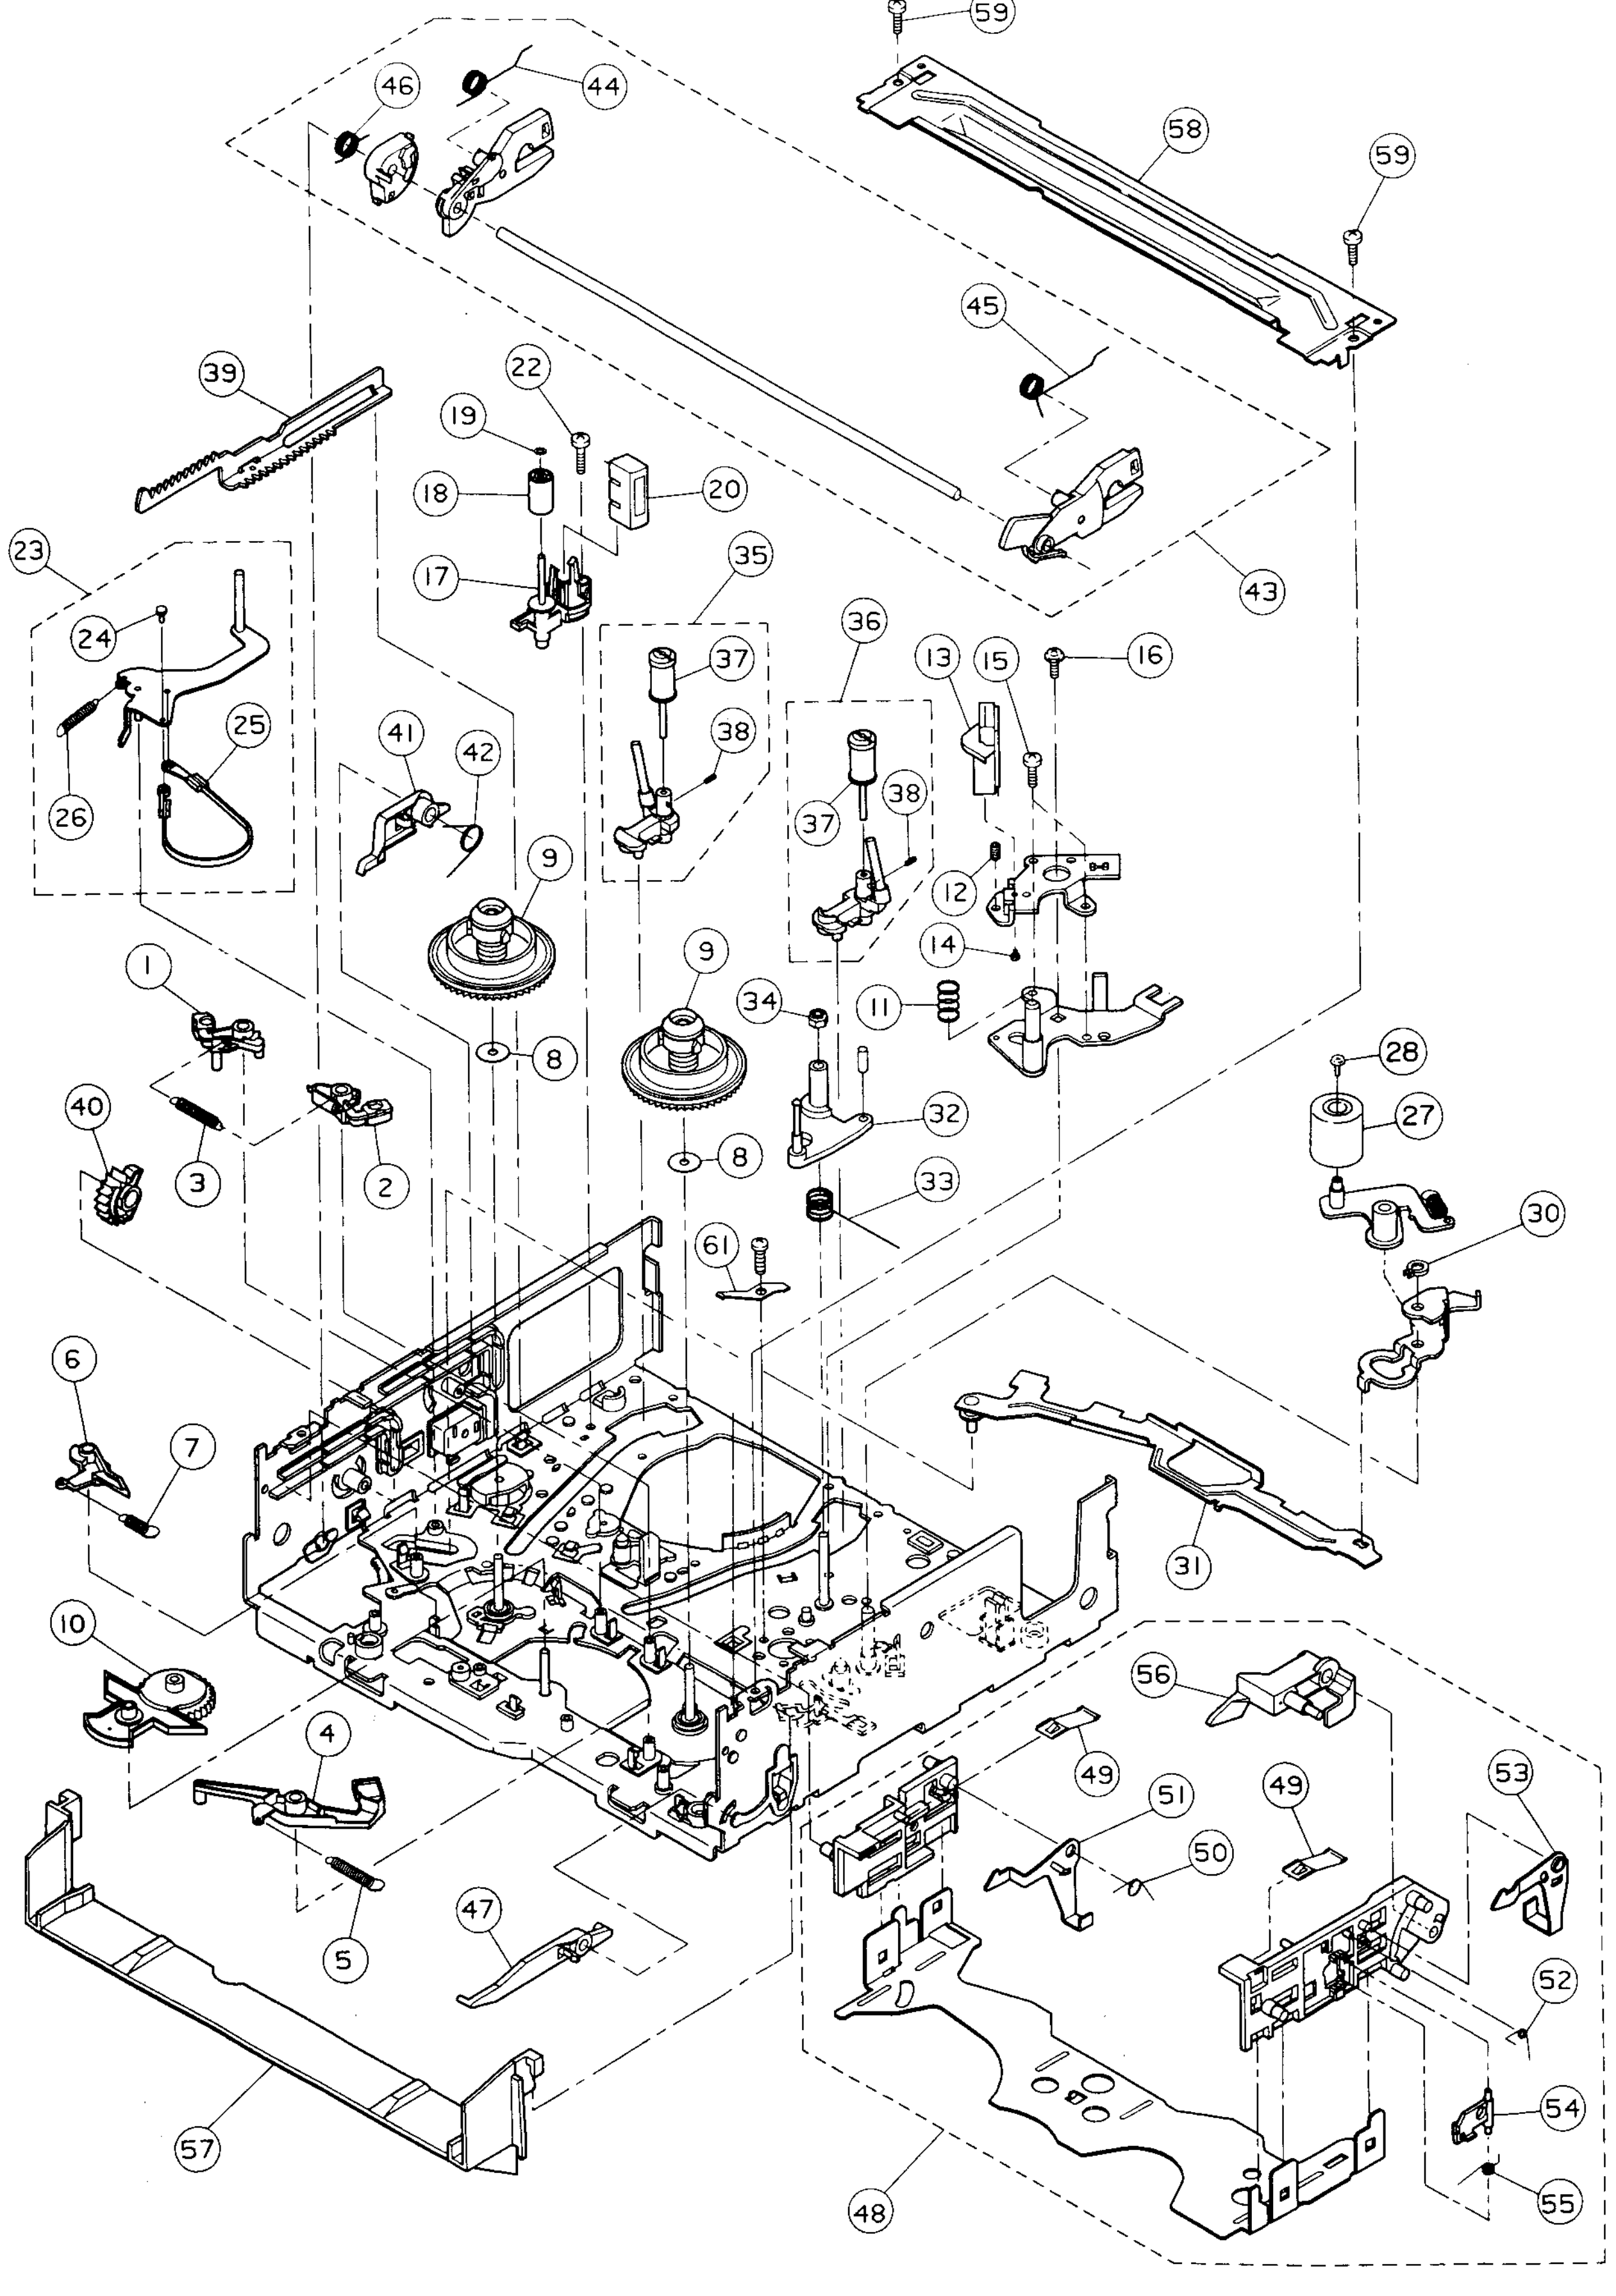

3. JFX MECHA BLOCK (1)

Ref.No.	Part No.	Description
1	ML-387316J	MAIN BRAKE (S) PART
2	ML-387318J	MAIN BRAKE (T) PART
3	ZG-387320J	SP PULL MAIN BRAKE
4	ML-387321J	REVIEW BRAKE PART
5	ZG-387323J	SP PULL REVIEW BRAKE
6	ML-387423J	ARM LOADING BRAKE
7	ZG-387467J	SP PULL LOADING BRAKE
8	ZW-389814J	PW31X110X050PSL
9	MT-390954J1	DISK (2) PART
10	MI-387294J	IDLER PART
11	ZG-387438J1	SP PUSH A/C
12	ZG-373900	6SET30X080SCM PKR CP
13	HR-405340J	HEAD COMBO HVMZA1121A
14	ZS-404844J	PAN20X02STL BZN PS1
15	ZS-321298	BID30X08STL CMT
16	ZS-344754	ST PAN30X06STL CMT C080
17	MZ-402760J2	HOLDER FE HEAD PART B
18	MR-387286J1	ROLLER IMPEDANCE
19	ZW-374445	SLIT W17X032X025PSL
20	HE-390013J	HEAD E HVFME0020A
22	ZS-336714	ST BID30X12STL CMT
23	BL-V1102A050A	TENSION ARM BLK 425EA
24	SZ-407187J2	HOLDER LEVER TENSION (2)
25	ML-390768J4	TENSION BAND PART
26	ZG-387272J	SP PULL TENSION
27	MP-404852J	PINCH ROLLER (2) PART
28	ZS-464703	BID20X04STL CMT
30	ZW-332843	RETAINING RING GRIP 380STL ACP
31	ML-387431J1	SLIDER PINCH PART
32	ML-387277J3	ARM REVIEW PART
33	ZG-387282J	SP TORSION REVIEW
34	ZW-401776J	NUT REVIEW
35	BV-V1102A070A	LEADER S BLK 425EA
36	BV-V1102A080A	LEADER T BLK 425EA
37	VT-387394J1	GUIDE ROLLER D8 PART
38	ZS-374458	6SET20X030SCM PKR FP
39	ML-387428J	SLIDER FRONT LOADING
40	MZ-387335J	GEAR EJECT
41	ML-391745J3	ARM DAMPER
42	ZG-395567J	SP TORSION ARM DAMPER
43	BL-V1102A140A	ARM LOADING BLK 425EA
44	ZG-387417J	SP TORSION LOAD (S)
45	ZG-387418J	SP TORSION LOAD (T)
46	ZG-392831J	SP TORSION JOINT (2)
47	ML-387350J1	ARM LID OPENER
48	BV-V1102A150A	CASSETTE LOAD BLK 425EA
49	ZG-387348J1	SP PLATE HOLDER
50	ZG-387421J	SP TORSION DAMPER (S)
51	ML-387345J	LEVER DAMPER (S)
52	ZG-388290J1	SP TORSION DAMPER (T)
53	ML-387346J	LEVER DAMPER (T)
54	ML-387344J	LEVER LOCK RELEASE
55	ZG-387420J1	SP TORSION RELEASE
56	ML-387349J2	ARM SHUTTER
57	SE-395554J	GUIDE FRONT (2)
58	MZ-406134J	PLATE UPPER (2)
59	ZS-358936	ST BID30X06STL CMT
61	ZG-392294J	SP PLATE EARTH
64	BB-V1130A020H	MECHA DECK BLK F260EA

NOTE:

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

4. JFX MECHA BLOCK (1)

Ref.No.	Part No.	Description
1	ML-387316J	MAIN BRAKE (S) PART
2	ML-387318J	MAIN BRAKE (T) PART
3	ZG-387320J	SP PULL MAIN BRAKE
4	ML-407119J	REVIEW BRAKE (3) PART
5	ZG-387323J	SP PULL REVIEW BRAKE
8	ZW-389814J	PW31X110X050PSL
9	MT-404547J	DISK (3) PART
10	MI-404552J	IDLER (2) PART
11	ZG-387438J1	SP PUSH A/C
12	ZG-373900	6SET30X080SCM PKR CP
13	HR-405340J	HEAD COMBO HVMZA1121A
14	ZS-404844J	PAN20X02STL BZN PS1
15	ZS-321298	BID30X08STL CMT
16	ZS-389853J	DT BID30X06STL CMT C080
17	MZ-402760J2	HOLDER FE HEAD PART B
18	MR-387286J1	ROLLER IMPEDANCE
19	ZW-374445	SLIT W17X032X025PSL
20	HE-390013J	HEAD E HVFME0020A
22	ZS-336714	ST BID30X12STL CMT
23	BL-V1123A050A	TENSION ARM BLK F600EA
24	SZ-387263J4	HOLDER LEVER TENSION
25	ML-390768J4	TENSION BAND PART
26	ZG-395470J	SP PULL TENSION (2)
27	MZ-395471J3	TENSION BRAKE PART
30	ZW-332843	RETAINING RING GRIP 380STL ACP
31	ML-387431J1	SLIDER PINCH PART
32	ML-387277J3	ARM REVIEW PART
33	ZG-387282J	SP TORSION REVIEW
34	ZW-401776J	NUT REVIEW
35	BV-V1102A070A	LEADER S BLK 425EA
36	BV-V1102A080A	LEADER T BLK 425EA
37	VT-387394J1	GUIDE ROLLER D8 PART
38	ZS-374458	6SET20X030SCM PKR FP
39	ML-387428J	SLIDER FRONT LOADING
40	MZ-387335J	GEAR EJECT
41	ML-391745J3	ARM DAMPER
42	ZG-395567J	SP TORSION ARM DAMPER
43	BL-V1102A140A	ARM LOADING BLK 425EA
44	ZG-387417J	SP TORSION LOAD (S)
45	ZG-387418J	SP TORSION LOAD (T)
46	ZG-392831J	SP TORSION JOINT (2)
47	ML-387350J1	ARM LID OPENER
48	BV-V1102A150A	CASSETTE LOAD BLK 425EA
49	ZG-387348J1	SP PLATE HOLDER
50	ZG-387421J	SP TORSION DAMPER (S)
51	ML-387345J	LEVER DAMPER (S)
52	ZG-388290J1	SP TORSION DAMPER (T)
53	ML-387346J	LEVER DAMPER (T)
54	ML-387344J	LEVER LOCK RELEASE
55	ZG-387420J1	SP TORSION RELEASE
56	ML-387349J2	ARM SHUTTER
57	SE-395554J	GUIDE FRONT (2)
58	MZ-387351J2	PLATE UPPER
59	ZS-358936	ST BID30X06STL CMT
60	SZ-391866J1	CUSHION COVER
61	ZG-392294J	SP PLATE EARTH
62	MZ-404995J	GEAR MID PART
64	MP-404852J	PINCH ROLLER (2) PART
65	BL-V1130A160A	ARM PINCH ROLLER BLK F410EK
70	BB-V1130A020C	MECHA DECK BLK F410EK

NOTE:

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

• MODEL VS-F480EK-V/EOG-V, F490EM/EO/EOH/ES, F497EOH

JFX MECHA (1)

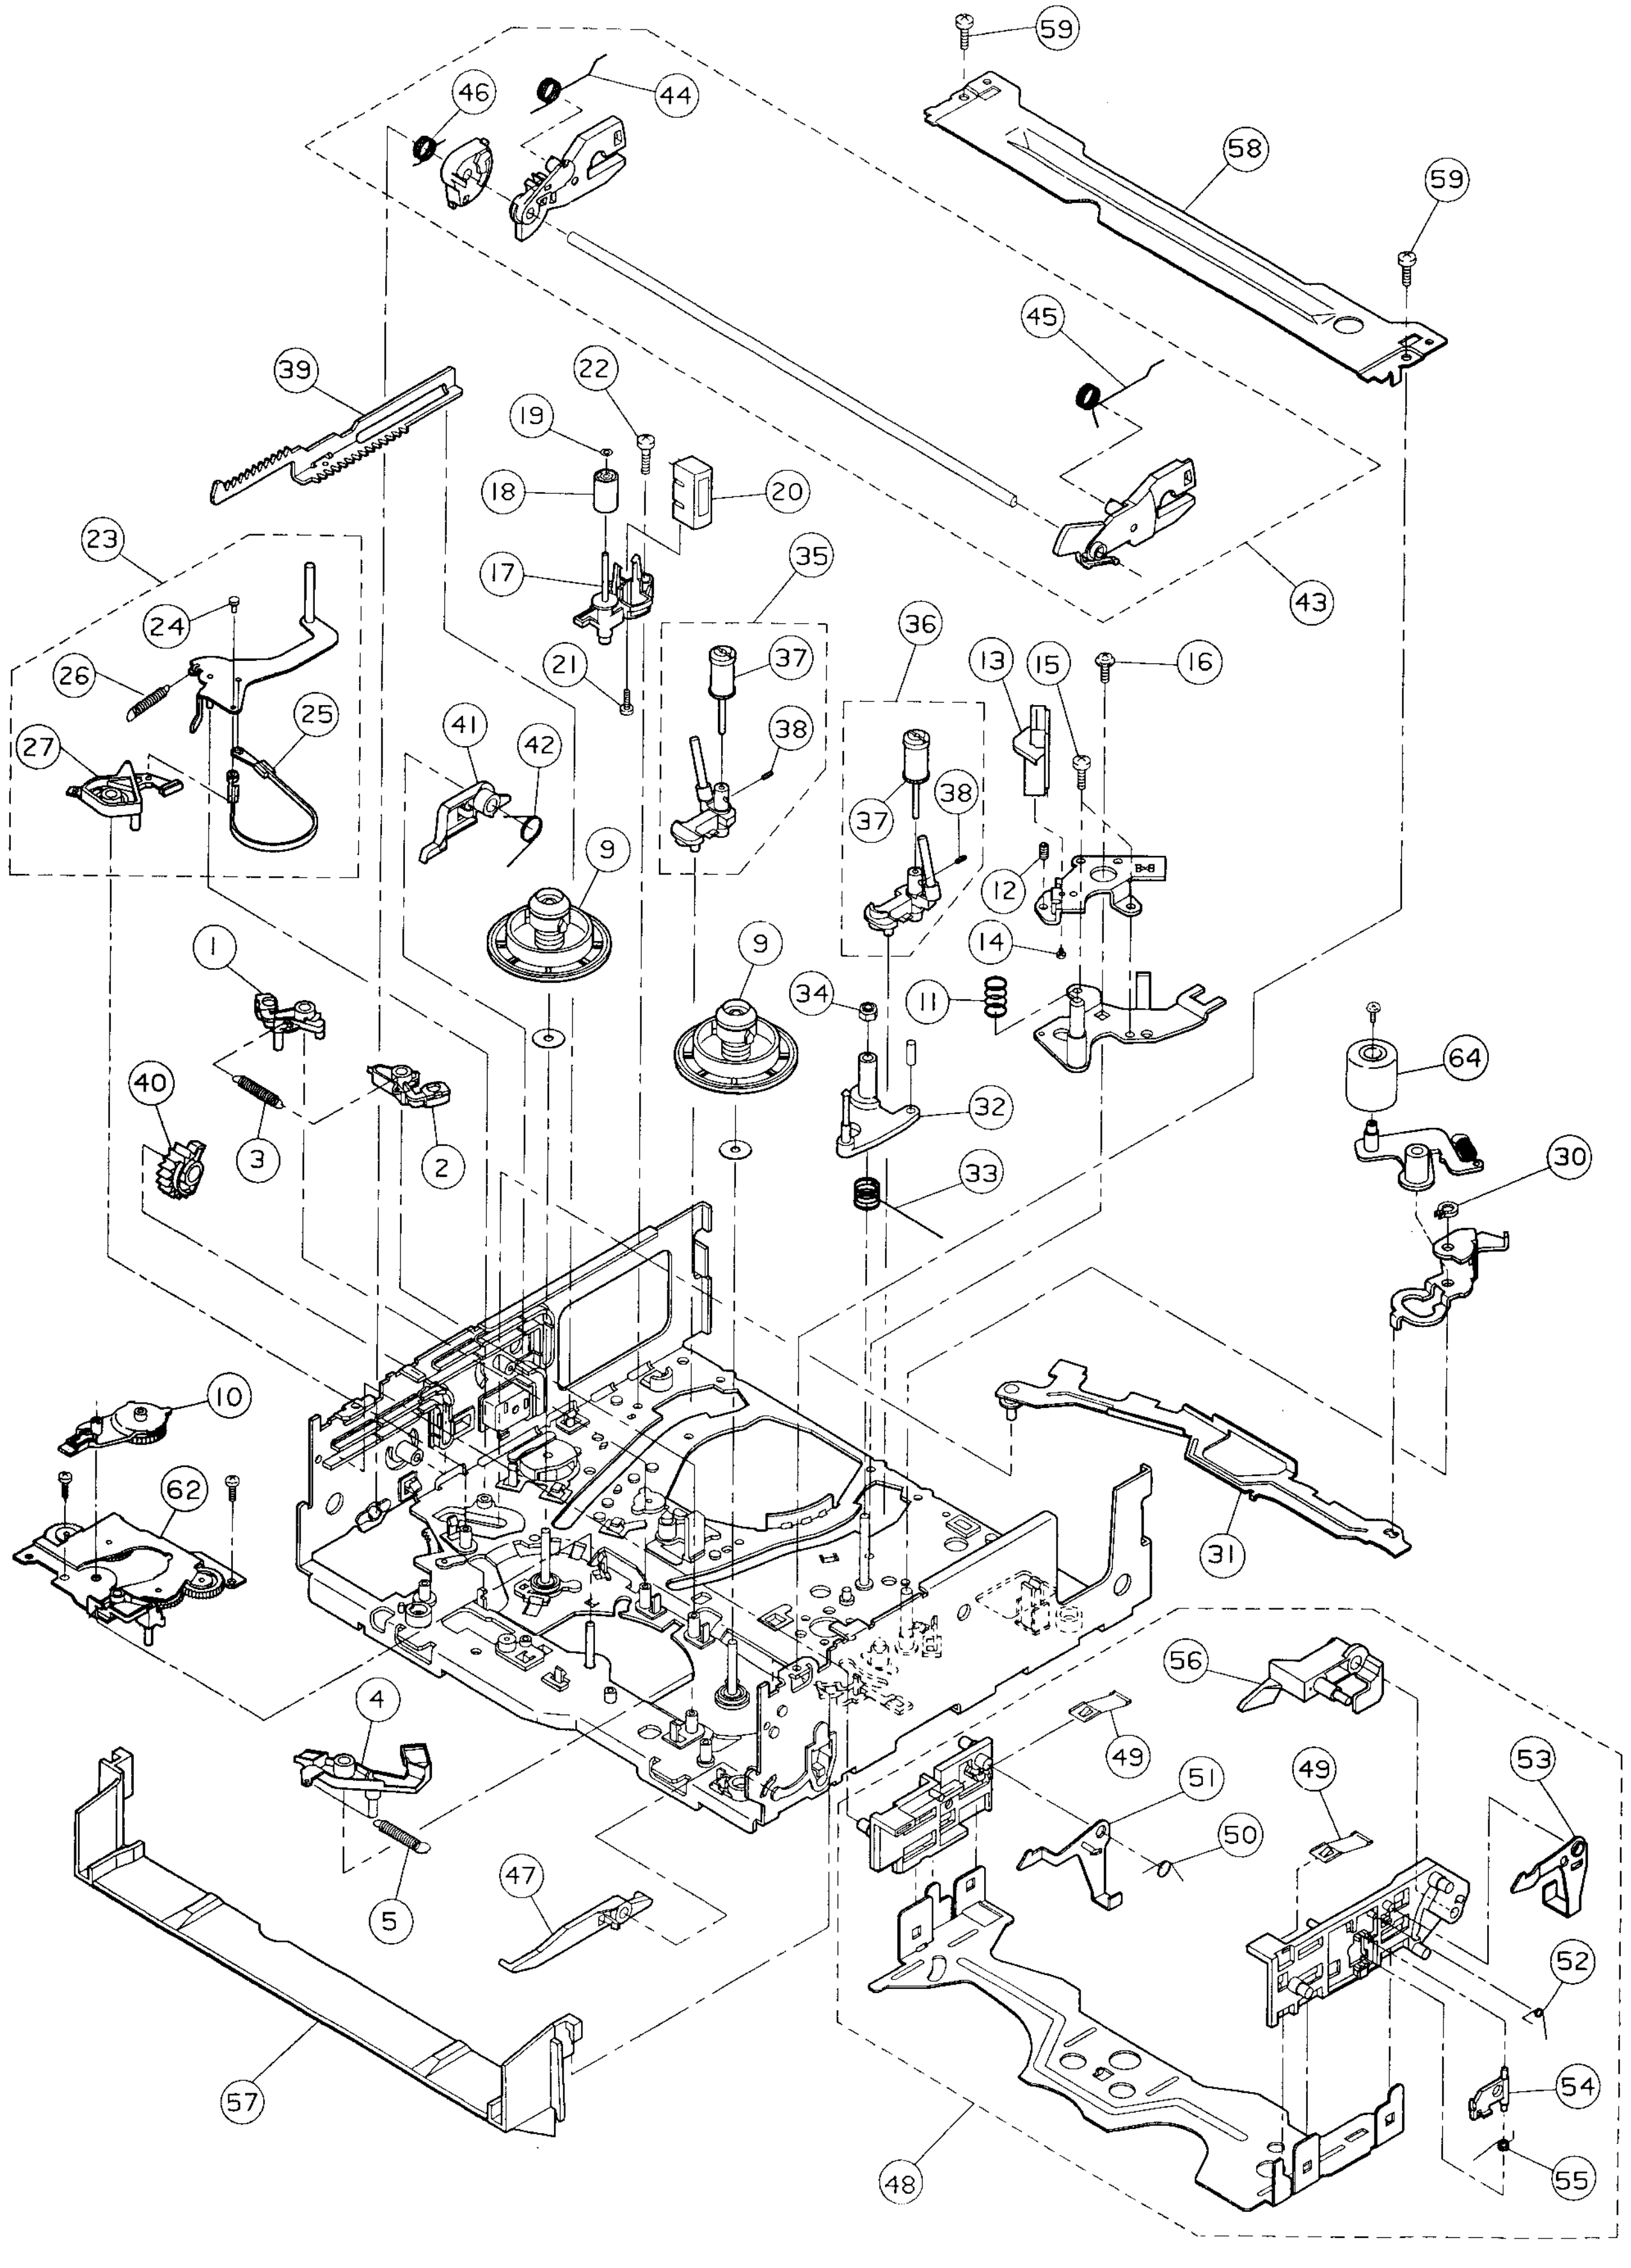

• MODEL VS-F440EA/EDG/EDI/EK/EM/EO/EOG-V/EOH, F441EA, F450EOH, F455EOH

JFX MECHA (2)

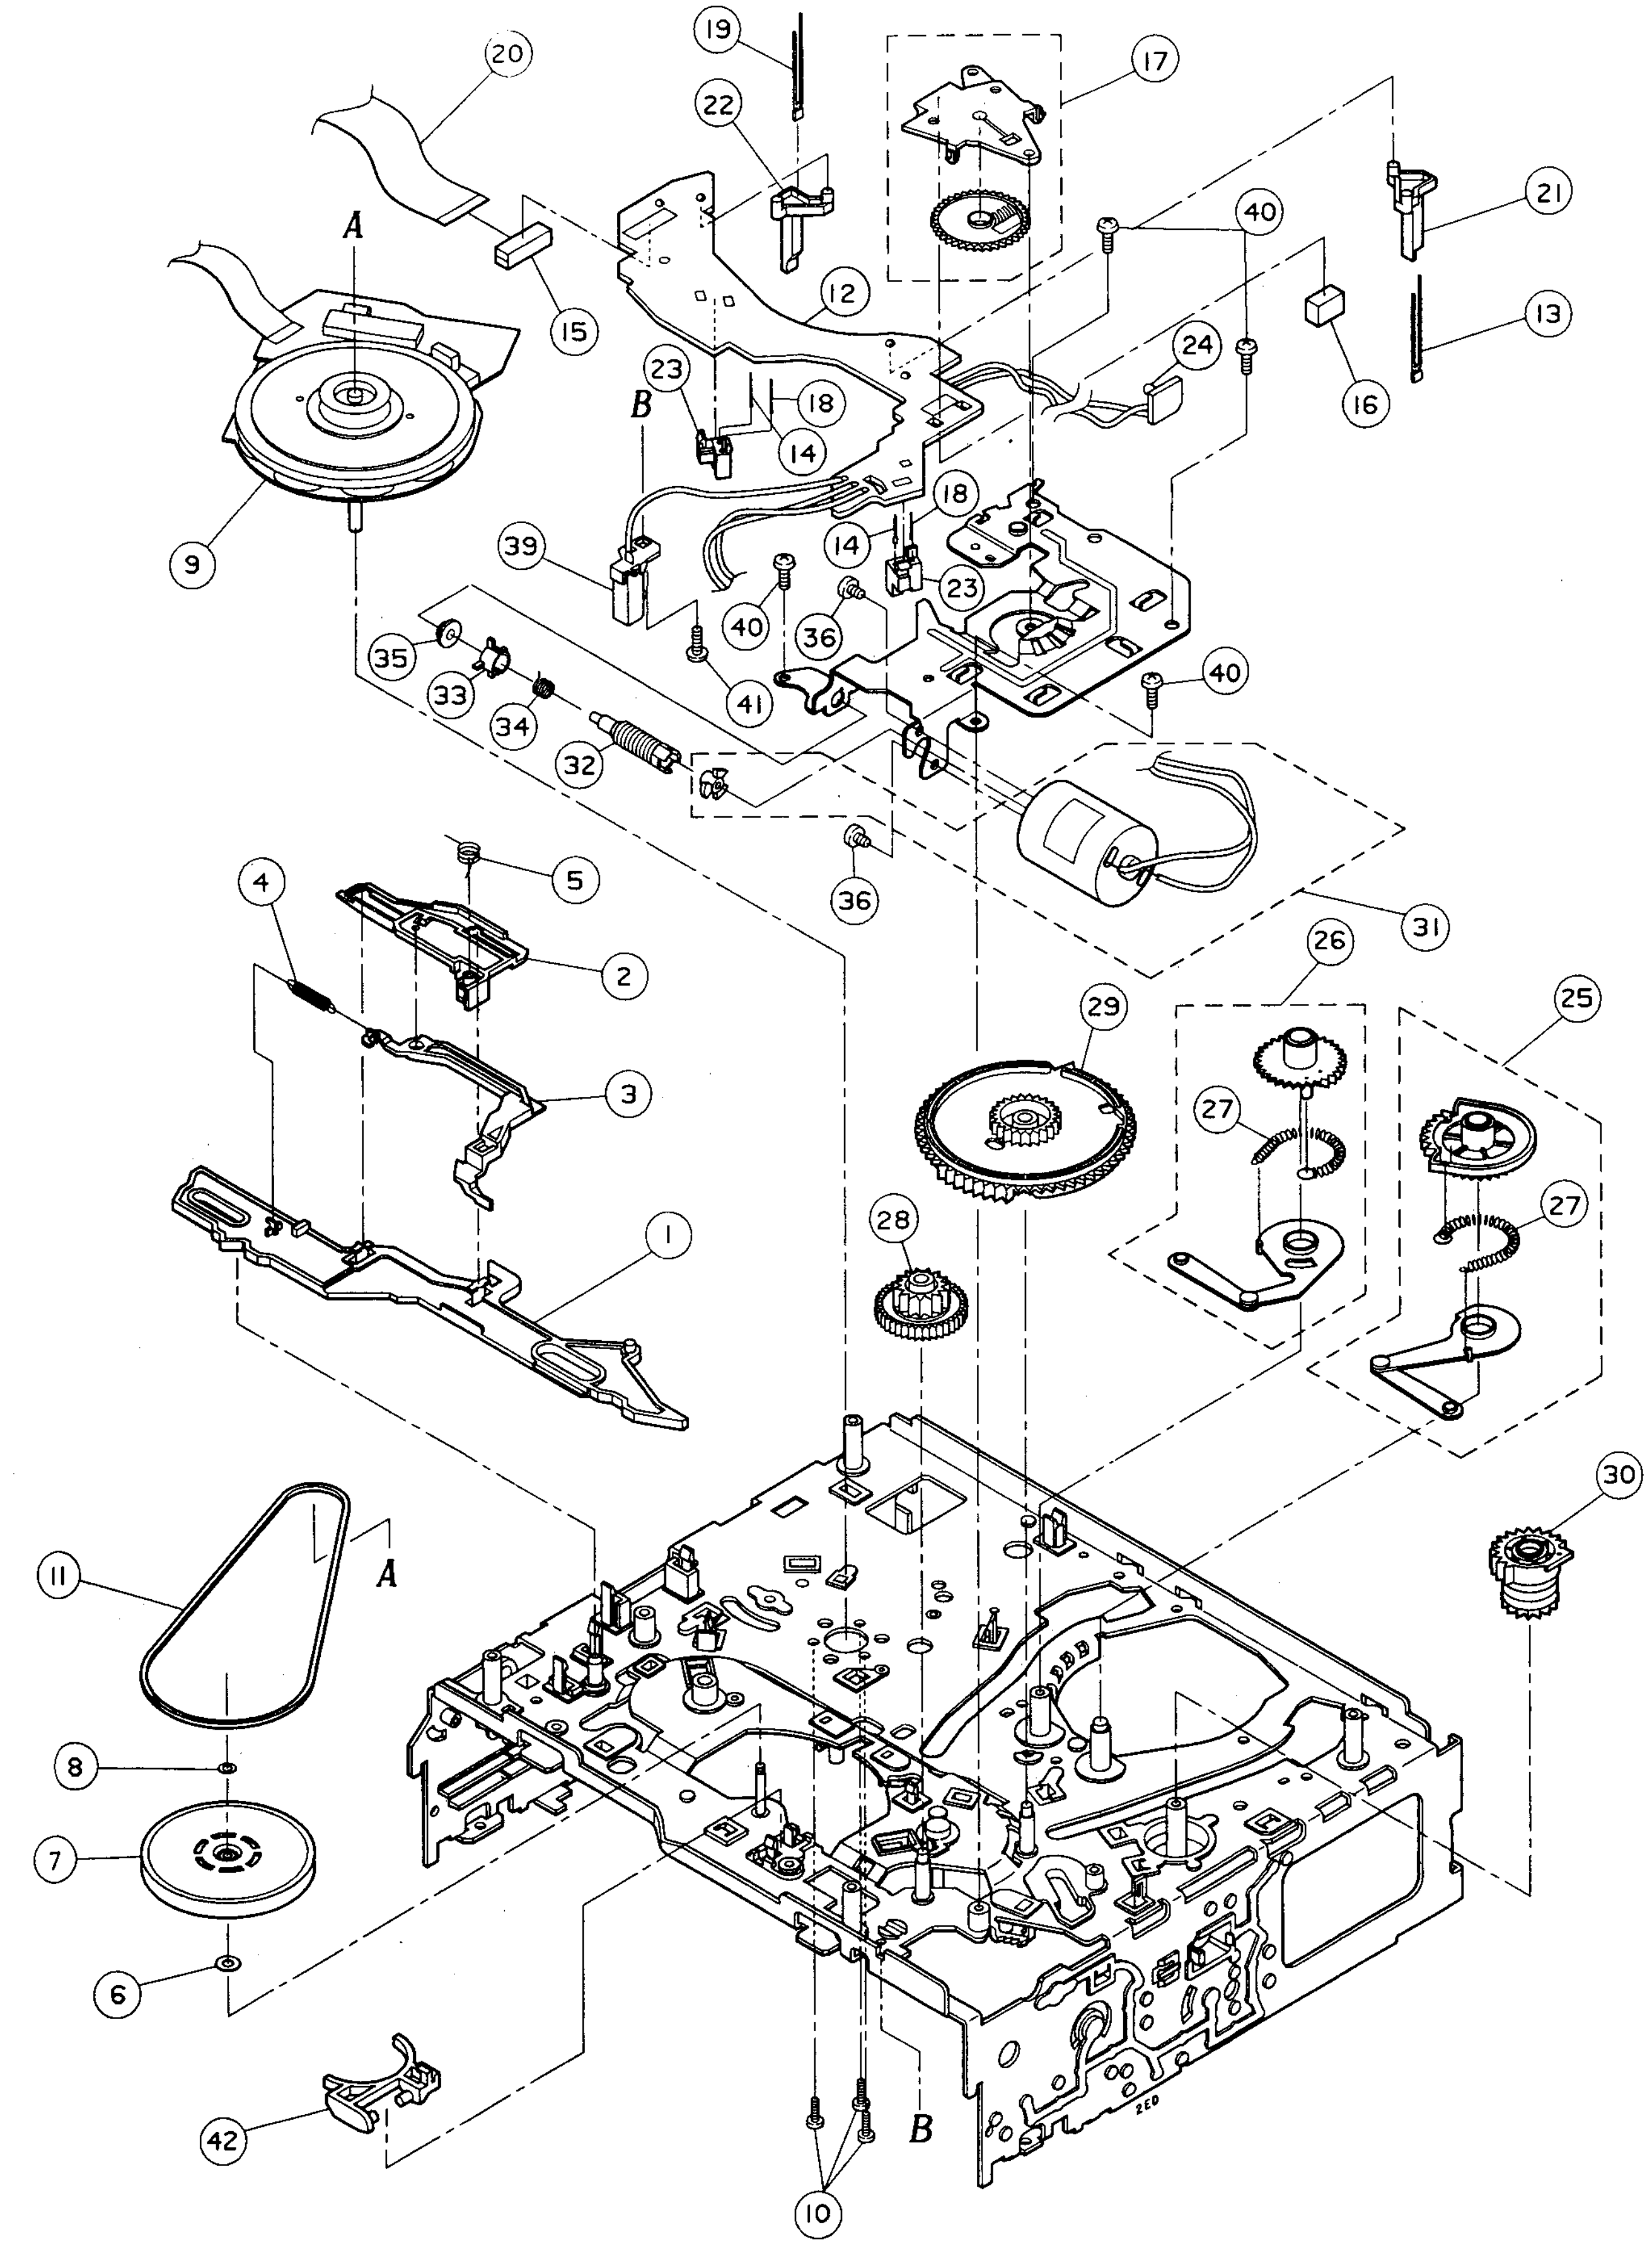

5. JFX MECHA BLOCK (2)

Ref.No.	Part No.	Description
1	ML-387324J1	SLIDER BRAKE PART
2	ML-404944J	SLIDER TRIGGER (2)
3	ML-387402J1	LEVER TRIGGER
4	ZG-387468J	SP PULL SLIDER
5	ZG-387403J	SP TORSION COUPLING
6	ZW-389923J	PW26X060X050PSL
7	MZ-387298J3	DISK CLUTCH PART
8	ZW-387492J	SLIT W21X040X050PSL
9	BM-400682J1	MOTOR DFX-67B3VWB1 [CAPSTAN MOTOR]
10	ZS-365149	PT BID26X06STL CMT
11	MB-387289J	BELT CAPSTAN
12	EA-387496J	PC (#) SENSOR
13	ED-390011J	D LED GL451 INFRARED [D1]
14	ED-390012J	D LED GL4800 INFRARED [D2]
15	EJ-387497J	SOCKET HOUSING 5062-30-10-13 [PS1]
16	EJ-381837J	SOCKET 174074-5 5P [P1]
17	ES-387465J	SW MODE SELECT MMS00070ZLBO [SW1]
18	ET-390010J	TR PHOTO PT4800 [TR2]
19	ET-390009J	TR PHOTO PT493F [TR4]
20	EW-389313J	CORD FFC P1.25 L=120 13P [WP1]
21	MZ-387430J	HOLDER D-LED
22	MZ-387445J	HOLDER S SENSOR
23	MZ-387446J	HOLDER PHOTO SENSOR
24	ET-361490	TR PHOTO PN268 [TR1]
25	MZ-V1102A090A	GEAR TOGGLE (S) BLK 425EA
26	MZ-V1102A100A	GEAR TOGGLE (T) BLK 425EA
27	ZG-387413J1	SP PULL TOGGLE
28	MZ-387332J	GEAR WORM WHEEL
29	MZ-387331J	GEAR CAM SLIDER
30	MZ-387333J	GEAR FRONT LOADING
31	BM-387503J	MOTOR PART [LOADING MOTOR]
32	MZ-387330J	GEAR WORM PART
33	MR-391968J	PULLEY TRIGGER (2)
34	ZG-387443J	SP TRIGGER
35	MR-387406J	HOLDER THRUST WORM
36	ZS-425981	BID30X03STL CMT
39	ES-373099	SW LEAF MTS10110MPC1
40	ZS-389950J	PT BID26X10STL CMT
41	ZS-358936	ST BID30X06STL CMT
42	ML-387311J2	ARM COUPLING

NOTE:

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

6. JFX MECHA BLOCK (2)

Ref.No.	Part No.	Description
1	ML-404567J1	SLIDER BRAKE (3) PART
2	ML-404944J	SLIDER TRIGGER (2)
3	ML-387402J1	LEVER TRIGGER
4	ZG-387468J	SP PULL SLIDER
5	ZG-387403J	SP TORSION COUPLING
6	ZW-389923J	PW26X060X050PSL
7	MZ-404577J	DISK CLUTCH (2) PART
8	ZW-387492J	SLIT W21X040X050PSL
9	BM-400682J1	MOTOR DFX-67B3VWB1 [CAPSTAN MOTOR]
10	ZS-365149	PT BID26X06STL CMT
11	MB-407117J	BELT CAPSTAN (3)
12	EA-404543J	PC (#) SENSOR (2) KFX
13	ED-390011J	D LED GL451 INFRARED [D1]
14	ET-403420J	DETECTOR SG-105LF [PH1][PH2]
15	EJ-387497J	SOCKET HOUSING 5062-30-10-13 [PS1]
16	EJ-381837J	SOCKET 174074-5 5P [P1]
17	ES-387465J	SW MODE SELECT MMS00070ZLBO [SW1]
19	ET-390009J	TR PHOTO PT493F [TR4]
20	EW-389313J	CORD FFC P1.25 L=120 13P [WP1]
21	MZ-387430J	HOLDER D-LED
22	MZ-387445J	HOLDER S SENSOR
23	MZ-404542J	HOLDER PHOTO SENSOR (2)
24	ET-361490	TR PHOTO PN268 [TR1]
25	MZ-V1102A090A	GEAR TOGGLE (S) BLK 425EA
26	MZ-V1102A100A	GEAR TOGGLE (T) BLK 425EA
27	ZG-387413J1	SP PULL TOGGLE
28	MZ-387332J	GEAR WORM WHEEL
29	MZ-404538J	GEAR CAM SLIDER (3)
30	MZ-387333J	GEAR FRONT LOADING
31	BM-387503J	MOTOR PART [LOADING MOTOR]
32	MZ-401686J1	GEAR WORM (2)
33	MR-391968J	PULLEY TRIGGER (2)
34	ZG-387443J	SP TRIGGER
35	MR-387406J	HOLDER THRUST WORM
36	ZS-425981	BID30X03STL CMT
37	BL-387458J2	CAPSTAN BRAKE PART
38	ZG-387502J	SP PULL CAPSTAN BRAKE
39	ES-373099	SW LEAF MTS10110MPC1
40	ZS-389950J	PT BID26X10STL CMT
41	ZS-358936	ST BID30X06STL CMT
42	ML-387311J2	ARM COUPLING

NOTE:

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

• MODEL VS-F480EK-V/EOG-V, F490EM/EO/EOH/ES, F497EOH

JFX MECHA (2)

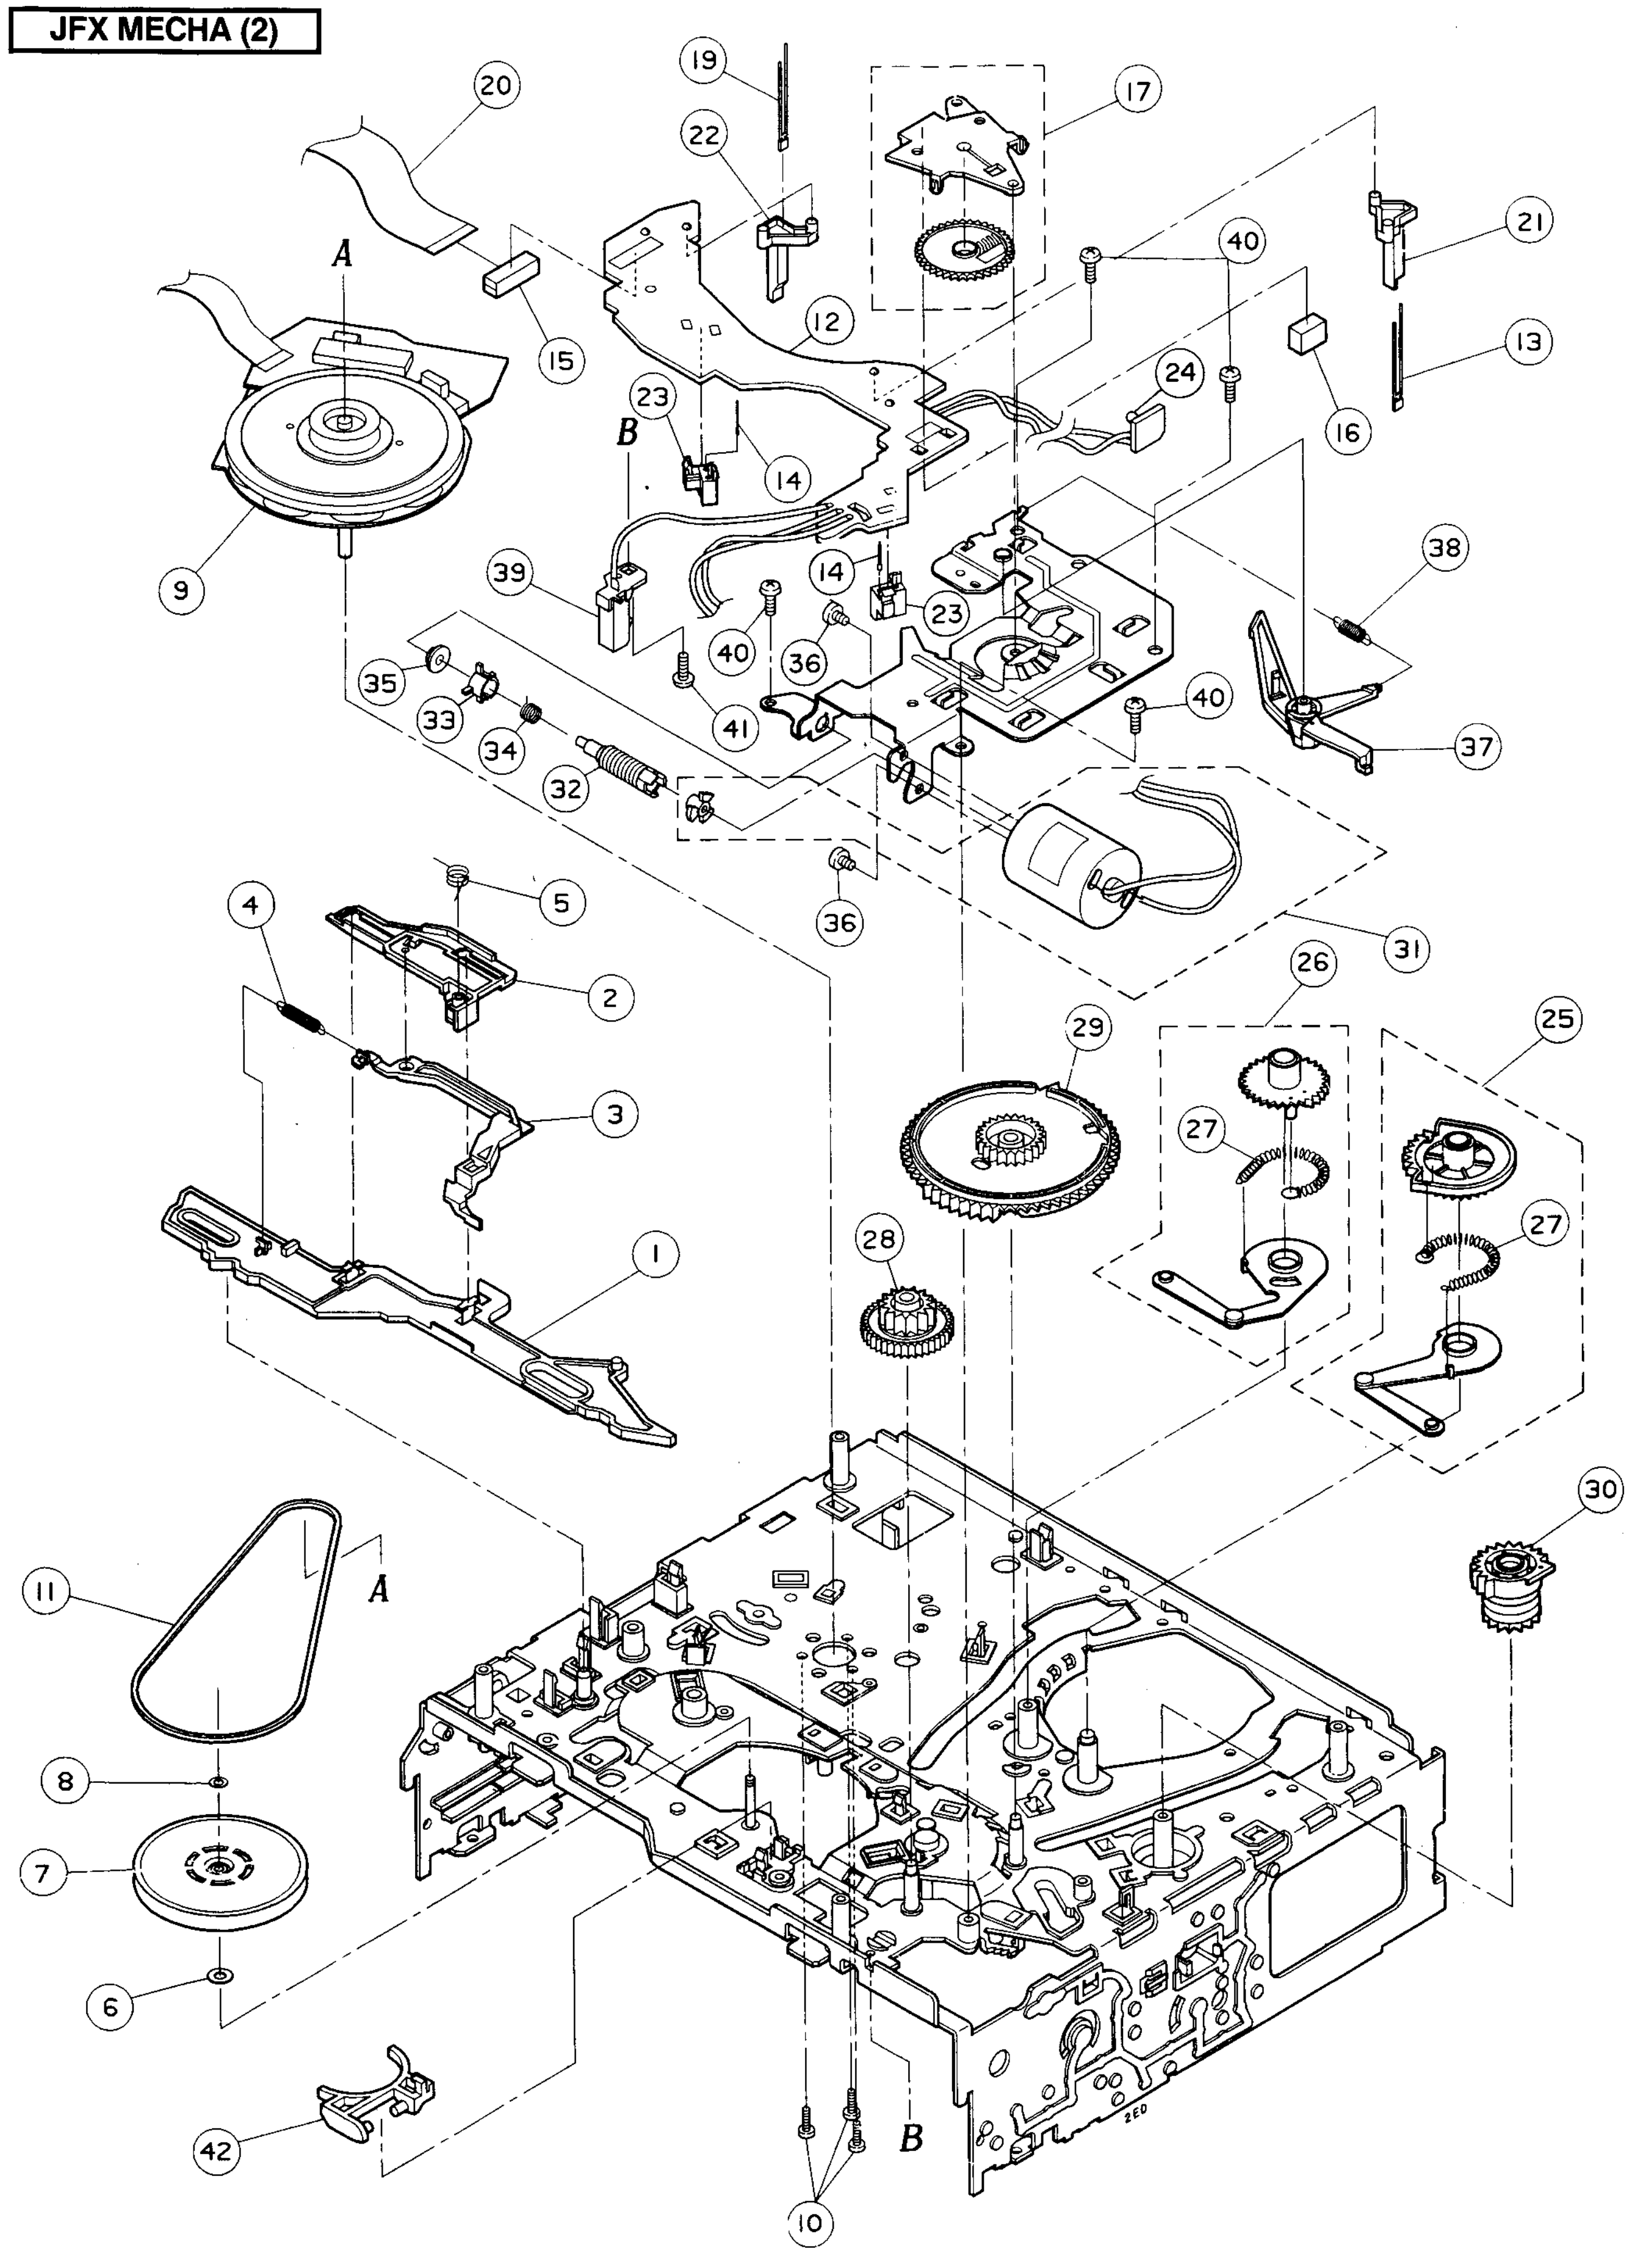

7. P.C BOARD BLOCK

Ref.No.	Part No.	Description
1A	BA-V1150A600A	PC (#) MAIN (PAL) BLK F440EA
1B	BA-V1150A600D	PC (#) MAIN (PAL) BLK F440EDI
1C	BA-V1150A600E	PC (#) MAIN (PAL) BLK F440EM
1D	BA-V1152A600B	PC (#) MAIN (PAL) BLK F490EM
2A	BA-V1132A610F	PC PRE AMP BLK F400EA [EA]
2B	BA-V1132A615C	PC PRE AMP BLK F400EDI [EDI]
2C	BA-V1132A615G	PC PRE AMP BLK F440EM [F440EM]
2D	BA-V1132A610G	PC PRE AMP BLK F410EM [F490EM]
3A	BA-V1146A635K	PC OPERATION (A) BLK F440EA
3B	BA-V1146A635L	PC OPERATION (A) BLK F441EA
3C	BA-V1146A640A	PC OPERATION (A) BLK F440EDI
3D	BA-V1146A640C	PC OPERATION (A) BLK F440EM
3E	BA-V1152A630B	PC—OPERATION (G) BLK F490EM
4A	BA-V1130A500A	PC POWER BLK F220EDG [EA,EDI]
4B	BA-V1130A510A	PC (#) POWER EM BLK F220EM [EM]

PC (#) MAIN BLK CONSISTS OF FOLLOWING P.C BOARD.

- MAIN (A) P.C BOARD
- MAIN (B) P.C BOARD
- VIF UNIT

PC (#) OPERATION P.C BOARD CONSISTS OF FOLLOWING P.C BOARD.

- OPERATION-A P.C BOARD
- OPERATION-B P.C BOARD

PC (#) POWER P.C BOARD CONSISTS OF FOLLOWING P.C BOARD.

- POWER SUPPLY (1) P.C BOARD
- POWER SUPPLY (2) P.C BOARD
- DIODE P.C BOARD

8. MAIN (A) P.C BOARD

Ref.No.	Part No.	Description
C369	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D8	ED-387919J	D ZENER H HZS6A1L
D201	ED-307572	D SILICON H 1SS131
D202	ED-307572	D SILICON H 1SS131
D203	ED-307572	D SILICON H 1SS131
D204	ED-397233J	D ZENER H HZS5C3
D205	ED-403267J	D ZENER H MTZJ3.3B T26
D208	ED-307572	D SILICON H 1SS131
D209	ED-307572	D SILICON H 1SS131
D212	ED-511907	D SILICON 1N4002 100/1.0A
D213	ED-511907	D SILICON 1N4002 100/1.0A
D301	ED-307572	D SILICON H 1SS131
D302	ED-307572	D SILICON H 1SS131
D303	ED-404086J	D ZENER H UTZJ7.5C
D304	ED-403724J	D ZENER H UTZJ10A
D305	ED-307572	D SILICON H 1SS131
D306	ED-307572	D SILICON H 1SS131
D307	ED-307572	D SILICON H 1SS131
D308	ED-307572	D SILICON H 1SS131
D309	ED-307572	D SILICON H 1SS131
D310	ED-307572	D SILICON H 1SS131 [F490EM]
D401	ED-307572	D SILICON H 1SS131
D402	ED-307572	D SILICON H 1SS131
D403	ED-307572	D SILICON H 1SS131 [EM]
D404	ED-307572	D SILICON H 1SS131
D405	ED-307572	D SILICON H 1SS131
D406	ED-366443	D SILICON H MA700FA5 F10
D408	ED-307572	D SILICON H 1SS131
D410	ED-307572	D SILICON H 1SS131
D411	ED-307572	D SILICON H 1SS131
D412	ED-403729J	D ZENER H UTZJ5.6C
D501	ED-307572	D SILICON H 1SS131 [EA,EDI]
D502	ED-307572	D SILICON H 1SS131
D503	ED-307572	D SILICON H 1SS131
D504	ED-307572	D SILICON H 1SS131
D505	ED-307572	D SILICON H 1SS131
D506	ED-307572	D SILICON H 1SS131
D507	ED-307572	D SILICON H 1SS131
D508	ED-307572	D SILICON H 1SS131 [EA,EDI]
D509	ED-307572	D SILICON H 1SS131
DL500	EH-390730J	DL EFD-JF124A13J
DL501	EH-394838J	DL ADL-FN1344Q [EM]
FR201	ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
FR350	ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
FR501	ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
IC1	EI-389622J	IC L5631
IC101	EI-310036	IC TC4066BP
IC201	EI-400756J	IC NJM4558L-B
IC301A	EI-408849J	IC MN675201 XDL JFLSYP1 [EXCEPT F490EM]
IC301B	EI-408850J	IC MN675201 XDJ JFXSYP1 [F490EM]
IC302	EI-353421	IC BA6229
IC303	EI-373980	IC BA15218N
IC304	EI-360586	IC LA6358S [F490EM]
IC400	EI-403234J1	IC LA7391A
IC401	EI-394856J	IC LC8992
IC402	EI-373981J1	IC BA10393N
IC403	EI-356457	IC BU4013B
L1	EO-373260	COIL FIX 1 LAP02 F05 1R0K [EA]
L101	EO-345881	COIL FIX 1 EL0606SKI 101J
L103	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L301	EO-381196J	COIL FIX 1 EL0405SKI 470K
L302	EO-345881	COIL FIX 1 EL0606SKI 101J
L303	EO-354600	COIL FIX 1 LAP02 F05 101K
L401	EO-354600	COIL FIX 1 LAP02 F05 101K
L402	EO-357508	COIL FIX 1 LAP02 F05 151K
L403	EO-381192J	COIL FIX 1 EL0405SKI 270K

Ref.No.	Part No.	Description
L404	EO-345880	COIL FIX 1 EL0606SKI 820J
L405	EO-354600	COIL FIX 1 LAP02 F05 101K
L406	EO-354600	COIL FIX 1 LAP02 F05 101K
L410	EO-345874	COIL FIX 1 EL0606SKI 330J
L470	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L472	EO-345880	COIL FIX 1 EL0606SKI 820J
L474	EO-388161J	COIL FIX 1 EL0405SKI 560K
L500	EO-345880	COIL FIX 1 EL0606SKI 820J
L501	EO-353900	COIL FIX 1 LAP02 F05 150K
L502	EO-345880	COIL FIX 1 EL0606SKI 820J [EM]
L503	EO-353900	COIL FIX 1 LAP02 F05 150K [EM]
L504	EO-353900	COIL FIX 1 LAP02 F05 150K [EM]
L505	EO-345880	COIL FIX 1 EL0606SKI 820J
L506	EO-345880	COIL FIX 1 EL0606SKI 820J
L507	EO-392817J	COIL FIX 1 EL0405SKI 1R2K
L508	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J
L509	EO-345880	COIL FIX 1 EL0606SKI 820J
L510	EO-403270J	COIL FIX 1 EL0405RA T05 101J
L511	EO-381195J	COIL FIX 1 EL0405SKI 331K
L512	EO-381197J	COIL FIX 1 EL0405SKI 471K
L570	EO-345880	COIL FIX 1 EL0606SKI 820J
L590	EO-387802J	COIL FIX 1 EL0405SKI 330K [EM]
MD1A	BV-387610J	RF CONVERTER YAA21-0453 EA [EA]
MD1B	BV-404007J	RF CONVERTER MDLK6E766A EDI [EDI]
MD1C	BV-387611J	RF CONVERTER YAA21-0454 EV [EM]
PJ101	EJ-387614J	PIN J T6353-ABCB YL BK 4P
R214	ER-403405J	R OMF H S12 FS 1W R75J
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-375777	TR 2SC2926S P,Q
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	ET-353899	TR 2SA1317 S,T,U
TR5	ET-353899	TR 2SA1317 S,T,U
TR7	ET-353899	TR 2SA1317 S,T,U
TR8	ET-354414	TR DTC144ES
TR9	ET-354414	TR DTC144ES
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-397160J	TR 2SC3330 R,S,T,U,V
TR13	ET-353899	TR 2SA1317 S,T,U
TR15	ET-353897	TR DTC114ES
TR17	ET-397160J	TR 2SC3330 R,S,T,U,V
TR18	ET-397160J	TR 2SC3330 R,S,T,U,V
TR19	ET-354414	TR DTC144ES [EA,EM]
TR101	ET-354414	TR DTC144ES
TR102	ET-356336	TR DTA114ES
TR103	ET-354414	TR DTC144ES
TR104	ET-353899	TR 2SA1317 S,T,U
TR105	ET-353899	TR 2SA1317 S,T,U
TR107	ET-397160J	TR 2SC3330 R,S,T,U,V
TR109	ET-397160J	TR 2SC3330 R,S,T,U,V
TR202	ET-356336	TR DTA114ES
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR205	ET-388338J	TR 2SB1425 S,E
TR210	ET-405622J	TR 2SD2061 E,F
TR301	ET-354414	TR DTC144ES
TR302	ET-400218J	TR 2SC1740S R,S
TR303	ET-363953	TR DTA114TS [EM]
TR304	ET-354415	TR DTA144ES
TR305	ET-354414	TR DTC144ES
TR306	ET-354414	TR DTC144ES
TR307	ET-373985	TR DTA144TS
TR308	ET-373985	TR DTA144TS
TR309	ET-373985	TR DTA144TS
TR310	ET-354414	TR DTC144ES
TR313	ET-354414	TR DTC144ES
TR401	ET-356336	TR DTA114ES
TR402	ET-354414	TR DTC144ES
TR404	ET-354364	TR DTC143TS
TR406	ET-397160J	TR 2SC3330 R,S,T,U,V
TR407	ET-353899	TR 2SA1317 S,T,U
TR408	ET-354414	TR DTC144ES
TR409	ET-360399	TR DTC114TS
TR410	ET-354414	TR DTC144ES
TR411	ET-360399	TR DTC114TS

Ref.No.	Part No.	Description
TR413	ET-354415	TR DTA144ES
TR414	ET-388338J	TR 2SB1425 S,E
TR415	ET-353899	TR 2SA1317 S,T,U
TR417	ET-360399	TR DTC114TS
TR420	ET-354414	TR DTC144ES
TR421	ET-364040	TR UN421D
TR423	ET-356336	TR DTA114ES
TR424	ET-388338J	TR 2SB1425 S,E
TR425	ET-354414	TR DTC144ES [EM]
TR470	ET-353899	TR 2SA1317 S,T,U
TR471	ET-353899	TR 2SA1317 S,T,U
TR501	ET-353897	TR DTC114ES
TR502	ET-360646	TR DTA143ES [EM]
TR503	ET-397160J	TR 2SC3330 R,S,T,U,V
TR504	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR505	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR506	ET-397160J	TR 2SC3330 R,S,T,U,V
TR507	ET-397160J	TR 2SC3330 R,S,T,U,V
TR508	ET-356336	TR DTA114ES
TR509	ET-397160J	TR 2SC3330 R,S,T,U,V
TR510	ET-397160J	TR 2SC3330 R,S,T,U,V
TR511	ET-397160J	TR 2SC3330 R,S,T,U,V
TR512	ET-397160J	TR 2SC3330 R,S,T,U,V
TR513	ET-356336	TR DTA114ES [EDI,EM]
TR514	ET-354414	TR DTC144ES [EDI,EM]
TR515	ET-397160J	TR 2SC3330 R,S,T,U,V
TR570	ET-397160J	TR 2SC3330 R,S,T,U,V
TR571	ET-397160J	TR 2SC3330 R,S,T,U,V
TR572	ET-354414	TR DTC144ES
TR573	ET-354414	TR DTC144ES
VR301	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
VR401	EV-405657J	R S-FIX H T05 KVSF637T 0.1W103
VR402	EV-404300J	R S-FIX H T05 KVSF637T 0.1W472
VR403	EV-405659J	R S-FIX H T05 KVSF637T 0.1W682
VR404	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
WF201	EW-404138J1	CORD KX MA-POW L=225 12P
X301	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
X500	EI-381632J	OSC X'TAL 86686 4.433619MHZ
1A	BV-403236J1	VIF UNIT KX EA [EA]
1B	BV-403963J	VIF UNIT KX EDI [EDI]
1C	BV-403239J1	VIF UNIT KX EM [EM]
2A	EE-408417J	TV TUNER VTSS6AZV EA [EA]
2B	EE-408471J	TV TUNER ENV-77890F2 SK [EDI]
2C	EE-405638J	TV TUNER VTSS6CZ EM [EM]
3A	SP-388307J	PANEL REAR JACK EA [EA,EM]
3B	SP-404013J	PANEL REAR JACK EDI (2) [EDI]

9. MAIN (B) P.C BOARD

Ref.No.	Part No.	Description
D601	ED-307572	D SILICON H 1SS131
D603	ED-307572	D SILICON H 1SS131 [EDI,EM]
D801	ED-307572	D SILICON H 1SS131
D901	ED-307572	D SILICON H 1SS131 [F490EM]
D902	ED-307572	D SILICON H 1SS131 [F490EM]
FL701	EH-366894	FILTER CE SFE-4.16MB 4.16MHZ
FL801A	EO-388362J	COIL OSC 1 V1102 [EXCEPT F490EM]
FL801B	EO-388363J	COIL OSC 1 V1105-1 [F490EM]
L601	EO-345881	COIL FIX 1 EL0606SKI 101J
L602	EO-345876	COIL FIX 1 EL0606SKI 470J
L603	EO-351866	COIL FIX 1 LAP02 F05 330K [EDI,EM]
L604	EO-351866	COIL FIX 1 LAP02 F05 330K
L605	EO-345881	COIL FIX 1 EL0606SKI 101J
L701	EO-345881	COIL FIX 1 EL0606SKI 101J [EM]
L702	EO-345881	COIL FIX 1 EL0606SKI 101J [EM]
L801	EO-390717J	COIL FIX 1 LHL06TB T05 103J
L802	EO-390716J	COIL FIX 1 LHL06TB T05 272J
L901	EO-345881	COIL FIX 1 EL0606SKI 101J [F490EM]
IC601	EI-405722J	IC UPD6450CX-515
IC602	EI-403469J	IC MM1068XS
IC701	EI-366892	IC BA7025L [EM]
IC702	EI-200573	IC TC4053BP [EM]
IC801	EI-388360J	IC BA7765AS
IC901	EI-386468J	IC BA3308 [F490EM]
IC902	EI-310036	IC TC4066BP [F490EM]
TR601	ET-353899	TR 2SA1317 S,T,U
TR602	ET-354414	TR DTC144ES
TR603	ET-397160J	TR 2SC3330 R,S,T,U,V
TR604	ET-397160J	TR 2SC3330 R,S,T,U,V [EDI,EM]
TR605	ET-356336	TR DTA114ES [EDI,EM]
TR606	ET-356336	TR DTA114ES [EDI,EM]
TR607	ET-353899	TR 2SA1317 S,T,U
TR608	ET-389803J	TR 2SA933S R,S
TR609	ET-354414	TR DTC144ES [EDI,EM]
TR701	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR702	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR751	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR752	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR753	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR754	ET-397160J	TR 2SC3330 R,S,T,U,V [EM]
TR801	ET-397160J	TR 2SC3330 R,S,T,U,V
TR803	ET-354414	TR DTC144ES [F490EM]
TR901	ET-354414	TR DTC144ES [F490EM]
TR902	ET-354414	TR DTC144ES [F490EM]
TR903	ET-397160J	TR 2SC3330 R,S,T,U,V [F490EM]
TR904	ET-389803J	TR 2SA933S R,S [F490EM]
VC601	EC-394757J	C S-FIX H T05 VCT51F 5.5-30
VL701	EO-366893	COIL VARI 1 21D6 8.20MH [EM]
VR801	EV-403967J	R S-FIX V T05EVNDCAA03 0.1W332
VR802A	EV-403968J	R S-FIX V T05EVNDCAA03 0.1W473 [EXCEPT F490EM]
VR802B	EV-405263J	R S-FIX V T05EVNDCAA03 0.1W104 [F490EM]
X601	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
X602	EI-403467J	OSC CE CSB500F40 15.680KHZ

10. PRE AMP P.C BOARD

Ref.No.	Part No.	Description
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D101	ED-405247J	D ZENER H MTZJ2.7A T26 [F490EM]
FL101	EO-388349J	COIL OSC 1 V1105-2 [F490EM]
IC1	EI-387586J	IC BA7244BS
L1	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L2	EO-376858	COIL FIX 1 LF-5.0S F05 560K
L3	EO-376857	COIL FIX 1 LF-5.0S F05 5R6K
L4	EO-376606	COIL FIX 1 LF-5.0S F05 180K
L5	EO-376603	COIL FIX 1 LF-5.0S F05 150K
L6	EO-381193J	COIL FIX 1 EL0405SKI 271K
L7	EO-376860	COIL FIX 1 LF-5.0S F05 820K
L8	EO-345880	COIL FIX 1 EL0606SKI 820J
L9	EO-376614	COIL FIX 1 LF-5.0S F05 220K
L10	EO-345880	COIL FIX 1 EL0606SKI 820J
L11	EO-345880	COIL FIX 1 EL0606SKI 820J
L12	EO-376859	COIL FIX 1 LF-5.0S F05 8R2K
L13	EO-381195J	COIL FIX 1 EL0405SKI 331K
L14A	EO-376607	COIL FIX 1 LF-5.0S F05 181K [EXCEPT F440EM]
L14B	EO-376605	COIL FIX 1 LF-5.0S F05 151K [F440EM]
L15	EO-376612	COIL FIX 1 LF-5.0S F05 680K
L16	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L101	EO-390716J	COIL FIX 1 LHL06TB T05 272J [F490EM]
PS1	EJ-403389J	SOCKET HOUSING 5062-30-10-18
TH1	EX-405691J	THERMISTOR NTH5D332KA
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-397160J	TR 2SC3330 R,S,T,U,V
TR3	ET-360399	TR DTC114TS [EM]
TR4	ET-360399	TR DTC114TS
TR5	ET-364040	TR UN421D
TR6	ET-354414	TR DTC144ES [EDI,EM]
TR7	ET-397160J	TR 2SC3330 R,S,T,U,V
TR8	ET-397160J	TR 2SC3330 R,S,T,U,V
TR9	ET-397160J	TR 2SC3330 R,S,T,U,V
TR10	ET-353897	TR DTC114ES
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-353899	TR 2SA1317 S,T,U
TR13	ET-364040	TR UN421D
TR14	ET-397160J	TR 2SC3330 R,S,T,U,V
TR15	ET-354364	TR DTC143TS [EDI,EM]
TR16	ET-354414	TR DTC144ES
TR17	ET-364040	TR UN421D
TR18	ET-353897	TR DTC114ES
TR19	ET-354414	TR DTC144ES
TR21	ET-397160J	TR 2SC3330 R,S,T,U,V
TR22	ET-360399	TR DTC114TS
TR23	ET-354414	TR DTC144ES
TR101	ET-397160J	TR 2SC3330 R,S,T,U,V [F490EM]
VR1	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR2	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR3	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
VR4	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
WP1	EW-403386J1	CORD FFC P1.25 L=230 18P

11. OPERATION (A) P.C BOARD (EXCEPT F490EM)

Ref.No.	Part No.	Description
D3	ED-307572	D SILICON H 1SS131 [EA]
D5	ED-307572	D SILICON H 1SS131 [EM]
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403278J	D ZENER H UTZJ7.5B
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D31	ED-307572	D SILICON H 1SS131
D41	ED-307572	D SILICON H 1SS131 [EA,EM]
D42	ED-307572	D SILICON H 1SS131 [EM]
D43	ED-307572	D SILICON H 1SS131 [EA]
D44	ED-307572	D SILICON H 1SS131 [EDI]
FL1	EM-401077J	IND FL FV496G CHARACTER
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408391J1	IC UPD75217CW-146 JBXOPP2
IC2	EI-394467J	IC X24C01P
IC3	EI-373955	IC S-8053ALR
PH1	ET-381637J2	DETECTOR GP1U521X
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1A	ES-408405J	SW TACT EVQ 235 09K T05 [F440EA,RESET]
SW1B	ES-408404J	SW TACT EVQ 235 07K T05 [EDI/EM,RESET]
SW2	ES-349474	SW TACT SKHHAM004A
SW3	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

12. OPERATION (G) -A P.C BOARD (F490EM)

Ref.No.	Part No.	Description
D5	ED-307572	D SILICON H 1SS131
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403731J	D ZENER H UTZJ8.2C
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D16	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D18	ED-307572	D SILICON H 1SS131
D19	ED-307572	D SILICON H 1SS131
D20	ED-307572	D SILICON H 1SS131
D21	ED-307572	D SILICON H 1SS131
D22	ED-307572	D SILICON H 1SS131
D23	ED-307572	D SILICON H 1SS131
D24	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D28	ED-307572	D SILICON H 1SS131
D41	ED-307572	D SILICON H 1SS131
D42	ED-307572	D SILICON H 1SS131
D45	ED-307572	D SILICON H 1SS131
D46	ED-307572	D SILICON H 1SS131
D47	ED-307572	D SILICON H 1SS131
D48	ED-307572	D SILICON H 1SS131
FL1	EM-403367J	IND FL FV506G CHARACTER
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408397J	IC UPD75217CW-147 JFXOPP1
IC2	EI-408393J	IC ST24C01B1
IC3	EI-373955	IC S-8053ALR
PJ1	EJ-408399J	PHONE J 2P YKB21-5165 3.5
PJ2	EJ-387622J	PIN J JPJ5022-01-010 1P
PJ3	EJ-387623J	PIN J JPJ5022-01-040 1P
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1	ES-349474	SW TACT SKHHAM004A
SW2	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW10	ES-349474	SW TACT SKHHAM004A
SW11	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
SW13	ES-349474	SW TACT SKHHAM004A
SW14	ES-349474	SW TACT SKHHAM004A
SW15	ES-349474	SW TACT SKHHAM004A
SW16	ES-349474	SW TACT SKHHAM004A
SW17	ES-349474	SW TACT SKHHAM004A
SW18	ES-349474	SW TACT SKHHAM004A
SW19	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

13. OPERATION (G) - B P.C BOARD (F490EM)

Ref.No.	Part No.	Description
PH1	ET-381637J2	DETECTOR GP1U521X
SW3	ES-349474	SW TACT SKHHAM004A

14. VIF UNIT (EA,EM)

Ref.No.	Part No.	Description
CF1A	EH-714626	FILTER SAW SAF36.9MZ70Z [EA]
CF1B	EH-730625J	FILTER CE SAF38.9MZW70Z [EM]
CF2	EH-373920	FILTER CE SFE5.5MB
CF3A	EH-368948	FILTER CE TPS5.5MW 5.5000MHZ [EA]
CF3B	EH-729986J	FILTER CE TPS5.5MB2 [EM]
IC1	EI-368809	IC M51496P
L1	EO-387800J	COIL FIX 1 EL0405SKI 2R7K
L3	EO-725953J	COIL SIF DET 6F16263A2
L4A	EO-714616	COIL RF 6F16115B3 [EA]
L4B	EO-714614	COIL RF 6F16115B1 [EM]
L5A	EO-714613	COIL RF 6R16113B3 [EA]
L5B	EO-714610	COIL RF 6F16113B1 [EM]
L6	EO-387799J	COIL FIX 1 EL0405SKI 180K
L7	EO-387799J	COIL FIX 1 EL0405SKI 180K
L8	EO-387802J	COIL FIX 1 EL0405SKI 330K
Q1	ET-725820J	TR CHIP 2SC2735J
Q2	ET-713614	TR CHIP 2SA1235 E,F
VR2	EV-404298J	R S-FIX H T05 KVSF637T 0.1W222
VR51	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223

15. VIF UNIT (EDI)

Ref.No.	Part No.	Description
CF1	EH-368816	FILTER CE SAF38.0MZA70Z [EDI]
CF2	EH-376338	FILTER CE TPS6.5MB [EDI]
CF3	EH-373919	FILTER CE TPS6.0MB [EDI]
CF51	EH-388287J	FILTER CE SFS6.5MX 6.500MHZ [EDI]
CF52	EH-381309J	FILTER CE SFS6.0MD 6.000MHZ [EDI]
CF53	EH-780128	FILTER CE SFE 6.5MB [EDI]
IC1	EI-368809	IC M51496P
L1	EO-387782J	COIL FIX 1 EL0405SKI 2R2K
L2	EO-725954J	COIL SIF DET 6F16263A3
L3	EO-714614	COIL RF 6F16115B1
L4	EO-714610	COIL RF 6F16113B1
L5	EO-397238J	COIL FIX 1 EL0405SKI 6R8K
L6	EO-387798J	COIL FIX 1 EL0405SKI 150K
L51	EO-396361J	COIL FIX 1 EL0405SKI 8R2K
L52	EO-387803J	COIL FIX 1 EL0405SKI 221K
Q1	ET-725820J	TR CHIP 2SC2735J
Q2	ET-713614	TR CHIP 2SA1235 E,F
Q3	ET-370819	TR.CHIP 2SC3052
Q4	ET-713614	TR CHIP 2SA1235 E,F
Q51	ET-370819	TR.CHIP 2SC3052
Q52	ET-370819	TR.CHIP 2SC3052
VR1	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223
VR2	EV-404298J	R S-FIX H T05 KVSF637T 0.1W222
X51	EI-368829	OSC CE CSB512P

16. POWER SUPPLY P.C BOARD (EA,EDI)

Ref.No.	Part No.	Description
C1	EC-406634J	C EC V SXE12 222M 25.0DC
C2	EC-363490	C EC V CUT SME 222M 16.0DC
C3	EC-406635J	C EC V SXE16 222M 35.0DC
D1	*ED-511907	D SILICON 1N4002 100/1.0A
D2	*ED-511907	D SILICON 1N4002 100/1.0A
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D5	*ED-511907	D SILICON 1N4002 100/1.0A
D6	*ED-511907	D SILICON 1N4002 100/1.0A
D7	*ED-511907	D SILICON 1N4002 100/1.0A
D8	*ED-511907	D SILICON 1N4002 100/1.0A
D9	*ED-511907	D SILICON 1N4002 100/1.0A
D10	*ED-511907	D SILICON 1N4002 100/1.0A
D11	*ED-511907	D SILICON 1N4002 100/1.0A
D12	*ED-511907	D SILICON 1N4002 100/1.0A
D13	ED-405373J	D ZENER H MTZJ16A T26
D14	ED-404032J	D ZENER H UTZJ39A
D15	ED-405524J	D ZENER H MTZJ36A T26
D16	*ED-404029J	D ZENER H UTZJ10B T26
D17	ED-511907	D SILICON 1N4002 100/1.0A
D18	ED-511907	D SILICON 1N4002 100/1.0A
FR1	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR2	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR3	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR4	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR5	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
TR1	*ET-381175J	TR 2SD1856
TR2	*ET-366365	TR 2SB1185 E,F
TR3	*ET-405622J	TR 2SD2061 E,F
TR4	*ET-405622J	TR 2SD2061 E,F
TR5	*ET-405622J	TR 2SD2061 E,F
TR6	*ET-391025J	TR 2SD2012
TR7	*ET-366365	TR 2SB1185 E,F

17. POWER SUPPLY (1) P.C BOARD (EM)

Ref.No.	Part No.	Description
C1	EC-408376J	C EC V CUT KMG 102M 50.0DC
C2	EC-408377J	C EC V CUT KMG 222M 50.0DC
C3	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C4	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C14	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C15	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C20	EC-403880J	C EC V T05 LXF8 221M 25.0DC
C23	EC-404197J	C EC V T05 SXE8 330M 80.0DC
C24	EC-404197J	C EC V T05 SXE8 330M 80.0DC
C101	*EC-389414J	C CE V DE7 B102K 400AC
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D6	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D8	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D11	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D16	ED-307572	D SILICON H 1SS131
D17	*ED-511907	D SILICON 1N4002 100/1.0A
D18	*ED-511907	D SILICON 1N4002 100/1.0A
D19	ED-404032J	D ZENER H UTZJ39A
D20	ED-405524J	D ZENER H MTZJ36A T26
D27	ED-408807J	D ZENER H HZS12C3
D28	ED-391005J	D ZENER H HZS12B1
D54	ED-307572	D SILICON H 1SS131
D55	ED-307572	D SILICON H 1SS131
D57	ED-405264J	D ZENER H UTZJ10C
D58	ED-405264J	D ZENER H UTZJ10C
D71	*ED-511907	D SILICON 1N4002 100/1.0A
D72	*ED-511907	D SILICON 1N4002 100/1.0A
D73	*ED-511907	D SILICON 1N4002 100/1.0A
D74	*ED-511907	D SILICON 1N4002 100/1.0A
D101	*ED-511907	D SILICON 1N4002 100/1.0A
D102	ED-403947J	D ZENER H UTZJ22C T26
D103	ED-307572	D SILICON H 1SS131
D104	ED-404031J	D ZENER H UTZJ11B T26
D106	ED-401046J	D SILICON RL104F-E T26 400/1A
D107	ED-403948J	D ZENER H UTZJ16C T26
D108	ED-405265J	D ZENER H UTZJ36C
D109	ED-405265J	D ZENER H UTZJ36C
FR1	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR2	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR3	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
FR4	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
FR5	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
FR101	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
FR102	*ER-401039J	R FUSE V T05 ERD2FCV 1/4W 4R7J
L1	EO-408381J	COIL FIX 2 C-5344-40 560K
L2	EO-408381J	COIL FIX 2 C-5344-40 560K
L3	EO-408381J	COIL FIX 2 C-5344-40 560K
L4	EO-408381J	COIL FIX 2 C-5344-40 560K
L6	EO-386541J	COIL FIX 1 ELF1010SKI 101K
L9	EO-393769J	COIL FIX 1 LHL06TB T05 471K
R14	ER-393768J	R OMF H S15 FS 2W 270J
RL101	*EQ-400153J	RELAY POW AG2013 1TR 12V
TR1	*ET-366365	TR 2SB1185 E,F
TR5	*ET-366365	TR 2SB1185 E,F
TR6	ET-356817	TR 2SB891 Q,R
TR9	*ET-366365	TR 2SB1185 E,F
TR12	*ET-405622J	TR 2SD2061 E,F
TR13	*ET-366365	TR 2SB1185 E,F
TR14	ET-360399	TR DTC114TS
TR15	ET-360399	TR DTC114TS
TR16	ET-397160J	TR 2SC3330 R,S,T,U,V
TR101	ET-389803J	TR 2SA933S R,S
TR102	ET-400218J	TR 2SC1740S R,S
TR103	ET-366168	TR 2SD1292 Q,R
TR104	ET-366365	TR 2SB1185 E,F
TR106	ET-389803J	TR 2SA933S R,S
TR107	*ET-404195J	TR 2SC4486 S,T T05

18. POWER SUPPLY (2) P.C BOARD (EM)

Ref.No.	Part No.	Description
D7	ED-405264J	D ZENER H UTZJ10C
D10	ED-307572	D SILICON H 1SS131
D50	ED-403732J	D ZENER H UTZJ5.6A
D56	ED-391005J	D ZENER H HZS12B1
IC1	*EI-381575J	IC BA6121
L10	EO-380091J1	COIL FIX 2 C-5293-01 560K
TR2	*ET-405622J	TR 2SD2061 E,F
TR3	ET-389803J	TR 2SA933S R,S
TR4	*ET-366168	TR 2SD1292 Q,R
TR7	*ET-405622J	TR 2SD2061 E,F
TR8	ET-389803J	TR 2SA933S R,S
TR50	ET-353897	TR DTC114ES

19. DIODE P.C BOARD (EM)

Ref.No.	Part No.	Description
D60	*ED-379298	D SILICON DBA20B 100/2.0A

20. SUB P.C BOARD (EM)

Ref.No.	Part No.	Description
D1	ED-401099J	D SCHOTTKY MA719 T26 40/0.5A
D2	ED-401099J	D SCHOTTKY MA719 T26 40/0.5A
D3	ED-403267J	D ZENER H MTZJ3.3B T26
TR1	ET-366365	TR 2SB1185 E,F
TR2	ET-397160J	TR 2SC3330 R,S,T,U,V
TR3	ET-397160J	TR 2SC3330 R,S,T,U,V

21. JOG/SHUTTLE P.C BOARD (F490EM ONLY)

Ref.No.	Part No.	Description
SW1	ES-403377J	SW ROTARY ENCODER SRGPHJ

22. FINAL ASSEMBLY

Ref.No.	Part No.	Description
1A	BD-409284J	PANEL FRONT VS-F440EOH PART [F440EA,F440EDI]
1B	BD-409299J1	PANEL FRONT VS-F441EA PART [F441EA]
1C	BD-409298J	PANEL FRONT VS-F440EM PART [F440EM]
1D	BD-409126J1	PANEL FRONT VS-F490EM PART [F490EM]
2A	SE-409197J	MASK CASSETTE (J) VS-F440 (E2) [F400EA,F400EDI]
2B	SE-409265J	MASK CASSETTE VS-F441 (E) [F441EA]
2C	SE-409196J	MASK CASSETTE (J) VS-F440 (E1) [F440EM]
2D	SE-409104J1	MASK CASSETTE VS-F490 (E2) [F490EM]
3	ZG-387370J	SP MASK
4	SP-409113J	DOOR (E2) [F490EM]
5	SZ-404290J	MINI SIDE LOCK [F490EM]
6	SC-387353J	COVER TRANS
7	ZS-378341	PLX BID30X12STL CMT
8	SA-387507J	FOOT SX
9	ZS-358936	ST BID30X06STL CMT
11	ZG-387505J	PLATE EARTH
12	ZS-373962	PLX BID40X10STL CMT
13	ZG-387354J	PLATE EARTH (2)
14	SP-407479J	COVER UPPER JX
15	ZS-385611J	DT BID26X06STL BNI
16	ZS-391046J	PLX BID26X10STL BNI
17	ZS-659046	PAN26X10STL CMT
18	SK-407561J	KNOB SHUTTLE [F490EM]
19A	*BT-410487J	TRANS POW V1130 EA [EM]
19B	*BT-410489J	TRANS POW V1130 ES [EDI]
19C	*BT-410488J	TRANS POW V1130 EM [EM]
20A	*EW-404003M	AC CORD 200 SA-2 WITH TUBE S [EA]
20B	*EW-404002M	AC CORD 200 SE-1 WITH TUBE E [EDI,EM]
21A	SZ-401874J	STOPPER MASK [EXCEPT F490EM]
21B	SZ-407583J	STOPPER MASK (2) [F490EM]
22	SK-407562J	KNOB JOG [F490EM]
26A	SE-409191J	WINDOW FLD (3) [F440EM]
26B	SE-409119J	WINDOW FLD (2) [F490EM]

NOTE:
Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

23. ACCESSARY

Ref.No.	Part No.	Description
1	EW-348414	CORD PAL
2A	AV-B1038A010A	REMOCON BLK RC-V250E [EXCEPT F490EM]
2B	AV-B1043A010E	REMOCON BLK RC-V452E [F490EM]

FINAL ASSEMBLY BLOCK

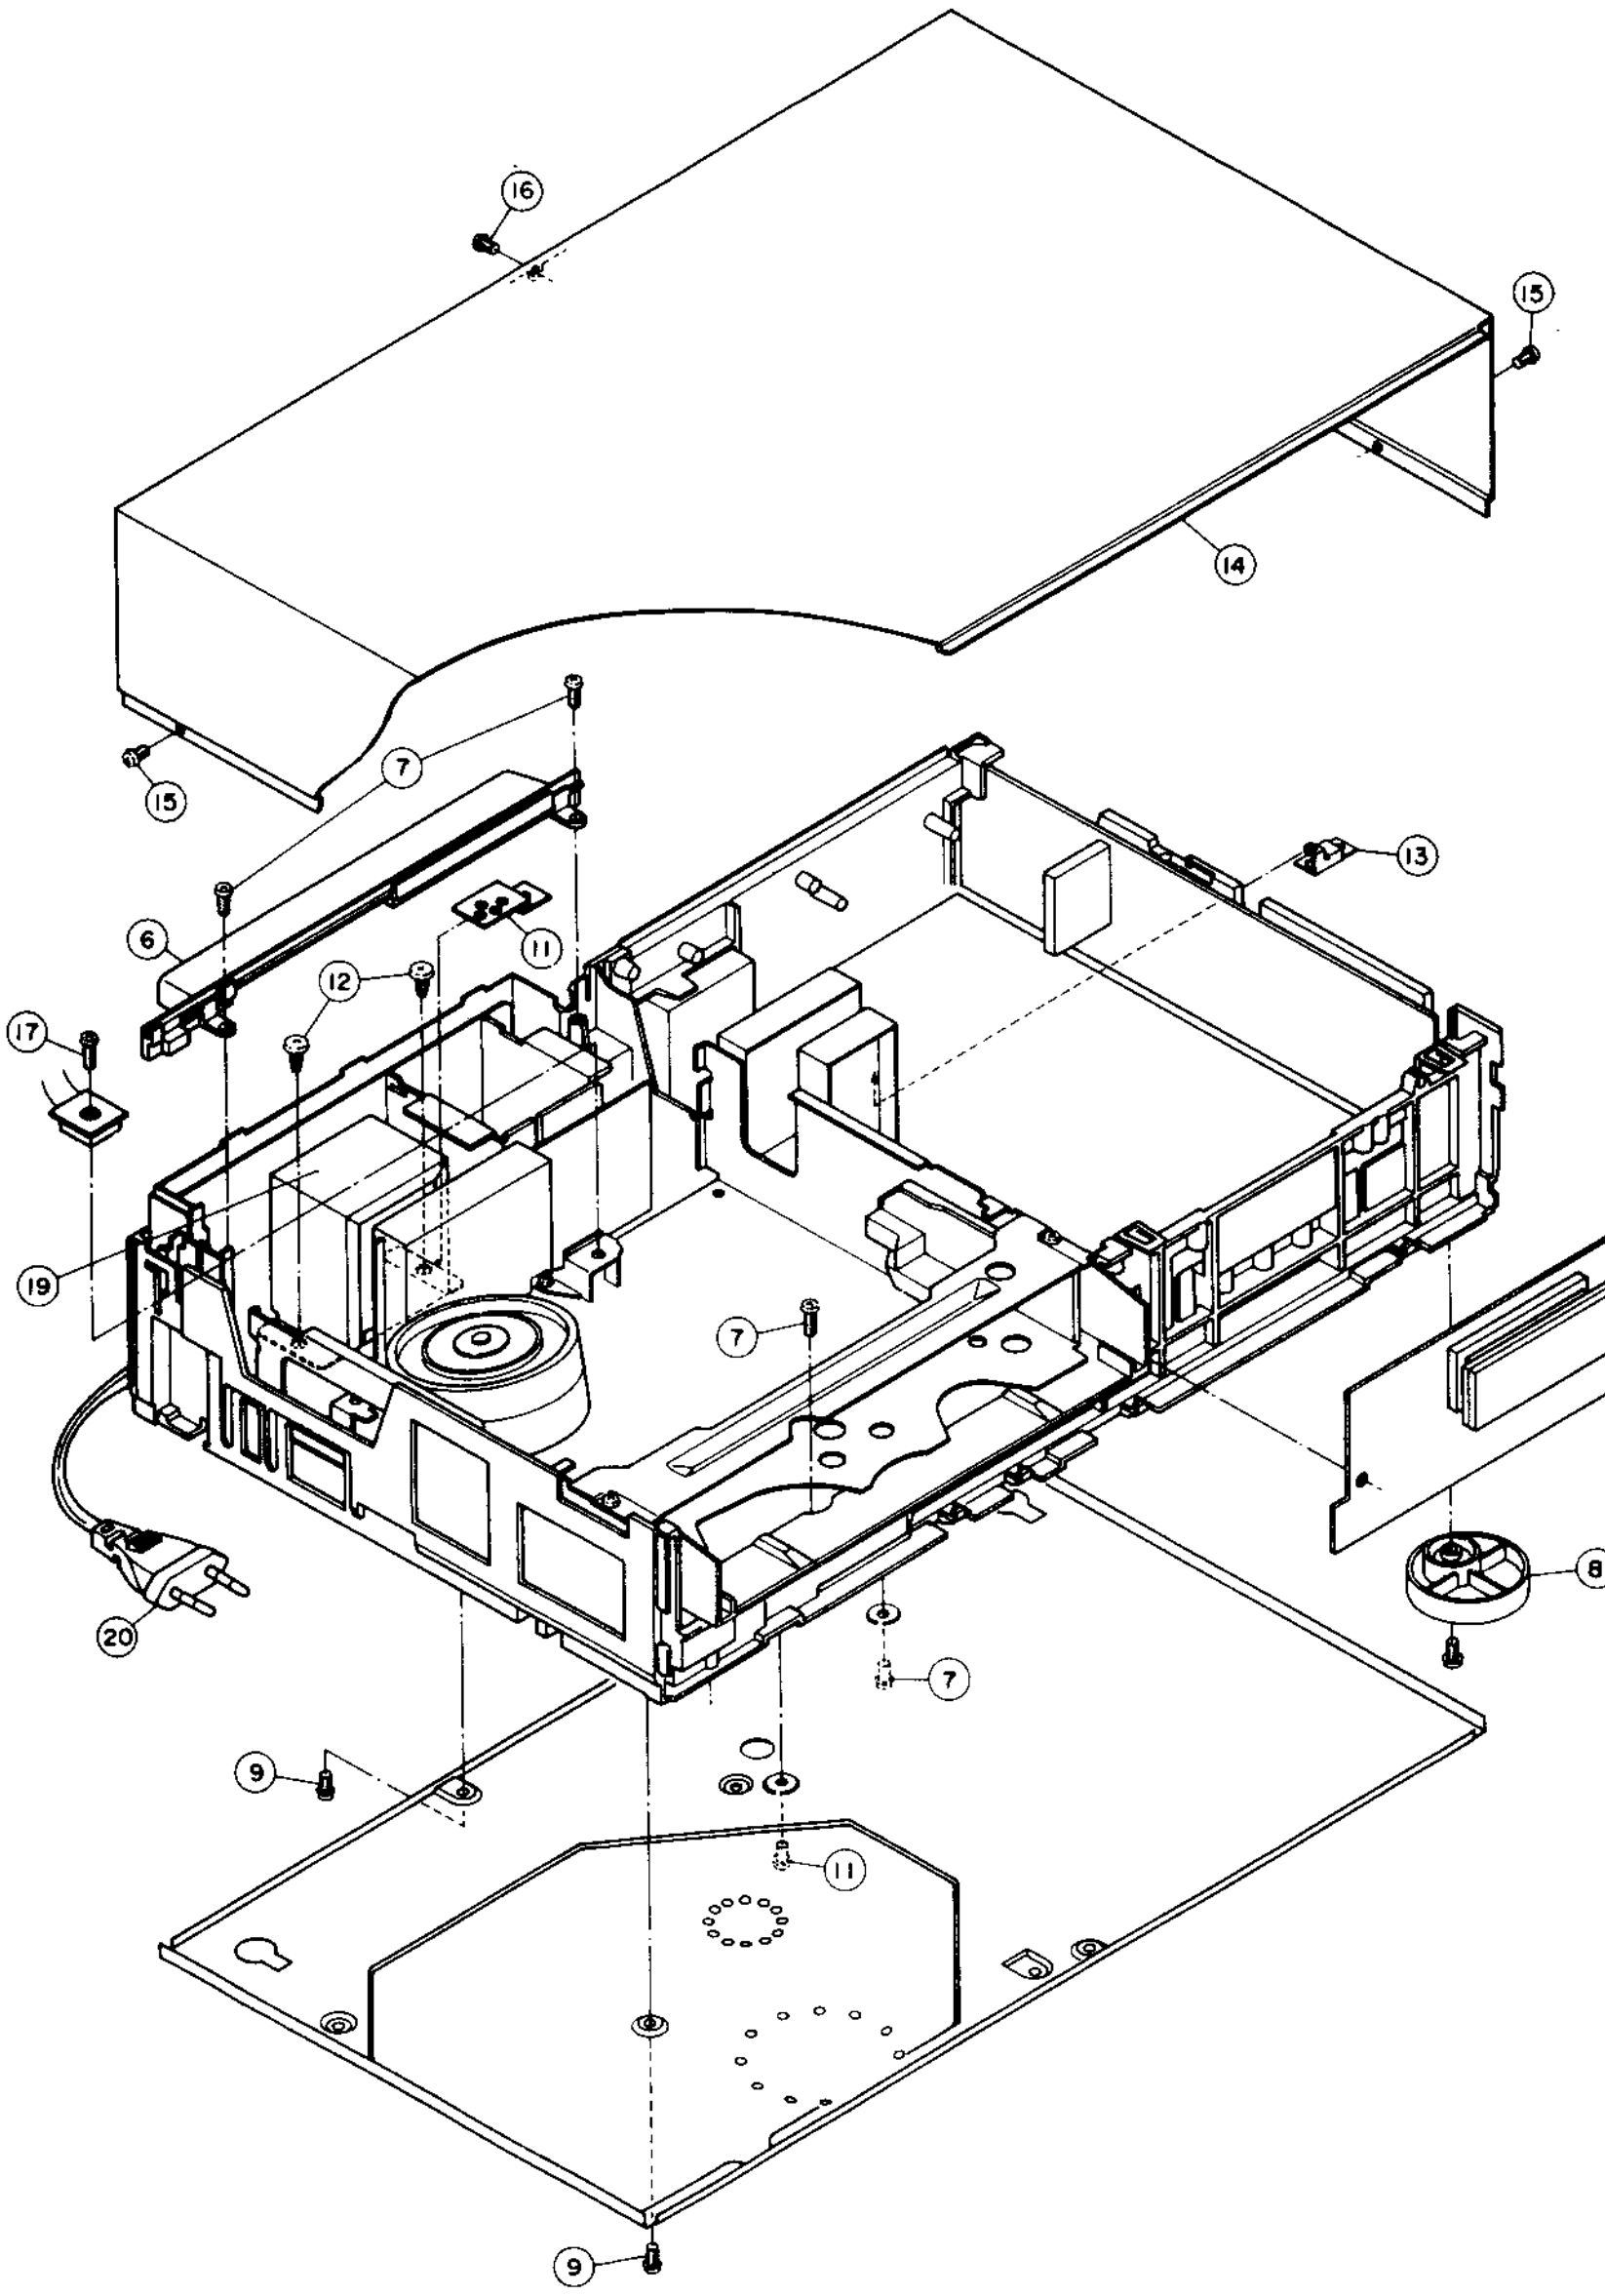
16
15
14
15
7
7
6
11
12
13
17
19
7
8
20
7
9
11
9

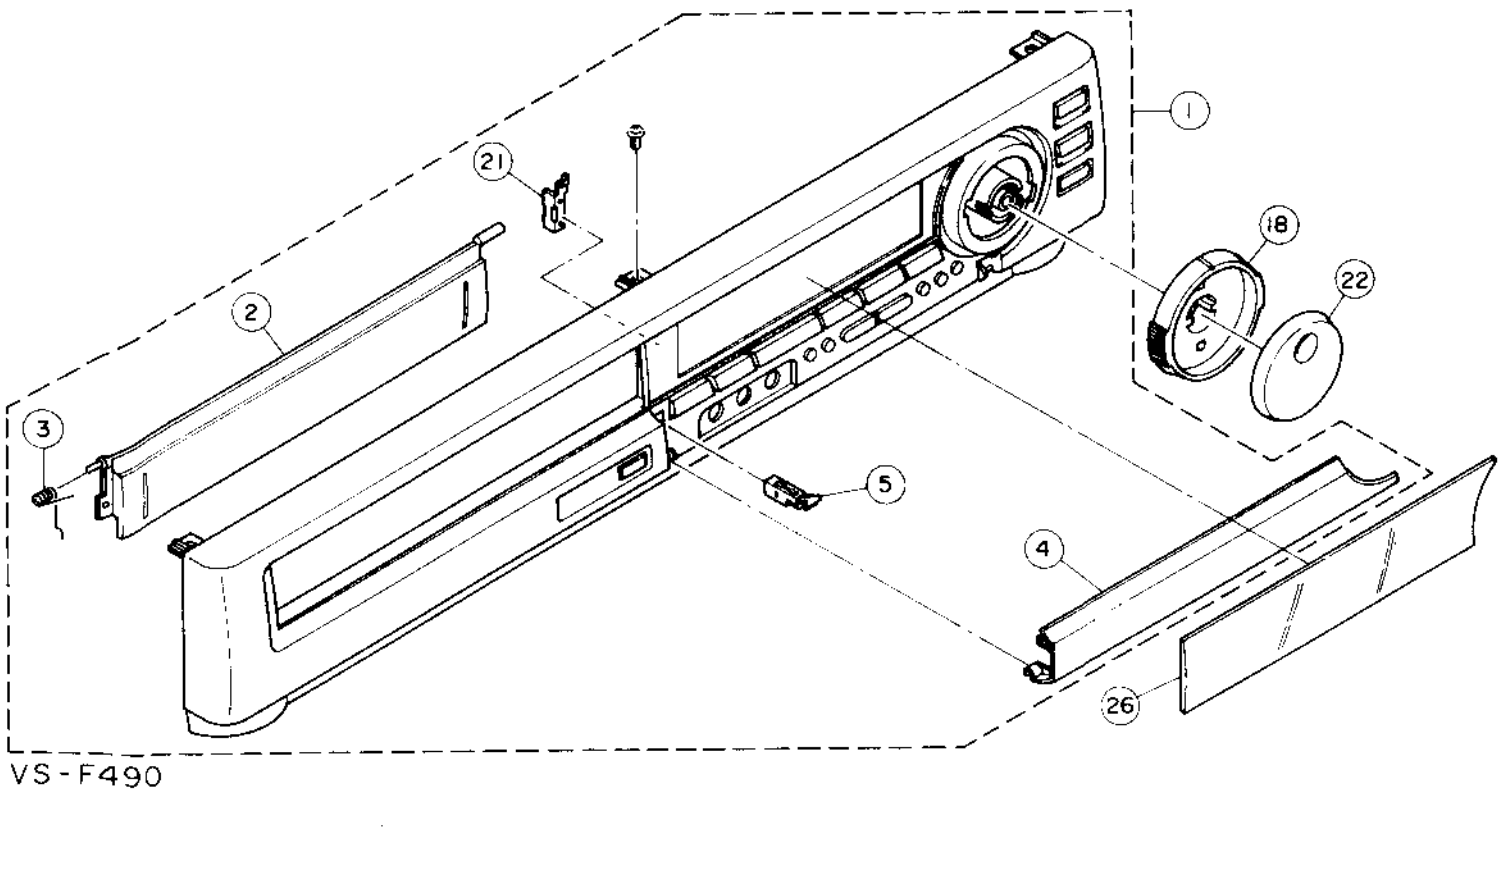
1
21
18
22
2
3
5
4
26

VS-F490

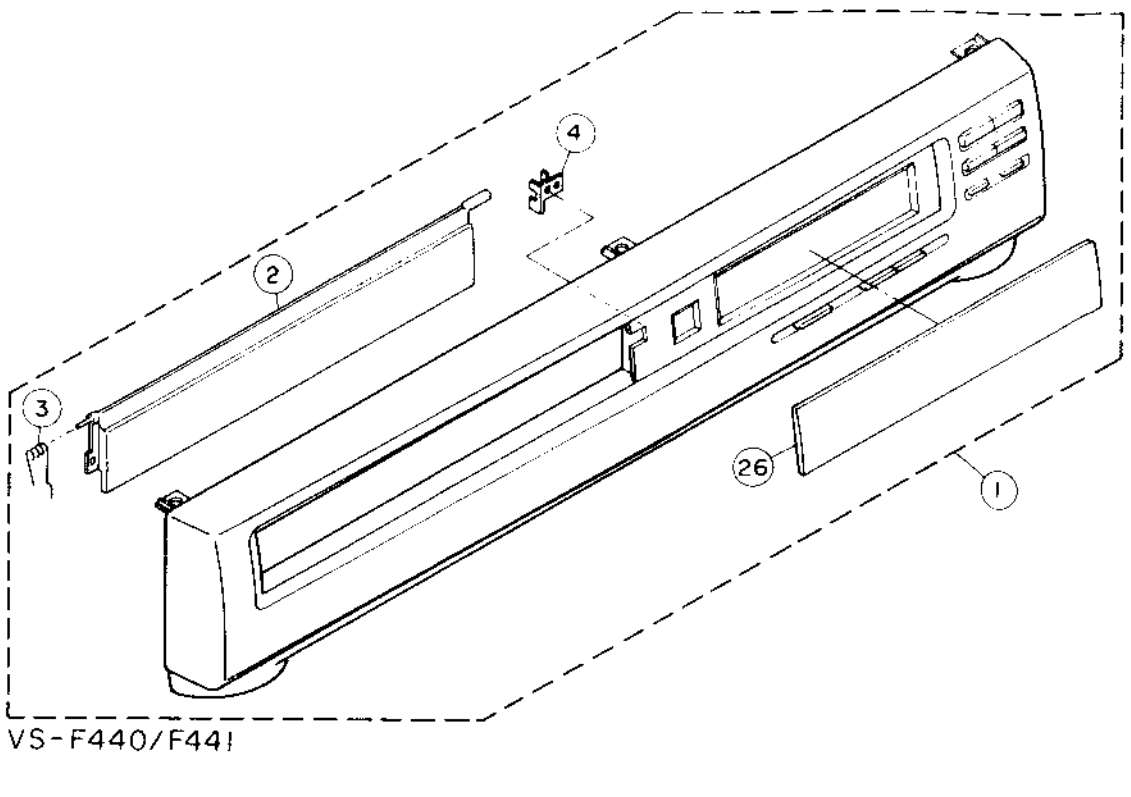

VS-F440/F441

6-2. MODEL VS-F440EK, F480EK-V, F490ES

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref.No.	Part No.	Description
1	AV-B1038A010A	REMOCON BLK RC-V250E [440EK]
2	AV-B1040A010E	REMOCON BLK RC-V451E [480EK]
3	AV-B1043A010E	REMOCON BLK RC-V452E [490ES]
4	BB-V1130A020H	MECHA DECK BLK F260EA
5	BB-V1130A020C	MECHA DECK BLK F410EK
6	BL-V1102A140A	ARM LOADING BLK 425EA
7	BL-387458J2	CAPSTAN BRAKE PART
8	BL-V1123A050A	TENSION ARM BLK F600EA
9	BL-V1102A050A	TENSION ARM BLK 425EA
10	BM-400682J1	MOTOR DFX-67B3VWB1 [CAPSTAN MOTOR]
11	BM-401296J1	MOTOR E20EL89 [DRUM MOTOR]
12	BM-387503J	MOTOR PART [LOADING MOTOR]
13	*BT-403872J	TRANS POW V1130 EK [440EK]
14	*BT-403883J	TRANS POW V1130 EOG-V [480EK]
15	*BT-410489J	TRANS POW V1130 ES [490ES]
16	BV-V1102A150A	CASSETTE LOAD BLK 425EA
17	BV-V1102A070A	LEADER S BLK 425EA
18	BV-V1102A080A	LEADER T BLK 425EA
19	BV-V1123A410B	LOWER DRUM BLK X450EGN
20	BV-403410J	RF CONVERTER MDLK6B733A EK [EK]
21	BV-403411J	RF CONVERTER MDLK6B734A ES [ES]
22	BV-V1123A420B	UPPER DRUM BLK X450EGN
23	BV-403238J1	VIF UNIT KX EK [EK]
24	BV-403242J1	VIF UNIT KX ES [ES]
25	EA-387496J	PC (#) SENSOR
26	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
27	EC-363490	C EC V CUT SME 222M 16.0DC
28	EC-406634J	C EC V SXE12 222M 25.0DC
29	EC-406635J	C EC V SXE16 222M 35.0DC
30	EC-394757J	C S-FIX H T05 VCT51F 5.5-30
31	ED-390011J	D LED GL451 INFRARED [D1]
32	ED-390012J	D LED GL4800 INFRARED [D2]
33	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
34	*ED-379298	D SILICON DBA20B 100/2.0A
35	ED-366443	D SILICON H MA700FA5 F10
36	ED-307572	D SILICON H 1SS131
37	ED-511907	D SILICON 1N4002 100/1.0A
38	ED-391005J	D ZENER H HZS12B1
39	ED-396057J	D ZENER H HZS16-2
40	ED-396060J	D ZENER H HZS18-2
41	ED-397233J	D ZENER H HZS5C3
42	ED-387919J	D ZENER H HZS6A1L
43	ED-405373J	D ZENER H MTZJ16A T26
44	ED-404170J	D ZENER H MTZJ2.0A T26 [480EK]
45	ED-405247J	D ZENER H MTZJ2.7A T26 [F490ES]
46	ED-403267J	D ZENER H MTZJ3.3B T26
47	ED-405524J	D ZENER H MTZJ36A T26
48	ED-403724J	D ZENER H UTZJ10A
49	*ED-404029J	D ZENER H UTZJ10B T26
50	ED-405264J	D ZENER H UTZJ10C
51	ED-403725J	D ZENER H UTZJ12C [440EK]
52	ED-404032J	D ZENER H UTZJ39A
53	ED-403732J	D ZENER H UTZJ5.6A
54	ED-403729J	D ZENER H UTZJ5.6C
55	ED-403278J	D ZENER H UTZJ7.5B
56	ED-404086J	D ZENER H UTZJ7.5C
57	ED-403731J	D ZENER H UTZJ8.2C
58	ED-403279J	D ZENER H UTZJ9.1B
59	EE-387607J1	TV TUNER TERB1-008B EK [EK]
60	EE-387603J1	TV TUNER TERE1-019B EO [ES]
61	EH-383083J	COMP R RGLE3X 103J
62	EH-403945J	COMP R RGLE9X 103J
63	EH-394838J	DL ADL-FN1344Q [480EK,490ES]
64	EH-390730J	DL EFD-JF124A13J
65	EH-373921	FILTER CE SFE6.0MB
66	EH-373919	FILTER CE TPS6.0MB
67	EH-394684J	FILTER EMI ZBF503D-00TA T05
68	EH-714627	FILTER SAW SAF38.9MW70Z [ES]
69	EH-714628	FILTER SAW SAF39.5MZ70Z [EK]
70	EI-394680J	IC AN3171K
71	EI-373981J1	IC BA10393N
72	EI-373980	IC BA15218N
73	EI-386468J	IC BA3308 [480EK,490ES]
74	*EI-381575J	IC BA6121
75	EI-353421	IC BA6229
76	EI-387586J	IC BA7244BS
77	EI-388360J	IC BA7765AS
78	EI-356457	IC BU4013B
79	EI-360586	IC LA6358S
80	EI-403234J1	IC LA7391A
81	EI-394856J	IC LC8992
82	EI-394861J	IC LVA521S-2 [EK]
83	EI-401050J	IC LVA523SA2
84	EI-389622J	IC L5631
85	EI-387019J	IC MC1377P
86	EI-403469J	IC MM1068XS
87	EI-408850J	IC MN675201 XDJ JFXSYP1 [480EK,490ES]
88	EI-408849J	IC MN675201 XDL JFLSYP1 [440EK]
89	EI-408434J	IC MV1815-1BA
90	EI-368809	IC M51496P
91	EI-403964J	IC NJM2245L [EK]
92	EI-400756J	IC NJM4558L-B
93	EI-373955	IC S-8053ALR
94	EI-408393J	IC ST24C01B1
95	EI-405224J	IC ST24C02
96	EI-310036	IC TC4066BP [EK]
97	EI-405722J	IC UPD6450CX-515
98	EI-408391J1	IC UPD75217CW-146 JBXOPP2
99	EI-408397J	IC UPD75217CW-147 JFXOPP1
100	EI-410521J	IC UPD75218CW-014 JXPDC1
101	EI-410125J	IC V53C464AP-80
102	EI-403467J	OSC CE CSB500F40 15.680KHZ
103	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
104	EI-368825M	OSC X'TAL C-002RX 32.768KHZ
105	EI-408433J	OSC X'TAL HC-43/U 27750KHZ
106	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
107	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
108	EI-394673J	OSC X'TAL HC-49/U 8867.238KHZ
109	EI-381632J	OSC X'TAL 86686 4.433619MHZ
110	EM-401077J	IND FL FV496G CHARACTER
111	EM-403367J	IND FL FV506G CHARACTER [ES]
112	EM-408395J	IND FL FV562G CHARACTER [EK]

Ref.No.	Part No.	Description
113	EO-388362J	COIL OSC 1 V1102 [440EK]
114	EO-388363J	COIL OSC 1 V1105-1 [480EK,490EK]
115	EO-388349J	COIL OSC 1 V1105-2 [F490ES]
116	*ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
117	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
118	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
119	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
120	*ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
121	ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K [480EK]
122	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
123	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
124	ER-403405J	R OMF H S12 FS 1W R75J
125	ES-373099	SW LEAF MTS10110MPC1
126	ES-387465J	SW MODE SELECT MMS00070ZLBO [SW1]
127	ES-403377J	SW ROTARY ENCODER SRGPHJ
128	ES-408404J	SW TACT EVQ 235 07K T05
129	ES-349474	SW TACT SKHHAM004A
130	ET-381637J2	DETECTOR GP1U521X
131	ET-403420J	DETECTOR SG-105LF [PH1][PH2]
132	ET-356336	TR DTA114ES
133	ET-354415	TR DTA144ES
134	ET-373985	TR DTA144TS
135	ET-353897	TR DTC114ES
136	ET-360399	TR DTC114TS
137	ET-354364	TR DTC143TS
138	ET-354414	TR DTC144ES [EK]
139	ET-361490	TR PHOTO PN268 [TR1]
140	ET-390010J	TR PHOTO PT4800 [TR2]
141	ET-390009J	TR PHOTO PT493F [TR4]
142	ET-364040	TR UN421D
143	ET-353899	TR 2SA1317 S,T,U
144	ET-389803J	TR 2SA933S R,S
145	*ET-366365	TR 2SB1185 E,F
146	ET-388338J	TR 2SB1425 S,E
147	ET-356817	TR 2SB891 Q,R
148	ET-375777	TR 2SC2926S P,Q
149	ET-397160J	TR 2SC3330 R,S,T,U,V
150	*ET-404195J	TR 2SC4486 S,T T05
151	*ET-381175J	TR 2SD1856
152	*ET-405622J	TR 2SD2061 E,F
153	EX-405691J	THERMISTOR NTH5D332KA
154	HE-390013J	HEAD E HVFME0020A
155	HR-405340J	HEAD COMBO HVMZA1121A
156	MB-387289J	BELT CAPSTAN
157	MB-407117J	BELT CAPSTAN (3)
158	MI-387294J	IDLER PART
159	MI-404552J	IDLER (2) PART
160	ML-391745J3	ARM DAMPER
161	ML-387350J1	ARM LID OPENER
162	ML-387423J	ARM LOADING BRAKE
163	ML-387277J3	ARM REVIEW PART
164	ML-387402J1	LEVER TRIGGER
165	ML-387316J	MAIN BRAKE (S) PART
166	ML-387318J	MAIN BRAKE (T) PART
167	ML-387321J	REVIEW BRAKE PART
168	ML-407119J	REVIEW BRAKE (3) PART
169	ML-387324J1	SLIDER BRAKE PART
170	ML-404567J1	SLIDER BRAKE (3) PART
171	ML-404944J	SLIDER TRIGGER (2)
172	MP-404852J	PINCH ROLLER (2) PART
173	MR-387406J	HOLDER THRUST WORM
174	MR-391968J	PULLEY TRIGGER (2)
175	MR-387286J1	ROLLER IMPEDANCE
176	MT-390954J1	DISK (2)PART
177	MT-404547J	DISK (3) PART
178	MZ-387298J3	DISK CLUTCH PART
179	MZ-404577J	DISK CLUTCH (2) PART
180	MZ-387331J	GEAR CAM SLIDER
181	MZ-404538J	GEAR CAM SLIDER (3)
182	MZ-387335J	GEAR EJECT
183	MZ-387333J	GEAR FRONT LOADING
184	MZ-404995J	GEAR MID PART
185	MZ-V1102A090A	GEAR TOGGLE (S) BLK 425EA
186	MZ-V1102A100A	GEAR TOGGLE (T) BLK 425EA
187	MZ-387332J	GEAR WORM WHEEL
188	MZ-401686J1	GEAR WORM (2)

※ Parts list for HEAD DRUM, MECHA. (1) and MECHA. (2) BLOCK refer to 6-1. EA/EDI/EM list (P24 to P28).

7. P.C BOARD BLOCK

Ref.No.	Part No.	Description
1A	BA-V1150Q600C	FRPC (#) MAIN (PAL) BLKF440EK/FR
1B	BA-V1152Q600A	FRPC (#) MAIN (PAL) BLKF480EK-V/FR
1C	BA-V1152A600F	PC (#) MAIN (PAL) BLK F490ES
2A	BA-V1132A610F	PC PRE AMP BLK F400EA [F440EK]
2B	BA-V1132A610H	PC PRE AMP BLK F430ES [F480EK,F490ES]
3A	BA-V1146Q640B	FRPC OPERATION (A) BLK F440EK/FR
3B	BA-V1152Q630A	FRPC—OPERATION G BLK F480EK-V/FR
3C	BA-V1152A630G	PC—OPERATION (G) BLK F490ES
4A	BA-V1130A500B	PC POWER BLK F200EK [F440EK]
4B	BA-V1135A500C	PC (#) POWER EOG BLK F480EK-V [F480EK]
4C	BA-V1130A500A	PC POWER BLK F220EDG [F490ES]

PC (#) MAIN BLK CONSISTS OF FOLLOWING P.C BOARD.

- MAIN (A) P.C BOARD
- MAIN (B) P.C BOARD
- VIF UNIT

PC (#) OPERATION P.C BOARD CONSISTS OF FOLLOWING P.C BOARD.

- OPERATION-A P.C BOARD
- OPERATION-B P.C BOARD

- POWER SUPPLY (1) P.C BOARD
- POWER SUPPLY (2) P.C BOARD
- DIODE P.C BOARD

8. MAIN (A) P.C BOARD

Ref.No.	Part No.	Description
C369	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
DL500	EH-390730J	DL EFD-JF124A13J
D501	EH-394838J	DL ADL-FN1344Q [480EK,490ES]
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131 [ES]
D4	ED-307572	D SILICON H 1SS131 [ES]
D8	ED-403732J	D ZENER H UTZJ5.6A
D12	ED-405603J	D ZENER H MTZJ10B T26 [480EK]
D13	ED-405604J	D ZENER H MTZJ4.3C T26 [480EK]
D101	ED-403725J	D ZENER H UTZJ12C [440EK]
D102	ED-404170J	D ZENER H MTZJ2.0A T26 [480EK]
D201	ED-307572	D SILICON H 1SS131
D202	ED-307572	D SILICON H 1SS131
D203	ED-307572	D SILICON H 1SS131
D204	ED-397233J	D ZENER H HZS5C3
D205	ED-403267J	D ZENER H MTZJ3.3B T26
D208	ED-307572	D SILICON H 1SS131
D209	ED-307572	D SILICON H 1SS131
D212	ED-511907	D SILICON 1N4002 100/1.0A
D213	ED-511907	D SILICON 1N4002 100/1.0A
D301	ED-307572	D SILICON H 1SS131
D302	ED-307572	D SILICON H 1SS131
D303	ED-404086J	D ZENER H UTZJ7.5C
D304	ED-403724J	D ZENER H UTZJ10A
D305	ED-307572	D SILICON H 1SS131
D306	ED-307572	D SILICON H 1SS131
D307	ED-307572	D SILICON H 1SS131
D308	ED-307572	D SILICON H 1SS131
D309	ED-307572	D SILICON H 1SS131
D310	ED-307572	D SILICON H 1SS131 [480EK,490ES]
D401	ED-307572	D SILICON H 1SS131
D402	ED-307572	D SILICON H 1SS131
D403	ED-307572	D SILICON H 1SS131 [480EK/490ES]
D404	ED-307572	D SILICON H 1SS131
D405	ED-307572	D SILICON H 1SS131
D406	ED-366443	D SILICON H MA700FA5 F10
D408	ED-307572	D SILICON H 1SS131
D410	ED-307572	D SILICON H 1SS131
D411	ED-307572	D SILICON H 1SS131
D412	ED-403729J	D ZENER H UTZJ5.6C
D502	ED-307572	D SILICON H 1SS131
D503	ED-307572	D SILICON H 1SS131
D504	ED-307572	D SILICON H 1SS131
D505	ED-307572	D SILICON H 1SS131
D506	ED-307572	D SILICON H 1SS131
D507	ED-307572	D SILICON H 1SS131
D509	ED-307572	D SILICON H 1SS131
FR201	*ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
FR202	ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K [480EK]
FR350	*ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
FR501	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
IC1	EI-389622J	IC L5631
IC101	EI-310036	IC TC4066BP [EK]
IC102	EI-394861J	IC LVA521S-2 [EK]
IC103	EI-403964J	IC NJM2245L [EK]
IC201	EI-400756J	IC NJM4558L-B
IC301A	EI-408849J	IC MN675201 XDL JFLSYP1 [440EK]
IC301B	EI-408850J	IC MN675201 XDJ JFXSYP1 [480EK,490ES]
IC302	EI-353421	IC BA6229
IC303	EI-373980	IC BA15218N
IC304	EI-360586	IC LA6358S
IC400	EI-403234J1	IC LA7391A
IC401	EI-394856J	IC LC8992

Ref.No.	Part No.	Description
IC402	EI-373981J1	IC BA10393N
IC403	EI-356457	IC BU4013B
L1	EO-390998J	COIL FIX 1 LAP02 F05 R68K [EK]
L101	EO-345881	COIL FIX 1 EL0606SKI 101J
L103	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L301	EO-381196J	COIL FIX 1 EL0405SKI 470K
L302	EO-345881	COIL FIX 1 EL0606SKI 101J
L303	EO-354600	COIL FIX 1 LAP02 F05 101K
L401	EO-354600	COIL FIX 1 LAP02 F05 101K
L402	EO-357508	COIL FIX 1 LAP02 F05 151K
L403	EO-381192J	COIL FIX 1 EL0405SKI 270K
L404	EO-345880	COIL FIX 1 EL0606SKI 820J
L405	EO-354600	COIL FIX 1 LAP02 F05 101K
L406	EO-354600	COIL FIX 1 LAP02 F05 101K
L410	EO-345874	COIL FIX 1 EL0606SKI 330J
L470	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L472	EO-345880	COIL FIX 1 EL0606SKI 820J
L474	EO-388161J	COIL FIX 1 EL0405SKI 560K
L500	EO-345880	COIL FIX 1 EL0606SKI 820J
L501	EO-353900	COIL FIX 1 LAP02 F05 150K
L502	EO-345880	COIL FIX 1 EL0606SKI 820J [480EK,490ES]
L503	EO-353900	COIL FIX 1 LAP02 F05 150K [480EK,490ES]
L504	EO-353900	COIL FIX 1 LAP02 F05 150K [480EK,490ES]
L505	EO-345880	COIL FIX 1 EL0606SKI 820J
L506	EO-345880	COIL FIX 1 EL0606SKI 820J
L507	EO-392817J	COIL FIX 1 EL0405SKI 1R2K
L508	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J
L509	EO-345880	COIL FIX 1 EL0606SKI 820J
L510	EO-403270J	COIL FIX 1 EL0405RA T05 101J
L511	EO-381195J	COIL FIX 1 EL0405SKI 331K
L512	EO-381197J	COIL FIX 1 EL0405SKI 471K
L570	EO-345880	COIL FIX 1 EL0606SKI 820J
L590	EO-387802J	COIL FIX 1 EL0405SKI 330K [480EK,490ES]
MD1A	BV-403410J	RF CONVERTER MDLK6B733A EK [EK]
MD1B	BV-403411J	RF CONVERTER MDLK6B734A ES [ES]
PJ101A	EJ-405226J	PIN JACK T6572-ABBB YLW.RED 2P [EK]
PJ101B	EJ-387614J	PIN J T6353-ABCB YL BK 4P [ES]
PJ102	EJ-387613J	SOCKET M1812 21P [EK]
PJ103	EJ-405225J	PIN J JPJ1018-01-030 WHITE 1P [EK]
R214	ER-403405J	R OMF H S12 FS 1W R75J
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-375777	TR 2SC2926S P,Q
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	ET-353899	TR 2SA1317 S,T,U [ES]
TR5	ET-353899	TR 2SA1317 S,T,U [ES]
TR7	ET-353899	TR 2SA1317 S,T,U [ES]
TR8	ET-354414	TR DTC144ES [ES]
TR9	ET-354414	TR DTC144ES [ES]
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-397160J	TR 2SC3330 R,S,T,U,V
TR13	ET-353899	TR 2SA1317 S,T,U
TR15	ET-353897	TR DTC114ES
TR17	ET-397160J	TR 2SC3330 R,S,T,U,V
TR18	ET-397160J	TR 2SC3330 R,S,T,U,V
TR19	ET-354414	TR DTC144ES [EK]
TR20	ET-405622J	TR 2SD2061 E,F [480EK,490ES]
TR101	ET-354414	TR DTC144ES
TR102	ET-356336	TR DTA114ES
TR103	ET-354414	TR DTC144ES
TR104	ET-353899	TR 2SA1317 S,T,U
TR105	ET-353899	TR 2SA1317 S,T,U
TR107	ET-397160J	TR 2SC3330 R,S,T,U,V
TR108	ET-356336	TR DTA114ES [EK]

Ref.No.	Part No.	Description
TR109	ET-397160J	TR 2SC3330 R,S,T,U,V
TR110	ET-353899	TR 2SA1317 S,T,U [480EK]
TR202	ET-356336	TR DTA114ES
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR205	ET-388338J	TR 2SB1425 S,E
TR210	*ET-405622J	TR 2SD2061 E,F
TR301	ET-354414	TR DTC144ES
TR302	ET-397160J	TR 2SC3330 R,S,T,U,V
TR303	ET-363953	TR DTA114TS [ES]
TR304	ET-354415	TR DTA144ES
TR305	ET-354414	TR DTC144ES
TR306	ET-354414	TR DTC144ES
TR307	ET-373985	TR DTA144TS
TR308	ET-373985	TR DTA144TS
TR309	ET-373985	TR DTA144TS
TR310	ET-354414	TR DTC144ES
TR313	ET-354414	TR DTC144ES
TR401	ET-356336	TR DTA114ES
TR402	ET-354414	TR DTC144ES
TR404	ET-354364	TR DTC143TS
TR406	ET-397160J	TR 2SC3330 R,S,T,U,V
TR407	ET-353899	TR 2SA1317 S,T,U
TR408	ET-354414	TR DTC144ES
TR409	ET-360399	TR DTC114TS
TR410	ET-354414	TR DTC144ES
TR411	ET-360399	TR DTC114TS
TR413	ET-354415	TR DTA144ES
TR414	ET-388338J	TR 2SB1425 S,E
TR415	ET-353899	TR 2SA1317 S,T,U
TR417	ET-360399	TR DTC114TS
TR420	ET-354414	TR DTC144ES
TR421	ET-364040	TR UN421D
TR423	ET-356336	TR DTA114ES
TR424	ET-388338J	TR 2SB1425 S,E
TR425	ET-354414	TR DTC144ES [480EK,490ES]
TR470	ET-353899	TR 2SA1317 S,T,U
TR471	ET-353899	TR 2SA1317 S,T,U
TR501	ET-353897	TR DTC114ES
TR502	ET-360646	TR DTA143ES [480EK,490ES]
TR503	ET-397160J	TR 2SC3330 R,S,T,U,V
TR504	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR505	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR506	ET-397160J	TR 2SC3330 R,S,T,U,V
TR507	ET-397160J	TR 2SC3330 R,S,T,U,V
TR508	ET-356336	TR DTA114ES
TR509	ET-397160J	TR 2SC3330 R,S,T,U,V
TR510	ET-397160J	TR 2SC3330 R,S,T,U,V
TR511	ET-397160J	TR 2SC3330 R,S,T,U,V
TR512	ET-397160J	TR 2SC3330 R,S,T,U,V
TR515	ET-397160J	TR 2SC3330 R,S,T,U,V
TR570	ET-397160J	TR 2SC3330 R,S,T,U,V
TR571	ET-397160J	TR 2SC3330 R,S,T,U,V
TR572	ET-354414	TR DTC144ES
TR573	ET-354414	TR DTC144ES
VR301	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
VR401	EV-405657J	R S-FIX H T05 KVSF637T 0.1W103
VR402	EV-404300J	R S-FIX H T05 KVSF637T 0.1W472
VR403	EV-405659J	R S-FIX H T05 KVSF637T 0.1W682
VR404A	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333 [EK]
VR404B	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223 [ES]
WF201	EW-404138J1	CORD KX MA-POW L=225 12P
X301	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
X500	EI-381632J	OSC X'TAL 86686 4.433619MHZ
1A	BV-403238J1	VIF UNIT KX EK [EK]
1B	BV-403242J1	VIF UNIT KX ES [ES]
2A	EE-387607J1	TV TUNER TERB1-008B EK [EK]
2B	EE-387603J1	TV TUNER TERE1-019B EO [ES]
3A	SP-404784J	PANEL REAR JACK EK (B) [EK]
3B	SP-388306J	PANEL REAR JACK ES [ES]

9. MAIN (B) P.C BOARD

Ref.No.	Part No.	Description
D601	ED-307572	D SILICON H 1SS131
D801	ED-307572	D SILICON H 1SS131
D901	ED-307572	D SILICON H 1SS131 [480EK,490ES]
D902	ED-307572	D SILICON H 1SS131 [480EK,490ES]
FL801A	EO-388362J	COIL OSC 1 V1102 [440EK]
FL801B	EO-388363J	COIL OSC 1 V1105-1 [480EK,490EK]
IC601	EI-405722J	IC UPD6450CX-515
IC602	EI-403469J	IC MM1068XS
IC702	EI-200573	IC TC4053BP [480EK,490ES]
IC801	EI-388360J	IC BA7765AS
IC901	EI-386468J	IC BA3308 [480EK,490ES]
IC902	EI-310036	IC TC4066BP [480EK,490ES]
L601	EO-345881	COIL FIX 1 EL0606SKI 101J
L602	EO-345876	COIL FIX 1 EL0606SKI 470J
L604	EO-351866	COIL FIX 1 LAP02 F05 330K
L605	EO-345881	COIL FIX 1 EL0606SKI 101J
L701	EO-345881	COIL FIX 1 EL0606SKI 101J [480EK,490ES]
L702	EO-345881	COIL FIX 1 EL0606SKI 101J [480EK,490ES]
L801	EO-390717J	COIL FIX 1 LHL06TB T05 103J
L802	EO-390716J	COIL FIX 1 LHL06TB T05 272J
L901	EO-345881	COIL FIX 1 EL0606SKI 101J [480EK,490ES]
TR601	ET-353899	TR 2SA1317 S,T,U
TR602	ET-354414	TR DTC144ES
TR603	ET-397160J	TR 2SC3330 R,S,T,U,V
TR607	ET-353899	TR 2SA1317 S,T,U
TR608	ET-389803J	TR 2SA933S R,S
TR701	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR751	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR752	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR753	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR754	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR801	ET-397160J	TR 2SC3330 R,S,T,U,V
TR803	ET-354414	TR DTC144ES [490ES]
TR901	ET-354414	TR DTC144ES [480EK,490ES]
TR902	ET-354414	TR DTC144ES [480EK,490ES]
TR903	ET-397160J	TR 2SC3330 R,S,T,U,V [480EK,490ES]
TR904	ET-389803J	TR 2SA933S R,S [480EK,490ES]
VC601	EC-394757J	C S-FIX H T05 VCT51F 5.5-30
VR801	EV-403967J	R S-FIX V T05EVNDCAA03 0.1W332
VR802A	EV-403968J	R S-FIX V T05EVNDCAA03 0.1W473 [440EK]
VR802B	EV-405263J	R S-FIX V T05EVNDCAA03 0.1W104 [480EK,490ES]
X601	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
X602	EI-403467J	OSC CE CSB500F40 15.680KHZ

10. PRE AMP P.C BOARD

Ref.No.	Part No.	Description
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D101	ED-405247J	D ZENER H MTZJ2.7A T26 [F490ES]
FL101	EO-388349J	COIL OSC 1 V1105-2 [F490ES]
IC1	EI-387586J	IC BA7244BS
L1	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L2	EO-376858	COIL FIX 1 LF-5.0S F05 560K
L3	EO-376857	COIL FIX 1 LF-5.0S F05 5R6K
L4	EO-376606	COIL FIX 1 LF-5.0S F05 180K
L5	EO-376603	COIL FIX 1 LF-5.0S F05 150K
L6	EO-381193J	COIL FIX 1 EL0405SKI 271K
L7	EO-376860	COIL FIX 1 LF-5.0S F05 820K
L8	EO-345880	COIL FIX 1 EL0606SKI 820J
L9	EO-376614	COIL FIX 1 LF-5.0S F05 220K
L10	EO-345880	COIL FIX 1 EL0606SKI 820J
L11	EO-345880	COIL FIX 1 EL0606SKI 820J
L12	EO-376859	COIL FIX 1 LF-5.0S F05 8R2K
L13	EO-381195J	COIL FIX 1 EL0405SKI 331K
L14	EO-376607	COIL FIX 1 LF-5.0S F05 181K
L15	EO-376612	COIL FIX 1 LF-5.0S F05 680K
L16	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L101	EO-390716J	COIL FIX 1 LHL06TB T05 272J [F490ES]
PS1	EJ-403389J	SOCKET HOUSING 5062-30-10-18
TH1	EX-405691J	THERMISTOR NTH5D332KA
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-397160J	TR 2SC3330 R,S,T,U,V
TR3	ET-360399	TR DTC114TS
TR4	ET-360399	TR DTC114TS
TR5	ET-364040	TR UN421D
TR6	ET-354414	TR DTC144ES [EK]
TR7	ET-397160J	TR 2SC3330 R,S,T,U,V
TR8	ET-397160J	TR 2SC3330 R,S,T,U,V
TR9	ET-397160J	TR 2SC3330 R,S,T,U,V
TR10	ET-353897	TR DTC114ES
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-353899	TR 2SA1317 S,T,U
TR13	ET-364040	TR UN421D
TR14	ET-397160J	TR 2SC3330 R,S,T,U,V
TR15	ET-354364	TR DTC143TS [EK]
TR16	ET-354414	TR DTC144ES
TR17	ET-364040	TR UN421D
TR18	ET-353897	TR DTC114ES
TR19	ET-354414	TR DTC144ES
TR21	ET-397160J	TR 2SC3330 R,S,T,U,V
TR22	ET-360399	TR DTC114TS
TR23	ET-354414	TR DTC144ES
TR101	ET-397160J	TR 2SC3330 R,S,T,U,V [490ES]
VR1	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR2	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR3	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
VR4	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
WP1	EW-403386J1	CORD FFC P1.25 L=230 18P

11. OPERATION (A) P.C BOARD (F440EK)

Ref.No.	Part No.	Description
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403278J	D ZENER H UTZJ7.5B
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D31	ED-307572	D SILICON H 1SS131
D42	ED-307572	D SILICON H 1SS131
FL1	EM-401077J	IND FL FV496G CHARACTER
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408391J1	IC UPD75217CW-146 JBXOPP2
IC2	EI-408393J	IC ST24C01B1
IC3	EI-373955	IC S-8053ALR
PH1	ET-381637J2	DETECTOR GP1U521X
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1	ES-408404J	SW TACT EVQ 235 07K T05
SW2	ES-349474	SW TACT SKHHAM004A
SW3	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

12. OPERATION (G) - A P.C BOARD (480EK/490ES)

Ref.No.	Part No.	Description
D2	ED-307572	D SILICON H 1SS131 [EK]
D5	ED-307572	D SILICON H 1SS131
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403731J	D ZENER H UTZJ8.2C
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D16	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D18	ED-307572	D SILICON H 1SS131
D19	ED-307572	D SILICON H 1SS131
D20	ED-307572	D SILICON H 1SS131
D21	ED-307572	D SILICON H 1SS131
D22	ED-307572	D SILICON H 1SS131
D23	ED-307572	D SILICON H 1SS131
D24	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D28	ED-307572	D SILICON H 1SS131
D32	ED-307572	D SILICON H 1SS131 [EK]
D42	ED-307572	D SILICON H 1SS131
D43	ED-307572	D SILICON H 1SS131 [ES]
D45	ED-307572	D SILICON H 1SS131
D46	ED-307572	D SILICON H 1SS131
D47	ED-307572	D SILICON H 1SS131
D48	ED-307572	D SILICON H 1SS131
D49	ED-307572	D SILICON H 1SS131 [EK]
FL1A	EM-408395J	IND FL FV562G CHARACTER [EK)
FL1B	EM-403367J	IND FL FV506G CHARACTER [ES]
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408397J	IC UPD75217CW-147 JFXOPP1
IC2	EI-408393J	IC ST24C01B1
IC3	EI-373955	IC S-8053ALR
PJ1	EJ-408399J	PHONE J 2P YKB21-5165 3.5
PJ2	EJ-387622J	PIN J JPJ5022-01-010 1P
PJ3	EJ-387623J	PIN J JPJ5022-01-040 1P
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1	ES-349474	SW TACT SKHHAM004A
SW2	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW10	ES-349474	SW TACT SKHHAM004A
SW11	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
SW13	ES-349474	SW TACT SKHHAM004A
SW14	ES-349474	SW TACT SKHHAM004A
SW15	ES-349474	SW TACT SKHHAM004A [EK]
SW16	ES-349474	SW TACT SKHHAM004A
SW17	ES-349474	SW TACT SKHHAM004A
SW18	ES-349474	SW TACT SKHHAM004A
SW19	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

13. OPERATION (G) - B P.C BOARD (490EK/ 490ES)

Ref.No.	Part No.	Description
PH1	ET-381637J2	DETECTOR GP1U521X
SW3	ES-349474	SW TACT SKHHAM004A

14. VIF UNIT (EK,ES)

Ref.No.	Part No.	Description
CF1A	EH-714628	FILTER SAW SAF39.5MZ70Z [EK]
CF1B	EH-714627	FILTER SAW SAF38.9MW70Z [ES]
CF2	EH-373921	FILTER CE SFE6.0MB
CF3	EH-373919	FILTER CE TPS6.0MB
IC1	EI-368809	IC M51496P
L1	EO-387800J	COIL FIX 1 EL0405SKI 2R7K
L3	EO-725954J	COIL SIF DET 6F16263A3
L4	EO-714614	COIL RF 6F16115B1
L5	EO-714610	COIL RF 6F16113B1
L6	EO-387798J	COIL FIX 1 EL0405SKI 150K
L7	EO-387798J	COIL FIX 1 EL0405SKI 150K
L8	EO-387802J	COIL FIX 1 EL0405SKI 330K
Q1	ET-725820J	TR CHIP 2SC2735J
Q2	ET-713614	TR CHIP 2SA1235 E,F
VR2	EV-404298J	R S-FIX H T05 KVSF637T 0.1W222
VR51	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223

15. POWER P.C BOARD (F440EK,F490ES)

Ref.No.	Part No.	Description
C1	EC-406634J	C EC V SXE12 222M 25.0DC
C2	EC-363490	C EC V CUT SME 222M 16.0DC
C3	EC-406635J	C EC V SXE16 222M 35.0DC
D1	*ED-511907	D SILICON 1N4002 100/1.0A
D2	*ED-511907	D SILICON 1N4002 100/1.0A
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D5	*'ED-511907	D SILICON 1N4002 100/1.0A
D6	*ED-511907	D SILICON 1N4002 100/1.0A
D7	*ED-511907	D SILICON 1N4002 100/1.0A
D8	*ED-511907	D SILICON 1N4002 100/1.0A
D9	*ED-511907	D SILICON 1N4002 100/1.0A
D10	*ED-511907	D SILICON 1N4002 100/1.0A
D11	*ED-511907	D SILICON 1N4002 100/1.0A
D12	*ED-511907	D SILICON 1N4002 100/1.0A
D13	ED-405373J	D ZENER H MTZJ16A T26
D14	ED-404032J	D ZENER H UTZJ39A
D15	ED-405524J	D ZENER H MTZJ36A T26
D16	*ED-404029J	D ZENER H UTZJ10B T26
D17	ED-511907	D SILICON 1N4002 100/1.0A
D18	ED-511907	D SILICON 1N4002 100/1.0A
FR1	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR2	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR3	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR4	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR5	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
TR1	*ET-381175J	TR 2SD1856
TR2	*ET-366365	TR 2SB1185 E,F
TR3	*ET-405622J	TR 2SD2061 E,F
TR4	*ET-405622J	TR 2SD2061 E,F
TR5	*ET-405622J	TR 2SD2061 E,F
TR6	*ET-405622J	TR 2SD2061 E,F
TR7	*ET-366365	TR 2SB1185 E,F

16. POWER SUPPLY (1) P.C BOARD (F480EK)

Ref.No.	Part No.	Description
C1	EC-408376J	C EC V CUT KMG 102M 50.0DC
C2	EC-408377J	C EC V CUT KMG 222M 50.0DC
C3	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C4	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C14	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C15	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C20	EC-403880J	C EC V T05 LXF8 221M 25.0DC
C23	EC-406639J	C EC V T05 LXF6 330M 63.0DC
C24	EC-406639J	C EC V T05 LXF6 330M 63.0DC
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D6	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D8	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D11	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D16	ED-307572	D SILICON H 1SS131
D17	*ED-511907	D SILICON 1N4002 100/1.0A
D18	*ED-511907	D SILICON 1N4002 100/1.0A
D19	ED-404032J	D ZENER H UTZJ39A
D20	ED-405524J	D ZENER H MTZJ36A T26
D27	ED-396060J	D ZENER H HZS18-2
D28	ED-391005J	D ZENER H HZS12B1
D54	ED-307572	D SILICON H 1SS131
D55	ED-307572	D SILICON H 1SS131
D57	ED-405264J	D ZENER H UTZJ10C
D58	ED-405264J	D ZENER H UTZJ10C
D71	*ED-511907	D SILICON 1N4002 100/1.0A
D72	*ED-511907	D SILICON 1N4002 100/1.0A
D73	*ED-511907	D SILICON 1N4002 100/1.0A
D74	*ED-511907	D SILICON 1N4002 100/1.0A
FR1	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR2	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR3	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
FR4	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
FR5	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
L1	EO-408381J	COIL FIX 2 C-5344-40 560K
L2	EO-408381J	COIL FIX 2 C-5344-40 560K
L3	EO-408381J	COIL FIX 2 C-5344-40 560K
L4	EO-408381J	COIL FIX 2 C-5344-40 560K
L6	EO-386541J	COIL FIX 1 ELF1010SKI 101K
L9	EO-393769J	COIL FIX 1 LHL06TB T05 471K
R14	ER-333091	R OMF H S20 FS 2W 360J
TR1	*ET-366365	TR 2SB1185 E,F
TR5	*ET-366365	TR 2SB1185 E,F
TR6	ET-356817	TR 2SB891 Q,R
TR9	*ET-366365	TR 2SB1185 E,F
TR12	*ET-405622J	TR 2SD2061 E,F
TR13	*ET-366365	TR 2SB1185 E,F
TR14	ET-360399	TR DTC114TS
TR15	ET-360399	TR DTC114TS
TR16	ET-397160J	TR 2SC3330 R,S,T,U,V

17. POWER SUPPLY (2) P.C BOARD (F480EK)

Ref.No.	Part No.	Description
D7	ED-405264J	D ZENER H UTZJ10C
D10	ED-307572	D SILICON H 1SS131
D50	ED-387919J	D ZENER H HZS6A1L
D56	ED-396057J	D ZENER H HZS16-2
IC1	*EI-381575J	IC BA6121
L10	EO-380091J1	COIL FIX 2 C-5293-01 560K
TR2	*ET-405622J	TR 2SD2061 E,F
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	*ET-404195J	TR 2SC4486 S,T T05
TR7	*ET-405622J	TR 2SD2061 E,F
TR8	ET-353899	TR 2SA1317 S,T,U
TR50	ET-353897	TR DTC114ES

18. DIODE P.C BOARD (F480EK)

Ref.No.	Part No.	Description
D14	*ED-379298	D SILICON DBA20B 100/2.0A

19. VPST PDC P.C BLOCK (F480EK ONLY)

Ref.No.	Part No.	Description
D1	ED-307572	D SILICON H 1SS131
D101	ED-307572	D SILICON H 1SS131
D201	ED-307572	D SILICON H 1SS131
FL101	EH-394684J	FILTER EMI ZBF503D-00TA T05
IB101	EH-383056J	COMP R RGLE4X 103J
IB102	EH-386637J	COMP R RGLE8X 103J
IC101	EI-410521J	IC UPD75218CW-014 JXPDC1
IC102	EI-405224J	IC ST24C02
IC103	EI-405224J	IC ST24C02
IC104	EI-408434J	IC MV1815-1BA
IC105	EI-410125J	IC V53C464AP-80
IC106	EI-401050J	IC LVA523SA2
IC107	EI-394680J	IC AN3171K
IC108	EI-387019J	IC MC1377P
L1	EO-345865	COIL FIX 1 EL0606SKI 100J
L101	EO-345865	COIL FIX 1 EL0606SKI 100J
L102	EO-345865	COIL FIX 1 EL0606SKI 100J
L121	EO-345865	COIL FIX 1 EL0606SKI 100J
L151	EO-410104J	COIL FIX 1 SPT0203SA T26 181J
L152	EO-410104J	COIL FIX 1 SPT0203SA T26 181J
L153	EO-345880	COIL FIX 1 EL0606SKI 820J
L154	EO-410099J	COIL FIX 1 SPT0203SA T26 470J
L155	EO-345865	COIL FIX 1 EL0606SKI 100J
L201	EO-345865	COIL FIX 1 EL0606SKI 100J
L202	EO-345865	COIL FIX 1 EL0606SKI 100J
L203	EO-345875	COIL FIX 1 EL0606SKI 390J
L204	EO-345873	COIL FIX 1 EL0606SKI 270J
L206	EO-345871	COIL FIX 1 EL0606SKI 180J
L207	EO-345874	COIL FIX 1 EL0606SKI 330J
L208	EO-345874	COIL FIX 1 EL0606SKI 330J
L251	EO-345865	COIL FIX 1 EL0606SKI 100J
TR1	ET-397160J	TR 2SC3330 R,S,T,U,V
TR101	ET-354415	TR DTA144ES
TR102	ET-397160J	TR 2SC3330 R,S,T,U,V
TR151	ET-397160J	TR 2SC3330 R,S,T,U,V
TR152	ET-353899	TR 2SA1317 S,T,U
TR153	ET-353899	TR 2SA1317 S,T,U
TR154	ET-397160J	TR 2SC3330 R,S,T,U,V
TR155	ET-397160J	TR 2SC3330 R,S,T,U,V
TR201	ET-397160J	TR 2SC3330 R,S,T,U,V
TR202	ET-397160J	TR 2SC3330 R,S,T,U,V
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR204	ET-353899	TR 2SA1317 S,T,U
TR208	ET-353899	TR 2SA1317 S,T,U
TR251	ET-397160J	TR 2SC3330 R,S,T,U,V
TR252	ET-353899	TR 2SA1317 S,T,U
TR253	ET-353899	TR 2SA1317 S,T,U
X101	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X102	EI-408433J	OSC X'TAL HC-43/U 27750KHZ
X103	EI-394673J	OSC X'TAL HC-49/U 8867.238KHZ

20. JOG/SHUTTLE P.C BOARD (480EK,490ES)

Ref.No.	Part No.	Description
SW1	ES-403377J	SW ROTARY ENCODER SRGPHJ

FINAL ASSEMBLY BLOCK

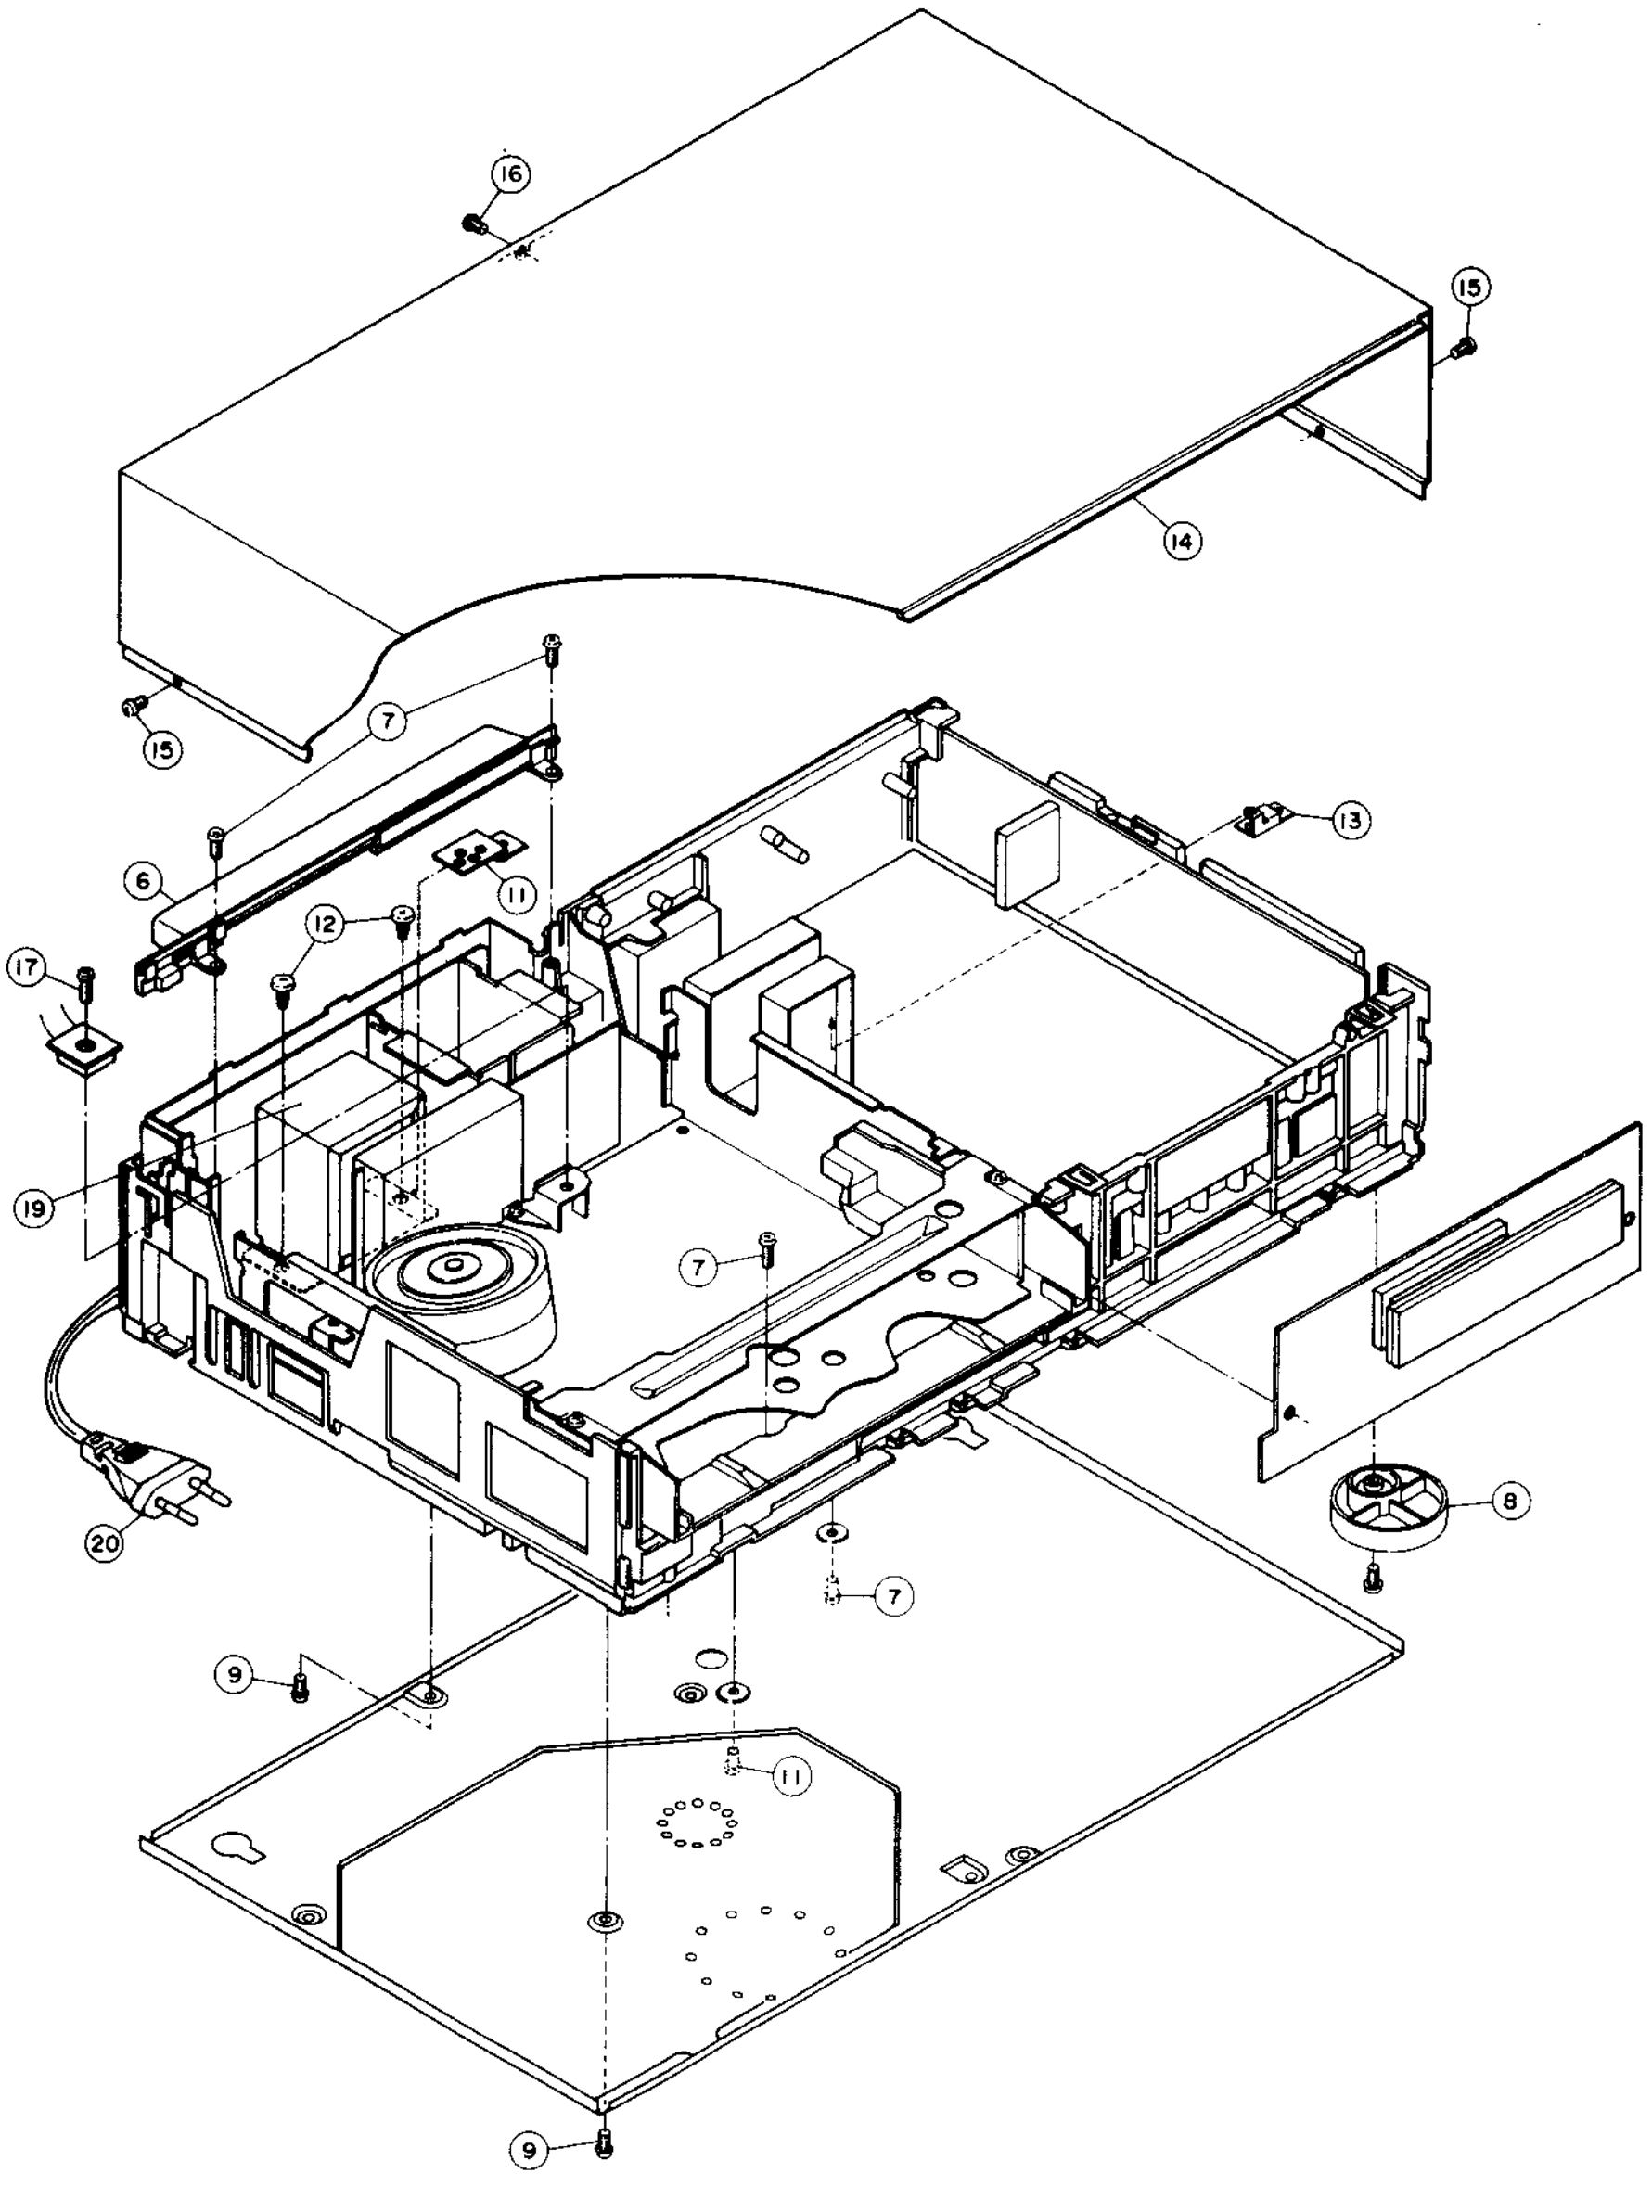
16
15
14
15
7
6
11
12
17
13
19
7
8
20
7
9
11
9

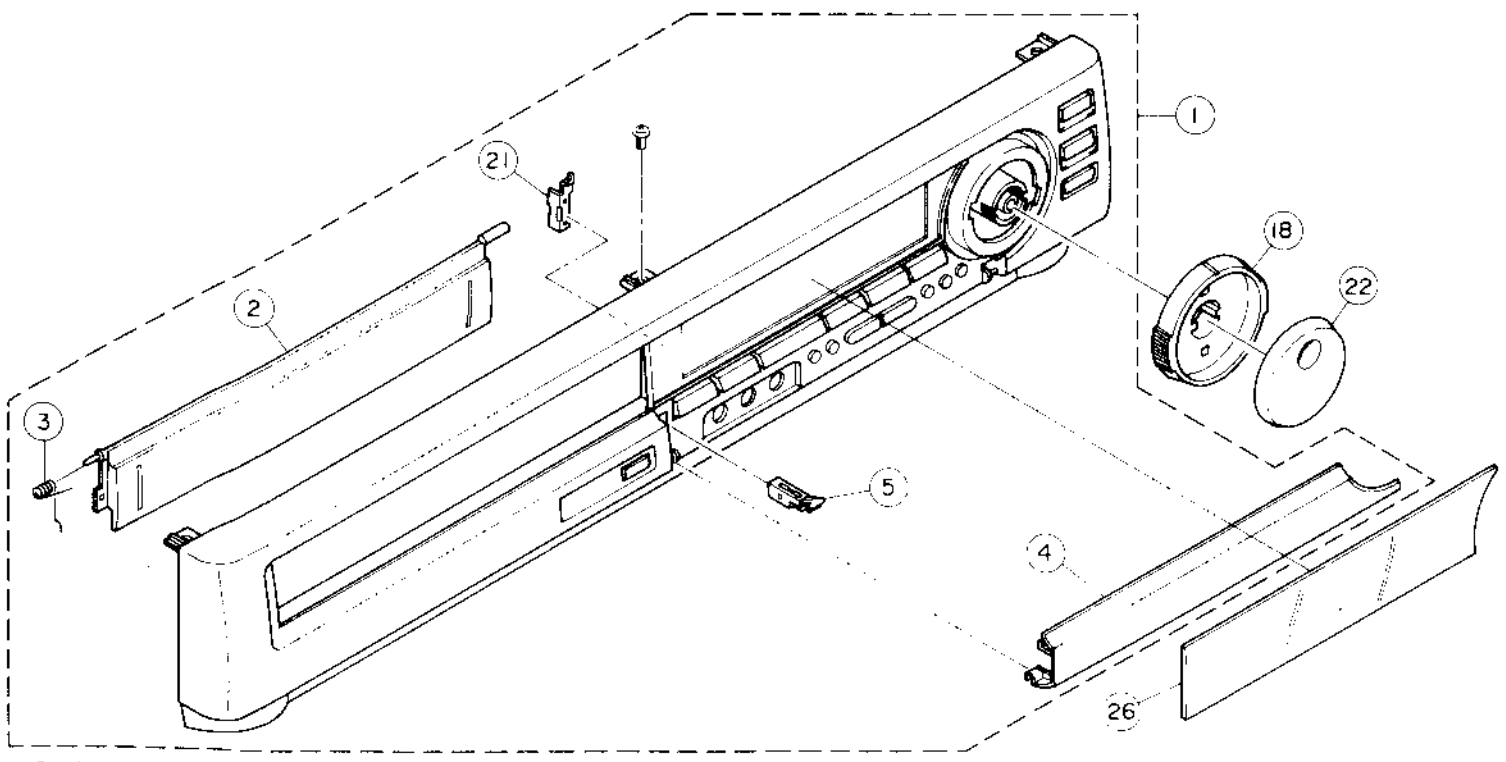
1
21
2
18
22
3
5
4
26

VS-F480/F490

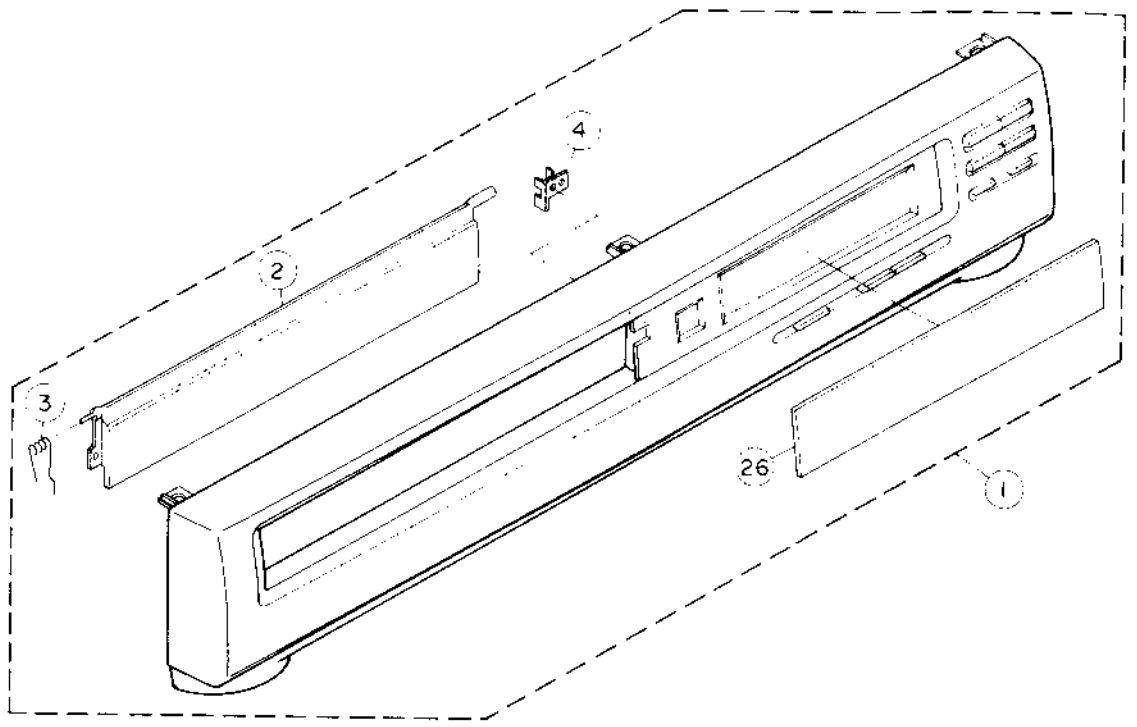

VS-F440

21. FINAL ASSEMBLY

Ref.No.	Part No.	Description
1A	BD-409284J	PANEL FRONT VS-F440EOH PART [440EK]
1B	BD-409123J1	PANEL FRONT VS-F480EK-V PART [480EK]
1C	BD-409128J1	PANEL FRONT VS-F490ES PART [490ES]
2A	SE-409197J	MASK CASSETTE (J) VS-F440 (E2) [400EK]
2B	SE-409101J1	MASK CASSETTE VS-F480 (E) [480EK]
2C	SE-409104J1	MASK CASSETTE VS-F490 (E2) [490ES]
3	ZG-387370J	SP MASK
4A	SP-409166J	DOOR (E4) [480EK]
4B	SP-409133J	DOOR (E3) [490ES]
5	SZ-404290J	MINI SIDE LOCK [480EK,490ES]
6	SC-387353J	COVER TRANS
7	ZS-378341	PLX BID30X12STL CMT
8	SA-387507J	FOOT SX
9	ZS-358936	ST BID30X06STL CMT
11	ZG-387505J	PLATE EARTH
12	ZS-373962	PLX BID40X10STL CMT
13	ZG-387354J	PLATE EARTH (2)
14	SP-407479J	COVER UPPER JX
15	ZS-385611J	DT BID26X06STL BNI
16	ZS-391046J	PLX BID26X10STL BNI
17	ZS-659046	PAN26X10STL CMT
18	SK-407561J	KNOB SHUTTLE [480EK,490ES]
19A	*BT-403872J	TRANS POW V1130 EK [440EK]
19B	*BT-403883J	TRANS POW V1130 EOG-V [480EK]
19C	*BT-410489J	TRANS POW V1130 ES [490ES]
20A	*EW-404001M	AC CORD 200 VCTFK WITH TUBE B [EK]
20B	*EW-404002M	AC CORD 200 SE-1 WITH TUBE E [ES]
21A	SZ-401874J	STOPPER MASK [440EK]
21B	SZ-407583J	STOPPER MASK (2) [480EK,490ES]
22	SK-407562J	KNOB JOG [480EK,490ES]

NOTE:
Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

22. ACCESSARY

Ref.No.	Part No.	Description
1	EW-348414	CORD PAL
2A	AV-B1038A010A	REMOCON BLK RC-V250E [440EK]
2B	AV-B1040A010E	REMOCON BLK RC-V451E [480EK]
2C	AV-B1043A010E	REMOCON BLK RC-V452E [490ES]

6-3. VS-F440EDG/EO/EOG-V/EOH, F455EOH, F480EOG-V, F490EO/EOH, F497EOH

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref.No.	Part No.	Description
1	AV-B1038A010A	REMOCON BLK RC-V250E [440EDG/EO/EOH]
2	AV-B1039A010A	REMOCON BLK RC-V251G [440EOG]
3	AV-B1042A010C	REMOCON BLK RC-V252E (G) [450/455EOH]
4	AV-B1040A010F	REMOCON BLK RC-V451G [480EOG]
5	AV-B1043A010E	REMOCON BLK RC-V452E [490EO/EOH,497EOH]
6	BB-V1130A020H	MECHA DECK BLK F260EA
7	BB-V1130A020C	MECHA DECK BLK F410EK
8	BL-V1102A140A	ARM LOADING BLK 425EA
9	BL-387458J2	CAPSTAN BRAKE PART
10	BL-V1123A050A	TENSION ARM BLK F600EA
11	BL-V1102A050A	TENSION ARM BLK 425EA
12	BM-400682J1	MOTOR DFX-67B3VWB1 [CAPSTAN MOTOR]
13	BM-401296J1	MOTOR E20EL89 [DRUM MOTOR]
14	BM-387503J	MOTOR PART [LOADING MOTOR]
15	*BT-410491J	TRANS POW V1130 EDG [EDG)
16	*BT-403873J	TRANS POW V1130 EO [EO,440-455EOH]
17	*BT-403883J	TRANS POW V1130 EOG-V [EOG,490-497EOH]
18	BV-V1102A150A	CASSETTE LOAD BLK 425EA
19	BV-V1102A070A	LEADER S BLK 425EA
20	BV-V1102A080A	LEADER T BLK 425EA
21	BV-V1123A410B	LOWER DRUM BLK X450EGN
22	BV-403409J	RF CONVERTER MDLK6D755A EO [EO/EOG/EOH]
23	BV-403408J	RF CONVERTER MDLK6E753A EDG [EDG]
24	BV-V1123A420B	UPPER DRUM BLK X450EGN
25	BV-403237J	VIF UNIT KX EDG [EDG]
26	BV-403241J1	VIF UNIT KX EOG [EO/EOG]
27	BV-403240J1	VIF UNIT KX EOH [EOH]
28	EA-387496J	PC (#) SENSOR
29	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
30	EC-363490	C EC V CUT SME 222M 16.0DC
31	EC-406634J	C EC V SXE12 222M 25.0DC
32	EC-406635J	C EC V SXE16 222M 35.0DC
33	ED-390011J	D LED GL451 INFRARED [D1]
34	ED-390012J	D LED GL4800 INFRARED [D2]
35	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
36	*ED-379298	D SILICON DBA20B 100/2.0A
37	ED-366443	D SILICON H MA700FA5 F10
38	ED-307572	D SILICON H 1SS131
39	ED-511907	D SILICON 1N4002 100/1.0A
40	ED-391005J	D ZENER H HZS12B1
41	ED-396057J	D ZENER H HZS16-2 [EOH]
42	ED-396060J	D ZENER H HZS18-2
43	ED-397233J	D ZENER H HZS5C3
44	ED-387919J	D ZENER H HZS6A1L
45	ED-405603J	D ZENER H MTZJ10B T26 [EO/EOG/EOH]
46	ED-405373J	D ZENER H MTZJ16A T26
47	ED-404170J	D ZENER H MTZJ2.0A T26 [EOG/EOH]
48	ED-405247J	D ZENER H MTZJ2.7A T26 [F480-F497]
49	ED-403267J	D ZENER H MTZJ3.3B T26
50	ED-405524J	D ZENER H MTZJ36A T26
51	ED-405604J	D ZENER H MTZJ4.3C T26 [EO/EOG/EOH]
52	ED-403724J	D ZENER H UTZJ10A
53	*ED-404029J	D ZENER H UTZJ10B T26
54	ED-405264J	D ZENER H UTZJ10C
55	ED-403726J	D ZENER H UTZJ30B [EOG]
56	ED-404032J	D ZENER H UTZJ39A
57	ED-405446J	D ZENER H UTZJ5.6B T26
58	ED-403729J	D ZENER H UTZJ5.6C
59	ED-403730J	D ZENER H UTZJ6.2A [EOG]
60	ED-403278J	D ZENER H UTZJ7.5B
61	ED-404086J	D ZENER H UTZJ7.5C
62	ED-403731J	D ZENER H UTZJ8.2C [EOH]
63	ED-403279J	D ZENER H UTZJ9.1B
64	EE-408471J	TV TUNER ENV-77890F2 SK [EDG]
65	EE-387604J2	TV TUNER TERE1-007C EOG [EO/EOG]
66	EE-390143J2	TV TUNER TERE3-001C EOH [EOH]
67	EH-394838J	DL ADL-FN1344Q [490EOH]
68	EH-390730J	DL EFD-JF124A13J
69	EH-368816	FILTER CE SAF38.0MZA70Z
70	EH-730625J	FILTER CE SAF38.9MZW70Z
71	EH-780128	FILTER CE SFE 6.5MB
72	EH-366894	FILTER CE SFE-4.16MB 4.16MHZ [EDG/EOG]
73	EH-373920	FILTER CE SFE5.5MB
74	EH-368827	FILTER CE SFS5.5MD 5.500MHZ
75	EH-388287J	FILTER CE SFS6.5MX 6.500MHZ
76	EH-373918	FILTER CE TPS5.5MB
77	EH-368948	FILTER CE TPS5.5MW 5.5000MHZ
78	EH-376338	FILTER CE TPS6.5MB
79	EH-394684J	FILTER EMI ZBF503D-00TA T05
80	EI-394680J	IC AN3171K
81	EI-373981J1	IC BA10393N
82	EI-373980	IC BA15218N
83	EI-386468J	IC BA3308
84	*EI-381575J	IC BA6121
85	EI-353421	IC BA6229
86	EI-366892	IC BA7025L [EDG/EOG]
87	EI-387586J	IC BA7244BS
88	EI-388360J	IC BA7765AS
89	EI-356457	IC BU4013B
90	EI-360586	IC LA6358S
91	EI-403234J1	IC LA7391A
92	EI-394856J	IC LC8992
93	EI-394861J	IC LVA521S-2
94	EI-401050J	IC LVA523SA2
95	EI-389622J	IC L5631
96	EI-387019J	IC MC1377P
97	EI-403469J	IC MM1068XS
98	EI-408850J	IC MN675201 XDJ JFXSYP1
99	EI-408849J	IC MN675201 XDL JFLSYP1
100	EI-408434J	IC MV1815-1BA
101	EI-368809	IC M51496P
102	EI-403964J	IC NJM2245L [EOG/EOH]
103	EI-400756J	IC NJM4558L-B
104	EI-373955	IC S-8053ALR
105	EI-385958J	IC SAA4700
106	EI-408393J	IC ST24C01B1
107	EI-405224J	IC ST24C02
108	EI-310036	IC TC4066BP
109	EI-405722J	IC UPD6450CX-515
110	EI-408391J1	IC UPD75217CW-146 JBXOPP2

Ref.No.	Part No.	Description
111	EI-408397J	IC UPD75217CW-147 JFXOPP1
112	EI-410521J	IC UPD75218CW-014 JXPDC1
113	EI-410125J	IC V53C464AP-80
114	EI-403467J	OSC CE CSB500F40 15.680KHZ
115	EI-368829	OSC CE CSB512P
116	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
117	EI-368825M	OSC X'TAL C-002RX 32.768KHZ
118	EI-408433J	OSC X'TAL HC-43/U 27750KHZ
119	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
120	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
121	EI-394673J	OSC X'TAL HC-49/U 8867.238KHZ
122	EI-381632J	OSC X'TAL 86686 4.433619MHZ
123	EM-401077J	IND FL FV496G CHARACTER
124	EM-403367J	IND FL FV506G CHARACTER
125	EO-388362J	COIL OSC 1 V1102
126	EO-388363J	COIL OSC 1 V1105-1
127	EO-388349J	COIL OSC 1 V1105-2 [F480-F497]
128	ER-331188	R FUSE H S10 ERD2FC 1/4W 8R2J
129	*ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
130	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
131	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
132	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
133	*ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
134	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K [EO/EOG/EOH]
135	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
136	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
137	ER-403405J	R OMF H S12 FS 1W R75J
138	ES-373099	SW LEAF MTS10110MPC1
139	ES-387465J	SW MODE SELECT MMS00070ZLBO [SW1]
140	ES-403377J	SW ROTARY ENCODER SRGPHJ
141	ES-408404J	SW TACT EVQ 235 07K T05 [RESET]
142	ES-349474	SW TACT SKHHAM004A
143	ET-381637J2	DETECTOR GP1U521X
144	ET-403420J	DETECTOR SG-105LF [PH1][PH2]
145	ET-724885J	TR CHIP RT1N141C [EOG]
146	ET-713614	TR CHIP 2SA1235 E,F
147	ET-725820J	TR CHIP 2SC2735J
148	ET-356336	TR DTA114ES
149	ET-363953	TR DTA114TS [490EOH]
150	ET-360646	TR DTA143ES [490EOH]
151	ET-354415	TR DTA144ES
152	ET-373985	TR DTA144TS
153	ET-353897	TR DTC114ES
154	ET-360399	TR DTC114TS
155	ET-354364	TR DTC143TS
156	ET-354414	TR DTC144ES
157	ET-361490	TR PHOTO PN268 [TR1]
158	ET-390010J	TR PHOTO PT4800 [TR2]
159	ET-390009J	TR PHOTO PT493F [TR4]
160	ET-364040	TR UN421D
161	ET-353899	TR 2SA1317 S,T,U
162	*ET-366365	TR 2SB1185 E,F
163	ET-388338J	TR 2SB1425 S,E
164	ET-356817	TR 2SB891 Q,R
165	ET-375777	TR 2SC2926S P,Q
166	ET-397160J	TR 2SC3330 R,S,T,U,V
167	*ET-404195J	TR 2SC4486 S,T T05
168	ET-354083	TR 2SD1189 Q,R
169	ET-366168	TR 2SD1292 Q,R [EOG]
170	*ET-381175J	TR 2SD1856
171	ET-405622J	TR 2SD2061 E,F [EO/EOG/EOH]
172	ET-370819	TR.CHIP 2SC3052
173	EX-405691J	THERMISTOR NTH5D332KA
174	HE-390013J	HEAD E HVFME0020A
175	HR-405340J	HEAD COMBO HVMZA1121A
176	MB-387289J	BELT CAPSTAN
177	MB-407117J	BELT CAPSTAN (3)
178	MI-387294J	IDLER PART
179	MI-404552J	IDLER (2) PART
180	ML-391745J3	ARM DAMPER
181	ML-387350J1	ARM LID OPENER
182	ML-387423J	ARM LOADING BRAKE
183	ML-387277J3	ARM REVIEW PART
184	ML-387402J1	LEVER TRIGGER
185	ML-387316J	MAIN BRAKE (S) PART
186	ML-387318J	MAIN BRAKE (T) PART
187	ML-387321J	REVIEW BRAKE PART
188	ML-407119J	REVIEW BRAKE (3) PART
189	ML-387324J1	SLIDER BRAKE PART
190	ML-404567J1	SLIDER BRAKE (3) PART
191	ML-404944J	SLIDER TRIGGER (2)
192	MP-404852J	PINCH ROLLER (2) PART
193	MR-387406J	HOLDER THRUST WORM
194	MR-391968J	PULLEY TRIGGER (2)
195	MR-387286J1	ROLLER IMPEDANCE
196	MT-390954J1	DISK (2) PART
197	MT-404547J	DISK (3) PART
198	MZ-387298J3	DISK CLUTCH PART
199	MZ-404577J	DISK CLUTCH (2) PART
200	MZ-387331J	GEAR CAM SLIDER
201	MZ-404538J	GEAR CAM SLIDER (3)
202	MZ-387335J	GEAR EJECT
203	MZ-387333J	GEAR FRONT LOADING
204	MZ-404995J	GEAR MID PART
205	MZ-V1102A090A	GEAR TOGGLE (S) BLK 425EA
206	MZ-V1102A100A	GEAR TOGGLE (T) BLK 425EA
207	MZ-387332J	GEAR WORM WHEEL
208	MZ-401686J1	GEAR WORM (2)

※ Parts list for HEAD DRUM, MECHA. (1) and MECHA. (2) BLOCK refer to 6-1. EA/EDI/EM list (P24 to P28).

7. P.C BOARD BLOCK

Ref.No.	Part No.	Description
1A	BA-V1150A600B	PC (#) MAIN (PAL) BLK F440EDG
1B	BA-V1150Q600F	FRPC (#) MAIN (PAL) BLKF440EO/FR
1C	BA-V1150Q600G	FRPC (#) MAIN (PAL) BLKF440EOG-V/ FR
1D	BA-V1150A600H	PC (#) MAIN (PAL) BLK F440EOH [440/450EOH]
1E	BA-V1150A600J	PC (#) MAIN (PAL) BLK F455EOH
1F	BA-V1152Q600D	FRPC (#) MAIN (PAL) BLKF480EOG-V/ FR
1G	BA-V1152Q600C	FRPC (#) MAIN (PAL) BLKF490EO/FR
1H	BA-V1152A600E	PC (#) MAIN (PAL) BLK F490EOH
1J	BA-V1152A600G	PC (#) MAIN (PAL) BLK F497EOH [497EOH]
2A	BA-V1132A615C	PC PRE AMP BLK F400EDI [440EDG/EO/EOG,440-455EOH]
2B	BA-V1132A610J	PC PRE AMP BLK F410EO [480EOG,490EO/EOH]
2C	BA-V1132A610G	PC PRE AMP BLK F410EM [497EOH]
3A	BA-V1146A635M	PC OPERATION (A) BLK F440EDG
3B	BA-V1146A640D	PC OPERATION (A) BLK F440EO
3C	BA-V1146A640E	PC OPERATION (A) BLK F440EOG-V
3D	BA-V1146A640F	PC OPERATION (A) BLK F440EOH
3E	BA-V1146A640M	PC OPERATION (A) BLK F455EOH
3F	BA-V1152Q630D	FRPC—OPERATION G BLK F480EOG-V/ FR
3G	BA-V1152Q630C	FRPC—OPERATION G BLK F490EO/FR
3H	BA-V1152A630E	PC—OPERATION (G) BLK F490EOH
3J	BA-V1152A630F	PC—OPERATION (G) BLK F497EOH
4A	BA-V1130A500A	PC POWER BLK F220EDG [EDG]
4B	BA-V1132A500A	PC (#) POWER EO BLK F200EO [EO]
4C	BA-V1135A500E	PC (#) POWER EOG BLK F300EOG-V [EOG]
4D	BA-V1132A500C	PC (#) POWER EO BLK F200EOH [440/450/455EOH]
4E	BA-V1135A500C	PC (#) POWER EOG BLK F480EK-V [490/497EOH]

PC (#) MAIN BLK CONSISTS OF FOLLOWING P.C BOARD.

- MAIN (A) P.C BOARD
- MAIN (B) P.C BOARD
- VIF UNIT

PC (#) OPERATION P.C BOARD CONSISTS OF FOLLOWING P.C BOARD.

- OPERATION-A P.C BOARD
- OPERATION-B P.C BOARD

PC (#) POWER P.C BOARD CONSISTS OF FOLLOWING P.C BOARD.

- POWER SUPPLY (1) P.C BOARD
- POWER SUPPLY (2) P.C BOARD
- DIODE P.C BOARD

8. MAIN (A) P.C BOARD (F440-F455)

Ref.No.	Part No.	Description
C369	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D5	ED-307572	D SILICON H 1SS131 [EOH]
D6	ED-403731J	D ZENER H UTZJ8.2C [EOH]
D7	ED-307572	D SILICON H 1SS131 [EOH]
D8	ED-387919J	D ZENER H HZS6A1L
D9	ED-307572	D SILICON H 1SS131 [EO/EOG]
D10	ED-307572	D SILICON H 1SS131 [EO/EOG]
D12	ED-405603J	D ZENER H MTZJ10B T26 [EO/EOG/EOH]
D13	ED-405604J	D ZENER H MTZJ4.3C T26 [EO/EOG/EOH]
D201	ED-307572	D SILICON H 1SS131
D202	ED-307572	D SILICON H 1SS131
D203	ED-307572	D SILICON H 1SS131
D204	ED-397233J	D ZENER H HZS5C3
D205	ED-403267J	D ZENER H MTZJ3.3B T26
D206	ED-307572	D SILICON H 1SS131 [EOG]
D207	ED-307572	D SILICON H 1SS131 [EOG]
D208	ED-307572	D SILICON H 1SS131
D209	ED-307572	D SILICON H 1SS131
D210	ED-403726J	D ZENER H UTZJ30B [EOG]
D211	ED-403730J	D ZENER H UTZJ6.2A [EOG]
D212	ED-511907	D SILICON 1N4002 100/1.0A
D213	ED-511907	D SILICON 1N4002 100/1.0A
D301	ED-307572	D SILICON H 1SS131
D302	ED-307572	D SILICON H 1SS131
D303	ED-404086J	D ZENER H UTZJ7.5C
D304	ED-403724J	D ZENER H UTZJ10A
D305	ED-307572	D SILICON H 1SS131
D306	ED-307572	D SILICON H 1SS131
D307	ED-307572	D SILICON H 1SS131
D308	ED-307572	D SILICON H 1SS131
D309	ED-307572	D SILICON H 1SS131
D401	ED-307572	D SILICON H 1SS131
D402	ED-307572	D SILICON H 1SS131
D404	ED-307572	D SILICON H 1SS131 [EO/EOG]
D405	ED-307572	D SILICON H 1SS131
D406	ED-366443	D SILICON H MA700FA5 F10
D408	ED-307572	D SILICON H 1SS131
D410	ED-307572	D SILICON H 1SS131
D411	ED-307572	D SILICON H 1SS131
D412	ED-403729J	D ZENER H UTZJ5.6C
D501	ED-307572	D SILICON H 1SS131
D502	ED-307572	D SILICON H 1SS131
D503	ED-307572	D SILICON H 1SS131
D504	ED-307572	D SILICON H 1SS131 [EO/EOG]
D505	ED-307572	D SILICON H 1SS131
D506	ED-307572	D SILICON H 1SS131
D507	ED-307572	D SILICON H 1SS131
D508	ED-307572	D SILICON H 1SS131
D509	ED-307572	D SILICON H 1SS131
DL500	EH-390730J	DL EFD-JF124A13J
FR201	*ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
FR202	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K [EO/EOG/EOH]
FR350	*ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
FR501	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
IC1	EI-389622J	IC L5631
IC101	EI-310036	IC TC4066BP
IC201	EI-400756J	IC NJM4558L-B
IC301	EI-408849J	IC MN675201 XDL JFLSYP1
IC302	EI-353421	IC BA6229
IC303	EI-373980	IC BA15218N

Ref.No.	**Part No.**	**Description**
IC400	EI-403234J1	IC LA7391A
IC401	EI-394856J	IC LC8992
IC402	EI-373981J1	IC BA10393N
IC403	EI-356457	IC BU4013B
L1	EO-390999J	COIL FIX 1 LAP02 F05 R82K [EOH]
L101	EO-345881	COIL FIX 1 EL0606SKI 101J
L103	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L301	EO-381196J	COIL FIX 1 EL0405SKI 470K
L302	EO-345881	COIL FIX 1 EL0606SKI 101J
L303	EO-354600	COIL FIX 1 LAP02 F05 101K
L401	EO-354600	COIL FIX 1 LAP02 F05 101K
L402	EO-357508	COIL FIX 1 LAP02 F05 151K
L403	EO-381192J	COIL FIX 1 EL0405SKI 270K
L404	EO-345880	COIL FIX 1 EL0606SKI 820J
L405	EO-354600	COIL FIX 1 LAP02 F05 101K
L406	EO-354600	COIL FIX 1 LAP02 F05 101K
L410	EO-345874	COIL FIX 1 EL0606SKI 330J
L470	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L472	EO-345880	COIL FIX 1 EL0606SKI 820J
L474	EO-388161J	COIL FIX 1 EL0405SKI 560K
L480	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J [EOG]
L500	EO-345880	COIL FIX 1 EL0606SKI 820J
L501	EO-353900	COIL FIX 1 LAP02 F05 150K
L505	EO-345880	COIL FIX 1 EL0606SKI 820J
L506	EO-345880	COIL FIX 1 EL0606SKI 820J
L507	EO-392817J	COIL FIX 1 EL0405SKI 1R2K
L508	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J
L509	EO-345880	COIL FIX 1 EL0606SKI 820J
L510	EO-403270J	COIL FIX 1 EL0405RA T05 101J
L511	EO-381195J	COIL FIX 1 EL0405SKI 331K
L512	EO-381197J	COIL FIX 1 EL0405SKI 471K
L570	EO-345880	COIL FIX 1 EL0606SKI 820J
MD1A	BV-403408J	RF CONVERTER MDLK6E753A EDG [EDG]
MD1B	BV-403409J	RF CONVERTER MDLK6D755A EO [EO/EOG/EOH]
PJ101	EJ-387614J	PIN J T6353-ABCB YL BK 4P [EDG]
PJ102	EJ-387613J	SOCKET M1812 21P [EO/EOG/EOH]
R214	ER-403405J	R OMF H S12 FS 1W R75J
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-375777	TR 2SC2926S P,Q
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	ET-353899	TR 2SA1317 S,T,U
TR5	ET-353899	TR 2SA1317 S,T,U
TR6	ET-353899	TR 2SA1317 S,T,U [EOH]
TR7	ET-353899	TR 2SA1317 S,T,U
TR8	ET-354414	TR DTC144ES
TR9	ET-354414	TR DTC144ES
TR10	ET-354414	TR DTC144ES [EOH]
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-397160J	TR 2SC3330 R,S,T,U,V
TR13	ET-353899	TR 2SA1317 S,T,U [EXCEPT EOH]
TR14	ET-397160J	TR 2SC3330 R,S,T,U,V [EOH]
TR15	ET-353897	TR DTC114ES
TR16	ET-397160J	TR 2SC3330 R,S,T,U,V [EOH]
TR17	ET-397160J	TR 2SC3330 R,S,T,U,V
TR18	ET-397160J	TR 2SC3330 R,S,T,U,V
TR19	ET-354414	TR DTC144ES
TR20	ET-405622J	TR 2SD2061 E,F [EO/EOG/EOH]
TR101	ET-354414	TR DTC144ES
TR102	ET-356336	TR DTA114ES
TR103	ET-354414	TR DTC144ES
TR104	ET-353899	TR 2SA1317 S,T,U
TR105	ET-353899	TR 2SA1317 S,T,U
TR107	ET-397160J	TR 2SC3330 R,S,T,U,V
TR108	ET-356336	TR DTA114ES [EO/EOG/EOH]
TR109	ET-397160J	TR 2SC3330 R,S,T,U,V
TR202	ET-356336	TR DTA114ES
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR205	ET-388338J	TR 2SB1425 S,E
TR209	ET-354414	TR DTC144ES [EOG]

Ref.No.	**Part No.**	**Description**
TR210	ET-405622J	TR 2SD2061 E,F [EOH]
TR211	ET-356336	TR DTA114ES [EOG]
TR301	ET-354414	TR DTC144ES
TR302	ET-397160J	TR 2SC3330 R,S,T,U,V
TR304	ET-354415	TR DTA144ES
TR305	ET-354414	TR DTC144ES
TR306	ET-354414	TR DTC144ES
TR307	ET-373985	TR DTA144TS
TR308	ET-373985	TR DTA144TS
TR309	ET-373985	TR DTA144TS
TR310	ET-354414	TR DTC144ES
TR313	ET-354414	TR DTC144ES [EO/EOG]
TR401	ET-356336	TR DTA114ES
TR402	ET-354414	TR DTC144ES
TR404	ET-354364	TR DTC143TS
TR406	ET-397160J	TR 2SC3330 R,S,T,U,V
TR407	ET-353899	TR 2SA1317 S,T,U
TR408	ET-354414	TR DTC144ES
TR409	ET-360399	TR DTC114TS
TR410	ET-354414	TR DTC144ES
TR411	ET-360399	TR DTC114TS
TR413	ET-354415	TR DTA144ES
TR414	ET-388338J	TR 2SB1425 S,E
TR415	ET-353899	TR 2SA1317 S,T,U
TR417	ET-360399	TR DTC114TS
TR420	ET-354414	TR DTC144ES
TR421	ET-364040	TR UN421D
TR423	ET-356336	TR DTA114ES
TR424	ET-388338J	TR 2SB1425 S,E
TR470	ET-353899	TR 2SA1317 S,T,U
TR471	ET-353899	TR 2SA1317 S,T,U
TR501	ET-353897	TR DTC114ES
TR503	ET-397160J	TR 2SC3330 R,S,T,U,V
TR506	ET-397160J	TR 2SC3330 R,S,T,U,V
TR507	ET-397160J	TR 2SC3330 R,S,T,U,V
TR508	ET-356336	TR DTA114ES
TR509	ET-397160J	TR 2SC3330 R,S,T,U,V
TR510	ET-397160J	TR 2SC3330 R,S,T,U,V
TR511	ET-397160J	TR 2SC3330 R,S,T,U,V
TR512	ET-397160J	TR 2SC3330 R,S,T,U,V
TR513	ET-356336	TR DTA114ES [EXCEPT ES]
TR514	ET-354414	TR DTC144ES [EXCEPT ES]
TR515	ET-397160J	TR 2SC3330 R,S,T,U,V
TR570	ET-397160J	TR 2SC3330 R,S,T,U,V
TR571	ET-397160J	TR 2SC3330 R,S,T,U,V
TR572	ET-354414	TR DTC144ES
TR573	ET-354414	TR DTC144ES
VR301	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
VR401	EV-405657J	R S-FIX H T05 KVSF637T 0.1W103
VR402	EV-404300J	R S-FIX H T05 KVSF637T 0.1W472
VR403	EV-405659J	R S-FIX H T05 KVSF637T 0.1W682
VR404	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
WF201	EW-404138J1	CORD KX MA-POW L=225 12P
X301	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
X500	EI-381632J	OSC X'TAL 86686 4.433619MHZ
1A	BV-403237J	VIF UNIT KX EDG [EDG]
1B	BV-403241J1	VIF UNIT KX EOG [EO/EOG]
1C	BV-403240J1	VIF UNIT KX EOH [EOH]
2A	EE-408471J	TV TUNER ENV-77890F2 SK [EDG]
2B	EE-387604J2	TV TUNER TERE1-007C EOG [EO/EOG]
2C	EE-390143J2	TV TUNER TERE3-001C EOH [EOH]
3A	SP-395563J	PANEL REAR JACK EDG (2) [EDG]
3B	SP-387357J	PANEL REAR JACK EK [EO/EOH]
3C	SP-388305J	PANEL REAR JACK EOG [EOG]

9. MAIN (A) P.C BOARD (F480-F497)

Ref.No.	Part No.	Description
C369	*EC-391843J	C DOUBLE FYD0H223Z 5.5DC
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D5	ED-307572	D SILICON H 1SS131 [EOH]
D6	ED-403731J	D ZENER H UTZJ8.2C [EOH]
D7	ED-307572	D SILICON H 1SS131 [EOH]
D8	ED-387919J	D ZENER H HZS6A1L
D9	ED-307572	D SILICON H 1SS131 [EO/EOG]
D10	ED-307572	D SILICON H 1SS131 [EO/EOG]
D12	ED-405603J	D ZENER H MTZJ10B T26
D13	ED-405604J	D ZENER H MTZJ4.3C T26
D102	ED-404170J	D ZENER H MTZJ2.0A T26 [EOG/EOH]
D201	ED-307572	D SILICON H 1SS131
D202	ED-307572	D SILICON H 1SS131
D203	ED-307572	D SILICON H 1SS131
D204	ED-397233J	D ZENER H HZS5C3
D205	ED-403267J	D ZENER H MTZJ3.3B T26
D206	ED-307572	D SILICON H 1SS131 [EOG]
D207	ED-307572	D SILICON H 1SS131 [EOG]
D208	ED-307572	D SILICON H 1SS131
D209	ED-307572	D SILICON H 1SS131
D210	ED-403726J	D ZENER H UTZJ30B [EOG]
D211	ED-403730J	D ZENER H UTZJ6.2A [EOG]
D212	ED-511907	D SILICON 1N4002 100/1.0A
D213	ED-511907	D SILICON 1N4002 100/1.0A
D301	ED-307572	D SILICON H 1SS131
D302	ED-307572	D SILICON H 1SS131
D303	ED-404086J	D ZENER H UTZJ7.5C
D304	ED-403724J	D ZENER H UTZJ10A
D305	ED-307572	D SILICON H 1SS131
D306	ED-307572	D SILICON H 1SS131
D307	ED-307572	D SILICON H 1SS131
D308	ED-307572	D SILICON H 1SS131
D309	ED-307572	D SILICON H 1SS131
D310	ED-307572	D SILICON H 1SS131
D401	ED-307572	D SILICON H 1SS131
D402	ED-307572	D SILICON H 1SS131
D404	ED-307572	D SILICON H 1SS131
D405	ED-307572	D SILICON H 1SS131
D406	ED-366443	D SILICON H MA700FA5 F10
D408	ED-307572	D SILICON H 1SS131
D410	ED-307572	D SILICON H 1SS131
D411	ED-307572	D SILICON H 1SS131
D412	ED-403729J	D ZENER H UTZJ5.6C
D501	ED-307572	D SILICON H 1SS131
D502	ED-307572	D SILICON H 1SS131
D503	ED-307572	D SILICON H 1SS131
D504	ED-307572	D SILICON H 1SS131
D505	ED-307572	D SILICON H 1SS131
D506	ED-307572	D SILICON H 1SS131
D507	ED-307572	D SILICON H 1SS131
D508	ED-307572	D SILICON H 1SS131
D509	ED-307572	D SILICON H 1SS131
DL500	EH-390730J	DL EFD-JF124A13J
DL501	EH-394838J	DL ADL-FN1344Q [490EOH]
FR201	*ER-400959J	R FUSE V T05 ERD2FCV 1/4W1200G
FR202	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
FR350	*ER-400729J	R FUSE V T05 RF25SCVTP1/4WR47K
FR501	*ER-404093J	R FUSE V T05 RF25SCVTP1/4WR56K
IC1	EI-389622J	IC L5631
IC101	EI-310036	IC TC4066BP
IC102	EI-394861J	IC LVA521S-2
IC103	EI-403964J	IC NJM2245L [EOG/EOH]
IC201	EI-400756J	IC NJM4558L-B
IC301	EI-408850J	IC MN675201 XDJ JFXSYP1
IC302	EI-353421	IC BA6229
IC303	EI-373980	IC BA15218N
IC304	EI-360586	IC LA6358S
IC400	EI-403234J1	IC LA7391A
IC401	EI-394856J	IC LC8992
IC402	EI-373981J1	IC BA10393N
IC403	EI-356457	IC BU4013B
L1	EO-390999J	COIL FIX 1 LAP02 F05 R82K [EOH]
L101	EO-345881	COIL FIX 1 EL0606SKI 101J
L103	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L301	EO-381196J	COIL FIX 1 EL0405SKI 470K
L302	EO-345881	COIL FIX 1 EL0606SKI 101J
L303	EO-354600	COIL FIX 1 LAP02 F05 101K
L401	EO-354600	COIL FIX 1 LAP02 F05 101K
L402	EO-357508	COIL FIX 1 LAP02 F05 151K
L403	EO-381192J	COIL FIX 1 EL0405SKI 270K
L404	EO-345880	COIL FIX 1 EL0606SKI 820J
L405	EO-354600	COIL FIX 1 LAP02 F05 101K
L406	EO-354600	COIL FIX 1 LAP02 F05 101K
L410	EO-345874	COIL FIX 1 EL0606SKI 330J
L470	EO-356722	COIL FIX 1 LAP02 F05 6R8K
L472	EO-345880	COIL FIX 1 EL0606SKI 820J
L474	EO-388161J	COIL FIX 1 EL0405SKI 560K
L480	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J [EOG]
L500	EO-345880	COIL FIX 1 EL0606SKI 820J
L501	EO-353900	COIL FIX 1 LAP02 F05 150K
L502	EO-345880	COIL FIX 1 EL0606SKI 820J [490EOH]
L503	EO-353900	COIL FIX 1 LAP02 F05 150K [490EOH]
L504	EO-353900	COIL FIX 1 LAP02 F05 150K [490EOH]
L505	EO-345880	COIL FIX 1 EL0606SKI 820J
L506	EO-345880	COIL FIX 1 EL0606SKI 820J
L507	EO-392817J	COIL FIX 1 EL0405SKI 1R2K
L508	EO-403937J	COIL FIX 1 EL0405RA T05 4R7J
L509	EO-345880	COIL FIX 1 EL0606SKI 820J
L510	EO-403270J	COIL FIX 1 EL0405RA T05 101J
L511	EO-381195J	COIL FIX 1 EL0405SKI 331K
L512	EO-381197J	COIL FIX 1 EL0405SKI 471K
L570	EO-345880	COIL FIX 1 EL0606SKI 820J
L590	EO-387802J	COIL FIX 1 EL0405SKI 330K [490EOH]
MD1	BV-403409J	RF CONVERTER MDLK6D755A EO
PJ101	EJ-405226J	PIN JACK T6572-ABBB YLW.RED 2P [EOG/EOH]
PJ102	EJ-387613J	SOCKET M1812 21P
PJ103	EJ-405225J	PIN J JPJ1018-01-030 WHITE 1P [EOG/EOH]
R214	ER-403405J	R OMF H S12 FS 1W R75J
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-375777	TR 2SC2926S P,Q
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	ET-353899	TR 2SA1317 S,T,U
TR5	ET-353899	TR 2SA1317 S,T,U
TR6	ET-353899	TR 2SA1317 S,T,U [EOH]
TR7	ET-353899	TR 2SA1317 S,T,U
TR8	ET-354414	TR DTC144ES
TR9	ET-354414	TR DTC144ES
TR10	ET-354414	TR DTC144ES [EOH]
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-397160J	TR 2SC3330 R,S,T,U,V
TR13	ET-353899	TR 2SA1317 S,T,U [EO/EOG]
TR14	ET-397160J	TR 2SC3330 R,S,T,U,V [EOH]
TR15	ET-353897	TR DTC114ES
TR16	ET-397160J	TR 2SC3330 R,S,T,U,V [EOH]
TR17	ET-397160J	TR 2SC3330 R,S,T,U,V
TR18	ET-397160J	TR 2SC3330 R,S,T,U,V
TR19	ET-354414	TR DTC144ES
TR20	ET-405622J	TR 2SD2061 E,F
TR101	ET-354414	TR DTC144ES
TR102	ET-356336	TR DTA114ES
TR103	ET-354414	TR DTC144ES
TR104	ET-353899	TR 2SA1317 S,T,U
TR105	ET-353899	TR 2SA1317 S,T,U
TR107	ET-397160J	TR 2SC3330 R,S,T,U,V
TR108	ET-356336	TR DTA114ES

Ref.No.	Part No.	Description
TR109	ET-397160J	TR 2SC3330 R,S,T,U,V
TR110	ET-353899	TR 2SA1317 S,T,U [EOG/EOH]
TR201	ET-366168	TR 2SD1292 Q,R [EOG]
TR202	ET-356336	TR DTA114ES
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR205	ET-388338J	TR 2SB1425 S,E
TR209	ET-354414	TR DTC144ES [EOG]
TR210	ET-405622J	TR 2SD2061 E,F
TR211	ET-356336	TR DTA114ES [EOG]
TR301	ET-354414	TR DTC144ES
TR302	ET-397160J	TR 2SC3330 R,S,T,U,V
TR303	ET-363953	TR DTA114TS [490EOH]
TR304	ET-354415	TR DTA144ES
TR305	ET-354414	TR DTC144ES
TR306	ET-354414	TR DTC144ES
TR307	ET-373985	TR DTA144TS
TR308	ET-373985	TR DTA144TS
TR309	ET-373985	TR DTA144TS
TR310	ET-354414	TR DTC144ES
TR313	ET-354414	TR DTC144ES
TR401	ET-356336	TR DTA114ES
TR402	ET-354414	TR DTC144ES
TR404	ET-354364	TR DTC143TS
TR406	ET-397160J	TR 2SC3330 R,S,T,U,V
TR407	ET-353899	TR 2SA1317 S,T,U
TR408	ET-354414	TR DTC144ES
TR409	ET-360399	TR DTC114TS
TR410	ET-354414	TR DTC144ES
TR411	ET-360399	TR DTC114TS
TR413	ET-354415	TR DTA144ES
TR414	ET-388338J	TR 2SB1425 S,E
TR415	ET-353899	TR 2SA1317 S,T,U
TR417	ET-360399	TR DTC114TS
TR420	ET-354414	TR DTC144ES
TR421	ET-364040	TR UN421D
TR423	ET-356336	TR DTA114ES
TR424	ET-388338J	TR 2SB1425 S,E
TR425	ET-354414	TR DTC144ES [490EOH]
TR470	ET-353899	TR 2SA1317 S,T,U
TR471	ET-353899	TR 2SA1317 S,T,U
TR501	ET-353897	TR DTC114ES
TR502	ET-360646	TR DTA143ES [490EOH]
TR503	ET-397160J	TR 2SC3330 R,S,T,U,V
TR504	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR505	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR506	ET-397160J	TR 2SC3330 R,S,T,U,V
TR507	ET-397160J	TR 2SC3330 R,S,T,U,V
TR508	ET-356336	TR DTA114ES
TR509	ET-397160J	TR 2SC3330 R,S,T,U,V
TR510	ET-397160J	TR 2SC3330 R,S,T,U,V
TR511	ET-397160J	TR 2SC3330 R,S,T,U,V
TR512	ET-397160J	TR 2SC3330 R,S,T,U,V
TR513	ET-356336	TR DTA114ES
TR514	ET-354414	TR DTC144ES
TR515	ET-397160J	TR 2SC3330 R,S,T,U,V
TR570	ET-397160J	TR 2SC3330 R,S,T,U,V
TR571	ET-397160J	TR 2SC3330 R,S,T,U,V
TR572	ET-354414	TR DTC144ES
TR573	ET-354414	TR DTC144ES
VR301	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333
VR401	EV-405657J	R S-FIX H T05 KVSF637T 0.1W103
VR402	EV-404300J	R S-FIX H T05 KVSF637T 0.1W472
VR403	EV-405659J	R S-FIX H T05 KVSF637T 0.1W682
VR404A	EV-405665J	R S-FIX H T05 KVSF637T 0.1W333 [EO/EOG]
VR404B	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223 [EOH]
WF201	EW-404138J1	CORD KX MA-POW L=225 12P
X301	EI-389640J	OSC X'TAL HC-49/U 8000KHZ
X500	EI-381632J	OSC X'TAL 86686 4.433619MHZ
1A	BV-403241J1	VIF UNIT KX EOG [EO/EOG]

Ref.No.	Part No.	Description
1B	BV-403240J1	VIF UNIT KX EOH [EOH]
2A	EE-387604J2	TV TUNER TERE1-007C EOG [EO/EOG]
2B	EE-390143J2	TV TUNER TERE3-001C EOH [EOH]
3A	SP-387357J	PANEL REAR JACK EK [EO]
3B	SP-404783J	PANEL REAR JACK EOG (B) [EOG]
3C	SP-404784J	PANEL REAR JACK EK (B) [EOH]

10. MAIN (B) P.C BOARD (F440-F455)

Ref.No.	Part No.	Description
D601	ED-307572	D SILICON H 1SS131
D603	ED-307572	D SILICON H 1SS131
D801	ED-307572	D SILICON H 1SS131
FL701	EH-366894	FILTER CE SFE-4.16MB 4.16MHZ [EDG/EOG]
FL801	EO-388362J	COIL OSC 1 V1102
IC601	EI-405722J	IC UPD6450CX-515
IC602	EI-403469J	IC MM1068XS
IC701	EI-366892	IC BA7025L [EDG/EOG]
IC801	EI-388360J	IC BA7765AS
L601	EO-345881	COIL FIX 1 EL0606SKI 101J
L602	EO-345876	COIL FIX 1 EL0606SKI 470J
L603	EO-351866	COIL FIX 1 LAP02 F05 330K
L604	EO-351866	COIL FIX 1 LAP02 F05 330K
L605	EO-345881	COIL FIX 1 EL0606SKI 101J
L701	EO-345881	COIL FIX 1 EL0606SKI 101J [EDG/EOG]
L801	EO-390717J	COIL FIX 1 LHL06TB T05 103J
L802	EO-390716J	COIL FIX 1 LHL06TB T05 272J
L850	EO-397389J	COIL FIX 1 EL0606SKI 4R7J [EOG]
TR601	ET-353899	TR 2SA1317 S,T,U
TR602	ET-354414	TR DTC144ES
TR603	ET-397160J	TR 2SC3330 R,S,T,U,V
TR604	ET-397160J	TR 2SC3330 R,S,T,U,V
TR605	ET-356336	TR DTA114ES
TR606	ET-356336	TR DTA114ES
TR607	ET-353899	TR 2SA1317 S,T,U
TR608	ET-353899	TR 2SA1317 S,T,U
TR609	ET-354414	TR DTC144ES
TR701	ET-397160J	TR 2SC3330 R,S,T,U,V [EDG/EOG]
TR702	ET-397160J	TR 2SC3330 R,S,T,U,V [EDG/EOG]
TR801	ET-397160J	TR 2SC3330 R,S,T,U,V
VC601	EC-394757J	C S-FIX H T05 VCT51F 5.5-30
VL701	EO-366893	COIL VARI 1 21D6 8.20MH [EDG/EOG]
VR801	EV-403967J	R S-FIX V T05EVNDCAA03 0.1W332
VR802	EV-403968J	R S-FIX V T05EVNDCAA03 0.1W473
X601	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
X602	EI-403467J	OSC CE CSB500F40 15.680KHZ

11. MAIN (B) P.C BOARD (F480-F497)

Ref.No.	Part No.	Description
D601	ED-307572	D SILICON H 1SS131
D603	ED-307572	D SILICON H 1SS131
D801	ED-307572	D SILICON H 1SS131
D901	ED-307572	D SILICON H 1SS131
D902	ED-307572	D SILICON H 1SS131
FL701	EH-366894	FILTER CE SFE-4.16MB 4.16MHZ [EOG]
FL801	EO-388363J	COIL OSC 1 V1105-1
IC601	EI-405722J	IC UPD6450CX-515
IC602	EI-403469J	IC MM1068XS
IC701	EI-366892	IC BA7025L [EOG]
IC702	EI-200573	IC TC4053BP [490EOH]
IC801	EI-388360J	IC BA7765AS
IC901	EI-386468J	IC BA3308
IC902	EI-310036	IC TC4066BP
L601	EO-345881	COIL FIX 1 EL0606SKI 101J
L602	EO-345876	COIL FIX 1 EL0606SKI 470J
L603	EO-351866	COIL FIX 1 LAP02 F05 330K
L604	EO-351866	COIL FIX 1 LAP02 F05 330K
L605	EO-345881	COIL FIX 1 EL0606SKI 101J
L701	EO-345881	COIL FIX 1 EL0606SKI 101J [EOG]
L702	EO-345881	COIL FIX 1 EL0606SKI 101J [490EOH]
L801	EO-390717J	COIL FIX 1 LHL06TB T05 103J
L802	EO-390716J	COIL FIX 1 LHL06TB T05 272J
L901	EO-345881	COIL FIX 1 EL0606SKI 101J
TR601	ET-353899	TR 2SA1317 S,T,U
TR602	ET-354414	TR DTC144ES
TR603	ET-397160J	TR 2SC3330 R,S,T,U,V
TR604	ET-397160J	TR 2SC3330 R,S,T,U,V
TR605	ET-356336	TR DTA114ES
TR606	ET-356336	TR DTA114ES
TR607	ET-353899	TR 2SA1317 S,T,U
TR608	ET-353899	TR 2SA1317 S,T,U
TR609	ET-354414	TR DTC144ES
TR701	ET-397160J	TR 2SC3330 R,S,T,U,V [EOG]
TR702	ET-397160J	TR 2SC3330 R,S,T,U,V [EOG]
TR751	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR752	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR753	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR754	ET-397160J	TR 2SC3330 R,S,T,U,V [490EOH]
TR801	ET-397160J	TR 2SC3330 R,S,T,U,V
TR803	ET-354414	TR DTC144ES [490EOH]
TR901	ET-354414	TR DTC144ES
TR902	ET-354414	TR DTC144ES
TR903	ET-397160J	TR 2SC3330 R,S,T,U,V
TR904	ET-353899	TR 2SA1317 S,T,U
VC601	EC-394757J	C S-FIX H T05 VCT51F 5.5-30
VL701	EO-366893	COIL VARI 1 21D6 8.20MH [EOG]
VR801	EV-403967J	R S-FIX V T05EVNDCAA03 0.1W332
VR802	EV-405263J	R S-FIX V T05EVNDCAA03 0.1W104
X601	EI-389974J	OSC X'TAL HC-49/U 17.734475MHZ
X602	EI-403467J	OSC CE CSB500F40 15.680KHZ

12. PRE AMP P.C BOARD

Ref.No.	Part No.	Description
D1	ED-307572	D SILICON H 1SS131
D2	ED-307572	D SILICON H 1SS131
D3	ED-307572	D SILICON H 1SS131
D4	ED-307572	D SILICON H 1SS131
D101	ED-405247J	D ZENER H MTZJ2.7A T26 [F480-F497]
FL101	EO-388349J	COIL OSC 1 V1105-2 [F480-F497]
IC1	EI-387586J	IC BA7244BS
L1	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L2	EO-376858	COIL FIX 1 LF-5.0S F05 560K
L3	EO-376857	COIL FIX 1 LF-5.0S F05 5R6K
L4	EO-376606	COIL FIX 1 LF-5.0S F05 180K
L5	EO-376603	COIL FIX 1 LF-5.0S F05 150K
L6	EO-381193J	COIL FIX 1 EL0405SKI 271K
L7	EO-376860	COIL FIX 1 LF-5.0S F05 820K
L8	EO-345880	COIL FIX 1 EL0606SKI 820J
L9	EO-376614	COIL FIX 1 LF-5.0S F05 220K
L10	EO-345880	COIL FIX 1 EL0606SKI 820J
L11	EO-345880	COIL FIX 1 EL0606SKI 820J
L12	EO-376859	COIL FIX 1 LF-5.0S F05 8R2K
L13	EO-381195J	COIL FIX 1 EL0405SKI 331K
L14A	EO-376607	COIL FIX 1 LF-5.0S F05 181K [F440-F455]
L14B	EO-376605	COIL FIX 1 LF-5.0S F05 151K [F480-F497]
L15	EO-376612	COIL FIX 1 LF-5.0S F05 680K
L16	EO-376600	COIL FIX 1 LF-5.0S F05 101K
L101	EO-390716J	COIL FIX 1 LHL06TB T05 272J [F480-F497]
PS1	EJ-403389J	SOCKET HOUSING 5062-30-10-18
TH1	EX-405691J	THERMISTOR NTH5D332KA
TR1	ET-353899	TR 2SA1317 S,T,U
TR2	ET-397160J	TR 2SC3330 R,S,T,U,V
TR3	ET-360399	TR DTC114TS [497EOH]
TR4	ET-360399	TR DTC114TS
TR5	ET-364040	TR UN421D
TR6	ET-354414	TR DTC144ES
TR7	ET-397160J	TR 2SC3330 R,S,T,U,V
TR8	ET-397160J	TR 2SC3330 R,S,T,U,V
TR9	ET-397160J	TR 2SC3330 R,S,T,U,V
TR10	ET-353897	TR DTC114ES
TR11	ET-353899	TR 2SA1317 S,T,U
TR12	ET-353899	TR 2SA1317 S,T,U
TR13	ET-364040	TR UN421D
TR14	ET-397160J	TR 2SC3330 R,S,T,U,V
TR15	ET-354364	TR DTC143TS
TR16	ET-354414	TR DTC144ES
TR17	ET-364040	TR UN421D
TR18	ET-353897	TR DTC114ES
TR19	ET-354414	TR DTC144ES
TR21	ET-397160J	TR 2SC3330 R,S,T,U,V
TR22	ET-360399	TR DTC114TS
TR23	ET-354414	TR DTC144ES
TR101	ET-397160J	TR 2SC3330 R,S,T,U,V [F480-F497]
VR1	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR2	EV-390157J	R S-FIX V KVSF639A 0.10W 102
VR3	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
VR4	EV-405248J	R S-FIX V T05EVNDCAA03 0.1W471
WP1	EW-403386J1	CORD FFC P1.25 L=230 18P

13. OPERATION (A) P.C BOARD (F440-F455)

Ref.No.	Part No.	Description
D2	ED-307572	D SILICON H 1SS131 [EXCEPT 440EDG]
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403278J	D ZENER H UTZJ7.5B
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D31	ED-307572	D SILICON H 1SS131
D32	ED-307572	D SILICON H 1SS131 [440EOG,440/450EOH]
D33	ED-307572	D SILICON H 1SS131 [440EOG]
D41	ED-307572	D SILICON H 1SS131 [440EDG/EOG]
D43	ED-307572	D SILICON H 1SS131 [440EDG]
D44	ED-307572	D SILICON H 1SS131 [440EO]
FL1	EM-401077J	IND FL FV496G CHARACTER
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408391J1	IC UPD75217CW-146 JBXOPP2
IC2	EI-408393J	IC ST24C01B1
IC3	EI-373955	IC S-8053ALR
PH1	ET-381637J2	DETECTOR GP1U521X
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1	ES-408404J	SW TACT EVQ 235 07K T05 [RESET]
SW2	ES-349474	SW TACT SKHHAM004A
SW3	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

14. OPERATION (G) - A P.C BOARD (F480-F497)

Ref.No.	Part No.	Description
D2	ED-307572	D SILICON H 1SS131
D5	ED-307572	D SILICON H 1SS131 [497EOH]
D10	ED-403279J	D ZENER H UTZJ9.1B
D11	ED-403731J	D ZENER H UTZJ8.2C
D12	ED-307572	D SILICON H 1SS131
D13	ED-307572	D SILICON H 1SS131
D14	ED-307572	D SILICON H 1SS131
D15	ED-307572	D SILICON H 1SS131
D16	ED-307572	D SILICON H 1SS131
D17	ED-307572	D SILICON H 1SS131
D18	ED-307572	D SILICON H 1SS131
D19	ED-307572	D SILICON H 1SS131
D20	ED-307572	D SILICON H 1SS131
D21	ED-307572	D SILICON H 1SS131
D22	ED-307572	D SILICON H 1SS131
D23	ED-307572	D SILICON H 1SS131
D24	ED-307572	D SILICON H 1SS131
D25	ED-307572	D SILICON H 1SS131
D26	ED-307572	D SILICON H 1SS131
D27	ED-307572	D SILICON H 1SS131
D28	ED-307572	D SILICON H 1SS131
D32	ED-307572	D SILICON H 1SS131 [480EOG,490EOH]
D41	ED-307572	D SILICON H 1SS131 [480EOG]
D44	ED-307572	D SILICON H 1SS131 [490EO]
D45	ED-307572	D SILICON H 1SS131
D46	ED-307572	D SILICON H 1SS131
D47	ED-307572	D SILICON H 1SS131
D48	ED-307572	D SILICON H 1SS131
FL1	EM-403367J	IND FL FV506G CHARACTER
IB1	EH-403945J	COMP R RGLE9X 103J
IB2	EH-383083J	COMP R RGLE3X 103J
IC1	EI-408397J	IC UPD75217CW-147 JFXOPP1
IC2	EI-408393J	IC ST24C01B1
IC3	EI-373955	IC S-8053ALR
PJ1	EJ-408399J	PHONE J 2P YKB21-5165 3.5
PJ2	EJ-387622J	PIN J JPJ5022-01-010 1P
PJ3	EJ-387623J	PIN J JPJ5022-01-040 1P
PS1	EJ-389815J	SOCKET HOUSING 5062-30-10-15
PS2	EJ-387497J	SOCKET HOUSING 5062-30-10-13
SW1	ES-349474	SW TACT SKHHAM004A
SW2	ES-349474	SW TACT SKHHAM004A
SW4	ES-349474	SW TACT SKHHAM004A
SW5	ES-349474	SW TACT SKHHAM004A
SW6	ES-349474	SW TACT SKHHAM004A
SW7	ES-349474	SW TACT SKHHAM004A
SW8	ES-349474	SW TACT SKHHAM004A
SW9	ES-349474	SW TACT SKHHAM004A
SW10	ES-349474	SW TACT SKHHAM004A
SW11	ES-349474	SW TACT SKHHAM004A
SW12	ES-349474	SW TACT SKHHAM004A
SW13	ES-349474	SW TACT SKHHAM004A
SW14	ES-349474	SW TACT SKHHAM004A
SW15	ES-349474	SW TACT SKHHAM004A
SW16	ES-349474	SW TACT SKHHAM004A
SW17	ES-349474	SW TACT SKHHAM004A
SW18	ES-349474	SW TACT SKHHAM004A
SW19	ES-349474	SW TACT SKHHAM004A
TR1	ET-354414	TR DTC144ES
WP1	EW-394623J	CORD FFC P1.25 L=110 15P
WP2	EW-389313J	CORD FFC P1.25 L=120 13P
X1	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X2	EI-368825M	OSC X'TAL C-002RX 32.768KHZ

15. OPERATION (G) - B P.C BOARD (F480-F497)

Ref.No.	Part No.	Description
D33	ED-307572	D SILICON H 1SS131 [480EOG]
PH1	ET-381637J2	DETECTOR GP1U521X
SW3	ES-349474	SW TACT SKHHAM004A

16. VIF UNIT (EDG)

Ref.No.	Part No.	Description
CF1	EH-368816	FILTER CE SAF38.0MZA70Z
CF2	EH-376338	FILTER CE TPS6.5MB
CF3	EH-368948	FILTER CE TPS5.5MW 5.5000MHZ
CF4	EH-373918	FILTER CE TPS5.5MB
CF51	EH-388287J	FILTER CE SFS6.5MX 6.500MHZ
CF52	EH-368827	FILTER CE SFS5.5MD 5.500MHZ
CF53	EH-780128	FILTER CE SFE 6.5MB
IC1	EI-368809	IC M51496P
L1	EO-387782J	COIL FIX 1 EL0405SKI 2R2K
L2	EO-725954J	COIL SIF DET 6F16263A3
L3	EO-714614	COIL RF 6F16115B1
L4	EO-714610	COIL RF 6F16113B1
L5	EO-397238J	COIL FIX 1 EL0405SKI 6R8K
L6	EO-387798J	COIL FIX 1 EL0405SKI 150K
L51	EO-396361J	COIL FIX 1 EL0405SKI 8R2K
L52	EO-387803J	COIL FIX 1 EL0405SKI 221K
Q1	ET-725820J	TR CHIP 2SC2735J
Q2	ET-713614	TR CHIP 2SA1235 E,F
Q3	ET-370819	TR.CHIP 2SC3052
Q4	ET-713614	TR CHIP 2SA1235 E,F
Q51	ET-370819	TR.CHIP 2SC3052
Q52	ET-370819	TR.CHIP 2SC3052
VR1	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223
VR2	EV-404298J	R S-FIX H T05 KVSF637T 0.1W222
X51	EI-368829	OSC CE CSB512P

17. VIF UNIT (EOG/EOH)

Ref.No.	Part No.	Description
CF1	EH-730625J	FILTER CE SAF38.9MZW70Z
CF2	EH-373920	FILTER CE SFE5.5MB
CF3	EH-368948	FILTER CE TPS5.5MW 5.5000MHZ
IC1	EI-368809	IC M51496P
L1	EO-387800J	COIL FIX 1 EL0405SKI 2R7K
L3	EO-725953J	COIL SIF DET 6F16263A2
L4	EO-714614	COIL RF 6F16115B1
L5	EO-714610	COIL RF 6F16113B1
L6	EO-387799J	COIL FIX 1 EL0405SKI 180K
L7A	EO-387799J	COIL FIX 1 EL0405SKI 180K [EOG]
L7B	EO-387798J	COIL FIX 1 EL0405SKI 150K [EOH]
L8	EO-387802J	COIL FIX 1 EL0405SKI 330K
L51	EO-725964J	COIL TRAP 6F16222A1 [EOG]
L52	EO-725965J	COIL TRAP 6F16223A1 [EOG]
Q1	ET-725820J	TR CHIP 2SC2735J
Q2	ET-713614	TR CHIP 2SA1235 E,F
Q51	ET-724885J	TR CHIP RT1N141C [EOG]
Q52	ET-724885J	TR CHIP RT1N141C [EOG]
VR2	EV-404298J	R S-FIX H T05 KVSF637T 0.1W222
VR51	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223
VR52	EV-405658J	R S-FIX H T05 KVSF637T 0.1W223 [EOG]

18. POWER P.C BOARD (EDG,EO,440-455EOH)

Ref.No.	Part No.	Description
C1	EC-406634J	C EC V SXE12 222M 25.0DC
C2	EC-363490	C EC V CUT SME 222M 16.0DC
C3	EC-406635J	C EC V SXE16 222M 35.0DC
D1	*ED-511907	D SILICON 1N4002 100/1.0A
D2	*ED-511907	D SILICON 1N4002 100/1.0A
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D5	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D6	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D7	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D8	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D9	*ED-511907	D SILICON 1N4002 100/1.0A
D10	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D11	*ED-511907	D SILICON 1N4002 100/1.0A
D12	*ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D13	ED-405373J	D ZENER H MTZJ16A T26
D14	ED-404032J	D ZENER H UTZJ39A
D15	ED-405524J	D ZENER H MTZJ36A T26
D16	*ED-404029J	D ZENER H UTZJ10B T26
D17	ED-511907	D SILICON 1N4002 100/1.0A [EDG]
D18	ED-511907	D SILICON 1N4002 100/1.0A [EDG]
FR1	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR2	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR3	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR4	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR5	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
TR1	*ET-381175J	TR 2SD1856
TR2	*ET-366365	TR 2SB1185 E,F
TR3	*ET-405622J	TR 2SD2061 E,F
TR4	*ET-405622J	TR 2SD2061 E,F
TR5	*ET-405622J	TR 2SD2061 E,F
TR6	*ET-405622J	TR 2SD2061 E,F
TR7	*ET-366365	TR 2SB1185 E,F

19. POWER SUPPLY (1) P.C BOARD (EOG,490/497EOH)

Ref.No.	Part No.	Description
C1	EC-408376J	C EC V CUT KMG 102M 50.0DC
C2	EC-408377J	C EC V CUT KMG 222M 50.0DC
C3	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C4	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C14	EC-408426J	C EC V F05 LXF8 121M 50.0DC
C15	EC-403878J	C EC V T05 LXF8 271M 16.0DC
C20	EC-403880J	C EC V T05 LXF8 221M 25.0DC
C23	EC-406639J	C EC V T05 LXF6 330M 63.0DC
C24	EC-406639J	C EC V T05 LXF6 330M 63.0DC
D3	*ED-511907	D SILICON 1N4002 100/1.0A
D4	*ED-511907	D SILICON 1N4002 100/1.0A
D6	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D8	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D11	*ED-386226J	D SCHOTTKY RB100AT-32T26 40/1
D16	ED-307572	D SILICON H 1SS131
D17	*ED-511907	D SILICON 1N4002 100/1.0A
D18	*ED-511907	D SILICON 1N4002 100/1.0A
D19	ED-404032J	D ZENER H UTZJ39A
D20	ED-405524J	D ZENER H MTZJ36A T26
D27	ED-396060J	D ZENER H HZS18-2
D28	ED-391005J	D ZENER H HZS12B1
D51	ED-403267J	D ZENER H MTZJ3.3B T26 [EOG]
D52	ED-307572	D SILICON H 1SS131 [EOG]
D54	ED-307572	D SILICON H 1SS131
D55	ED-307572	D SILICON H 1SS131
D56	ED-396057J	D ZENER H HZS16-2 [EOH]
D57	ED-405264J	D ZENER H UTZJ10C
D58	ED-405264J	D ZENER H UTZJ10C
D71	*ED-511907	D SILICON 1N4002 100/1.0A
D72	*ED-511907	D SILICON 1N4002 100/1.0A
D73	*ED-511907	D SILICON 1N4002 100/1.0A
D74	*ED-511907	D SILICON 1N4002 100/1.0A
FL2	EF-339908	FUSE TLC A 250V 630MA [EOG]
FR1	*ER-400728J	R FUSE V T05 RF25SCVTP1/4WR12K
FR2	*ER-408375J	R FUSE V T05RF25SCPVTP1/4WR12K
FR3	*ER-400605J	R FUSE V T05 ERD2FCV 1/4W15R0G
FR4	*ER-400689J	R FUSE V T05 RF25SCVTP1/4WR68K
FR5	*ER-405441J	R FUSE V T05 RF25SCVTP1/4WR27K
L1	EO-408381J	COIL FIX 2 C-5344-40 560K
L2	EO-408381J	COIL FIX 2 C-5344-40 560K
L3	EO-408381J	COIL FIX 2 C-5344-40 560K
L4	EO-408381J	COIL FIX 2 C-5344-40 560K
L6	EO-386541J	COIL FIX 1 ELF1010SKI 101K
L9	EO-393769J	COIL FIX 1 LHL06TB T05 471K
R14	ER-333091	R OMF H S20 FS 2W 360J
TR1	*ET-366365	TR 2SB1185 E,F
TR5	*ET-366365	TR 2SB1185 E,F
TR6	ET-356817	TR 2SB891 Q,R
TR9	*ET-366365	TR 2SB1185 E,F
TR12	*ET-405622J	TR 2SD2061 E,F
TR13	*ET-366365	TR 2SB1185 E,F
TR14	ET-360399	TR DTC114TS
TR15	ET-360399	TR DTC114TS
TR16	ET-397160J	TR 2SC3330 R,S,T,U,V

20. POWER SUPPLY (2) P.C BOARD (EOG, 490/497EOH)

Ref.No.	Part No.	Description
D7	ED-405264J	D ZENER H UTZJ10C
D10	ED-307572	D SILICON H 1SS131
D50	ED-387919J	D ZENER H HZS6A1L
D52	ED-307572	D SILICON H 1SS131
IC1	*EI-381575J	IC BA6121
L10	EO-380091J1	COIL FIX 2 C-5293-01 560K
TR2	*ET-405622J	TR 2SD2061 E,F
TR3	ET-353899	TR 2SA1317 S,T,U
TR4	*ET-404195J	TR 2SC4486 S,T T05
TR7	*ET-405622J	TR 2SD2061 E,F
TR8	ET-353899	TR 2SA1317 S,T,U
TR50	ET-353897	TR DTC114ES [EOH]

21. DIODE P.C BOARD (EO/EOG/EOH)

Ref.No.	Part No.	Description
D1/D14	*ED-379298	D SILICON DBA20B 100/2.0A

22. VPST PDC P.C BLOCK (EOG ONLY)

Ref.No.	Part No.	Description
D1	ED-307572	D SILICON H 1SS131
D101	ED-307572	D SILICON H 1SS131
D201	ED-307572	D SILICON H 1SS131
D601	ED-307572	D SILICON H 1SS131
D602	ED-405446J	D ZENER H UTZJ5.6B T26
FL101	EH-394684J	FILTER EMI ZBF503D-00TA T05
FR601	ER-331188	R FUSE H S10 ERD2FC 1/4W 8R2J
IB101	EH-383056J	COMP R RGLE4X 103J
IB102	EH-386637J	COMP R RGLE8X 103J
IC101	EI-410521J	IC UPD75218CW-014 JXPDC1
IC102	EI-405224J	IC ST24C02
IC103	EI-405224J	IC ST24C02
IC104	EI-408434J	IC MV1815-1BA
IC105	EI-410125J	IC V53C464AP-80
IC106	EI-401050J	IC LVA523SA2
IC107	EI-394680J	IC AN3171K
IC108	EI-387019J	IC MC1377P
IC301	EI-385958J	IC SAA4700
L1	EO-345865	COIL FIX 1 EL0606SKI 100J
L101	EO-345865	COIL FIX 1 EL0606SKI 100J
L102	EO-345865	COIL FIX 1 EL0606SKI 100J
L121	EO-345865	COIL FIX 1 EL0606SKI 100J
L151	EO-410104J	COIL FIX 1 SPT0203SA T26 181J
L152	EO-410104J	COIL FIX 1 SPT0203SA T26 181J
L153	EO-345880	COIL FIX 1 EL0606SKI 820J
L154	EO-410099J	COIL FIX 1 SPT0203SA T26 470J
L155	EO-345865	COIL FIX 1 EL0606SKI 100J
L201	EO-345865	COIL FIX 1 EL0606SKI 100J
L202	EO-345865	COIL FIX 1 EL0606SKI 100J
L203	EO-345875	COIL FIX 1 EL0606SKI 390J
L204	EO-345873	COIL FIX 1 EL0606SKI 270J
L206	EO-345871	COIL FIX 1 EL0606SKI 180J
L207	EO-345874	COIL FIX 1 EL0606SKI 330J
L208	EO-345874	COIL FIX 1 EL0606SKI 330J
L251	EO-345865	COIL FIX 1 EL0606SKI 100J
L301	EO-345865	COIL FIX 1 EL0606SKI 100J
TR1	ET-397160J	TR 2SC3330 R,S,T,U,V
TR101	ET-354415	TR DTA144ES
TR102	ET-397160J	TR 2SC3330 R,S,T,U,V
TR151	ET-397160J	TR 2SC3330 R,S,T,U,V
TR152	ET-353899	TR 2SA1317 S,T,U
TR153	ET-353899	TR 2SA1317 S,T,U
TR154	ET-397160J	TR 2SC3330 R,S,T,U,V
TR155	ET-397160J	TR 2SC3330 R,S,T,U,V
TR201	ET-397160J	TR 2SC3330 R,S,T,U,V
TR202	ET-397160J	TR 2SC3330 R,S,T,U,V
TR203	ET-397160J	TR 2SC3330 R,S,T,U,V
TR204	ET-353899	TR 2SA1317 S,T,U
TR208	ET-353899	TR 2SA1317 S,T,U
TR251	ET-397160J	TR 2SC3330 R,S,T,U,V
TR252	ET-353899	TR 2SA1317 S,T,U
TR253	ET-353899	TR 2SA1317 S,T,U
TR601	ET-354083	TR 2SD1189 Q,R
X101	EI-373957J1	OSC CE CST4.19MGW 4.194MHZ
X102	EI-408433J	OSC X'TAL HC-43/U 27750KHZ
X103	EI-394673J	OSC X'TAL HC-49/U 8867.238KHZ

23. JOG/SHUTTLE P.C BOARD (480-497)

Ref.No.	Part No.	Description
SW1	ES-403377J	SW ROTARY ENCODER SRGPHJ

FINAL ASSEMBLY BLOCK

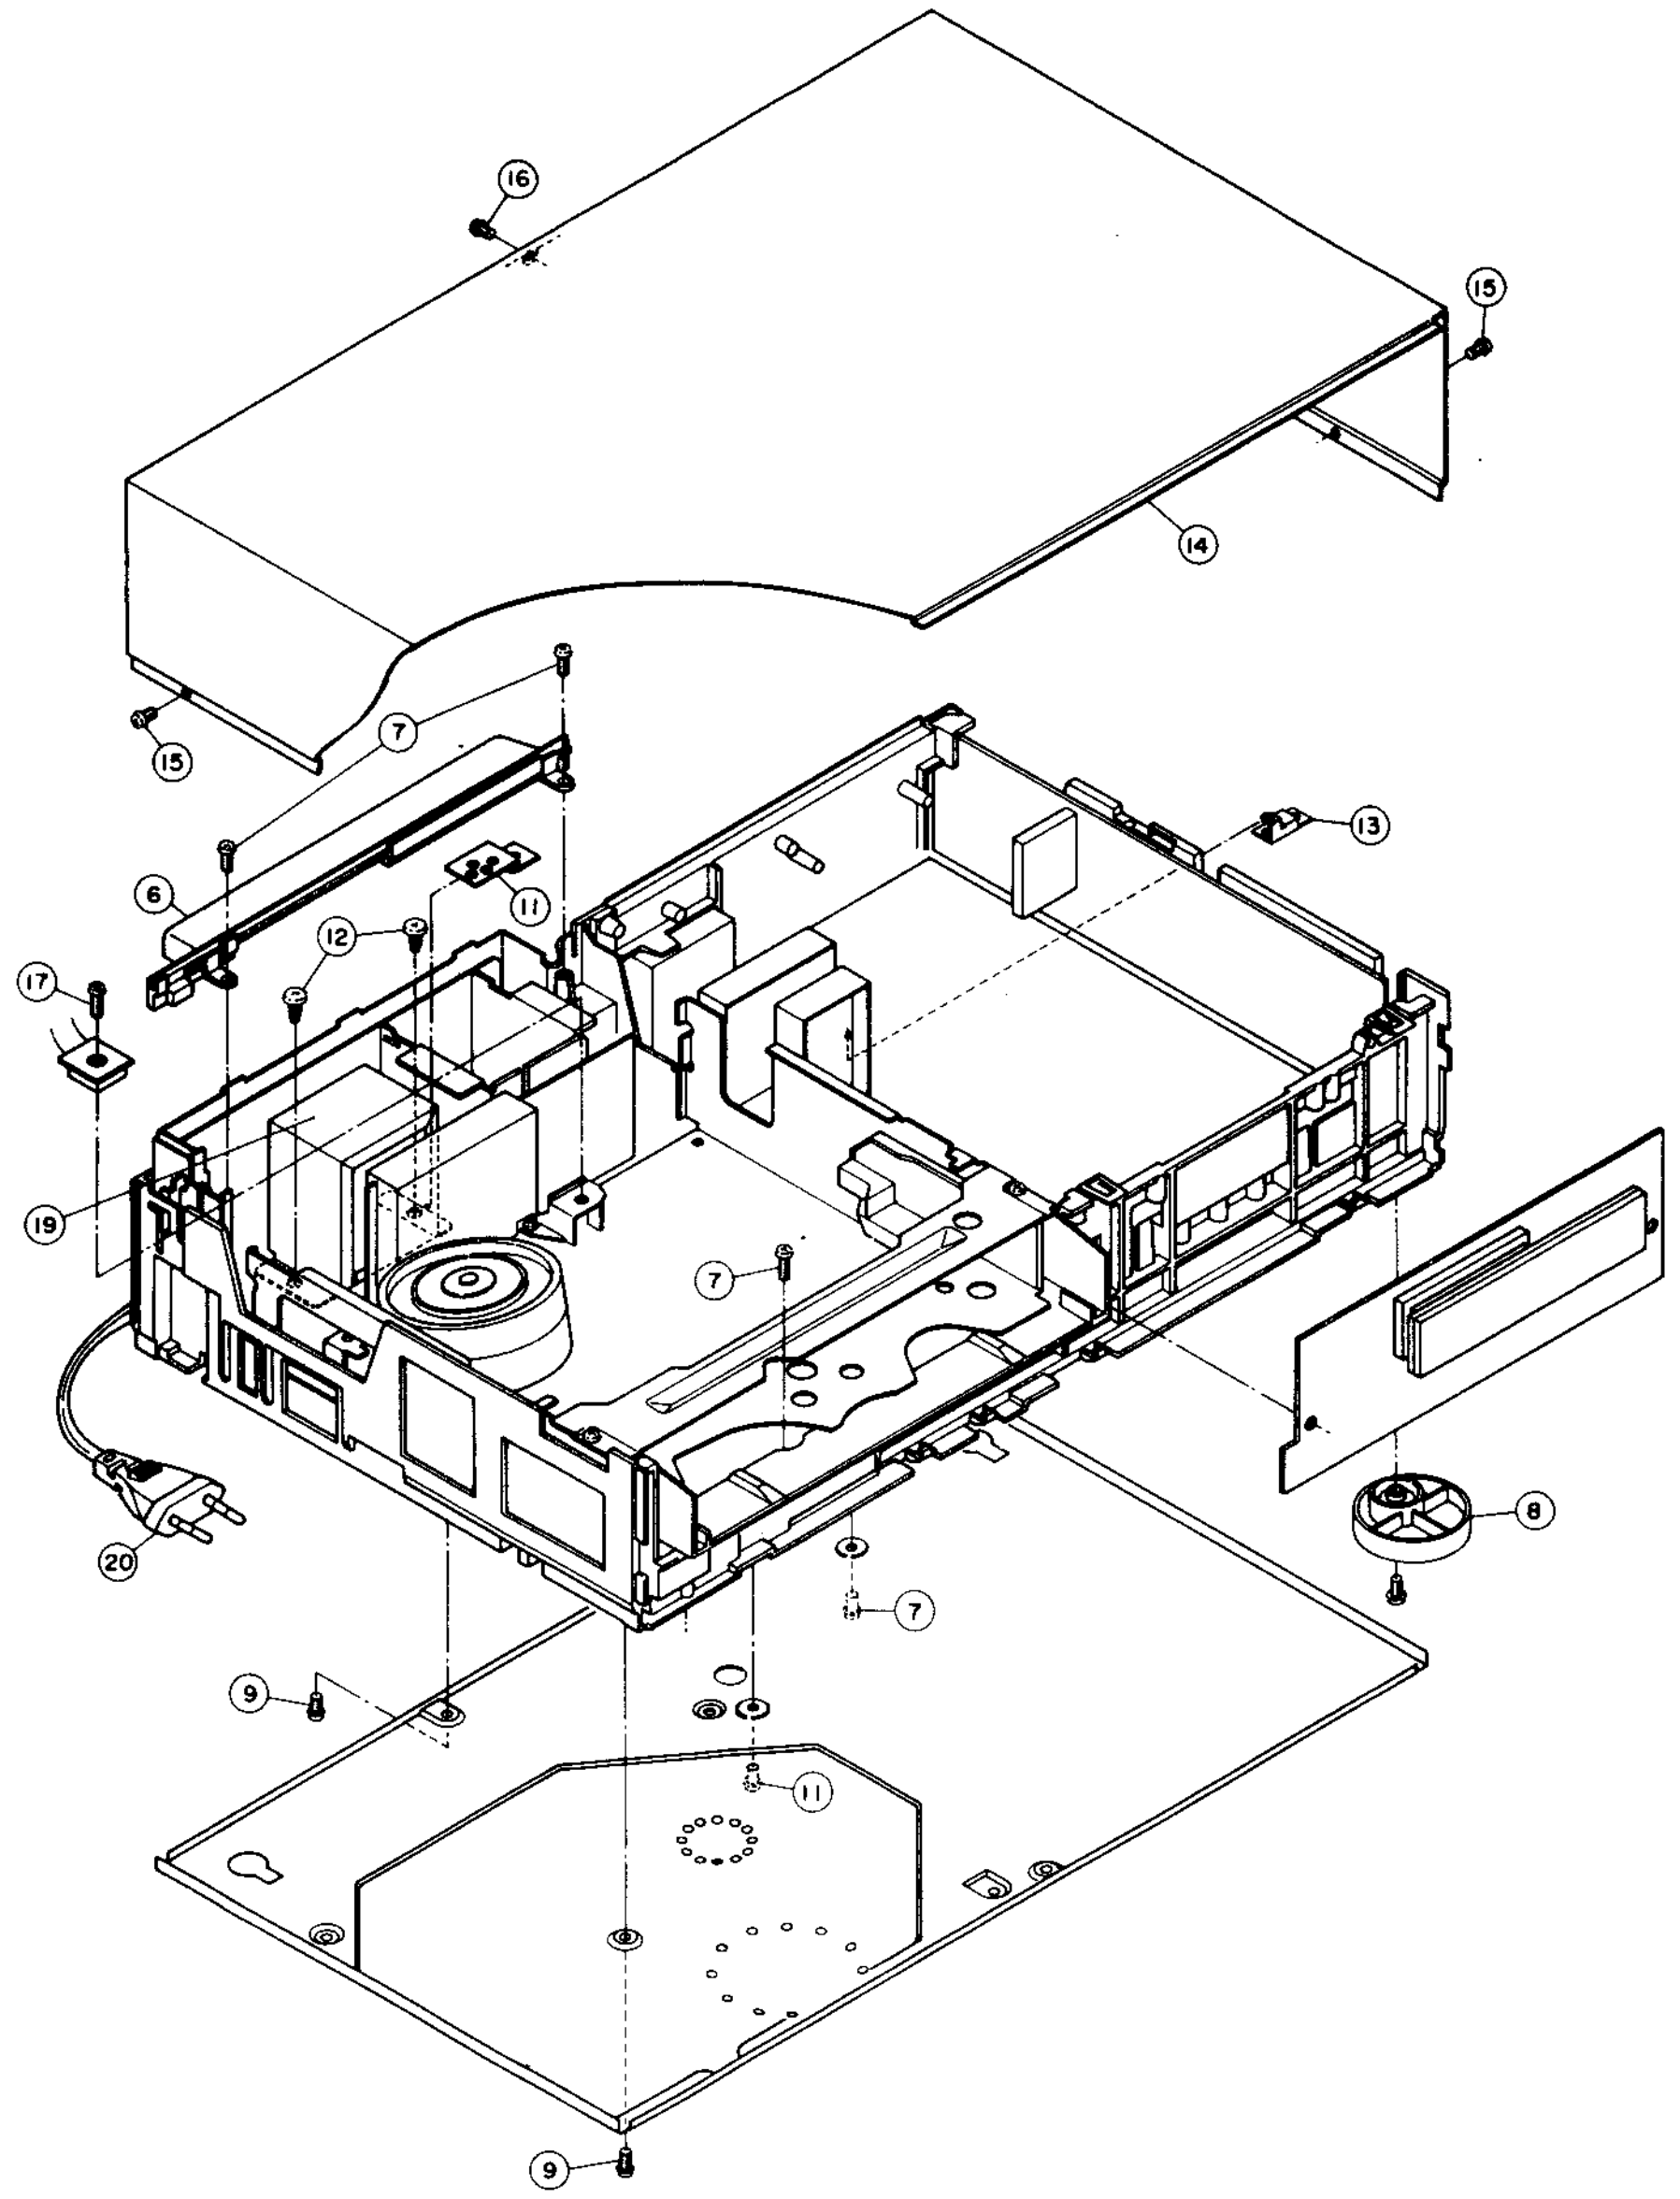
16
15
14
15
7
6
11
12
13
17
19
7
8
20
7
9
11
9

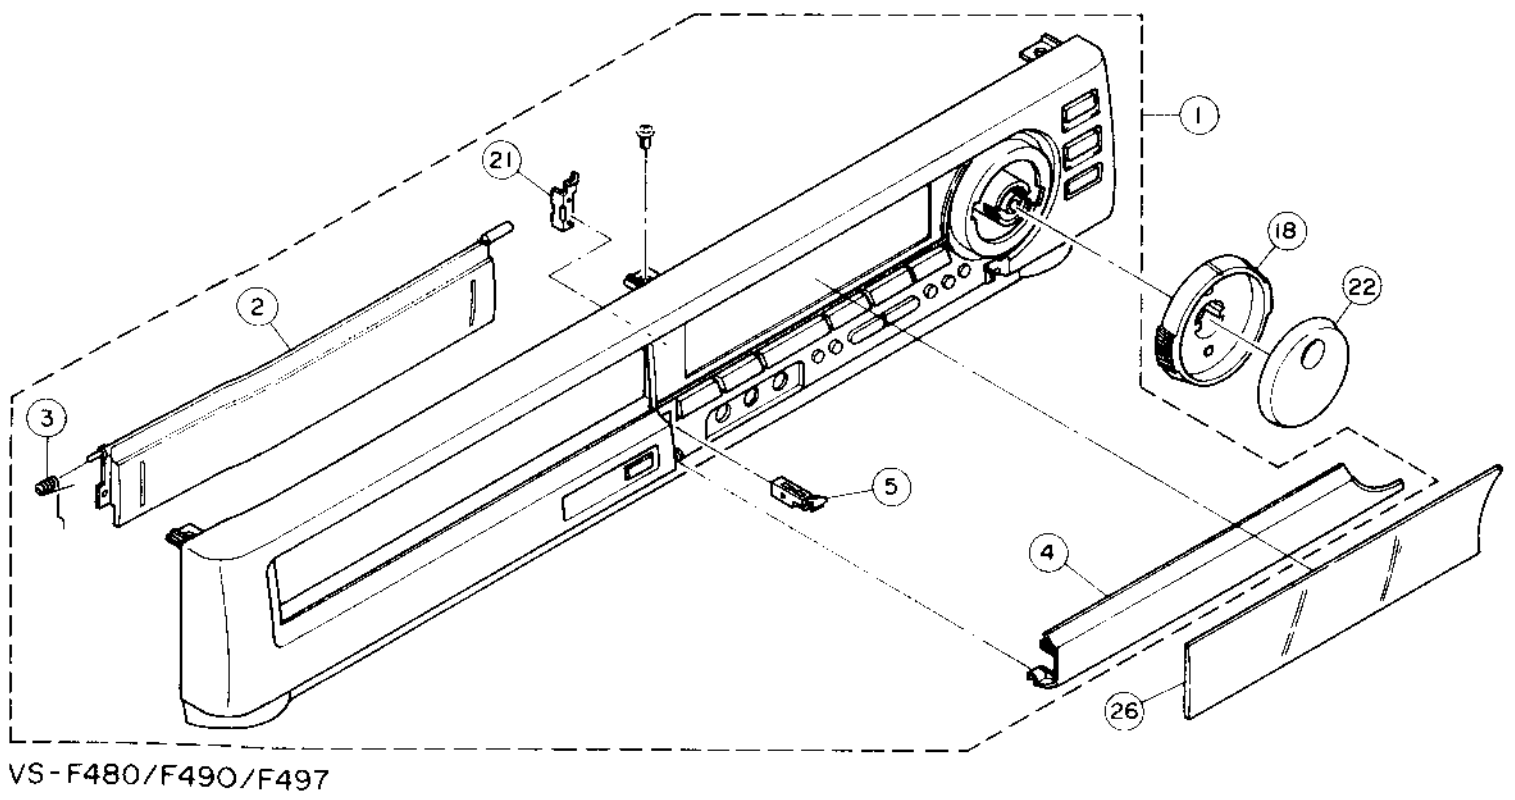
1
21
18
22
2
3
5
4
26

VS-F480/F490/F497

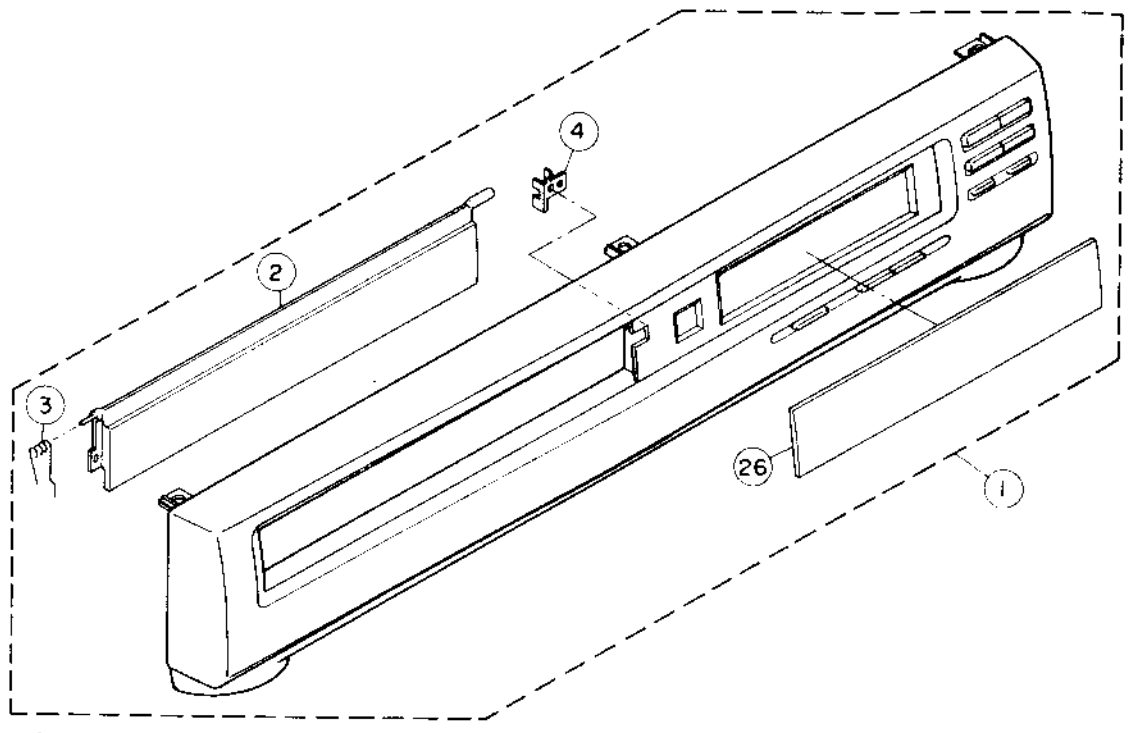

VS-F440/F450/F455

24. FINAL ASSEMBLY

Ref.No.	Part No.	Description
1A	BD-409297J	PANEL FRONT VS-F440EDG PART
1B	BD-409286J	PANEL FRONT VS-F440EOG-V PART
1C	BD-409284J	PANEL FRONT VS-F440EOH PART [440EO/EOH]
1D	BD-409287J	PANEL FRONT VS-F450EOH PART
1E	BD-409288J	PANEL FRONT VS-F455EOH PART
1F	BD-409124J1	PANEL FRONT VS-F480EOG-V PART
1G	BD-409125J1	PANEL FRONT VS-F490EO/EOH PART
1H	BD-409129J1	PANEL FRONT VS-F497EOH PART
2A	SE-409197J	MASK CASSETTE (J) VS-F440 (E2) [440EDG/EO/EOH]
2B	SE-409202J	MASK CASSETTE (J) VS-F440 (G) [440EOG]
2C	SE-409198J	MASK CASSETTE (J) VS-F450 (E) [450EOH]
2D	SE-409199J	MASK CASSETTE (J) VS-F455 (E) [455EOH]
2E	SE-409102J1	MASK CASSETTE VS-F480 (G) [480EOG]
2F	SE-409103J1	MASK CASSETTE VS-F490 (E) [490EO/EOH]
2G	SE-409107J1	MASK CASSETTE VS-F497 (E) [497EOH]
3	ZG-387370J	SP MASK
4A	SP-409112J	DOOR (G) [480EOG]
4B	SP-407593J	DOOR (E) [490EO/EOH]
4C	SP-409113J	DOOR (E2) [497EOH]
5	SZ-404290J	MINI SIDE LOCK [F480/F490/F497]
6	SC-387353J	COVER TRANS
7	ZS-378341	PLX BID30X12STL CMT
8	SA-387507J	FOOT SX
9	ZS-358936	ST BID30X06STL CMT
11	ZG-387505J	PLATE EARTH
12	ZS-373962	PLX BID40X10STL CMT
13	ZG-387354J	PLATE EARTH (2)
14	SP-407479J	COVER UPPER JX
15	ZS-385611J	DT BID26X06STL BNI
16	ZS-391046J	PLX BID26X10STL BNI
17	ZS-659046	PAN26X10STL CMT
18	SK-407561J	KNOB SHUTTLE [F480/F490/F497]
19A	*BT-410491J	TRANS POW V1130 EDG [EDG]
19B	*BT-403873J	TRANS POW V1130 EO [EO,440-455EOH]
19C	*BT-403883J	TRANS POW V1130 EOG-V [EOG,490-497EOH]
20	*EW-404002M	AC CORD 200 SE-1 WITH TUBE E
21A	SZ-401874J	STOPPER MASK [F440/F450/F455]
21B	SZ-407583J	STOPPER MASK (2) [F480/F490/F497]
22	SK-407562J	KNOB JOG [F480/F490/F497]
26	SE-409191J	WINDOW FLD (3) [440EDG]

NOTE:
Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

25. ACCESSARY

Ref.No.	Part No.	Description
1	EW-348414	CORD PAL
2A	AV-B1038A010A	REMOCON BLK RC-V250E [440EDG/EO/EOH]
2B	AV-B1039A010A	REMOCON BLK RC-V251G [440EOG]
2C	AV-B1042A010C	REMOCON BLK RC-V252E (G) [450/455EOH]
2D	AV-B1040A010F	REMOCON BLK RC-V451G [480EOG]
2E	AV-B1043A010E	REMOCON BLK RC-V452E [490EO/EOH,497EOH]

6-4. REMOTE CONTROL BLOCK

• ALL MODEL

1.RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref.No.	Part No.	Description
1	ED-397391J	D LED BR3668S RED
2	ED-403450J	D LED SE303ARF-C INFRARED
3	ED-386031J	D SILICON CHIP MA110-TW
4	EI-408408J1	IC M50933-128FP JXLCDR2
5	EI-400672J	IC S-8052ALB-LE
6	EI-376112	IC UPD6122G
7	EI-408449J	IC UPD75004GB-771 JXVPTR1 QF
8	EI-403451J	OSC CE CSB1200J 1.200MHZ
9	EI-408450J	OSC CE CST2.45MGW 2.450MHZ
10	EI-390687J	OSC CE CSU455PL 455KHZ
11	EI-368825M	OSC X'TAL C-002RX 32.768KHZ
12	EI-368825	OSC X'TAL MX-38T 32.768KHZ
13	EJ-408427J	CONNECTOR LCD (4) B1043
14	EJ-403095J	TERMINAL LCD (3) B1014
15	EM-408437J	IND LCD LD-B5444A ENGLISH
16	EM-403448J	IND LCD LF5381G ENGLISH
17	ES-408428J	SW ROTARY ENCODER SRGPPJ
18	ES-393431J	SW TACT CHIP SKHUAB T12E
19	ET-390826J	TR.CHIP 2SD1619 T,U TC T08
20	ET-405342J	TR.CHIP 2SD1620

- **MODEL VS-F440EA/EDG/EDI/EK/EM/EO/EOH, F441EA**

REMOCON RC-V250E

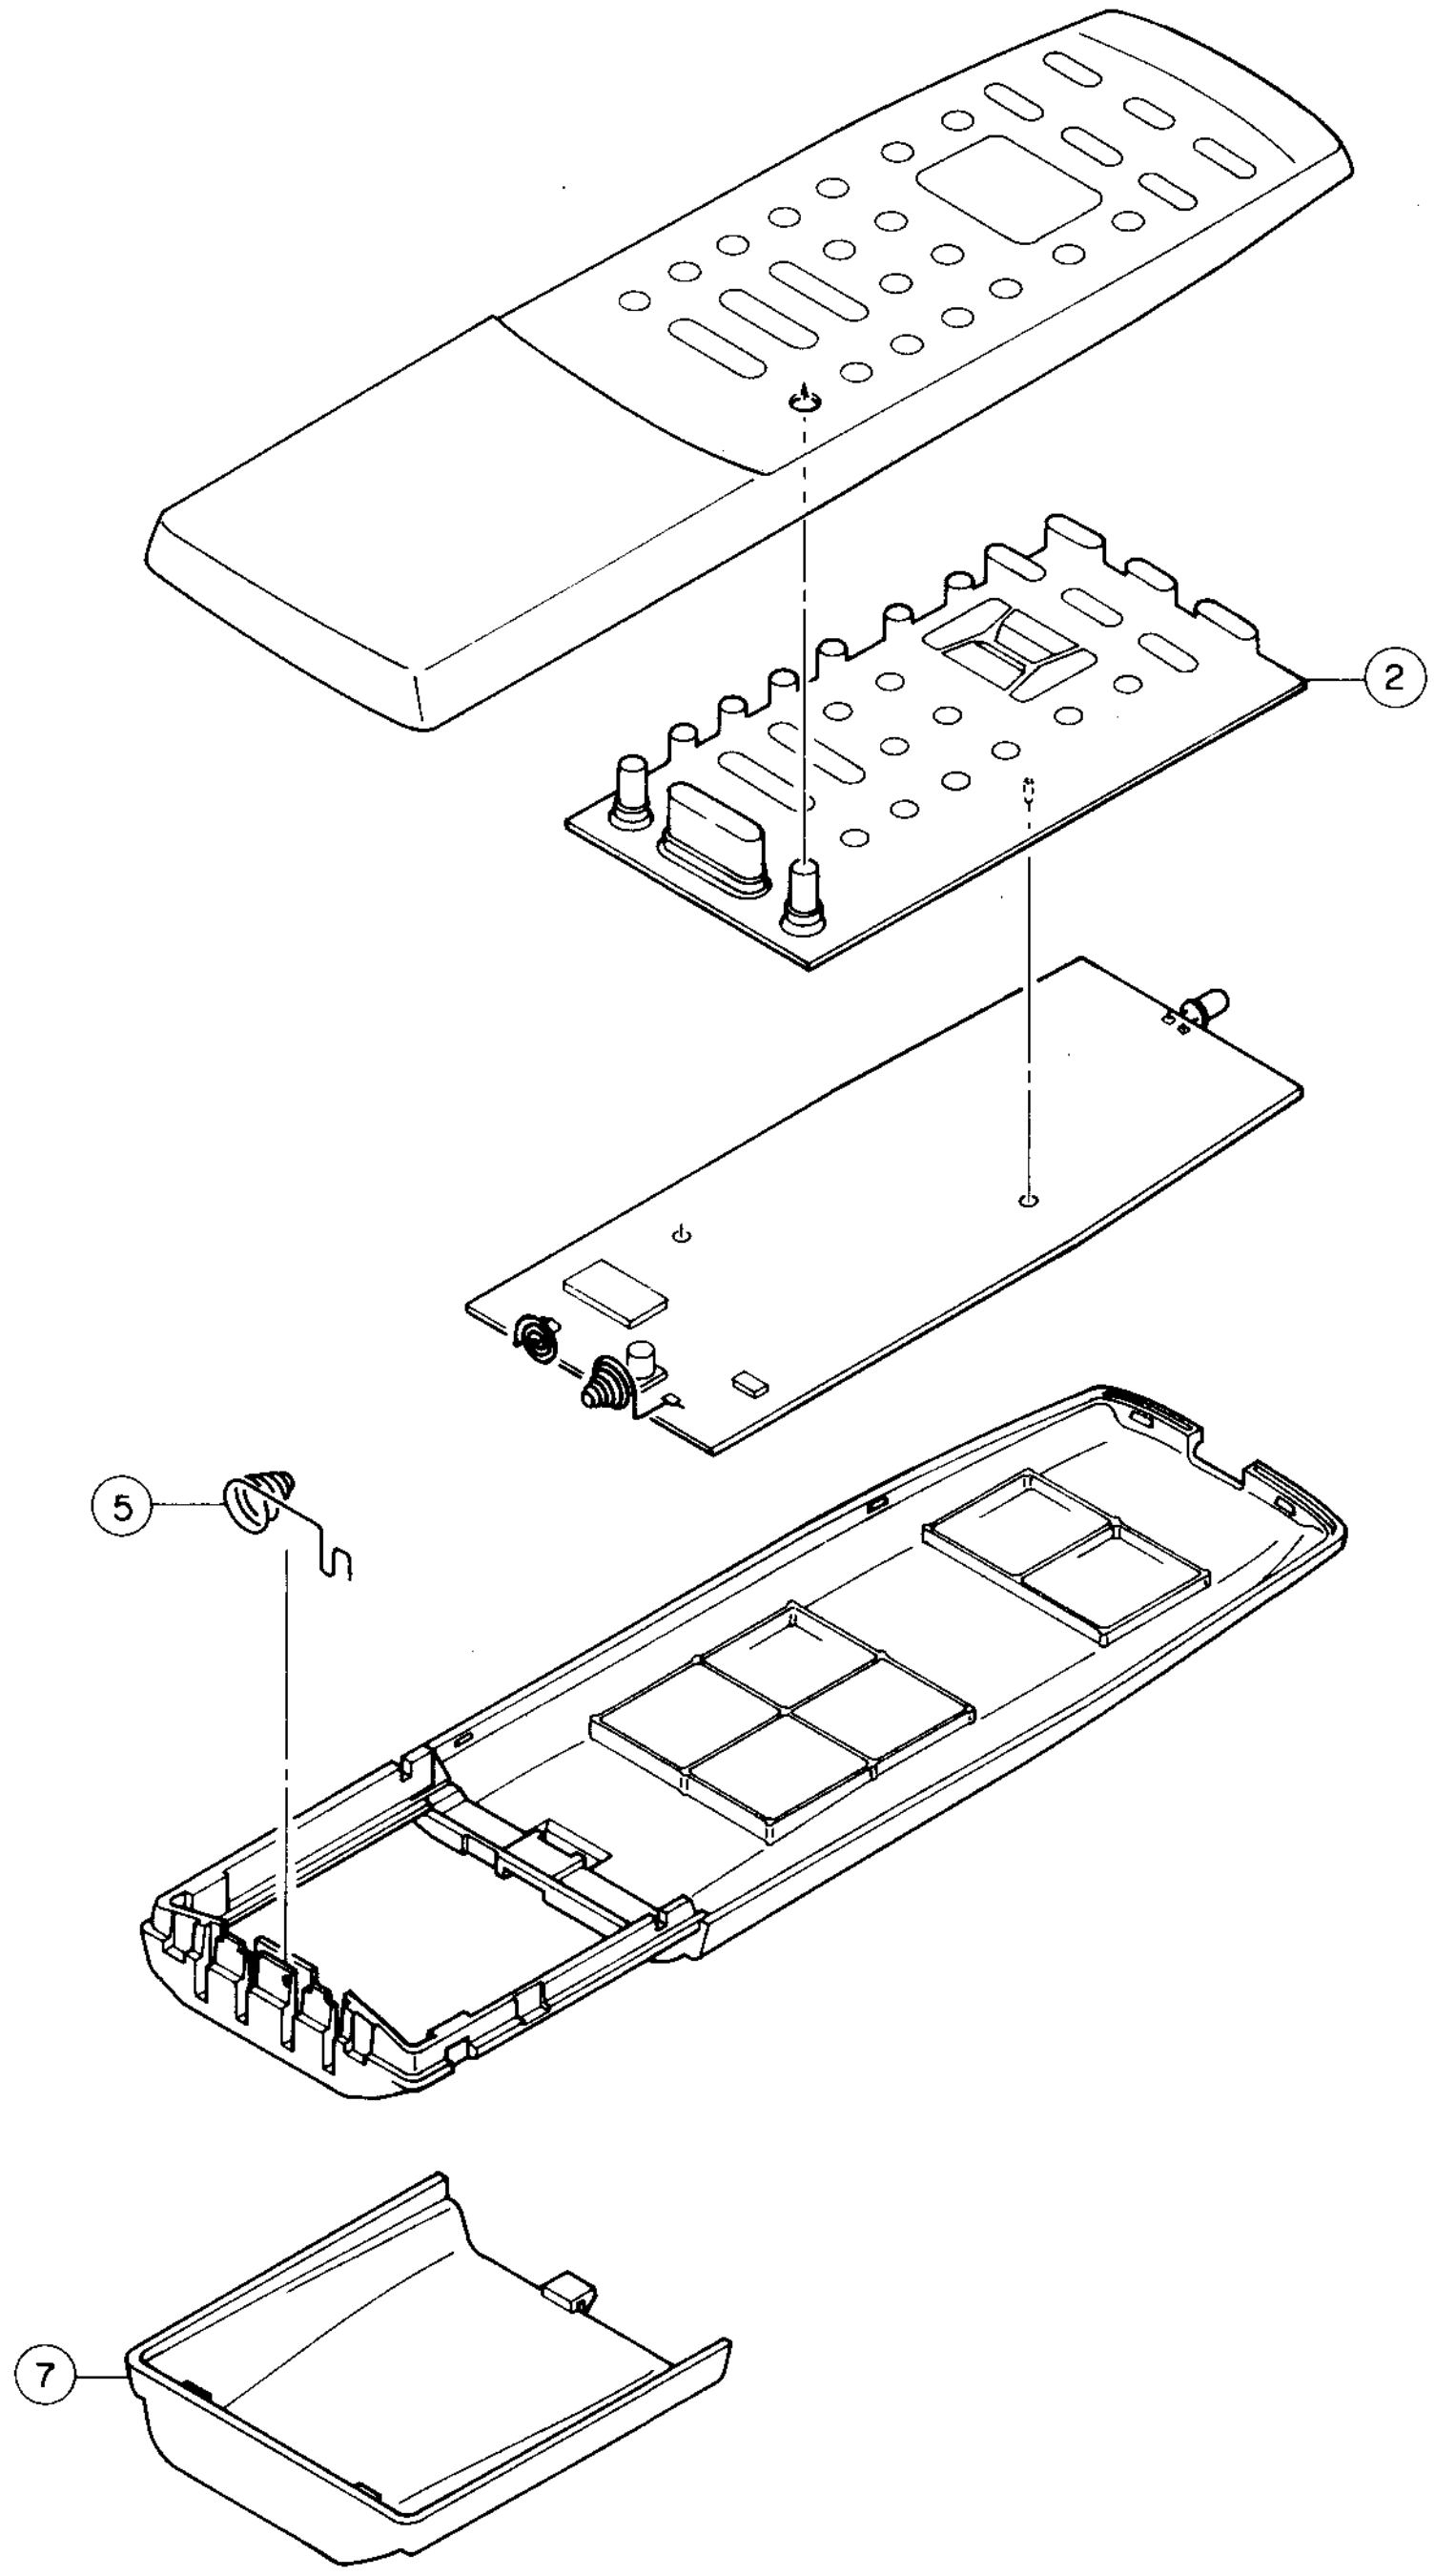

30. REMOCON RC-V250E

Ref.No.	Part No.	Description
2	MB-407424J	KEY RUBBER
5	ZG-406719J	TERMINAL BATTERY (A3)
7	SC-407425J	COVER BATTERY

31. REMOCON P.C BOARD RC-V250E

Ref.No.	Part No.	Description
D1	ED-403450J	D LED SE303ARF-C INFRARED
D2	ED-386031J	D SILICON CHIP MA110-TW
D3	ED-386031J	D SILICON CHIP MA110-TW
D4	ED-386031J	D SILICON CHIP MA110-TW
IC1	EI-376112	IC UPD6122G
TR1	ET-390826J	TR.CHIP 2SD1619 T,U TC T08
X1	EI-390687J	OSC CE CSU455PL 455KHZ
1	ZG-406720J	TERMINAL BATTERY (A1)
2	ZG-406722J	TERMINAL BATTERY (A2)

• MODEL VS-F440EOG-V

REMOCON RC-V251G

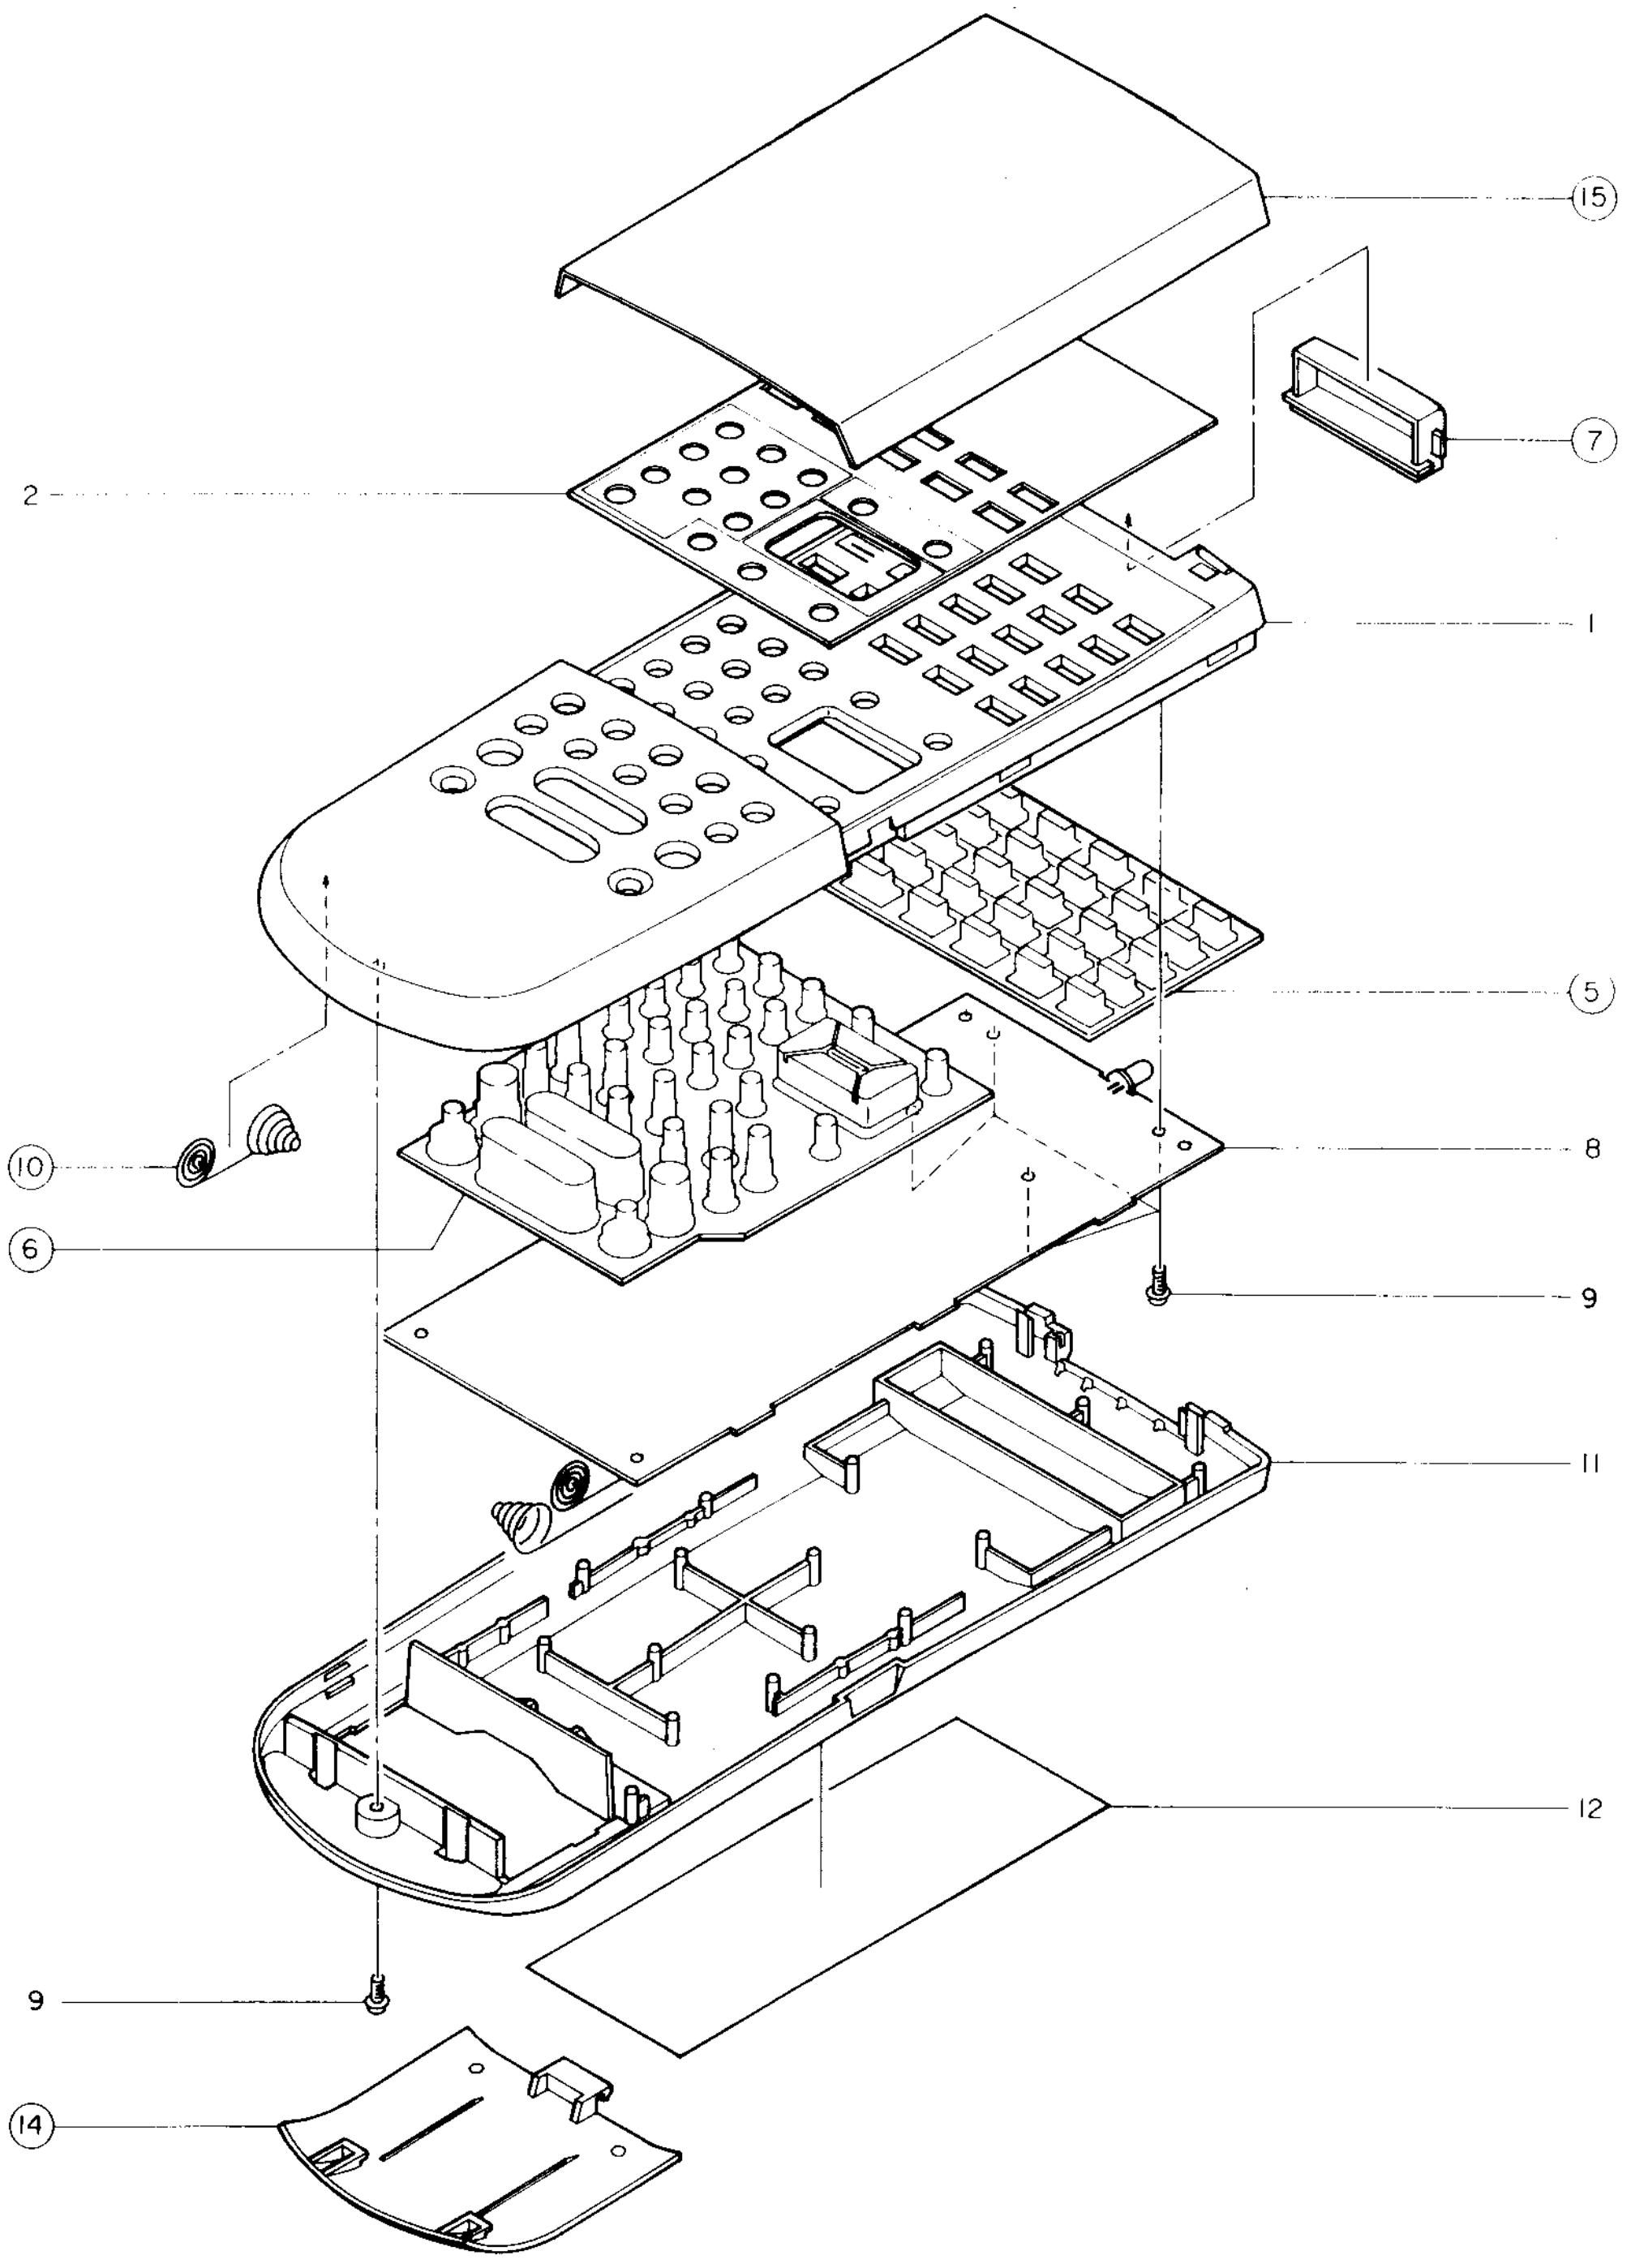

32. REMOCON RC-V251G

Ref.No.	Part No.	Description
5	MB-406737J	KEY RUBBER (M6)
6	MB-406738J	KEY RUBBER (L) -2
7	SE-403111J	FILTER
9	ZS-374389	PT BID20X06STL BNI
10	ZG-403100J2	TERMINAL BATTERY (+-)
14	SC-406730J	COVER BATTERY (2)
15	SP-406739J	DOOR PANEL (V) -G2

33. REMOCON P.C BOARD RC-V251G

Ref.No.	Part No.	Description
D1	ED-403450J	D LED SE303ARF-C INFRARED
D2	ED-386031J	D SILICON CHIP MA110-TW
D3	ED-386031J	D SILICON CHIP MA110-TW
D4	ED-386031J	D SILICON CHIP MA110-TW
IC1	EI-376112	IC UPD6122G
TR1	ET-390826J	TR.CHIP 2SD1619 T,U TC T08
X1	EI-390687J	OSC CE CSU455PL 455KHZ
1	ZG-403098J	TERMINAL BATTERY (+)
2	ZG-403099J	TERMINAL BATTERY (-)

• MODEL VS-F450EOH, F455EOH

REMOCON EC-V252E

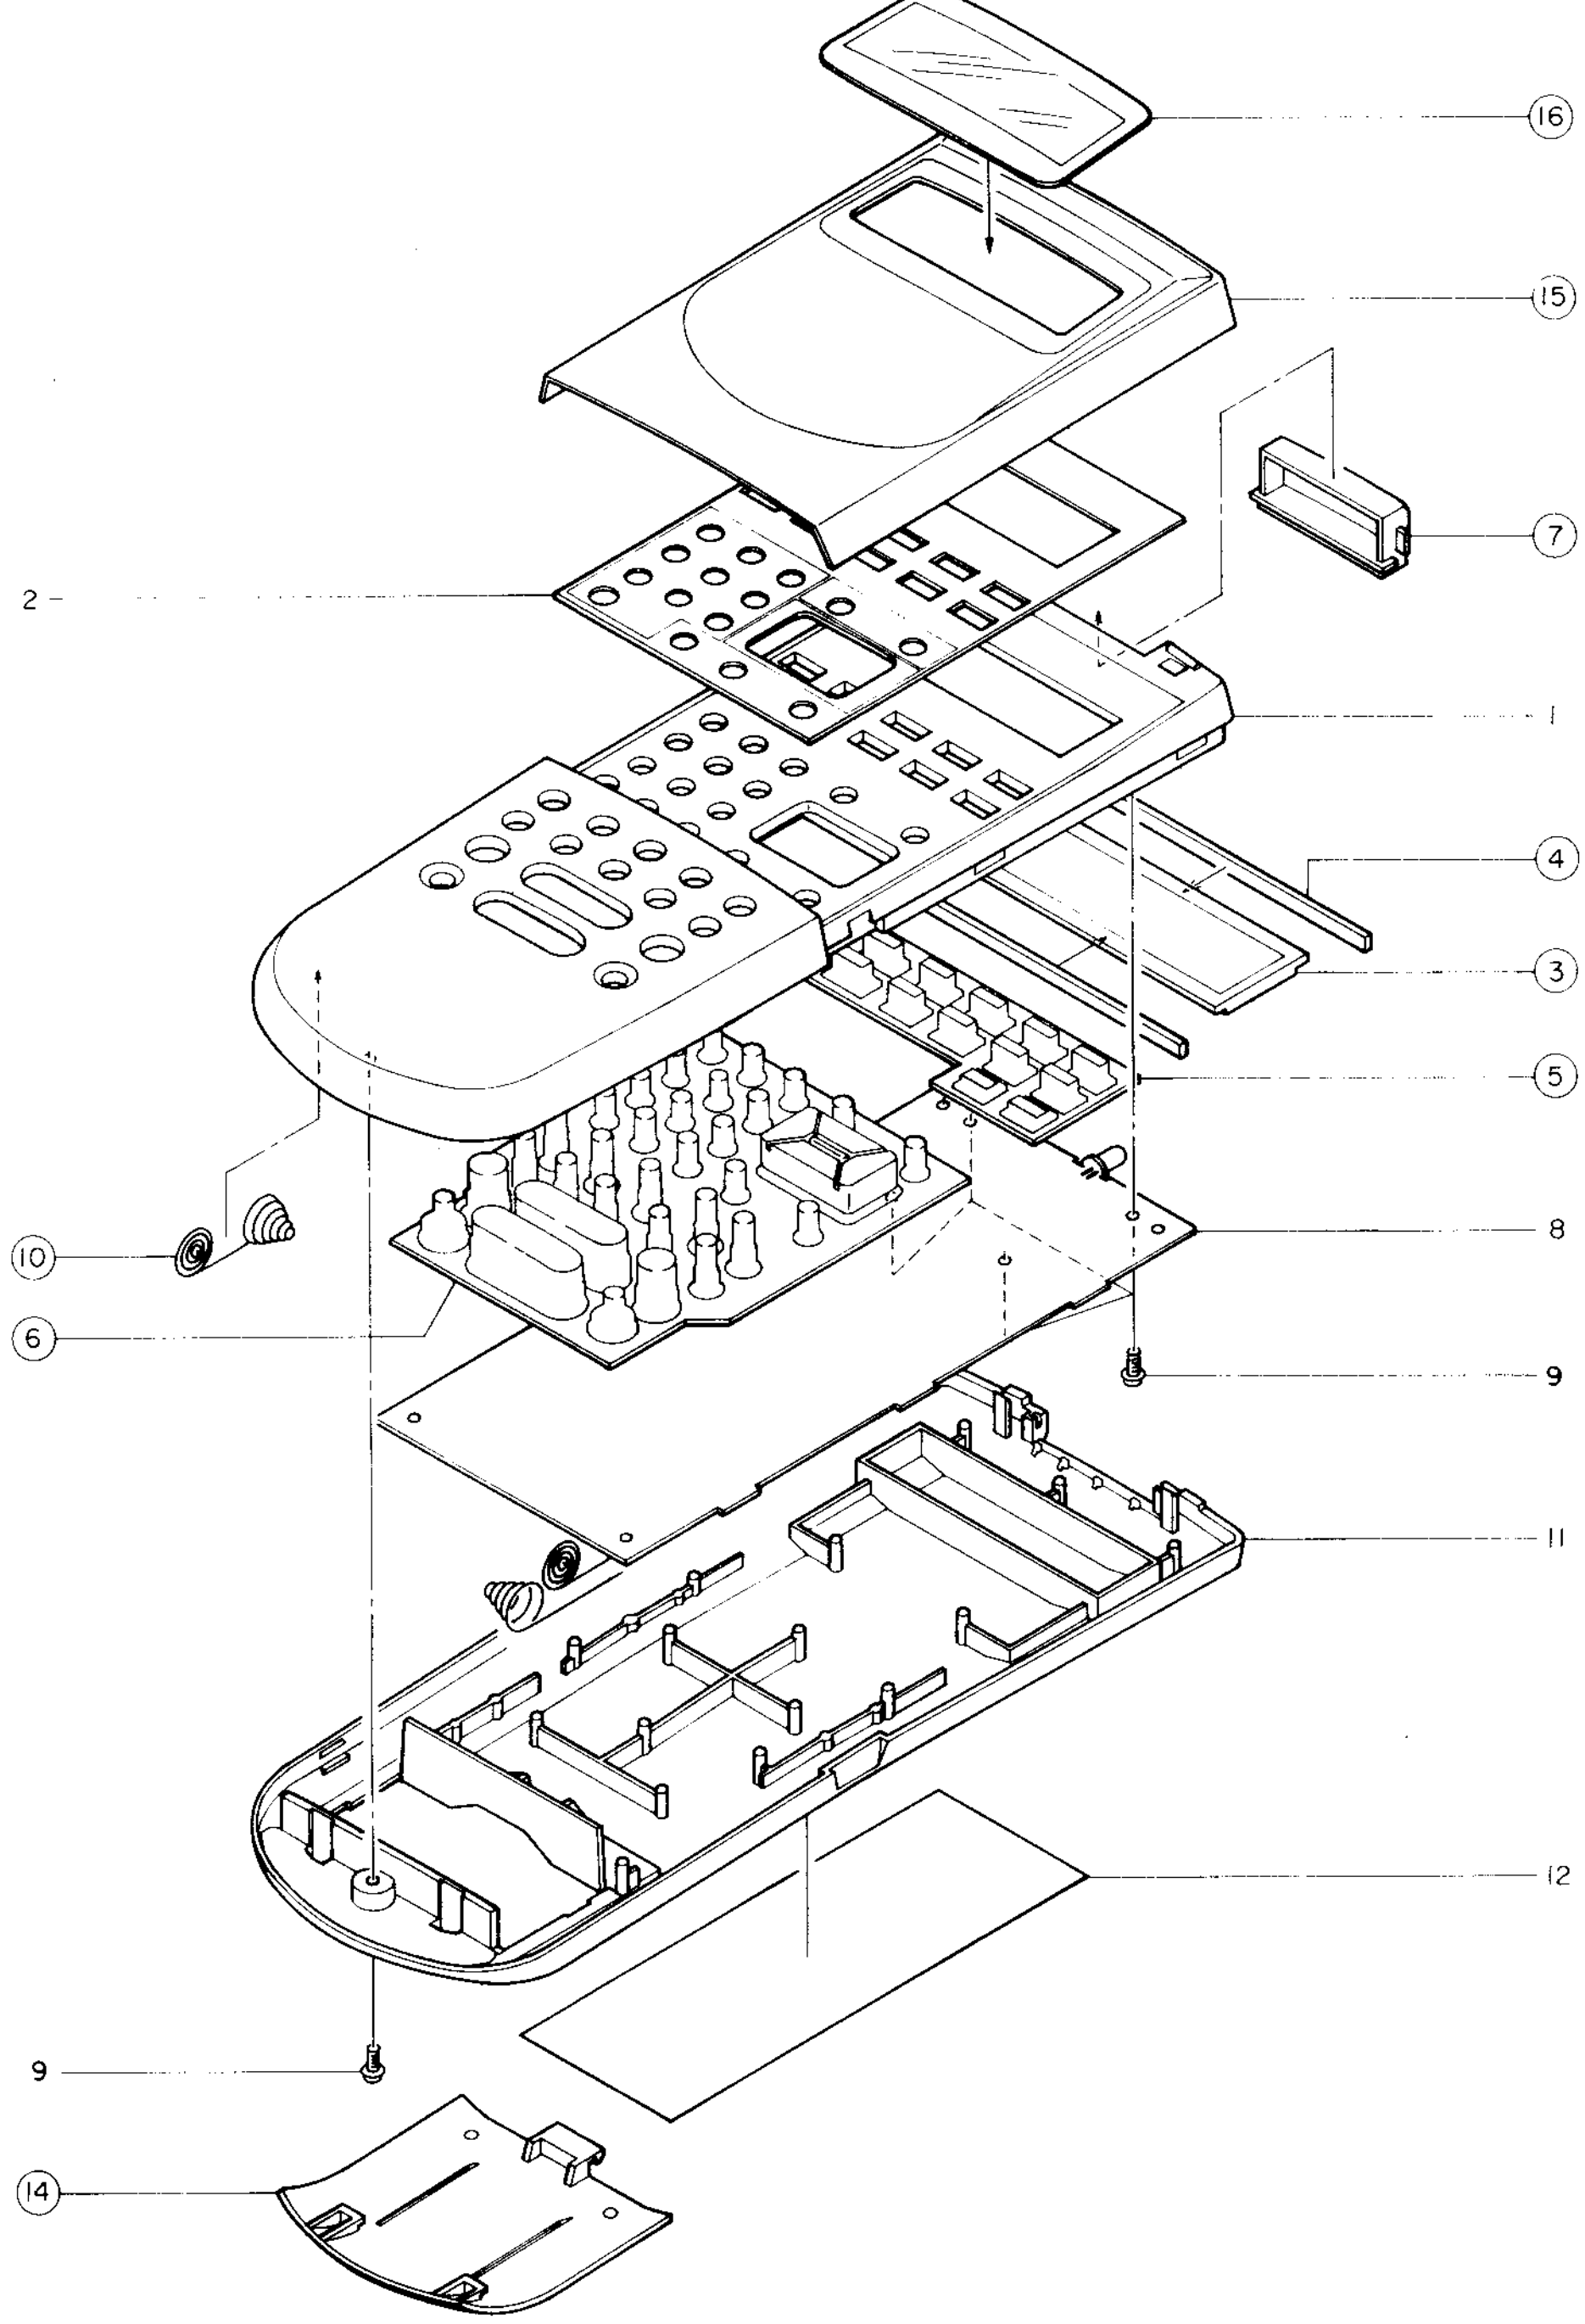

34. REMOCON RC-V252E (G)

Ref.No.	Part No.	Description
3	EM-403448J	IND LCD LF5381G ENGLISH
4	EJ-403095J	TERMINAL LCD (3) B1014
5	MB-403107J	KEY RUBBER (S2)
6	MB-406738J	KEY RUBBER (L) -2
7	SE-403111J	FILTER
9	ZS-374389	PT BID20X06STL BNI
10	ZG-403100J2	TERMINAL BATTERY (+-)
14	SC-406730J	COVER BATTERY (2)
15	SP-406731J	DOOR PANEL (L2)
16	SP-403096J1	WINDOW LCD

35. REMOCON P.C BOARD RC-V252E (G)

Ref.No.	Part No.	Description
D1	ED-403450J	D LED SE303ARF-C INFRARED
IC1	EI-408408J1	IC M50933-128FP JXLCDR2
IC2	EI-400672J	IC S-8052ALB-LE
TR1	ET-390826J	TR.CHIP 2SD1619 T,U TC T08
X1	EI-368825	OSC X'TAL MX-38T 32.768KHZ
X2	EI-403451J	OSC CE CSB1200J 1.200MHZ
1	ZG-403098J	TERMINAL BATTERY (+)
2	ZG-403099J	TERMINAL BATTERY (-)

- **MODEL VS-F480EK-V/EOG-V**

REMOCON RC-V451E/G

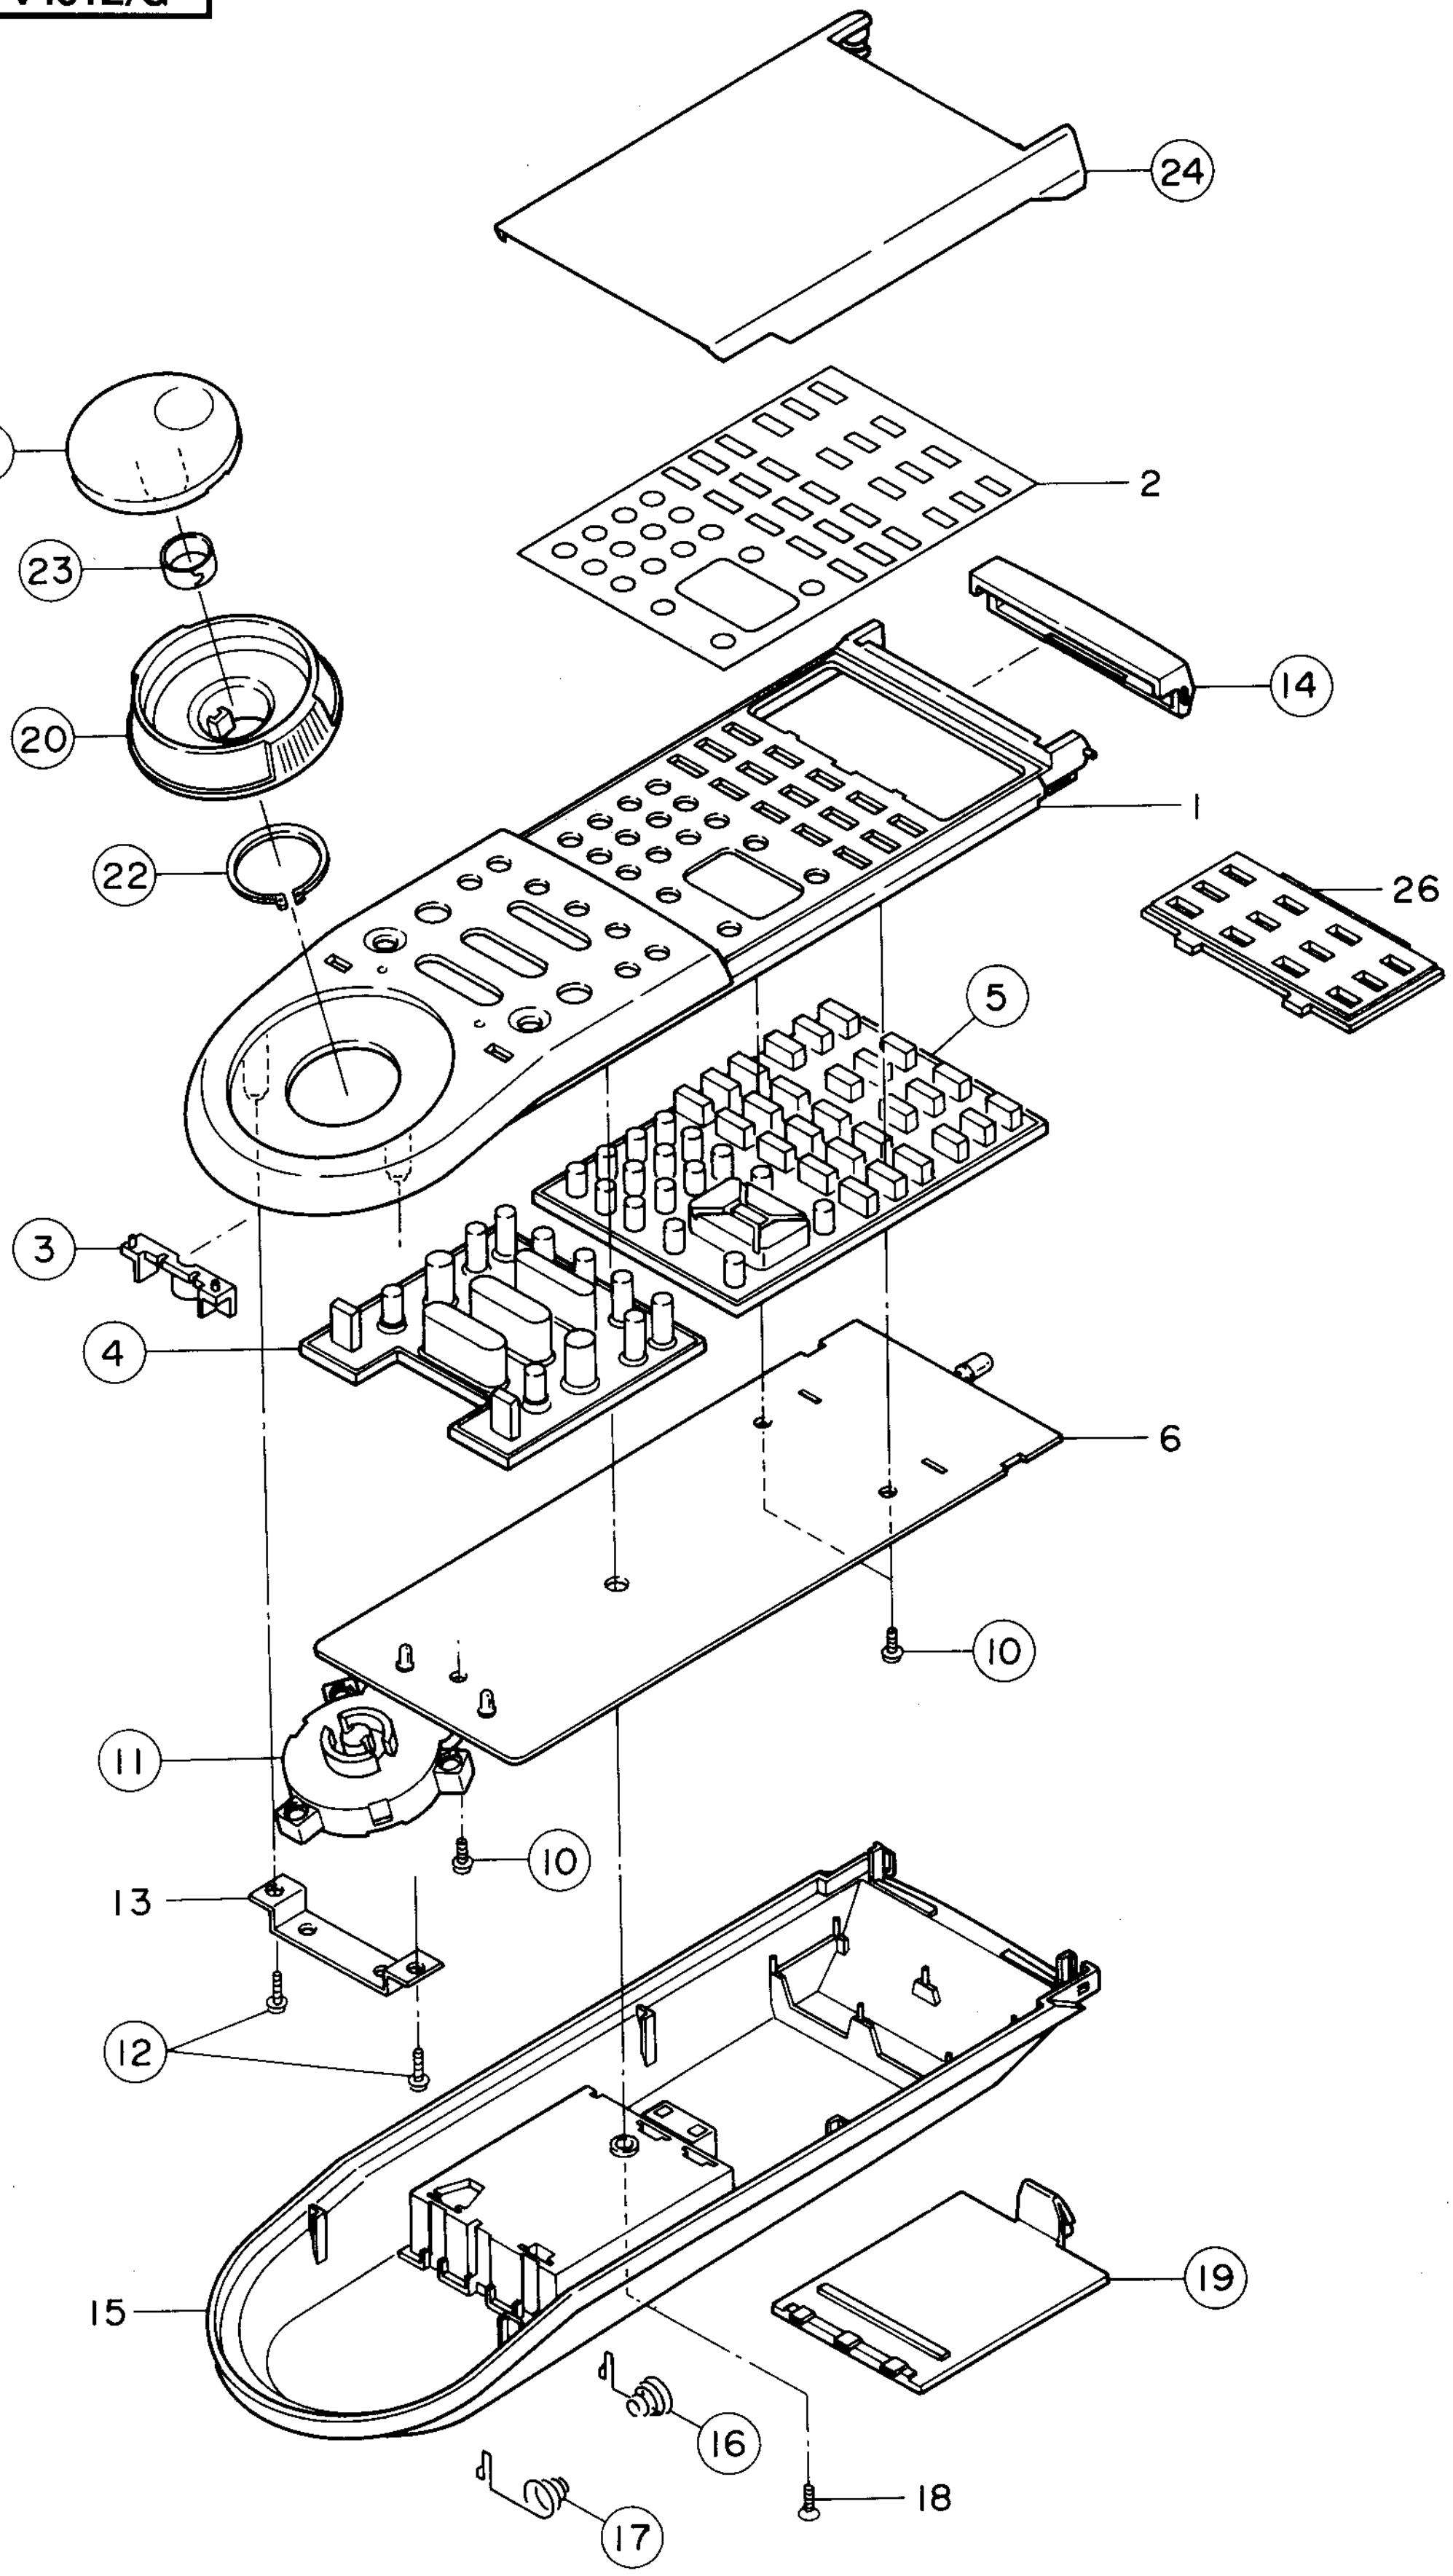
24
21
2
23
14
20
1
22
26
5
3
4
6
10
11
10
13
12
15
19
16
18
17

36. REMOCON RC-V451E/V451G

Ref.No.	Part No.	Description
3	SE-407612J	LENS (V)
4	MB-407645J	KEY RUBBER (V1)
5	MB-407624J	KEY RUBBER (V2) -C
10	ZS-374389	PT BID20X06STL BNI
11	ES-408428J	SW ROTARY ENCODER SRGPPJ
12	ZS-336614	PT PAN26X08STL CMT
14	SE-407625J	FILTER (V)
16	ZG-407614J	TERMINAL BATTERY (V3)
17	ZG-407615J	TERMINAL BATTERY (V4)
19	SC-407627J	COVER BATTERY (V)
20	SK-407713J	KNOB RING-R
21	SK-407708J	KNOB JOG
22	SZ-408436J	RING C S-19
23	SZ-408435J	COMPRESSION RING 10193
24A	SP-407633J	DOOR PANEL (V) -451E [RC-V451E]
24B	SP-407632J	DOOR PANEL (V) -451G [RC-V451G]

37. REMOCON P.C BOARD RC-V451E

Ref.No.	Part No.	Description
D1	ED-403450J	D LED SE303ARF-C INFRARED
D2	ED-397391J	D LED BR3668S RED
D3	ED-397391J	D LED BR3668S RED
IC1	EI-408449J	IC UPD75004GB-771 JXVPTR1 QF
IC2	EI-400672J	IC S-8052ALB-LE
TR1	ET-405342J	TR.CHIP 2SD1620
X1	EI-408450J	OSC CE CST2.45MGW 2.450MHZ
1	ZG-407616J	TERMINAL BATTERY (V1)
2	ZG-407617J	TERMINAL BATTERY (V2)

- **MODEL VS-F490EM/EO/EOH/ES, F497EOH**

REMOCON RC-V452E

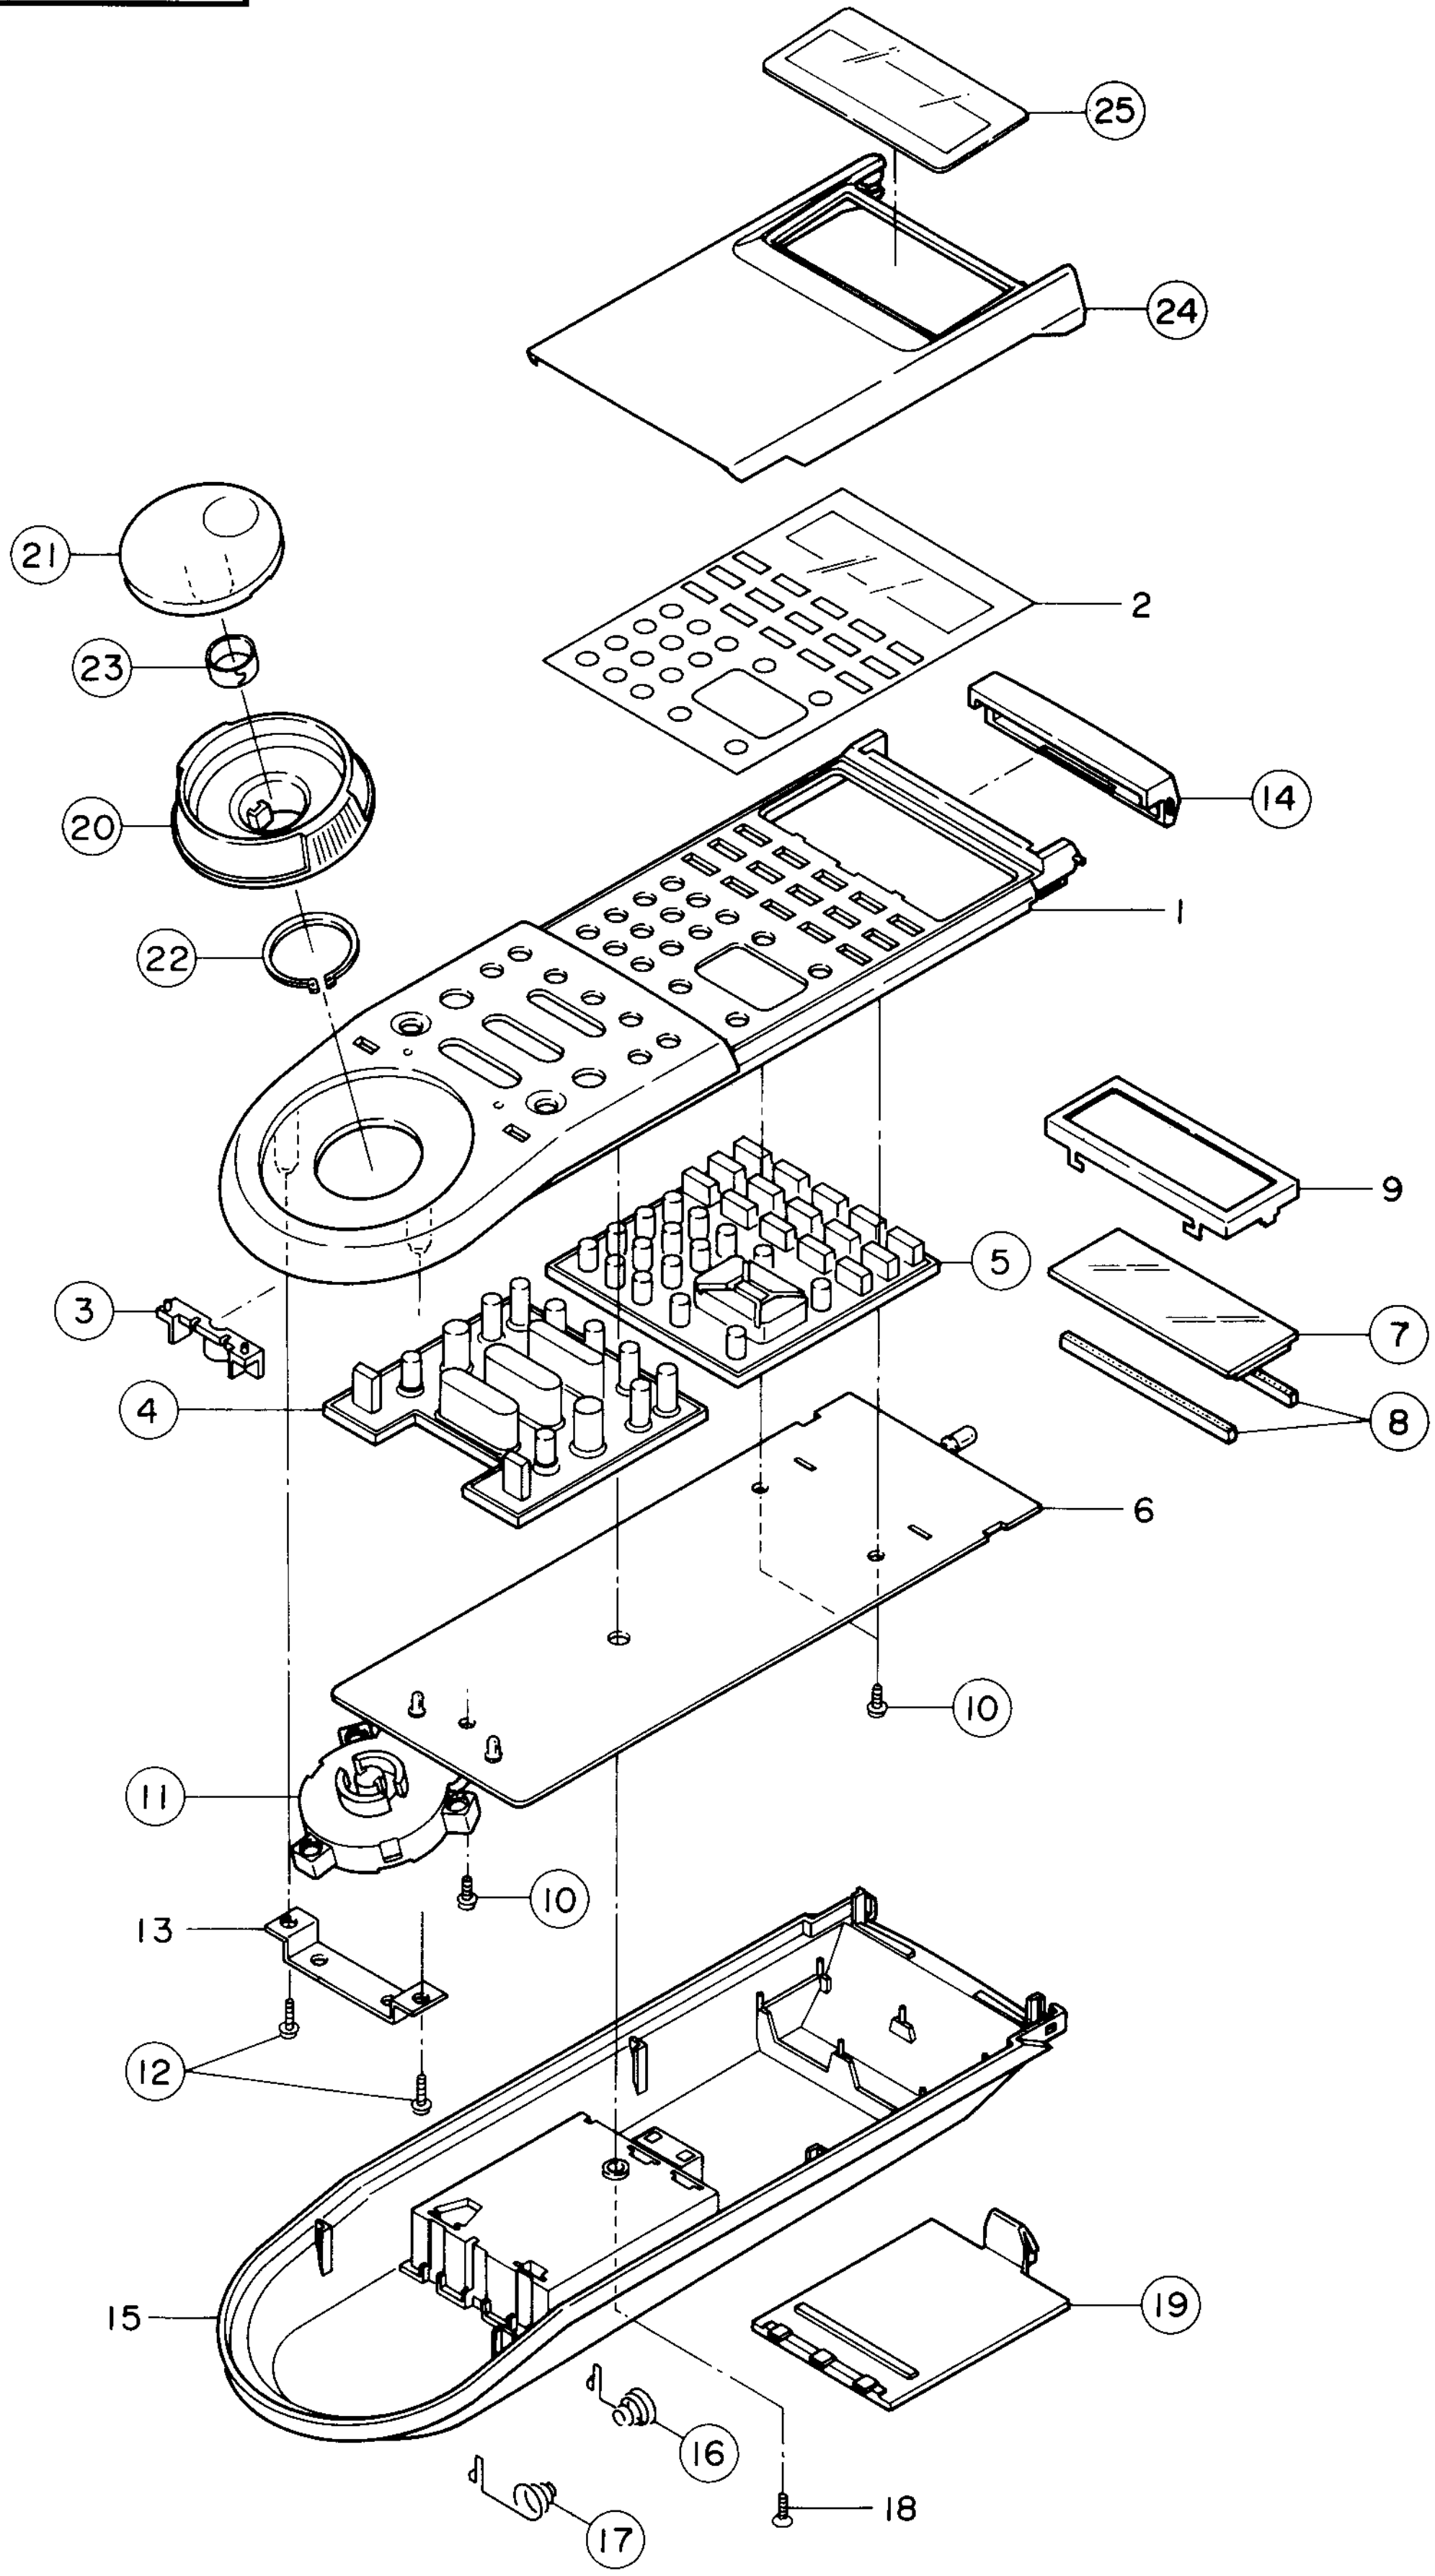
25
24
21
2
23
14
20
1
22
9
5
3
7
4
8
6
10
11
10
13
12
15
19
16
17
18

38. REMOCON RC-V452E

Ref.No.	Part No.	Description
3	SE-407612J	LENS (V)
4	MB-407645J	KEY RUBBER (V1)
5	MB-407620J	KEY RUBBER (W) -C
7	EM-408437J	IND LCD LD-B5444A ENGLISH
8	EJ-408427J	CONNECTOR LCD (4) B1043
10	ZS-374389	PT BID20X06STL BNI
11	ES-408428J	SW ROTARY ENCODER SRGPPJ
12	ZS-336614	PT PAN26X08STL CMT
14	SE-407625J	FILTER (V)
16	ZG-407614J	TERMINAL BATTERY (V3)
17	ZG-407615J	TERMINAL BATTERY (V4)
19	SC-407627J	COVER BATTERY (V)
20	SK-407713J	KNOB RING-R
21	SK-407708J	KNOB JOG
22	SZ-408436J	RING C S-19
23	SZ-408435J	COMPRESSION RING 10193
24	SP-407640J	DOOR PANEL (W) -452E
25	SE-407613J	WINDOW DOOR (W)

39. REMOCON P.C BOARD RC-V452E

Ref.No.	Part No.	Description
D1	ED-403450J	D LED SE303ARF-C INFRARED
D2	ED-397391J	D LED BR3668S RED
D3	ED-397391J	D LED BR3668S RED
D4	ED-386031J	D SILICON CHIP MA110-TW
D5	ED-386031J	D SILICON CHIP MA110-TW
D6	ED-386031J	D SILICON CHIP MA110-TW
D7	ED-386031J	D SILICON CHIP MA110-TW
D8	ED-386031J	D SILICON CHIP MA110-TW
D9	ED-386031J	D SILICON CHIP MA110-TW
D10	ED-386031J	D SILICON CHIP MA110-TW
D11	ED-386031J	D SILICON CHIP MA110-TW
IC1	EI-408408J1	IC M50933-128FP JXLCDR2
IC2	EI-400672J	IC S-8052ALB-LE
SW1	ES-393431J	SW TACT CHIP SKHUAB T12E
TR1	ET-405342J	TR.CHIP 2SD1620
X1	EI-368825M	OSC X'TAL C-002RX 32.768KHZ
X2	EI-403451J	OSC CE CSB1200J 1.200MHZ

NOTE

1. MODEL VS-F440EA/EDI/EM, F441EA, F490EM

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
AVB1038A010A	23-2A	ED307572	8-D3	ED307572	12-D25	ED511907	16-D17
AVB1043A010E	23-2B	ED307572	8-D4	ED307572	12-D26	ED511907	16-D18
BAV1130A500A	7-4A	ED307572	8-D201	ED307572	12-D27	ED511907	17-D3
BAV1130A510A	7-4B	ED307572	8-D202	ED307572	12-D28	ED511907	17-D4
BAV1132A610F	7-2A	ED307572	8-D203	ED307572	12-D41	ED511907	17-D17
BAV1132A610G	7-2D	ED307572	8-D208	ED307572	12-D42	ED511907	17-D18
BAV1132A615C	7-2B	ED307572	8-D209	ED307572	12-D45	ED511907	17-D71
BAV1132A615G	7-2C	ED307572	8-D301	ED307572	12-D46	ED511907	17-D72
BAV1146A635K	7-3A	ED307572	8-D302	ED307572	12-D47	ED511907	17-D73
BAV1146A635L	7-3B	ED307572	8-D305	ED307572	12-D48	ED511907	17-D74
BAV1146A640A	7-3C	ED307572	8-D306	ED307572	17-D16	ED511907	17-D101
BAV1146A640C	7-3D	ED307572	8-D307	ED307572	17-D54	EE405638J	8-2C
BAV1150A600A	7-1A	ED307572	8-D308	ED307572	17-D55	EE408417J	8-2A
BAV1150A600D	7-1B	ED307572	8-D309	ED307572	17-D103	EE408471J	8-2B
BAV1150A600E	7-1C	ED307572	8-D310	ED307572	18-D10	EH366894	9-FL701
BAV1152A600B	7-1D	ED307572	8-D401	ED366443	8-D406	EH368816	15-CF1
BAV1152A630B	7-3E	ED307572	8-D402	ED379298	19-D60	EH368948	14-CF3A
BBV1130A020C	4-70	ED307572	8-D403	ED386226J	17-D6	EH373919	15-CF3
BBV1130A020H	3-64	ED307572	8-D404	ED386226J	17-D8	EH373920	14-CF2
BD409126J1	22-1D	ED307572	8-D405	ED386226J	17-D11	EH376338	15-CF2
BD409284J	22-1A	ED307572	8-D408	ED387919J	8-D8	EH381309J	15-CF52
BD409298J	22-1C	ED307572	8-D410	ED390011J	5-13	EH383083J	11-IB2
BD409299J1	22-1B	ED307572	8-D411	ED390011J	6-13	EH383083J	12-IB2
BLV1102A050A	3-23	ED307572	8-D501	ED390012J	5-14	EH388287J	15-CF51
BLV1102A140A	3-43	ED307572	8-D502	ED391005J	17-D28	EH390730J	8-DL500
BLV1102A140A	4-43	ED307572	8-D503	ED391005J	18-D56	EH394838J	8-DL501
BLV1123A050A	4-23	ED307572	8-D504	ED397233J	8-D204	EH403945J	11-IB1
BLV1130A160A	4-65	ED307572	8-D505	ED401046J	17-D106	EH403945J	12-IB1
BL387458J2	6-37	ED307572	8-D506	ED401099J	20-D1	EH714626	14-CF1A
BM387503J	5-31	ED307572	8-D507	ED401099J	20-D2	EH729986J	14-CF3B
BM387503J	6-31	ED307572	8-D508	ED403267J	8-D205	EH730625J	14-CF1B
BM400682J1	5-9	ED307572	8-D509	ED403267J	20-D3	EH780128	15-CF53
BM400682J1	6-9	ED307572	9-D601	ED403278J	11-D11	EI200573	9-IC702
BM401296J1	2-8	ED307572	9-D603	ED403279J	11-D10	EI310036	8-IC101
BT410487J	22-19A	ED307572	9-D801	ED403279J	12-D10	EI310036	9-IC902
BT410488J	22-19C	ED307572	9-D901	ED403724J	8-D304	EI353421	8-IC302
BT410489J	22-19B	ED307572	9-D902	ED403729J	8-D412	EI356457	8-IC403
BVV1102A070A	3-35	ED307572	10-D1	ED403731J	12-D11	EI360586	8-IC304
BVV1102A070A	4-35	ED307572	10-D2	ED403732J	18-D50	EI366892	9-IC701
BVV1102A080A	3-36	ED307572	10-D3	ED403947J	17-D102	EI368809	14-IC1
BVV1102A080A	4-36	ED307572	10-D4	ED403948J	17-D107	EI368809	15-IC1
BVV1102A150A	3-48	ED307572	11-D3	ED404029J	16-D16	EI368825M	11-X2
BVV1102A150A	4-48	ED307572	11-D5	ED404031J	17-D104	EI368825M	12-X2
BVV1123A410B	2-1	ED307572	11-D12	ED404032J	16-D14	EI368829	15-X51
BVV1123A420B	2-2	ED307572	11-D13	ED404032J	17-D19	EI373955	11-IC3
BV387610J	8-MD1A	ED307572	11-D14	ED404086J	8-D303	EI373955	12-IC3
BV387611J	8-MD1C	ED307572	11-D15	ED405247J	10-D101	EI373957J1	11-X1
BV403236J1	8-1A	ED307572	11-D17	ED405264J	17-D57	EI373957J1	12-X1
BV403239J1	8-1C	ED307572	11-D25	ED405264J	17-D58	EI373980	8-IC303
BV403963J	8-1B	ED307572	11-D26	ED405264J	18-D7	EI373981J1	8-IC402
BV404007J	8-MD1B	ED307572	11-D27	ED405265J	17-D108	EI381575J	18-IC1
EA387496J	5-12	ED307572	11-D31	ED405265J	17-D109	EI381632J	8-X500
EA404543J	6-12	ED307572	11-D41	ED405373J	16-D13	EI386468J	9-IC901
EC363490	16-C2	ED307572	11-D42	ED405524J	16-D15	EI387586J	10-IC1
EC389414J	17-C101	ED307572	11-D43	ED405524J	17-D20	EI388360J	9-IC801
EC391843J	8-C369	ED307572	11-D44	ED408807J	17-D27	EI389622J	8-IC1
EC394757J	9-VC601	ED307572	12-D5	ED511907	8-D212	EI389640J	8-X301
EC403878J	17-C4	ED307572	12-D12	ED511907	8-D213	EI389974J	9-X601
EC403878J	17-C15	ED307572	12-D13	ED511907	16-D1	EI394467J	11-IC2
EC403880J	17-C20	ED307572	12-D14	ED511907	16-D2	EI394856J	8-IC401
EC404197J	17-C23	ED307572	12-D15	ED511907	16-D3	EI400756J	8-IC201
EC404197J	17-C24	ED307572	12-D16	ED511907	16-D4	EI403234J1	8-IC400
EC406634J	16-C1	ED307572	12-D17	ED511907	16-D5	EI403467J	9-X602
EC406635J	16-C3	ED307572	12-D18	ED511907	16-D6	EI403469J	9-IC602
EC408376J	17-C1	ED307572	12-D19	ED511907	16-D7	EI405722J	9-IC601
EC408377J	17-C2	ED307572	12-D20	ED511907	16-D8	EI408391J1	11-IC1
EC408426J	17-C3	ED307572	12-D21	ED511907	16-D9	EI408393J	12-IC2
EC408426J	17-C14	ED307572	12-D22	ED511907	16-D10	EI408397J	12-IC1
ED307572	8-D1	ED307572	12-D23	ED511907	16-D11	EI408849J	8-IC301A
ED307572	8-D2	ED307572	12-D24	ED511907	16-D12	EI408850J	8-IC301B

Part No.	Ref. No.
EJ381837J	5-16
EJ381837J	6-16
EJ387497J	5-15
EJ387497J	6-15
EJ387497J	11-PS2
EJ387497J	12-PS2
EJ387614J	8-PJ101
EJ387622J	12-PJ2
EJ387623J	12-PJ3
EJ389815J	11-PS1
EJ389815J	12-PS1
EJ403389J	10-PS1
EJ408399J	12-PJ1
EM401077J	11-FL1
EM403367J	12-FL1
EO345874	8-L410
EO345876	9-L602
EO345880	8-L404
EO345880	8-L472
EO345880	8-L500
EO345880	8-L502
EO345880	8-L505
EO345880	8-L506
EO345880	8-L509
EO345880	8-L570
EO345880	10-L8
EO345880	10-L10
EO345880	10-L11
EO345881	8-L101
EO345881	8-L302
EO345881	9-L601
EO345881	9-L605
EO345881	9-L701
EO345881	9-L702
EO345881	9-L901
EO351866	9-L603
EO351866	9-L604
EO353900	8-L501
EO353900	8-L503
EO353900	8-L504
EO354600	8-L303
EO354600	8-L401
EO354600	8-L405
EO354600	8-L406
EO356722	8-L103
EO356722	8-L470
EO357508	8-L402
EO366893	9-VL701
EO373260	8-L1
EO376600	10-L1
EO376600	10-L16
EO376603	10-L5
EO376605	10-L14B
EO376606	10-L4
EO376607	10-L14A
EO376612	10-L15
EO376614	10-L9
EO376857	10-L3
EO376858	10-L2
EO376859	10-L12
EO376860	10-L7
EO380091J1	18-L10
EO381192J	8-L403
EO381193J	10-L6
EO381195J	8-L511
EO381195J	10-L13
EO381196J	8-L301
EO381197J	8-L512
EO386541J	17-L6
EO387782J	15-L1
EO387798J	15-L6
EO387799J	14-L6
EO387799J	14-L7
EO387800J	14-L1
EO387802J	8-L590
EO387802J	14-L8
EO387803J	15-L52
EO388161J	8-L474
EO388349J	10-FL101
EO388362J	9-FL801A
EO388363J	9-FL801B
EO390716J	9-L802
EO390716J	10-L101
EO390717J	9-L801
EO392817J	8-L507
EO393769J	17-L9
EO396361J	15-L51
EO397238J	15-L5
EO403270J	8-L510
EO403937J	8-L508
EO408381J	17-L1
EO408381J	17-L2
EO408381J	17-L3
EO408381J	17-L4
EO714610	14-L5B
EO714610	15-L4
EO714613	14-L5A
EO714614	14-L4B
EO714614	15-L3
EO714616	14-L4A
EO725953J	14-L3
EO725954J	15-L2
EQ400153J	17-RL101
ER393768J	17-R14
ER400605J	16-FR5
ER400605J	17-FR3
ER400689J	17-FR4
ER400689J	17-FR101
ER400728J	16-FR2
ER400728J	16-FR4
ER400728J	17-FR1
ER400729J	8-FR350
ER400959J	8-FR201
ER401039J	17-FR102
ER403405J	8-R214
ER404093J	8-FR501
ER405441J	17-FR5
ER408375J	16-FR1
ER408375J	16-FR3
ER408375J	17-FR2
ES349474	11-SW2
ES349474	11-SW3
ES349474	11-SW4
ES349474	11-SW5
ES349474	11-SW6
ES349474	11-SW7
ES349474	11-SW8
ES349474	11-SW9
ES349474	11-SW12
ES349474	12-SW1
ES349474	12-SW2
ES349474	12-SW4
ES349474	12-SW5
ES349474	12-SW6
ES349474	12-SW7
ES349474	12-SW8
ES349474	12-SW9
ES349474	12-SW10
ES349474	12-SW11
ES349474	12-SW12
ES349474	12-SW13
ES349474	12-SW14
ES349474	12-SW15
ES349474	12-SW16
ES349474	12-SW17
ES349474	12-SW18
ES349474	12-SW19
ES349474	13-SW3
ES373099	5-39
ES373099	6-39
ES387465J	5-17
ES387465J	6-17
ES403377J	21-SW1
ES408404J	11-SW1B
ES408405J	11-SW1A
ET353897	8-TR15
ET353897	8-TR501
ET353897	10-TR10
ET353897	10-TR18
ET353897	18-TR50
ET353899	8-TR1
ET353899	8-TR3
ET353899	8-TR4
ET353899	8-TR5
ET353899	8-TR7
ET353899	8-TR11
ET353899	8-TR13
ET353899	8-TR104
ET353899	8-TR105
ET353899	8-TR407
ET353899	8-TR415
ET353899	8-TR470
ET353899	8-TR471
ET353899	9-TR601
ET353899	9-TR607
ET353899	10-TR1
ET353899	10-TR11
ET353899	10-TR12
ET354364	8-TR404
ET354364	10-TR15
ET354414	8-TR8
ET354414	8-TR9
ET354414	8-TR19
ET354414	8-TR101
ET354414	8-TR103
ET354414	8-TR301
ET354414	8-TR305
ET354414	8-TR306
ET354414	8-TR310
ET354414	8-TR313
ET354414	8-TR402
ET354414	8-TR408
ET354414	8-TR410
ET354414	8-TR420
ET354414	8-TR425
ET354414	8-TR514
ET354414	8-TR572
ET354414	8-TR573
ET354414	9-TR602
ET354414	9-TR609
ET354414	9-TR803
ET354414	9-TR901
ET354414	9-TR902
ET354414	10-TR6
ET354414	10-TR16
ET354414	10-TR19
ET354414	10-TR23
ET354414	11-TR1
ET354414	12-TR1
ET354415	8-TR304
ET354415	8-TR413
ET356336	8-TR102
ET356336	8-TR202
ET356336	8-TR401
ET356336	8-TR423
ET356336	8-TR508
ET356336	8-TR513
ET356336	9-TR605
ET356336	9-TR606
ET356817	17-TR6
ET360399	8-TR409
ET360399	8-TR411
ET360399	8-TR417
ET360399	10-TR3
ET360399	10-TR4
ET360399	10-TR22
ET360399	17-TR14
ET360399	17-TR15
ET360646	8-TR502
ET361490	5-24
ET361490	6-24
ET363953	8-TR303
ET364040	8-TR421
ET364040	10-TR5
ET364040	10-TR13
ET364040	10-TR17
ET366168	17-TR103
ET366168	18-TR4
ET366365	16-TR2
ET366365	16-TR7
ET366365	17-TR1
ET366365	17-TR5
ET366365	17-TR9
ET366365	17-TR13
ET366365	17-TR104
ET366365	20-TR1
ET370819	15-Q3
ET370819	15-Q51
ET370819	15-Q52
ET373985	8-TR307
ET373985	8-TR308
ET373985	8-TR309
ET375777	8-TR2
ET381175J	16-TR1
ET381637J2	11-PH1
ET381637J2	13-PH1
ET388338J	8-TR205
ET388338J	8-TR414
ET388338J	8-TR424
ET389803J	9-TR608
ET389803J	9-TR904
ET389803J	17-TR101
ET389803J	17-TR106
ET389803J	18-TR3
ET389803J	18-TR8
ET390009J	5-19
ET390009J	6-19
ET390010J	5-18
ET391025J	16-TR6
ET397160J	8-TR12
ET397160J	8-TR17
ET397160J	8-TR18
ET397160J	8-TR107
ET397160J	8-TR109
ET397160J	8-TR203
ET397160J	8-TR406
ET397160J	8-TR503
ET397160J	8-TR504
ET397160J	8-TR505
ET397160J	8-TR506

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
ET397160J	8-TR507	EW404138J1	8-WF201	MZ387351J2	4-58	ZG387467J	3-7
ET397160J	8-TR509	EX405691J	10-TH1	MZ387430J	5-21	ZG387468J	5-4
ET397160J	8-TR510	HE390013J	3-20	MZ387430J	6-21	ZG387468J	6-4
ET397160J	8-TR511	HE390013J	4-20	MZ387445J	5-22	ZG387502J	6-38
ET397160J	8-TR512	HR405340J	3-13	MZ387445J	6-22	ZG387505J	22-11
ET397160J	8-TR515	HR405340J	4-13	MZ387446J	5-23	ZG388290J1	3-52
ET397160J	8-TR570	MA387474J3	2-6	MZ395471J3	4-27	ZG388290J1	4-52
ET397160J	8-TR571	MB387289J	5-11	MZ401686J1	6-32	ZG392294J	3-61
ET397160J	9-TR603	MB407117J	6-11	MZ402760J2	3-17	ZG392294J	4-61
ET397160J	9-TR604	MI387294J	3-10	MZ402760J2	4-17	ZG392831J	3-46
ET397160J	9-TR701	MI404552J	4-10	MZ404538J	6-29	ZG392831J	4-46
ET397160J	9-TR702	ML387277J3	3-32	MZ404542J	6-23	ZG395470J	4-26
ET397160J	9-TR751	ML387277J3	4-32	MZ404577J	6-7	ZG395567J	3-42
ET397160J	9-TR752	ML387311J2	5-42	MZ404995J	4-62	ZG395567J	4-42
ET397160J	9-TR753	ML387311J2	6-42	MZ406134J	3-58	ZS321298	2-3
ET397160J	9-TR754	ML387316J	3-1	SA387507J	22-8	ZS321298	3-15
ET397160J	9-TR801	ML387316J	4-1	SC387353J	22-6	ZS321298	4-15
ET397160J	9-TR903	ML387318J	3-2	SE395554J	3-57	ZS336714	2-12
ET397160J	10-TR2	ML387318J	4-2	SE395554J	4-57	ZS336714	3-22
ET397160J	10-TR7	ML387321J	3-4	SE409104J1	22-2D	ZS336714	4-22
ET397160J	10-TR8	ML387324J1	5-1	SE409119J	22-26B	ZS344754	3-16
ET397160J	10-TR9	ML387344J	3-54	SE409191J	22-26A	ZS358936	3-59
ET397160J	10-TR14	ML387344J	4-54	SE409196J	22-2C	ZS358936	4-59
ET397160J	10-TR21	ML387345J	3-51	SE409197J	22-2A	ZS358936	5-41
ET397160J	10-TR101	ML387345J	4-51	SE409265J	22-2B	ZS358936	6-41
ET397160J	17-TR16	ML387346J	3-53	SK407561J	22-18	ZS358936	22-9
ET397160J	20-TR2	ML387346J	4-53	SK407562J	22-22	ZS365149	5-10
ET397160J	20-TR3	ML387349J2	3-56	SP388307J	8-3A	ZS365149	6-10
ET400218J	8-TR302	ML387349J2	4-56	SP404013J	8-3B	ZS373962	22-12
ET400218J	17-TR102	ML387350J1	3-47	SP407479J	22-14	ZS374458	3-38
ET403420J	6-14	ML387350J1	4-47	SP409113J	22-4	ZS374458	4-38
ET404195J	17-TR107	ML387402J1	5-3	SZ387263J4	4-24	ZS378341	22-7
ET405622J	8-TR210	ML387402J1	6-3	SZ387388J	2-4	ZS379350	2-11
ET405622J	16-TR3	ML387423J	3-6	SZ391866J1	4-60	ZS379405	2-5
ET405622J	16-TR4	ML387428J	3-39	SZ401874J	22-21A	ZS385611J	22-15
ET405622J	16-TR5	ML387428J	4-39	SZ404290J	22-5	ZS389853J	2-14
ET405622J	17-TR12	ML387431J1	3-31	SZ407187J2	3-24	ZS389853J	4-16
ET405622J	18-TR2	ML387431J1	4-31	SZ407583J	22-21B	ZS389950J	5-40
ET405622J	18-TR7	ML390768J4	3-25	VT387394J1	3-37	ZS389950J	6-40
ET713614	14-Q2	ML390768J4	4-25	VT387394J1	4-37	ZS391046J	22-16
ET713614	15-Q2	ML391745J3	3-41	VT401282J	2-13	ZS404844J	3-14
ET713614	15-Q4	ML391745J3	4-41	ZG373900	3-12	ZS404844J	4-14
ET725820J	14-Q1	ML404567J1	6-1	ZG373900	4-12	ZS425981	5-36
ET725820J	15-Q1	ML404847J	4-66	ZG387272J	3-26	ZS425981	6-36
EV390157J	10-VR1	ML404944J	5-2	ZG387282J	3-33	ZS464703	3-28
EV390157J	10-VR2	ML404944J	6-2	ZG387282J	4-33	ZS467796	2-9
EV403967J	9-VR801	ML407119J	4-4	ZG387320J	3-3	ZS563444	2-7
EV403968J	9-VR802A	MP404852J	3-27	ZG387320J	4-3	ZS659046	22-17
EV404298J	14-VR2	MP404852J	4-64	ZG387323J	3-5	ZW332843	3-30
EV404298J	15-VR2	MR387286J1	3-18	ZG387323J	4-5	ZW332843	4-30
EV404300J	8-VR402	MR387286J1	4-18	ZG387348J1	3-49	ZW374445	3-19
EV405248J	10-VR3	MR387406J	5-35	ZG387348J1	4-49	ZW374445	4-19
EV405248J	10-VR4	MR387406J	6-35	ZG387354J	22-13	ZW387492J	5-8
EV405263J	9-VR802B	MR391968J	5-33	ZG387370J	22-3	ZW387492J	6-8
EV405657J	8-VR401	MR391968J	6-33	ZG387403J	5-5	ZW389814J	3-8
EV405658J	14-VR51	MT390954J1	3-9	ZG387403J	6-5	ZW389814J	4-8
EV405658J	15-VR1	MT404547J	4-9	ZG387413J1	5-27	ZW389923J	5-6
EV405659J	8-VR403	MZV1102A090A	5-25	ZG387413J1	6-27	ZW389923J	6-6
EV405665J	8-VR301	MZV1102A090A	6-25	ZG387417J	3-44	ZW401776J	3-34
EV405665J	8-VR404	MZV1102A100A	5-26	ZG387417J	4-44	ZW401776J	4-34
EW348414	23-1	MZV1102A100A	6-26	ZG387418J	3-45		
EW389313J	5-20	MZ387298J3	5-7	ZG387418J	4-45		
EW389313J	6-20	MZ387330J	5-32	ZG387420J1	3-55		
EW389313J	11-WP2	MZ387331J	5-29	ZG387420J1	4-55		
EW389313J	12-WP2	MZ387332J	5-28	ZG387421J	3-50		
EW394623J	11-WP1	MZ387332J	6-28	ZG387421J	4-50		
EW394623J	12-WP1	MZ387333J	5-30	ZG387438J1	3-11		
EW403386J1	10-WP1	MZ387333J	6-30	ZG387438J1	4-11		
EW404002M	22-20B	MZ387335J	3-40	ZG387443J	5-34		
EW404003M	22-20A	MZ387335J	4-40	ZG387443J	6-34		

2. MODEL VS-F440EK, F480EK-V, F490ES

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
AVB1038A010A	22-2A	ED307572	8-D301	ED307572	16-D55	EH383083J	11-IB2
AVB1040A010E	22-2B	ED307572	8-D302	ED307572	17-D10	EH383083J	12-IB2
AVB1043A010E	22-2C	ED307572	8-D305	ED307572	19-D1	EH386637J	19-IB102
BAV1130A500A	7-4C	ED307572	8-D306	ED307572	19-D101	EH390730J	8-DL500
BAV1130A500B	7-4A	ED307572	8-D307	ED307572	19-D201	EH394684J	19-FL101
BAV1132A610F	7-2A	ED307572	8-D308	ED366443	8-D406	EH394838J	8-D501
BAV1132A610H	7-2B	ED307572	8-D309	ED379298	18-D14	EH403945J	11-IB1
BAV1135A500C	7-4B	ED307572	8-D310	ED386226J	16-D6	EH403945J	12-IB1
BAV1146Q640B	7-3A	ED307572	8-D401	ED386226J	16-D8	EH714627	14-CF1B
BAV1150Q600C	7-1A	ED307572	8-D402	ED386226J	16-D11	EH714628	14-CF1A
BAV1152A600F	7-1C	ED307572	8-D403	ED387919J	17-D50	EI200573	9-IC702
BAV1152A630G	7-3C	ED307572	8-D404	ED390011J	5-13	EI310036	8-IC101
BAV1152Q600A	7-1B	ED307572	8-D405	ED390011J	6-13	EI310036	9-IC902
BAV1152Q630A	7-3B	ED307572	8-D408	ED390012J	5-14	EI353421	8-IC302
BBV1130A020C	4-70	ED307572	8-D410	ED391005J	16-D28	EI356457	8-IC403
BBV1130A020H	3-64	ED307572	8-D411	ED396057J	17-D56	EI360586	8-IC304
BD409123J1	21-1B	ED307572	8-D502	ED396060J	16-D27	EI368809	14-IC1
BD409128J1	21-1C	ED307572	8-D503	ED397233J	8-D204	EI368825M	11-X2
BD409284J	21-1A	ED307572	8-D504	ED403267J	8-D205	EI368825M	12-X2
BLV1102A050A	3-23	ED307572	8-D505	ED403278J	11-D11	EI373955	11-IC3
BLV1102A140A	3-43	ED307572	8-D506	ED403279J	11-D10	EI373955	12-IC3
BLV1102A140A	4-43	ED307572	8-D507	ED403279J	12-D10	EI373957J1	11-X1
BLV1123A050A	4-23	ED307572	8-D509	ED403724J	8-D304	EI373957J1	12-X1
BLV1130A160A	4-65	ED307572	9-D601	ED403725J	8-D101	EI373957J1	19-X101
BL387458J2	6-37	ED307572	9-D801	ED403729J	8-D412	EI373980	8-IC303
BM387503J	5-31	ED307572	9-D901	ED403731J	12-D11	EI373981J1	8-IC402
BM387503J	6-31	ED307572	9-D902	ED403732J	8-D8	EI381575J	17-IC1
BM400682J1	5-9	ED307572	10-D1	ED404029J	15-D16	EI381632J	8-X500
BM400682J1	6-9	ED307572	10-D2	ED404032J	15-D14	EI386468J	9-IC901
BM401296J1	2-8	ED307572	10-D3	ED404032J	16-D19	EI387019J	19-IC108
BT403872J	21-19A	ED307572	10-D4	ED404086J	8-D303	EI387586J	10-IC1
BT403883J	21-19B	ED307572	11-D12	ED404170J	8-D102	EI388360J	9-IC801
BT410489J	21-19C	ED307572	11-D13	ED405247J	10-D101	EI389622J	8-IC1
BVV1102A070A	3-35	ED307572	11-D14	ED405264J	16-D57	EI389640J	8-X301
BVV1102A070A	4-35	ED307572	11-D15	ED405264J	16-D58	EI389974J	9-X601
BVV1102A080A	3-36	ED307572	11-D17	ED405264J	17-D7	EI394673J	19-X103
BVV1102A080A	4-36	ED307572	11-D25	ED405373J	15-D13	EI394680J	19-IC107
BVV1102A150A	3-48	ED307572	11-D26	ED405524J	15-D15	EI394856J	8-IC401
BVV1102A150A	4-48	ED307572	11-D27	ED405524J	16-D20	EI394861J	8-IC102
BVV1123A410B	2-1	ED307572	11-D31	ED405603J	8-D12	EI400756J	8-IC201
BVV1123A420B	2-2	ED307572	11-D42	ED405604J	8-D13	EI401050J	19-IC106
BV403238J1	8-1A	ED307572	12-D2	ED511907	8-D212	EI403234J1	8-IC400
BV403242J1	8-1B	ED307572	12-D5	ED511907	8-D213	EI403467J	9-X602
BV403410J	8-MD1A	ED307572	12-D12	ED511907	15-D1	EI403469J	9-IC602
BV403411J	8-MD1B	ED307572	12-D13	ED511907	15-D2	EI403964J	8-IC103
EA387496J	5-12	ED307572	12-D14	ED511907	15-D3	EI405224J	19-IC102
EA404543J	6-12	ED307572	12-D15	ED511907	15-D4	EI405224J	19-IC103
EC363490	15-C2	ED307572	12-D16	ED511907	15-D5	EI405722J	9-IC601
EC391843J	8-C369	ED307572	12-D17	ED511907	15-D6	EI408391J1	11-IC1
EC394757J	9-VC601	ED307572	12-D18	ED511907	15-D7	EI408393J	11-IC2
EC403878J	16-C4	ED307572	12-D19	ED511907	15-D8	EI408393J	12-IC2
EC403878J	16-C15	ED307572	12-D20	ED511907	15-D9	EI408397J	12-IC1
EC403880J	16-C20	ED307572	12-D21	ED511907	15-D10	EI408432J	19-IC101
EC406634J	15-C1	ED307572	12-D22	ED511907	15-D11	EI408433J	19-X102
EC406635J	15-C3	ED307572	12-D23	ED511907	15-D12	EI408434J	19-IC104
EC406639J	16-C23	ED307572	12-D24	ED511907	15-D17	EI408849J	8-IC301A
EC406639J	16-C24	ED307572	12-D25	ED511907	15-D18	EI408850J	8-IC301B
EC408376J	16-C1	ED307572	12-D26	ED511907	16-D3	EI410125J	19-IC105
EC408377J	16-C2	ED307572	12-D27	ED511907	16-D4	EJ381837J	5-16
EC408426J	16-C3	ED307572	12-D28	ED511907	16-D17	EJ381837J	6-16
EC408426J	16-C14	ED307572	12-D32	ED511907	16-D18	EJ387497J	5-15
ED307572	8-D1	ED307572	12-D42	ED511907	16-D71	EJ387497J	6-15
ED307572	8-D2	ED307572	12-D43	ED511907	16-D72	EJ387497J	11-PS2
ED307572	8-D3	ED307572	12-D45	ED511907	16-D73	EJ387497J	12-PS2
ED307572	8-D4	ED307572	12-D46	ED511907	16-D74	EJ387613J	8-PJ102
ED307572	8-D201	ED307572	12-D47	EE387603J1	8-2B	EJ387614J	8-PJ101B
ED307572	8-D202	ED307572	12-D48	EE387607J1	8-2A	EJ387622J	12-PJ2
ED307572	8-D203	ED307572	12-D49	EH373919	14-CF3	EJ387623J	12-PJ3
ED307572	8-D208	ED307572	16-D16	EH373921	14-CF2	EJ389815J	11-PS1
ED307572	8-D209	ED307572	16-D54	EH383056J	19-IB101	EJ389815J	12-PS1

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
EJ403389J	10-PS1	EO386541J	16-L6	ES349474	12-SW19	ET354415	8-TR413
EJ405225J	8-PJ103	EO387798J	14-L6	ES349474	13-SW3	ET354415	19-TR101
EJ405226J	8-PJ101A	EO387798J	14-L7	ES373099	5-39	ET356336	8-TR102
EJ408399J	12-PJ1	EO387800J	14-L1	ES373099	6-39	ET356336	8-TR108
EM401077J	11-FL1	EO387802J	8-L590	ES387465J	5-17	ET356336	8-TR202
EM403367J	12-FL1B	EO387802J	14-L8	ES387465J	6-17	ET356336	8-TR401
EM408395J	12-FL1A	EO388161J	8-L474	ES403377J	20-SW1	ET356336	8-TR423
EO345865	19-L1	EO388349J	10-FL101	ES408404J	11-SW1	ET356336	8-TR508
EO345865	19-L101	EO388362J	9-FL801A	ET353897	8-TR15	ET356817	16-TR6
EO345865	19-L102	EO388363J	9-FL801B	ET353897	8-TR501	ET360399	8-TR409
EO345865	19-L121	EO390716J	9-L802	ET353897	10-TR10	ET360399	8-TR411
EO345865	19-L155	EO390716J	10-L101	ET353897	10-TR18	ET360399	8-TR417
EO345865	19-L201	EO390717J	9-L801	ET353897	17-TR50	ET360399	10-TR3
EO345865	19-L202	EO390998J	8-L1	ET353899	8-TR1	ET360399	10-TR4
EO345865	19-L251	EO392817J	8-L507	ET353899	8-TR3	ET360399	10-TR22
EO345871	19-L206	EO393769J	16-L9	ET353899	8-TR4	ET360399	16-TR14
EO345873	19-L204	EO403270J	8-L510	ET353899	8-TR5	ET360399	16-TR15
EO345874	8-L410	EO403937J	8-L508	ET353899	8-TR7	ET360646	8-TR502
EO345874	19-L207	EO408381J	16-L1	ET353899	8-TR11	ET361490	5-24
EO345874	19-L208	EO408381J	16-L2	ET353899	8-TR13	ET361490	6-24
EO345875	19-L203	EO408381J	16-L3	ET353899	8-TR104	ET363953	8-TR303
EO345876	9-L602	EO408381J	16-L4	ET353899	8-TR105	ET364040	8-TR421
EO345880	8-L404	EO410099J	19-L154	ET353899	8-TR110	ET364040	10-TR5
EO345880	8-L472	EO410104J	19-L151	ET353899	8-TR407	ET364040	10-TR13
EO345880	8-L500	EO410104J	19-L152	ET353899	8-TR415	ET364040	10-TR17
EO345880	8-L502	EO714610	14-L5	ET353899	8-TR470	ET366365	15-TR2
EO345880	8-L505	EO714614	14-L4	ET353899	8-TR471	ET366365	15-TR7
EO345880	8-L506	EO725954J	14-L3	ET353899	9-TR601	ET366365	16-TR1
EO345880	8-L509	ER333091	16-R14	ET353899	9-TR607	ET366365	16-TR5
EO345880	8-L570	ER400605J	15-FR5	ET353899	10-TR1	ET366365	16-TR9
EO345880	10-L8	ER400605J	16-FR3	ET353899	10-TR11	ET366365	16-TR13
EO345880	10-L10	ER400689J	16-FR4	ET353899	10-TR12	ET373985	8-TR307
EO345880	10-L11	ER400728J	15-FR2	ET353899	17-TR3	ET373985	8-TR308
EO345880	19-L153	ER400728J	15-FR4	ET353899	17-TR8	ET373985	8-TR309
EO345881	8-L101	ER400728J	16-FR1	ET353899	19-TR152	ET375777	8-TR2
EO345881	8-L302	ER400729J	8-FR350	ET353899	19-TR153	ET381175J	15-TR1
EO345881	9-L601	ER400959J	8-FR201	ET353899	19-TR204	ET381637J2	11-PH1
EO345881	9-L605	ER403405J	8-R214	ET353899	19-TR208	ET381637J2	13-PH1
EO345881	9-L701	ER404093J	8-FR202	ET353899	19-TR252	ET388338J	8-TR205
EO345881	9-L702	ER404093J	8-FR501	ET353899	19-TR253	ET388338J	8-TR414
EO345881	9-L901	ER405441J	16-FR5	ET354364	8-TR404	ET388338J	8-TR424
EO351866	9-L604	ER408375J	15-FR1	ET354364	10-TR15	ET389803J	9-TR608
EO353900	8-L501	ER408375J	15-FR3	ET354414	8-TR8	ET389803J	9-TR904
EO353900	8-L503	ER408375J	16-FR2	ET354414	8-TR9	ET390009J	5-19
EO353900	8-L504	ES349474	11-SW2	ET354414	8-TR19	ET390009J	6-19
EO354600	8-L303	ES349474	11-SW3	ET354414	8-TR101	ET390010J	5-18
EO354600	8-L401	ES349474	11-SW4	ET354414	8-TR103	ET397160J	8-TR12
EO354600	8-L405	ES349474	11-SW5	ET354414	8-TR301	ET397160J	8-TR17
EO354600	8-L406	ES349474	11-SW6	ET354414	8-TR305	ET397160J	8-TR18
EO356722	8-L103	ES349474	11-SW7	ET354414	8-TR306	ET397160J	8-TR107
EO356722	8-L470	ES349474	11-SW8	ET354414	8-TR310	ET397160J	8-TR109
EO357508	8-L402	ES349474	11-SW9	ET354414	8-TR313	ET397160J	8-TR203
EO376600	10-L1	ES349474	11-SW12	ET354414	8-TR402	ET397160J	8-TR302
EO376600	10-L16	ES349474	12-SW1	ET354414	8-TR408	ET397160J	8-TR406
EO376603	10-L5	ES349474	12-SW2	ET354414	8-TR410	ET397160J	8-TR503
EO376606	10-L4	ES349474	12-SW4	ET354414	8-TR420	ET397160J	8-TR504
EO376607	10-L14	ES349474	12-SW5	ET354414	8-TR425	ET397160J	8-TR505
EO376612	10-L15	ES349474	12-SW6	ET354414	8-TR572	ET397160J	8-TR506
EO376614	10-L9	ES349474	12-SW7	ET354414	8-TR573	ET397160J	8-TR507
EO376857	10-L3	ES349474	12-SW8	ET354414	9-TR602	ET397160J	8-TR509
EO376858	10-L2	ES349474	12-SW9	ET354414	9-TR803	ET397160J	8-TR510
EO376859	10-L12	ES349474	12-SW10	ET354414	9-TR901	ET397160J	8-TR511
EO376860	10-L7	ES349474	12-SW11	ET354414	9-TR902	ET397160J	8-TR512
EO380091J1	17-L10	ES349474	12-SW12	ET354414	10-TR6	ET397160J	8-TR515
EO381192J	8-L403	ES349474	12-SW13	ET354414	10-TR16	ET397160J	8-TR570
EO381193J	10-L6	ES349474	12-SW14	ET354414	10-TR19	ET397160J	8-TR571
EO381195J	8-L511	ES349474	12-SW15	ET354414	10-TR23	ET397160J	9-TR603
EO381195J	10-L13	ES349474	12-SW16	ET354414	11-TR1	ET397160J	9-TR701
EO381196J	8-L301	ES349474	12-SW17	ET354414	12-TR1	ET397160J	9-TR751
EO381197J	8-L512	ES349474	12-SW18	ET354415	8-TR304	ET397160J	9-TR752

Part No.	Ref. No.
ET397160J	9-TR753
ET397160J	9-TR754
ET397160J	9-TR801
ET397160J	9-TR903
ET397160J	10-TR2
ET397160J	10-TR7
ET397160J	10-TR8
ET397160J	10-TR9
ET397160J	10-TR14
ET397160J	10-TR21
ET397160J	10-TR101
ET397160J	16-TR16
ET397160J	19-TR1
ET397160J	19-TR102
ET397160J	19-TR151
ET397160J	19-TR154
ET397160J	19-TR155
ET397160J	19-TR201
ET397160J	19-TR202
ET397160J	19-TR203
ET397160J	19-TR251
ET403420J	6-14
ET404195J	17-TR4
ET405622J	8-TR20
ET405622J	8-TR210
ET405622J	15-TR3
ET405622J	15-TR4
ET405622J	15-TR5
ET405622J	15-TR6
ET405622J	16-TR12
ET405622J	17-TR2
ET405622J	17-TR7
ET713614	14-Q2
ET725820J	14-Q1
EV390157J	10-VR1
EV390157J	10-VR2
EV403967J	9-VR801
EV403968J	9-VR802A
EV404298J	14-VR2
EV404300J	8-VR402
EV405248J	10-VR3
EV405248J	10-VR4
EV405263J	9-VR802B
EV405657J	8-VR401
EV405658J	8-VR404B
EV405658J	14-VR51
EV405659J	8-VR403
EV405665J	8-VR301
EV405665J	8-VR404A
EW348414	22-1
EW389313J	5-20
EW389313J	6-20
EW389313J	11-WP2
EW389313J	12-WP2
EW394623J	11-WP1
EW394623J	12-WP1
EW403386J1	10-WP1
EW404001M	21-20A
EW404002M	21-20B
EW404138J1	8-WF201
EX405691J	10-TH1
HE390013J	3-20
HE390013J	4-20
HR405340J	3-13
HR405340J	4-13
MA387474J3	2-6
MB387289J	5-11
MB407117J	6-11
MI387294J	3-10
MI404552J	4-10
ML387277J3	3-32
ML387277J3	4-32
ML387311J2	5-42
ML387311J2	6-42
ML387316J	3-1
ML387316J	4-1
ML387318J	3-2
ML387318J	4-2
ML387321J	3-4
ML387324J1	5-1
ML387344J	3-54
ML387344J	4-54
ML387345J	3-51
ML387345J	4-51
ML387346J	3-53
ML387346J	4-53
ML387349J2	3-56
ML387349J2	4-56
ML387350J1	3-47
ML387350J1	4-47
ML387402J1	5-3
ML387402J1	6-3
ML387423J	3-6
ML387428J	3-39
ML387428J	4-39
ML387431J1	3-31
ML387431J1	4-31
ML390768J4	3-25
ML390768J4	4-25
ML391745J3	3-41
ML391745J3	4-41
ML404567J1	6-1
ML404847J	4-66
ML404944J	5-2
ML404944J	6-2
ML407119J	4-4
MP404852J	3-27
MP404852J	4-64
MR387286J1	3-18
MR387286J1	4-18
MR387406J	5-35
MR387406J	6-35
MR391968J	5-33
MR391968J	6-33
MT390954J1	3-9
MT404547J	4-9
MZV1102A090A	5-25
MZV1102A090A	6-25
MZV1102A100A	5-26
MZV1102A100A	6-26
MZ387298J3	5-7
MZ387330J	5-32
MZ387331J	5-29
MZ387332J	5-28
MZ387332J	6-28
MZ387333J	5-30
MZ387333J	6-30
MZ387335J	3-40
MZ387335J	4-40
MZ387351J2	4-58
MZ387430J	5-21
MZ387430J	6-21
MZ387445J	5-22
MZ387445J	6-22
MZ387446J	5-23
MZ395471J3	4-27
MZ401686J1	6-32
MZ402760J2	3-17
MZ402760J2	4-17
MZ404538J	6-29
MZ404542J	6-23
MZ404577J	6-7
MZ404995J	4-62
MZ406134J	3-58
SA387507J	21-8
SC387353J	21-6
SE395554J	3-57
SE395554J	4-57
SE409101J1	21-2B
SE409104J1	21-2C
SE409197J	21-2A
SK407561J	21-18
SK407562J	21-22
SP388306J	8-3B
SP404784J	8-3A
SP407479J	21-14
SP409133J	21-4B
SP409166J	21-4A
SZ387263J4	4-24
SZ387388J	2-4
SZ391866J1	4-60
SZ401874J	21-21A
SZ404290J	21-5
SZ407187J2	3-24
SZ407583J	21-21B
VT387394J1	3-37
VT387394J1	4-37
VT401282J	2-13
ZG373900	3-12
ZG373900	4-12
ZG387272J	3-26
ZG387282J	3-33
ZG387282J	4-33
ZG387320J	3-3
ZG387320J	4-3
ZG387323J	3-5
ZG387323J	4-5
ZG387348J1	3-49
ZG387348J1	4-49
ZG387354J	21-13
ZG387370J	21-3
ZG387403J	5-5
ZG387403J	6-5
ZG387413J1	5-27
ZG387413J1	6-27
ZG387417J	3-44
ZG387417J	4-44
ZG387418J	3-45
ZG387418J	4-45
ZG387420J1	3-55
ZG387420J1	4-55
ZG387421J	3-50
ZG387421J	4-50
ZG387438J1	3-11
ZG387438J1	4-11
ZG387443J	5-34
ZG387443J	6-34
ZG387467J	3-7
ZG387468J	5-4
ZG387468J	6-4
ZG387502J	6-38
ZG387505J	21-11
ZG388290J1	3-52
ZG388290J1	4-52
ZG392294J	3-61
ZG392294J	4-61
ZG392831J	3-46
ZG392831J	4-46
ZG395470J	4-26
ZG395567J	3-42
ZG395567J	4-42
ZS321298	2-3
ZS321298	3-15
ZS321298	4-15
ZS336714	2-12
ZS336714	3-22
ZS336714	4-22
ZS344754	3-16
ZS358936	3-59
ZS358936	4-59
ZS358936	5-41
ZS358936	6-41
ZS358936	21-9
ZS365149	5-10
ZS365149	6-10
ZS373962	21-12
ZS374458	3-38
ZS374458	4-38
ZS378341	21-7
ZS379350	2-11
ZS379405	2-5
ZS385611J	21-15
ZS389853J	2-14
ZS389853J	4-16
ZS389950J	5-40
ZS389950J	6-40
ZS391046J	21-16
ZS404844J	3-14
ZS404844J	4-14
ZS425981	5-36
ZS425981	6-36
ZS464703	3-28
ZS467796	2-9
ZS563444	2-7
ZS659046	21-17
ZW332843	3-30
ZW332843	4-30
ZW374445	3-19
ZW374445	4-19
ZW387492J	5-8
ZW387492J	6-8
ZW389814J	3-8
ZW389814J	4-8
ZW389923J	5-6
ZW389923J	6-6
ZW401776J	3-34
ZW401776J	4-34

3. VS-F440EDG/EO/EOG-V/EOH, F450EOH, F455EOH, F480EOG-V, F490EO/EOH, F497EOH

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
AVB1038A010A	25-2A	BV403409J	9-MD1	ED307572	9-D208	ED307572	14-D27
AVB1039A010A	25-2B	EA387496J	5-12	ED307572	9-D209	ED307572	14-D28
AVB1040A010F	25-2D	EA404543J	6-12	ED307572	9-D301	ED307572	14-D32
AVB1042A010C	25-2C	EC363490	18-C2	ED307572	9-D302	ED307572	14-D41
AVB1043A010E	25-2E	EC391843J	8-C369	ED307572	9-D305	ED307572	14-D44
BAV1130A500A	7-4A	EC391843J	9-C369	ED307572	9-D306	ED307572	14-D45
BAV1132A500A	7-4B	EC394757J	10-VC601	ED307572	9-D307	ED307572	14-D46
BAV1132A500C	7-4D	EC394757J	11-VC601	ED307572	9-D308	ED307572	14-D47
BAV1132A610G	7-2C	EC403878J	19-C4	ED307572	9-D309	ED307572	14-D48
BAV1132A610J	7-2B	EC403878J	19-C15	ED307572	9-D310	ED307572	15-D33
BAV1132A615C	7-2A	EC403880J	19-C20	ED307572	9-D401	ED307572	19-D16
BAV1135A500C	7-4E	EC406634J	18-C1	ED307572	9-D402	ED307572	19-D52
BAV1135A500E	7-4C	EC406635J	18-C3	ED307572	9-D404	ED307572	19-D54
BAV1146A635M	7-3A	EC406639J	19-C23	ED307572	9-D405	ED307572	19-D55
BAV1146A640D	7-3B	EC406639J	19-C24	ED307572	9-D408	ED307572	20-D10
BAV1146A640E	7-3C	EC408376J	19-C1	ED307572	9-D410	ED307572	20-D52
BAV1146A640F	7-3D	EC408377J	19-C2	ED307572	9-D411	ED307572	22-D1
BAV1146A640M	7-3E	EC408426J	19-C3	ED307572	9-D501	ED307572	22-D101
BAV1150A600B	7-1A	EC408426J	19-C14	ED307572	9-D502	ED307572	22-D201
BAV1150A600H	7-1D	ED307572	8-D1	ED307572	9-D503	ED307572	22-D601
BAV1150A600J	7-1E	ED307572	8-D2	ED307572	9-D504	ED366443	8-D406
BAV1150Q600F	7-1B	ED307572	8-D3	ED307572	9-D505	ED366443	9-D406
BAV1150Q600G	7-1C	ED307572	8-D4	ED307572	9-D506	ED379298	21-D1/D14
BAV1152A600E	7-1H	ED307572	8-D5	ED307572	9-D507	ED386226J	19-D6
BAV1152A600G	7-1J	ED307572	8-D7	ED307572	9-D508	ED386226J	19-D8
BAV1152A630E	7-3H	ED307572	8-D9	ED307572	9-D509	ED386226J	19-D11
BAV1152A630F	7-3J	ED307572	8-D10	ED307572	10-D601	ED387919J	8-D8
BAV1152Q600C	7-1G	ED307572	8-D201	ED307572	10-D603	ED387919J	9-D8
BAV1152Q600D	7-1F	ED307572	8-D202	ED307572	10-D801	ED387919J	20-D50
BAV1152Q630C	7-3G	ED307572	8-D203	ED307572	11-D601	ED390011J	5-13
BAV1152Q630D	7-3F	ED307572	8-D206	ED307572	11-D603	ED390011J	6-13
BBV1130A020C	4-70	ED307572	8-D207	ED307572	11-D801	ED390012J	5-14
BBV1130A020H	3-64	ED307572	8-D208	ED307572	11-D901	ED391005J	19-D28
BD409124J1	24-1F	ED307572	8-D209	ED307572	11-D902	ED396057J	19-D56
BD409125J1	24-1G	ED307572	8-D301	ED307572	12-D1	ED396060J	19-D27
BD409129J1	24-1H	ED307572	8-D302	ED307572	12-D2	ED397233J	8-D204
BD409284J	24-1C	ED307572	8-D305	ED307572	12-D3	ED397233J	9-D204
BD409286J	24-1B	ED307572	8-D306	ED307572	12-D4	ED403267J	8-D205
BD409287J	24-1D	ED307572	8-D307	ED307572	13-D2	ED403267J	9-D205
BD409288J	24-1E	ED307572	8-D308	ED307572	13-D12	ED403267J	19-D51
BD409297J	24-1A	ED307572	8-D309	ED307572	13-D13	ED403278J	13-D11
BLV1102A050A	3-23	ED307572	8-D401	ED307572	13-D14	ED403279J	13-D10
BLV1102A140A	3-43	ED307572	8-D402	ED307572	13-D15	ED403279J	14-D10
BLV1102A140A	4-43	ED307572	8-D404	ED307572	13-D17	ED403724J	8-D304
BLV1123A050A	4-23	ED307572	8-D405	ED307572	13-D25	ED403724J	9-D304
BLV1130A160A	4-65	ED307572	8-D408	ED307572	13-D26	ED403726J	8-D210
BL387458J2	6-37	ED307572	8-D410	ED307572	13-D27	ED403726J	9-D210
BM387503J	5-31	ED307572	8-D411	ED307572	13-D31	ED403729J	8-D412
BM387503J	6-31	ED307572	8-D501	ED307572	13-D32	ED403729J	9-D412
BM400682J1	5-9	ED307572	8-D502	ED307572	13-D33	ED403730J	8-D211
BM400682J1	6-9	ED307572	8-D503	ED307572	13-D41	ED403730J	9-D211
BM401296J1	2-8	ED307572	8-D504	ED307572	13-D43	ED403731J	8-D6
BT403873J	24-19B	ED307572	8-D505	ED307572	13-D44	ED403731J	9-D6
BT403883J	24-19C	ED307572	8-D506	ED307572	14-D2	ED403731J	14-D11
BT410491J	24-19A	ED307572	8-D507	ED307572	14-D5	ED404029J	18-D16
BVV1102A070A	3-35	ED307572	8-D508	ED307572	14-D12	ED404032J	18-D14
BVV1102A070A	4-35	ED307572	8-D509	ED307572	14-D13	ED404032J	19-D19
BVV1102A080A	3-36	ED307572	9-D1	ED307572	14-D14	ED404086J	8-D303
BVV1102A080A	4-36	ED307572	9-D2	ED307572	14-D15	ED404086J	9-D303
BVV1102A150A	3-48	ED307572	9-D3	ED307572	14-D16	ED404170J	9-D102
BVV1102A150A	4-48	ED307572	9-D4	ED307572	14-D17	ED405247J	12-D101
BVV1123A410B	2-1	ED307572	9-D5	ED307572	14-D18	ED405264J	19-D57
BVV1123A420B	2-2	ED307572	9-D7	ED307572	14-D19	ED405264J	19-D58
BV403237J	8-1A	ED307572	9-D9	ED307572	14-D20	ED405264J	20-D7
BV403240J1	8-1C	ED307572	9-D10	ED307572	14-D21	ED405373J	18-D13
BV403240J1	9-1B	ED307572	9-D201	ED307572	14-D22	ED405446J	22-D602
BV403241J1	8-1B	ED307572	9-D202	ED307572	14-D23	ED405524J	18-D15
BV403241J1	9-1A	ED307572	9-D203	ED307572	14-D24	ED405524J	19-D20
BV403408J	8-MD1A	ED307572	9-D206	ED307572	14-D25	ED405603J	8-D12
BV403409J	8-MD1B	ED307572	9-D207	ED307572	14-D26	ED405603J	9-D12

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
ED405604J	8-D13	EI368825M	14-X2	EJ405226J	9-PJ101	EO356722	8-L470
ED405604J	9-D13	EI368829	16-X51	EJ408399J	14-PJ1	EO356722	9-L103
ED511907	8-D212	EI373955	13-IC3	EM401077J	13-FL1	EO356722	9-L470
ED511907	8-D213	EI373955	14-IC3	EM403367J	14-FL1	EO357508	8-L402
ED511907	9-D212	EI373957J1	13-X1	EO345865	22-L1	EO357508	9-L402
ED511907	9-D213	EI373957J1	14-X1	EO345865	22-L101	EO366893	10-VL701
ED511907	18-D1	EI373957J1	22-X101	EO345865	22-L102	EO366893	11-VL701
ED511907	18-D2	EI373980	8-IC303	EO345865	22-L121	EO376600	12-L1
ED511907	18-D3	EI373980	9-IC303	EO345865	22-L155	EO376600	12-L16
ED511907	18-D4	EI373981J1	8-IC402	EO345865	22-L201	EO376603	12-L5
ED511907	18-D5	EI373981J1	9-IC402	EO345865	22-L202	EO376605	12-L14B
ED511907	18-D6	EI381575J	20-IC1	EO345865	22-L251	EO376606	12-L4
ED511907	18-D7	EI381632J	8-X500	EO345865	22-L301	EO376607	12-L14A
ED511907	18-D8	EI381632J	9-X500	EO345871	22-L206	EO376612	12-L15
ED511907	18-D9	EI385958J	22-IC301	EO345873	22-L204	EO376614	12-L9
ED511907	18-D10	EI386468J	11-IC901	EO345874	8-L410	EO376857	12-L3
ED511907	18-D11	EI387019J	22-IC108	EO345874	9-L410	EO376858	12-L2
ED511907	18-D12	EI387586J	12-IC1	EO345874	22-L207	EO376859	12-L12
ED511907	18-D17	EI388360J	10-IC801	EO345874	22-L208	EO376860	12-L7
ED511907	18-D18	EI388360J	11-IC801	EO345875	22-L203	EO380091J1	20-L10
ED511907	19-D3	EI389622J	8-IC1	EO345876	10-L602	EO381192J	8-L403
ED511907	19-D4	EI389622J	9-IC1	EO345876	11-L602	EO381192J	9-L403
ED511907	19-D17	EI389640J	8-X301	EO345880	8-L404	EO381193J	12-L6
ED511907	19-D18	EI389640J	9-X301	EO345880	8-L472	EO381195J	8-L511
ED511907	19-D71	EI389974J	10-X601	EO345880	8-L500	EO381195J	9-L511
ED511907	19-D72	EI389974J	11-X601	EO345880	8-L505	EO381195J	12-L13
ED511907	19-D73	EI394673J	22-X103	EO345880	8-L506	EO381196J	8-L301
ED511907	19-D74	EI394680J	22-IC107	EO345880	8-L509	EO381196J	9-L301
EE387604J2	8-2B	EI394856J	8-IC401	EO345880	8-L570	EO381197J	8-L512
EE387604J2	9-2A	EI394856J	9-IC401	EO345880	9-L404	EO381197J	9-L512
EE390143J2	8-2C	EI394861J	9-IC102	EO345880	9-L472	EO386541J	19-L6
EE390143J2	9-2B	EI400756J	8-IC201	EO345880	9-L500	EO387782J	16-L1
EE408471J	8-2A	EI400756J	9-IC201	EO345880	9-L502	EO387798J	16-L6
EF339908	19-FL2	EI401050J	22-IC106	EO345880	9-L505	EO387798J	17-L7B
EH366894	10-FL701	EI403234J1	8-IC400	EO345880	9-L506	EO387799J	17-L6
EH366894	11-FL701	EI403234J1	9-IC400	EO345880	9-L509	EO387799J	17-L7A
EH368816	16-CF1	EI403467J	10-X602	EO345880	9-L570	EO387800J	17-L1
EH368827	16-CF52	EI403467J	11-X602	EO345880	12-L8	EO387802J	9-L590
EH368948	16-CF3	EI403469J	10-IC602	EO345880	12-L10	EO387802J	17-L8
EH368948	17-CF3	EI403469J	11-IC602	EO345880	12-L11	EO387803J	16-L52
EH373918	16-CF4	EI403964J	9-IC103	EO345880	22-L153	EO388161J	8-L474
EH373920	17-CF2	EI405224J	22-IC102	EO345881	8-L101	EO388161J	9-L474
EH376338	16-CF2	EI405224J	22-IC103	EO345881	8-L302	EO388349J	12-FL101
EH383056J	22-IB101	EI405722J	10-IC601	EO345881	9-L101	EO388362J	10-FL801
EH383083J	13-IB2	EI405722J	11-IC601	EO345881	9-L302	EO388363J	11-FL801
EH383083J	14-IB2	EI408391J1	13-IC1	EO345881	10-L601	EO390716J	10-L802
EH386637J	22-IB102	EI408393J	13-IC2	EO345881	10-L605	EO390716J	11-L802
EH388287J	16-CF51	EI408393J	14-IC2	EO345881	10-L701	EO390716J	12-L101
EH390730J	8-DL500	EI408397J	14-IC1	EO345881	11-L601	EO390717J	10-L801
EH390730J	9-DL500	EI408432J	22-IC101	EO345881	11-L605	EO390717J	11-L801
EH394684J	22-FL101	EI408433J	22-X102	EO345881	11-L701	EO390999J	8-L1
EH394838J	9-DL501	EI408434J	22-IC104	EO345881	11-L702	EO390999J	9-L1
EH403945J	13-IB1	EI408849J	8-IC301	EO345881	11-L901	EO392817J	8-L507
EH403945J	14-IB1	EI408850J	9-IC301	EO351866	10-L603	EO392817J	9-L507
EH730625J	17-CF1	EI410125J	22-IC105	EO351866	10-L604	EO393769J	19-L9
EH780128	16-CF53	EJ381837J	5-16	EO351866	11-L603	EO396361J	16-L51
EI200573	11-IC702	EJ381837J	6-16	EO351866	11-L604	EO397238J	16-L5
EI310036	8-IC101	EJ387497J	5-15	EO353900	8-L501	EO397389J	10-L850
EI310036	9-IC101	EJ387497J	6-15	EO353900	9-L501	EO403270J	8-L510
EI310036	11-IC902	EJ387497J	13-PS2	EO353900	9-L503	EO403270J	9-L510
EI353421	8-IC302	EJ387497J	14-PS2	EO353900	9-L504	EO403937J	8-L480
EI353421	9-IC302	EJ387613J	8-PJ102	EO354600	8-L303	EO403937J	8-L508
EI356457	8-IC403	EJ387613J	9-PJ102	EO354600	8-L401	EO403937J	9-L480
EI356457	9-IC403	EJ387614J	8-PJ101	EO354600	8-L405	EO403937J	9-L508
EI360586	9-IC304	EJ387622J	14-PJ2	EO354600	8-L406	EO408381J	19-L1
EI366892	10-IC701	EJ387623J	14-PJ3	EO354600	9-L303	EO408381J	19-L2
EI366892	11-IC701	EJ389815J	13-PS1	EO354600	9-L401	EO408381J	19-L3
EI368809	16-IC1	EJ389815J	14-PS1	EO354600	9-L405	EO408381J	19-L4
EI368809	17-IC1	EJ403389J	12-PS1	EO354600	9-L406	EO410099J	22-L154
EI368825M	13-X2	EJ405225J	9-PJ103	EO356722	8-L103	EO410104J	22-L151

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
EO410104J	22-L152	ET353897	12-TR18	ET354414	8-TR572	ET360399	19-TR14
EO714610	16-L4	ET353897	20-TR50	ET354414	8-TR573	ET360399	19-TR15
EO714610	17-L5	ET353899	8-TR1	ET354414	9-TR8	ET360646	9-TR502
EO714614	16-L3	ET353899	8-TR3	ET354414	9-TR9	ET361490	5-24
EO714614	17-L4	ET353899	8-TR4	ET354414	9-TR10	ET361490	6-24
EO725953J	17-L3	ET353899	8-TR5	ET354414	9-TR19	ET363953	9-TR303
EO725954J	16-L2	ET353899	8-TR6	ET354414	9-TR101	ET364040	8-TR421
EO725964J	17-L51	ET353899	8-TR7	ET354414	9-TR103	ET364040	9-TR421
EO725965J	17-L52	ET353899	8-TR11	ET354414	9-TR209	ET364040	12-TR5
ER331188	22-FR601	ET353899	8-TR13	ET354414	9-TR301	ET364040	12-TR13
ER333091	19-R14	ET353899	8-TR104	ET354414	9-TR305	ET364040	12-TR17
ER400605J	18-FR5	ET353899	8-TR105	ET354414	9-TR306	ET366168	9-TR201
ER400605J	19-FR3	ET353899	8-TR407	ET354414	9-TR310	ET366365	18-TR2
ER400689J	19-FR4	ET353899	8-TR415	ET354414	9-TR313	ET366365	18-TR7
ER400728J	18-FR2	ET353899	8-TR470	ET354414	9-TR402	ET366365	19-TR1
ER400728J	18-FR4	ET353899	8-TR471	ET354414	9-TR408	ET366365	19-TR5
ER400728J	19-FR1	ET353899	9-TR1	ET354414	9-TR410	ET366365	19-TR9
ER400729J	8-FR350	ET353899	9-TR3	ET354414	9-TR420	ET366365	19-TR13
ER400729J	9-FR350	ET353899	9-TR4	ET354414	9-TR425	ET370819	16-Q3
ER400959J	8-FR201	ET353899	9-TR5	ET354414	9-TR514	ET370819	16-Q51
ER400959J	9-FR201	ET353899	9-TR6	ET354414	9-TR572	ET370819	16-Q52
ER403405J	8-R214	ET353899	9-TR7	ET354414	9-TR573	ET373985	8-TR307
ER403405J	9-R214	ET353899	9-TR11	ET354414	10-TR602	ET373985	8-TR308
ER404093J	8-FR202	ET353899	9-TR13	ET354414	10-TR609	ET373985	8-TR309
ER404093J	8-FR501	ET353899	9-TR104	ET354414	11-TR602	ET373985	9-TR307
ER404093J	9-FR202	ET353899	9-TR105	ET354414	11-TR609	ET373985	9-TR308
ER404093J	9-FR501	ET353899	9-TR110	ET354414	11-TR803	ET373985	9-TR309
ER405441J	19-FR5	ET353899	9-TR407	ET354414	11-TR901	ET375777	8-TR2
ER408375J	18-FR1	ET353899	9-TR415	ET354414	11-TR902	ET375777	9-TR2
ER408375J	18-FR3	ET353899	9-TR470	ET354414	12-TR6	ET381175J	18-TR1
ER408375J	19-FR2	ET353899	9-TR471	ET354414	12-TR16	ET381637J2	13-PH1
ES349474	13-SW2	ET353899	10-TR601	ET354414	12-TR19	ET381637J2	15-PH1
ES349474	13-SW3	ET353899	10-TR607	ET354414	12-TR23	ET388338J	8-TR205
ES349474	13-SW4	ET353899	10-TR608	ET354414	13-TR1	ET388338J	8-TR414
ES349474	13-SW5	ET353899	11-TR601	ET354414	14-TR1	ET388338J	8-TR424
ES349474	13-SW6	ET353899	11-TR607	ET354415	8-TR304	ET388338J	9-TR205
ES349474	13-SW7	ET353899	11-TR608	ET354415	8-TR413	ET388338J	9-TR414
ES349474	13-SW8	ET353899	11-TR904	ET354415	9-TR304	ET388338J	9-TR424
ES349474	13-SW9	ET353899	12-TR1	ET354415	9-TR413	ET390009J	5-19
ES349474	13-SW12	ET353899	12-TR11	ET354415	22-TR101	ET390009J	6-19
ES349474	14-SW1	ET353899	12-TR12	ET356336	8-TR102	ET390010J	5-18
ES349474	14-SW2	ET353899	20-TR3	ET356336	8-TR108	ET397160J	8-TR12
ES349474	14-SW4	ET353899	20-TR8	ET356336	8-TR202	ET397160J	8-TR14
ES349474	14-SW5	ET353899	22-TR152	ET356336	8-TR211	ET397160J	8-TR16
ES349474	14-SW6	ET353899	22-TR153	ET356336	8-TR401	ET397160J	8-TR17
ES349474	14-SW7	ET353899	22-TR204	ET356336	8-TR423	ET397160J	8-TR18
ES349474	14-SW8	ET353899	22-TR208	ET356336	8-TR508	ET397160J	8-TR107
ES349474	14-SW9	ET353899	22-TR252	ET356336	8-TR513	ET397160J	8-TR109
ES349474	14-SW10	ET353899	22-TR253	ET356336	9-TR102	ET397160J	8-TR203
ES349474	14-SW11	ET354083	22-TR601	ET356336	9-TR108	ET397160J	8-TR302
ES349474	14-SW12	ET354364	8-TR404	ET356336	9-TR202	ET397160J	8-TR406
ES349474	14-SW13	ET354364	9-TR404	ET356336	9-TR211	ET397160J	8-TR503
ES349474	14-SW14	ET354364	12-TR15	ET356336	9-TR401	ET397160J	8-TR506
ES349474	14-SW15	ET354414	8-TR8	ET356336	9-TR423	ET397160J	8-TR507
ES349474	14-SW16	ET354414	8-TR9	ET356336	9-TR508	ET397160J	8-TR509
ES349474	14-SW17	ET354414	8-TR10	ET356336	9-TR513	ET397160J	8-TR510
ES349474	14-SW18	ET354414	8-TR19	ET356336	10-TR605	ET397160J	8-TR511
ES349474	14-SW19	ET354414	8-TR101	ET356336	10-TR606	ET397160J	8-TR512
ES349474	15-SW3	ET354414	8-TR103	ET356336	11-TR605	ET397160J	8-TR515
ES373099	5-39	ET354414	8-TR209	ET356336	11-TR606	ET397160J	8-TR570
ES373099	6-39	ET354414	8-TR301	ET356817	19-TR6	ET397160J	8-TR571
ES387465J	5-17	ET354414	8-TR305	ET360399	8-TR409	ET397160J	9-TR12
ES387465J	6-17	ET354414	8-TR306	ET360399	8-TR411	ET397160J	9-TR14
ES403377J	23-SW1	ET354414	8-TR310	ET360399	8-TR417	ET397160J	9-TR16
ES408404J	13-SW1	ET354414	8-TR313	ET360399	9-TR409	ET397160J	9-TR17
ET353897	8-TR15	ET354414	8-TR402	ET360399	9-TR411	ET397160J	9-TR18
ET353897	8-TR501	ET354414	8-TR408	ET360399	9-TR417	ET397160J	9-TR107
ET353897	9-TR15	ET354414	8-TR410	ET360399	12-TR3	ET397160J	9-TR109
ET353897	9-TR501	ET354414	8-TR420	ET360399	12-TR4	ET397160J	9-TR203
ET353897	12-TR10	ET354414	8-TR514	ET360399	12-TR22	ET397160J	9-TR302

Part No.	Ref. No.
ET397160J	9-TR406
ET397160J	9-TR503
ET397160J	9-TR504
ET397160J	9-TR505
ET397160J	9-TR506
ET397160J	9-TR507
ET397160J	9-TR509
ET397160J	9-TR510
ET397160J	9-TR511
ET397160J	9-TR512
ET397160J	9-TR515
ET397160J	9-TR570
ET397160J	9-TR571
ET397160J	10-TR603
ET397160J	10-TR604
ET397160J	10-TR701
ET397160J	10-TR702
ET397160J	10-TR801
ET397160J	11-TR603
ET397160J	11-TR604
ET397160J	11-TR701
ET397160J	11-TR702
ET397160J	11-TR751
ET397160J	11-TR752
ET397160J	11-TR753
ET397160J	11-TR754
ET397160J	11-TR801
ET397160J	11-TR903
ET397160J	12-TR2
ET397160J	12-TR7
ET397160J	12-TR8
ET397160J	12-TR9
ET397160J	12-TR14
ET397160J	12-TR21
ET397160J	12-TR101
ET397160J	19-TR16
ET397160J	22-TR1
ET397160J	22-TR102
ET397160J	22-TR151
ET397160J	22-TR154
ET397160J	22-TR155
ET397160J	22-TR201
ET397160J	22-TR202
ET397160J	22-TR203
ET397160J	22-TR251
ET403420J	6-14
ET404195J	20-TR4
ET405622J	8-TR20
ET405622J	8-TR210
ET405622J	9-TR20
ET405622J	9-TR210
ET405622J	18-TR3
ET405622J	18-TR4
ET405622J	18-TR5
ET405622J	18-TR6
ET405622J	19-TR12
ET405622J	20-TR2
ET405622J	20-TR7
ET713614	16-Q2
ET713614	16-Q4
ET713614	17-Q2
ET724885J	17-Q51
ET724885J	17-Q52
ET725820J	16-Q1
ET725820J	17-Q1
EV390157J	12-VR1
EV390157J	12-VR2
EV403967J	10-VR801
EV403967J	11-VR801
EV403968J	10-VR802
EV404298J	16-VR2
EV404298J	17-VR2
EV404300J	8-VR402
EV404300J	9-VR402
EV405248J	12-VR3
EV405248J	12-VR4
EV405263J	11-VR802
EV405657J	8-VR401
EV405657J	9-VR401
EV405658J	9-VR404B
EV405658J	16-VR1
EV405658J	17-VR51
EV405658J	17-VR52
EV405659J	8-VR403
EV405659J	9-VR403
EV405665J	8-VR301
EV405665J	8-VR404
EV405665J	9-VR301
EV405665J	9-VR404A
EW348414	25-1
EW389313J	5-20
EW389313J	6-20
EW389313J	13-WP2
EW389313J	14-WP2
EW394623J	13-WP1
EW394623J	14-WP1
EW403386J1	12-WP1
EW404002M	24-20
EW404138J1	8-WF201
EW404138J1	9-WF201
EX405691J	12-TH1
HE390013J	3-20
HE390013J	4-20
HR405340J	3-13
HR405340J	4-13
MA387474J3	2-6
MB387289J	5-11
MB407117J	6-11
MI387294J	3-10
MI404552J	4-10
ML387277J3	3-32
ML387277J3	4-32
ML387311J2	5-42
ML387311J2	6-42
ML387316J	3-1
ML387316J	4-1
ML387318J	3-2
ML387318J	4-2
ML387321J	3-4
ML387324J1	5-1
ML387344J	3-54
ML387344J	4-54
ML387345J	3-51
ML387345J	4-51
ML387346J	3-53
ML387346J	4-53
ML387349J2	3-56
ML387349J2	4-56
ML387350J1	3-47
ML387350J1	4-47
ML387402J1	5-3
ML387402J1	6-3
ML387423J	3-6
ML387428J	3-39
ML387428J	4-39
ML387431J1	3-31
ML387431J1	4-31
ML390768J4	3-25
ML390768J4	4-25
ML391745J3	3-41
ML391745J3	4-41
ML404567J1	6-1
ML404847J	4-66
ML404944J	5-2
ML404944J	6-2
ML407119J	4-4
MP404852J	3-27
MP404852J	4-64
MR387286J1	3-18
MR387286J1	4-18
MR387406J	5-35
MR387406J	6-35
MR391968J	5-33
MR391968J	6-33
MT390954J1	3-9
MT404547J	4-9
MZV1102A090A	5-25
MZV1102A090A	6-25
MZV1102A100A	5-26
MZV1102A100A	6-26
MZ387298J3	5-7
MZ387330J	5-32
MZ387331J	5-29
MZ387332J	5-28
MZ387332J	6-28
MZ387333J	5-30
MZ387333J	6-30
MZ387335J	3-40
MZ387335J	4-40
MZ387351J2	4-58
MZ387430J	5-21
MZ387430J	6-21
MZ387445J	5-22
MZ387445J	6-22
MZ387446J	5-23
MZ395471J3	4-27
MZ401686J1	6-32
MZ402760J2	3-17
MZ402760J2	4-17
MZ404538J	6-29
MZ404542J	6-23
MZ404577J	6-7
MZ404995J	4-62
MZ406134J	3-58
SA387507J	24-8
SC387353J	24-6
SE395554J	3-57
SE395554J	4-57
SE409102J1	24-2E
SE409103J1	24-2F
SE409107J1	24-2G
SE409191J	24-26
SE409197J	24-2A
SE409198J	24-2C
SE409199J	24-2D
SE409202J	24-2B
SK407561J	24-18
SK407562J	24-22
SP387357J	8-3B
SP387357J	9-3A
SP388305J	8-3C
SP395563J	8-3A
SP404783J	9-3B
SP404784J	9-3C
SP407479J	24-14
SP407593J	24-4B
SP409112J	24-4A
SP409113J	24-4C
SZ387263J4	4-24
SZ387388J	2-4
SZ391866J1	4-60
SZ401874J	24-21A
SZ404290J	24-5
SZ407187J2	3-24
SZ407583J	24-21B
VT387394J1	3-37
VT387394J1	4-37
VT401282J	2-13
ZG373900	3-12
ZG373900	4-12
ZG387272J	3-26
ZG387282J	3-33
ZG387282J	4-33
ZG387320J	3-3
ZG387320J	4-3
ZG387323J	3-5
ZG387323J	4-5
ZG387348J1	3-49
ZG387348J1	4-49
ZG387354J	24-13
ZG387370J	24-3
ZG387403J	5-5
ZG387403J	6-5
ZG387413J1	5-27
ZG387413J1	6-27
ZG387417J	3-44
ZG387417J	4-44
ZG387418J	3-45
ZG387418J	4-45
ZG387420J1	3-55
ZG387420J1	4-55
ZG387421J	3-50
ZG387421J	4-50
ZG387438J1	3-11
ZG387438J1	4-11
ZG387443J	5-34
ZG387443J	6-34
ZG387467J	3-7
ZG387468J	5-4
ZG387468J	6-4
ZG387502J	6-38
ZG387505J	24-11
ZG388290J1	3-52
ZG388290J1	4-52
ZG392294J	3-61
ZG392294J	4-61
ZG392831J	3-46
ZG392831J	4-46
ZG395470J	4-26
ZG395567J	3-42
ZG395567J	4-42
ZS321298	2-3
ZS321298	3-15
ZS321298	4-15
ZS336714	2-12
ZS336714	3-22
ZS336714	4-22
ZS344754	3-16
ZS358936	3-59
ZS358936	4-59
ZS358936	5-41
ZS358936	6-41
ZS358936	24-9
ZS365149	5-10
ZS365149	6-10
ZS373962	24-12
ZS374458	3-38
ZS374458	4-38
ZS378341	24-7
ZS379350	2-11

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
ZS379405	2-5						
ZS385611J	24-15						
ZS389853J	2-14						
ZS389853J	4-16						
ZS389950J	5-40						
ZS389950J	6-40						
ZS391046J	24-16						
ZS404844J	3-14						
ZS404844J	4-14						
ZS425981	5-36						
ZS425981	6-36						
ZS464703	3-28						
ZS467796	2-9						
ZS563444	2-7						
ZS659046	24-17						
ZW332843	3-30						
ZW332843	4-30						
ZW374445	3-19						
ZW374445	4-19						
ZW387492J	5-8						
ZW387492J	6-8						
ZW389814J	3-8						
ZW389814J	4-8						
ZW389923J	5-6						
ZW389923J	6-6						
ZW401776J	3-34						
ZW401776J	4-34						

4. REMOTE CONTROL (MODEL RC-V250E, V251G, V252E, V451E/G, V452E)

Part No.	Ref. No.
ED386031J	31-D2
ED386031J	31-D3
ED386031J	31-D4
ED386031J	33-D2
ED386031J	33-D3
ED386031J	33-D4
ED386031J	39-D4
ED386031J	39-D5
ED386031J	39-D6
ED386031J	39-D7
ED386031J	39-D8
ED386031J	39-D9
ED386031J	39-D10
ED386031J	39-D11
ED397391J	37-D2
ED397391J	37-D3
ED397391J	39-D2
ED397391J	39-D3
ED403450J	31-D1
ED403450J	33-D1
ED403450J	35-D1
ED403450J	37-D1
ED403450J	39-D1
EI368825	35-X1
EI368825M	39-X1
EI376112	31-IC1
EI376112	33-IC1
EI390687J	31-X1
EI390687J	33-X1
EI400672J	35-IC2
EI400672J	37-IC2
EI400672J	39-IC2
EI403451J	35-X2
EI403451J	39-X2
EI408408J1	35-IC1
EI408408J1	39-IC1
EI408449J	37-IC1
EI408450J	37-X1
EJ403095J	34-4
EJ408427J	38-8
EM403448J	34-3
EM408437J	38-7
ES393431J	39-SW1
ES408428J	36-11
ES408428J	38-11
ET390826J	31-TR1
ET390826J	33-TR1
ET390826J	35-TR1
ET405342J	37-TR1
ET405342J	39-TR1
MB403107J	34-5
MB406737J	32-5
MB406738J	32-6
MB406738J	34-6
MB407424J	30-2
MB407620J	38-5
MB407624J	36-5
MB407645J	36-4
MB407645J	38-4
SC406730J	32-14
SC406730J	34-14
SC407425J	30-7
SC407627J	36-19
SC407627J	38-19
SE403111J	32-7
SE403111J	34-7
SE407612J	36-3
SE407612J	38-3
SE407613J	38-25
SE407625J	36-14
SE407625J	38-14
SK407708J	36-21
SK407708J	38-21
SK407713J	36-20
SK407713J	38-20
SP403096J1	34-16
SP406731J	34-15
SP406739J	32-15
SP407632J	36-24B
SP407633J	36-24A
SP407640J	38-24
SZ408435J	36-23
SZ408435J	38-23
SZ408436J	36-22
SZ408436J	38-22
ZG403098J	33-1
ZG403098J	35-1
ZG403099J	33-2
ZG403099J	35-2
ZG403100J2	32-10
ZG403100J2	34-10
ZG406719J	30-5
ZG406720J	31-1
ZG406722J	31-2
ZG407614J	36-16
ZG407614J	38-16
ZG407615J	36-17
ZG407615J	38-17
ZG407616J	37-1
ZG407617J	37-2
ZS336614	36-12
ZS336614	38-12
ZS374389	32-9
ZS374389	34-9
ZS374389	36-10
ZS374389	38-10

ABBREVIATIONS (VIDEO)

ABBREVIATION	EXPLANATION
A	Audio or Analogue
AC	Alternating Current
ACC	Automatic Color Control
A/C	Audio and Control
ADJ	ADJust (ment)
AFC	Automatic Frequency Control
AFT	Automatic Fine Tuning
AGC	Automatic Gain Control
AH	Audio Head
AL	ALways (voltage)
ALC	Automatic Level Control
A-SW.P	Audio SWitching Pulse
A-MUTE	Audio MUTE
ANT	ANTenna
APC	Automatic Phase Control
ASSY	ASSemblY
BAL	BALance
B DOWN	Break DOWN
BGP	Burst Gate Pulse
BLK	BLocK or BLacK
BPF	Band Pass Filter
BU	Back Up (voltage)
B/W	Black and White
C	Chroma or Color
CCD	Charge Coupled Device
CCIR	Comité Consultatif International des Radio communications
CH (ch)	CHannel (channel)
CLK	CLocK
CM	Capstan Motor
CN	CoNnector
COMP	COMParator
CSW	Cassette SWitch
CSYNC	Composite SYNC
CTL	ConTrol
CUE	CUE
DAC	Digital to Analog Converter
DC	Direct Current
DEMOD	DEMODulator
DET	DETetct (DETector)
DL	Delay Line
DM	Drum Motor
DOC	Drop Out Compensator
D.P.E	Drum Phase Error
D.PG	Drum Pulse Generator
EE	Electronic to Electronic
EF	Emitter Follower
EMPHA	EMPHAsis
ENV	ENVelope
EP	Extended Play
EP ROM	Erasable Programmable ROM
EQ	EQualizer
FE	Full track Erase
FF	Flip-Flop or Fast Foward
FG	Frequency Generator
Fig	Figure
FLD	FLuorescent Display
FM	Frequency Modulation
Fo	resonance Frequency
FREQ	FREQuency
GND	GrouND
H	Horizontal
HP	Horizontal (sync) pulse
HPF	High Pass Filter
HQ	High Quality System
IC	Integrated Circuit
ID	IDentification
IDL	IDLe (Voltage)
IMS	Interactive Monitor System
INS	INSert
INV	INVerter
L	Left
LED	Light Emitting Diode
LIM	LIMitter
LM	Loading Motor
LM STP	Loading Motor STop
LP	Long Play
LPF	Low Pass Filter
ME-SECAM	Middle East SECAM
MI-COM	MIcro COMputer
MM	Mono-stayble Multi
MOD	MODulator
MRS	Motor ReverSe
NG	Noise Gate
NICAM	Near Instanteneous Compand Audio Multiplex
NON-LIN	NON-LINear
N.T.S.C.	National Television System Committee
OSC	OSCillator
PAL	Phase Alternation by Line
PB	Play Back
PCB (P.C.B)	Printed Circuit Board
P-COM	Phase-COMparator
P DOWN	Power DOWN
PG	Pulse Generator
P.I.P	Picture In Picture
PL, PLG	PLunger (PLunGer)
PRG (PGM)	PRoGram (ProGraM)
PU	Pick UP (head, pulse)
PWR	PoWeR
Q	Quality factor
R	Right
RAM	Random Access Memory
REC	RECord
REF	REFerence
REF-V	REFerence Vertical signal
REG	REGulator
REV (REVW)	REView (REVieW)
REW	REWind
RF	Radio Frequency
ROM	Read Only Memory
R.S SW	Record-Safety SWitch
RST (RES)	ReSet (RESet)
RVS	ReVerSe
S	Sensor, Shield
SAW	Surface Acoustic Wave
SC	SimulCast
S CLK	Serial CLocK
SECAM	SÉquentiel Couleur À Mémoire
S & H	Sample and Hold
SLP	Super Long Play
SP	Standard Play
SPD	SPeeD
SRP	Supply Reel Pulse
SRV	SeRVo
SOW	Sync On Word
STBY	STandBY
S.VHS	Super VHS
SW	SWitch
SW'NG	SWitchiNG
SWP	SWitching Pulse
SYNC	SYNChronize
T-AUDIO	Tuner AUDIO
TPZ (TRAPE)	TraPeZoid (TRAPEzoid)
TRK	TRacKing
TRP	Take up Reel Pulse
T/U	Take Up
TV	TeleVision
UHF	Ultra High Frequency
UNR	UNRegulated (voltage)
V	Vertical or Video
VASS	Video Address Search System
VCO	Voltage Controlled Oscillator
VH	Video Head
VHF	Very High Frequency
VHS	Video Home System
VIF	Video Intermediate Frequency
VISS	Video Index Search System
VJ	Video Judge
VM	Voltage for Memory
VOB	Video On Blank
VOW	Video On Word
VP	Vertical (sync) Pulse
VPS	Video Program System
VPT	Video Programming by video Text
VT	Voltage for Tuning
WHT	WHiTe
Y	Luminance
2H	2 Hour (SP)
4H	4 Hour (LP)
6H	6 Hour (SLP/EP)

(74)

AKAI

MODEL VS-F440EA/EDG/EDI/EK/EM/EO/EOH/EOG-V
MODEL VS-F441EA, F450EOH, F455EOH
MODEL VS-F480EK-V/EOG-V
MODEL VS-F490EM/EO/EOH/ES, F497EOH

SCHEMATIC DIAGRAMS AND PC BOARDS

TABLE OF CONTENTS

I. CATEGORY CODES USED IN THIS MANUAL 2

II. BLOCK DIAGRAMS

1. JFX-L OPERATION (A) & SYSCON 3
2. JFX OPERATION (G) & SYSCON 4
3. JFX/JFX-L VIDEO 5
4. JFX/JFX-L AUDIO 6
5. JFX/JFX-L PRE AMP 7
6. VS-F440EOG-V, F480EK-V/EOG-V VPST/PDC 8
7. JFX/JFX-L SERVO 9

III. SCHEMATIC DIAGRAMS AND PC BOARDS

1. VS-F440EA/EDG/EDI/EK/EM/EO/EOG-V, F441EA, F450EOH, F455EOH CONNECTION DIAGRAM 10
2. VS-F480EK-V/EOG-V, F490EM/EO/EOH/ES, F497EOH CONNECTION DIAGRAM 13
3. VS-F440EOG-V, F480EOG-V/EK-V POWER SUPPLY (1), (2) & DIODE 14
4. VS-F440EM, F490EM POWER SUPPLY (1), (2) & DIODE 17
5. VS-F440EA/EDG/EDI/EK/EO/EOH, F441EA, F450EOH, F455EOH, F490EO/EOH/ES, F497EOH POWER SUPPLY & DIODE 18
6. JFX/JFX-L MAIN (A) 1/3 20
7. JFX/JFX-L MAIN (A) 2/3 21
8. JFX/JFX-L MAIN (A) 3/3 22
9. JFX/JFX-L MAIN (B) 24
10. JFX/JFX-L PRE AMP 27
11. JFX-L OPERATION (A) 28
12. JFX OPERATION (G)-A, B 31
13. VS-F440EOG-V, F480EK-V/EOG-V VPST/PDC 32
14. VS-F440EO0EOG-V, F480EOG-V, F490EO VIF UNIT 34
15. VS-F440EDG/EDI VIF UNIT 37
16. VS-F440EA/EK/EM/EOH, F441EA, F450EOH, F455EOH, F480EK-V, F490EM/ES/EOH, F497EOH VIF UNIT 38
17. RC-V250E REMOTE CONTROL UNIT 41
18. RC-V251G REMOTE CONTROL UNIT 42
19. RC-V252E REMOTE CONTROL UNIT 45
20. RC-V451E/G REMOTE CONTROL UNIT 46
21. RC-V452E REMOTE CONTROL UNIT 49

IV. INFORMATION OF ICs 50

Use these schematic diagrams and PC boards together with the provided service manual.

CATEGORY CODES USED IN THIS MANUAL

CATEGORY CODE	TYPE	MODEL NUMBER
JBX	2 VIDEO HEAD TYPE	
JLX	3 VIDEO HEAD TYPE	
JLX-L	3 VIDEO HEAD L-TYPE	
JFX-L	4 VIDEO HEAD L-TYPE	VS-F440EA/EDG/EDI/EK/EM/EO/EOG-V/EOH VS-F441EA VS-F450EOH VS-F455EOH
JFX	4 VIDEO HEAD	VS-F480EK-V/EOG-V VS-F490EM/EO/EOH/ES VS-F497EOH
JTX	4 VIDEO HEAD & Hi-Fi STEREO TYPE	

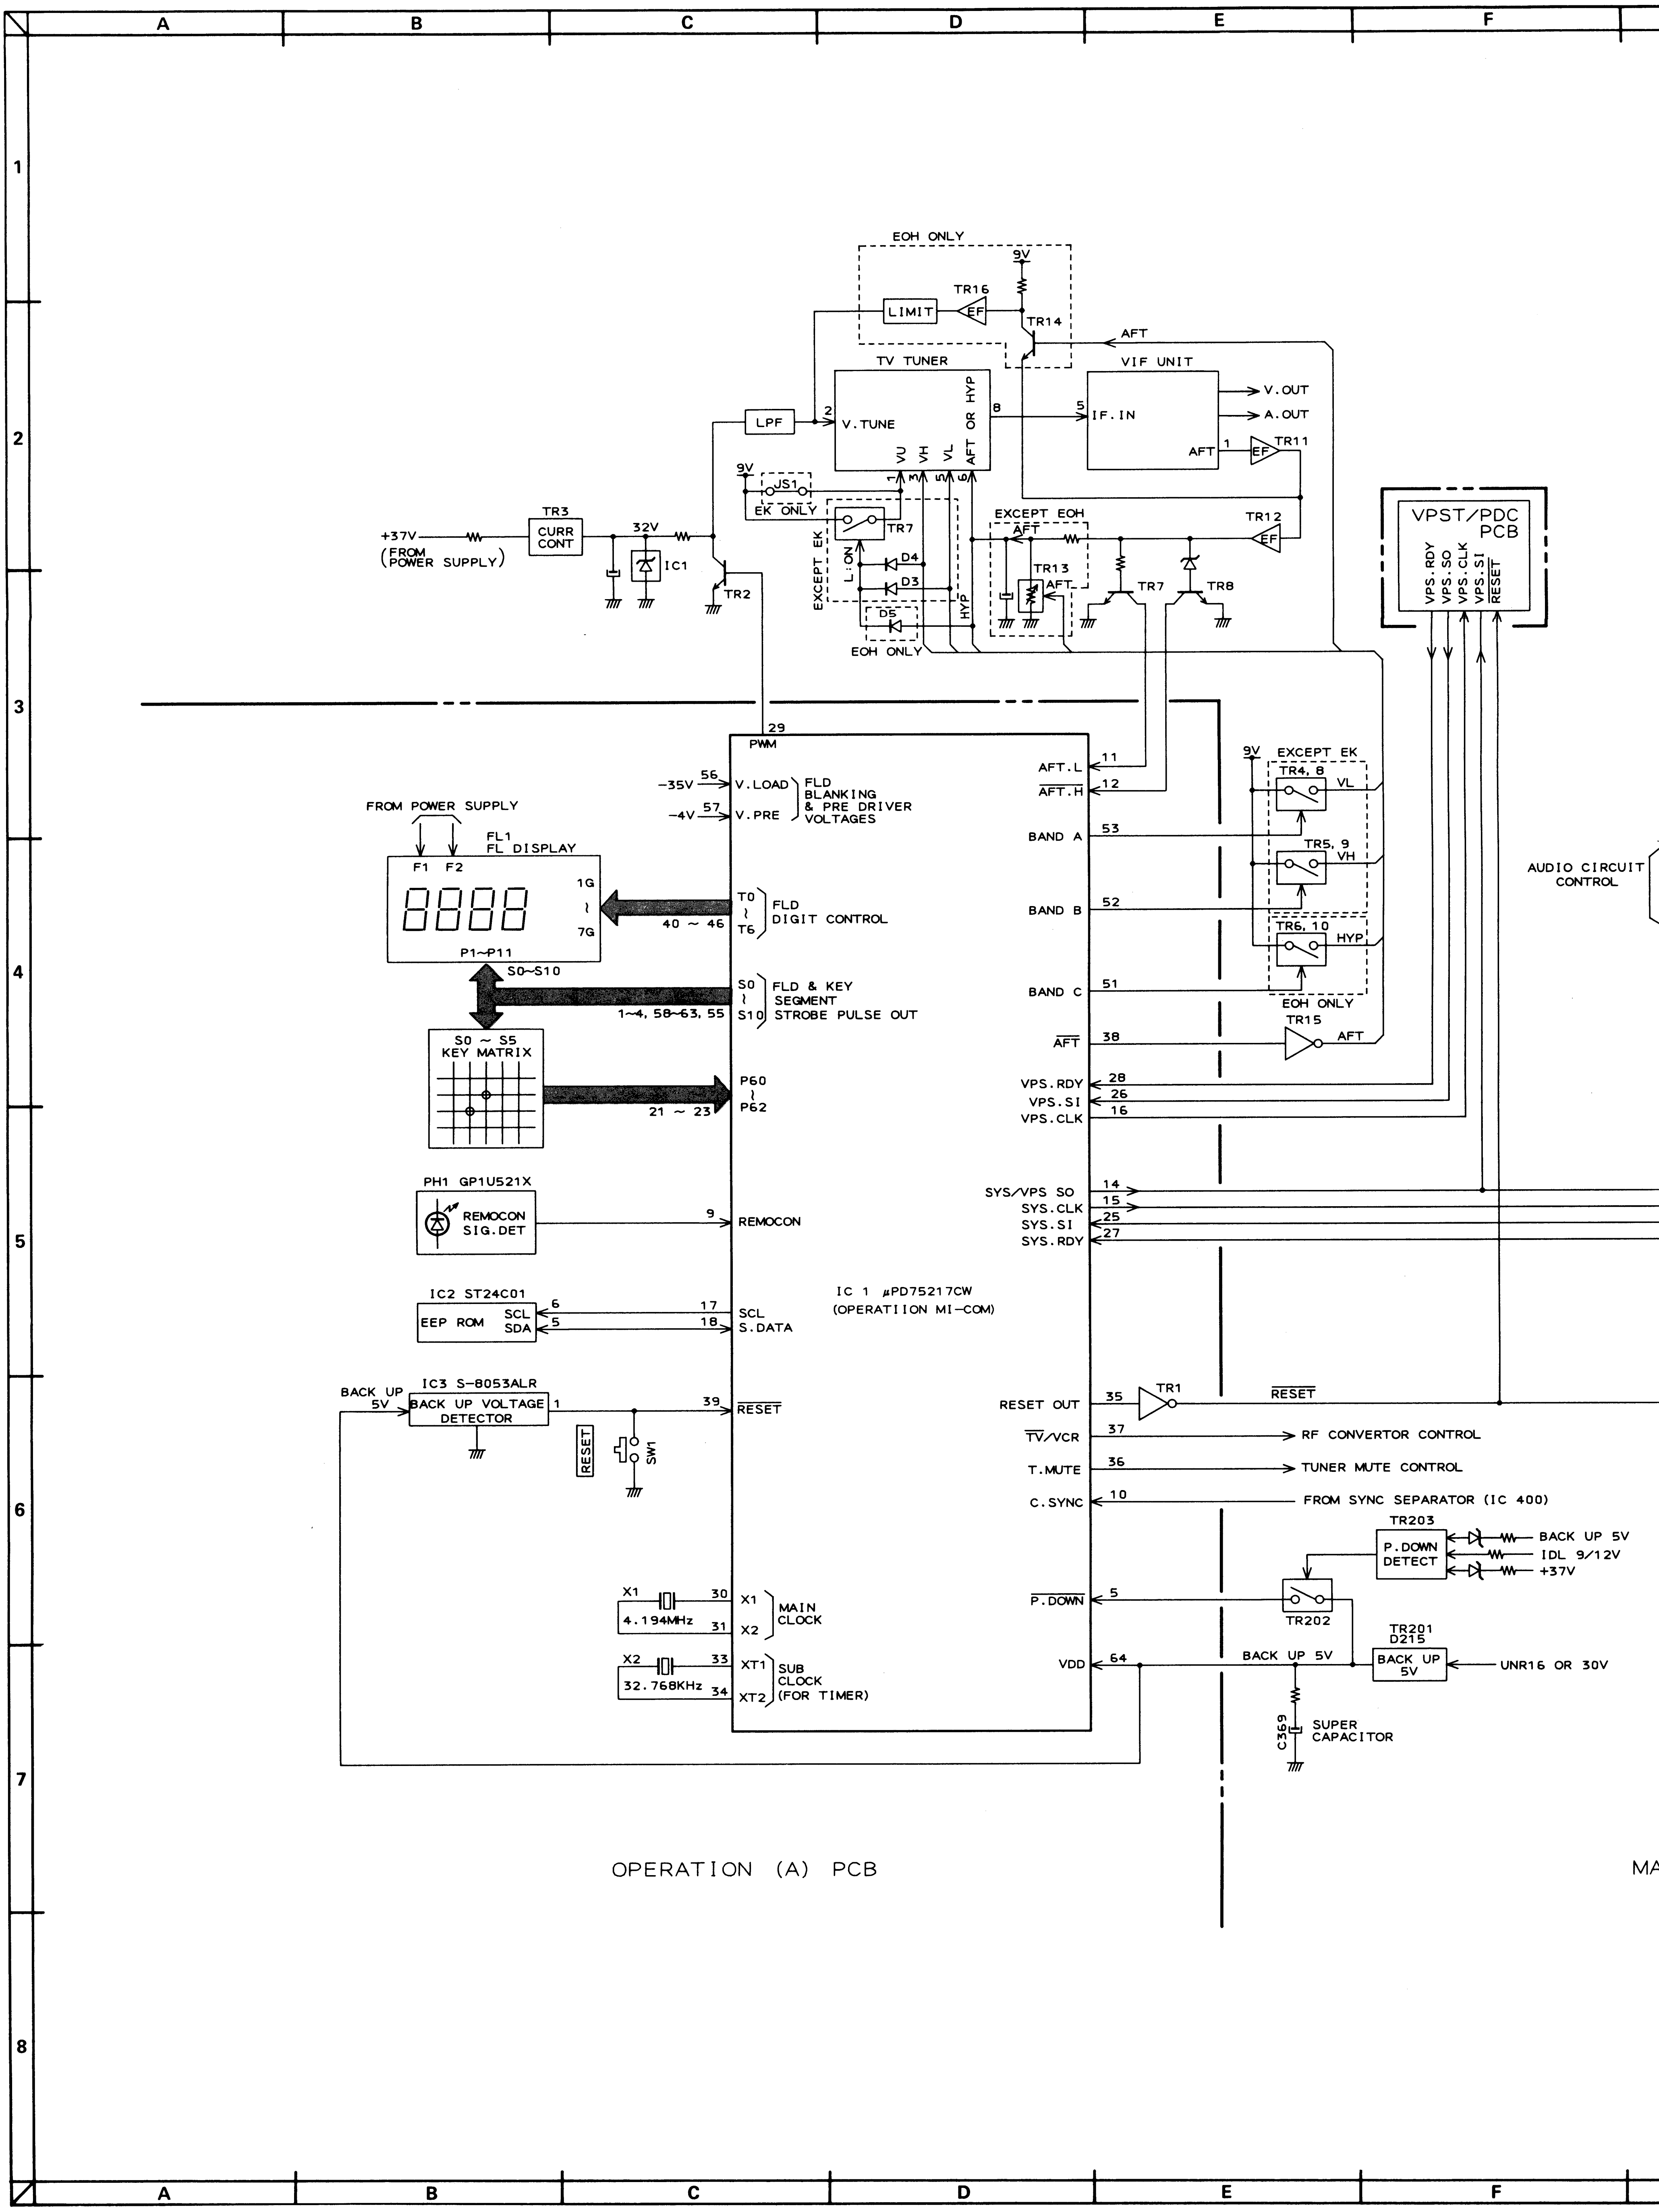
A
B
C
D
E
F
1
2
3
4
5
6
7
8
EOH ONLY
9V
TR16
LIMIT
EF
TR14
AFT
TV TUNER
VIF UNIT
LPF
V.TUNE
VU
VH
VL
AFT OR HYP
2
8
5
1
3
5
6
IF.IN
V.OUT
A.OUT
AFT
EF
TR11
9V
JS1
EK ONLY
EXCEPT EK
L:ON
TR7
D4
D3
D5
EOH ONLY
HYP
EXCEPT EOH
AFT
TR13
AFT
TR12
EF
TR7
TR8
+37V
(FROM POWER SUPPLY)
TR3
CURR CONT
32V
IC1
TR2
VPST/PDC PCB
VPS.RDY
VPS.SO
VPS.CLK
VPS.SI
RESET
29
PWM
-35V
56
V.LOAD
-4V
57
V.PRE
FLD BLANKING & PRE DRIVER VOLTAGES
FROM POWER SUPPLY
FL1
FL DISPLAY
F1
F2
1G
7G
P1~P11
T0 ~ T6
40 ~ 46
FLD DIGIT CONTROL
S0~S10
S0 ~ S10
1~4, 58~63, 55
FLD & KEY SEGMENT STROBE PULSE OUT
S0 ~ S5
KEY MATRIX
P60 ~ P62
21 ~ 23
PH1 GP1U521X
REMOCON SIG.DET
9
REMOCON
IC2 ST24C01
EEP ROM
SCL
SDA
6
5
17
18
SCL
S.DATA
IC 1 µPD75217CW
(OPERATIION MI-COM)
BACK UP 5V
IC3 S-8053ALR
BACK UP VOLTAGE DETECTOR
1
39
RESET
RESET
SW1
X1
4.194MHz
30
31
X1
X2
MAIN CLOCK
X2
32.768KHz
33
34
XT1
XT2
SUB CLOCK (FOR TIMER)
AFT.L
11
AFT.H
12
BAND A
53
BAND B
52
BAND C
51
AFT
38
VPS.RDY
28
VPS.SI
26
VPS.CLK
16
SYS/VPS SO
14
SYS.CLK
15
SYS.SI
25
SYS.RDY
27
RESET OUT
35
TR1
RESET
TV/VCR
37
RF CONVERTOR CONTROL
T.MUTE
36
TUNER MUTE CONTROL
C.SYNC
10
FROM SYNC SEPARATOR (IC 400)
P.DOWN
5
VDD
64
9V
EXCEPT EK
TR4, 8
VL
TR5, 9
VH
TR6, 10
HYP
EOH ONLY
TR15
AFT
AUDIO CIRCUIT CONTROL
TR203
P.DOWN DETECT
BACK UP 5V
IDL 9/12V
+37V
TR202
TR201
D215
BACK UP 5V
UNR16 OR 30V
BACK UP 5V
C369
SUPER CAPACITOR
OPERATION (A) PCB
MA

MODE SWITCH TRUTH TABLE

MODE / OUTPUT	EJECT	STOP (TAPE LOADED)	PAUSE/PLAY		PLAY		REVIEW		CUE		FF	REW	POWER OFF (WITH CASSETTE)
			A	B	A	B	A	B	A	B			
RSW 4	H (5V)	L	L	L	L	L	L	H	L	L	L	L	H
RSW 3	L (0V)	L	H	H	L	H	H	H	H	H	L	L	H
RSW 2	L	L	L	L	H	L	H	H	L	L	H	H	L
RSW 1	L	H	H	L	L	H	L	L	L	H	H	H	L

(A: 2 VIDEO HEADS MODEL
B: 3 OR 4 VIDEO HEADS MODEL)

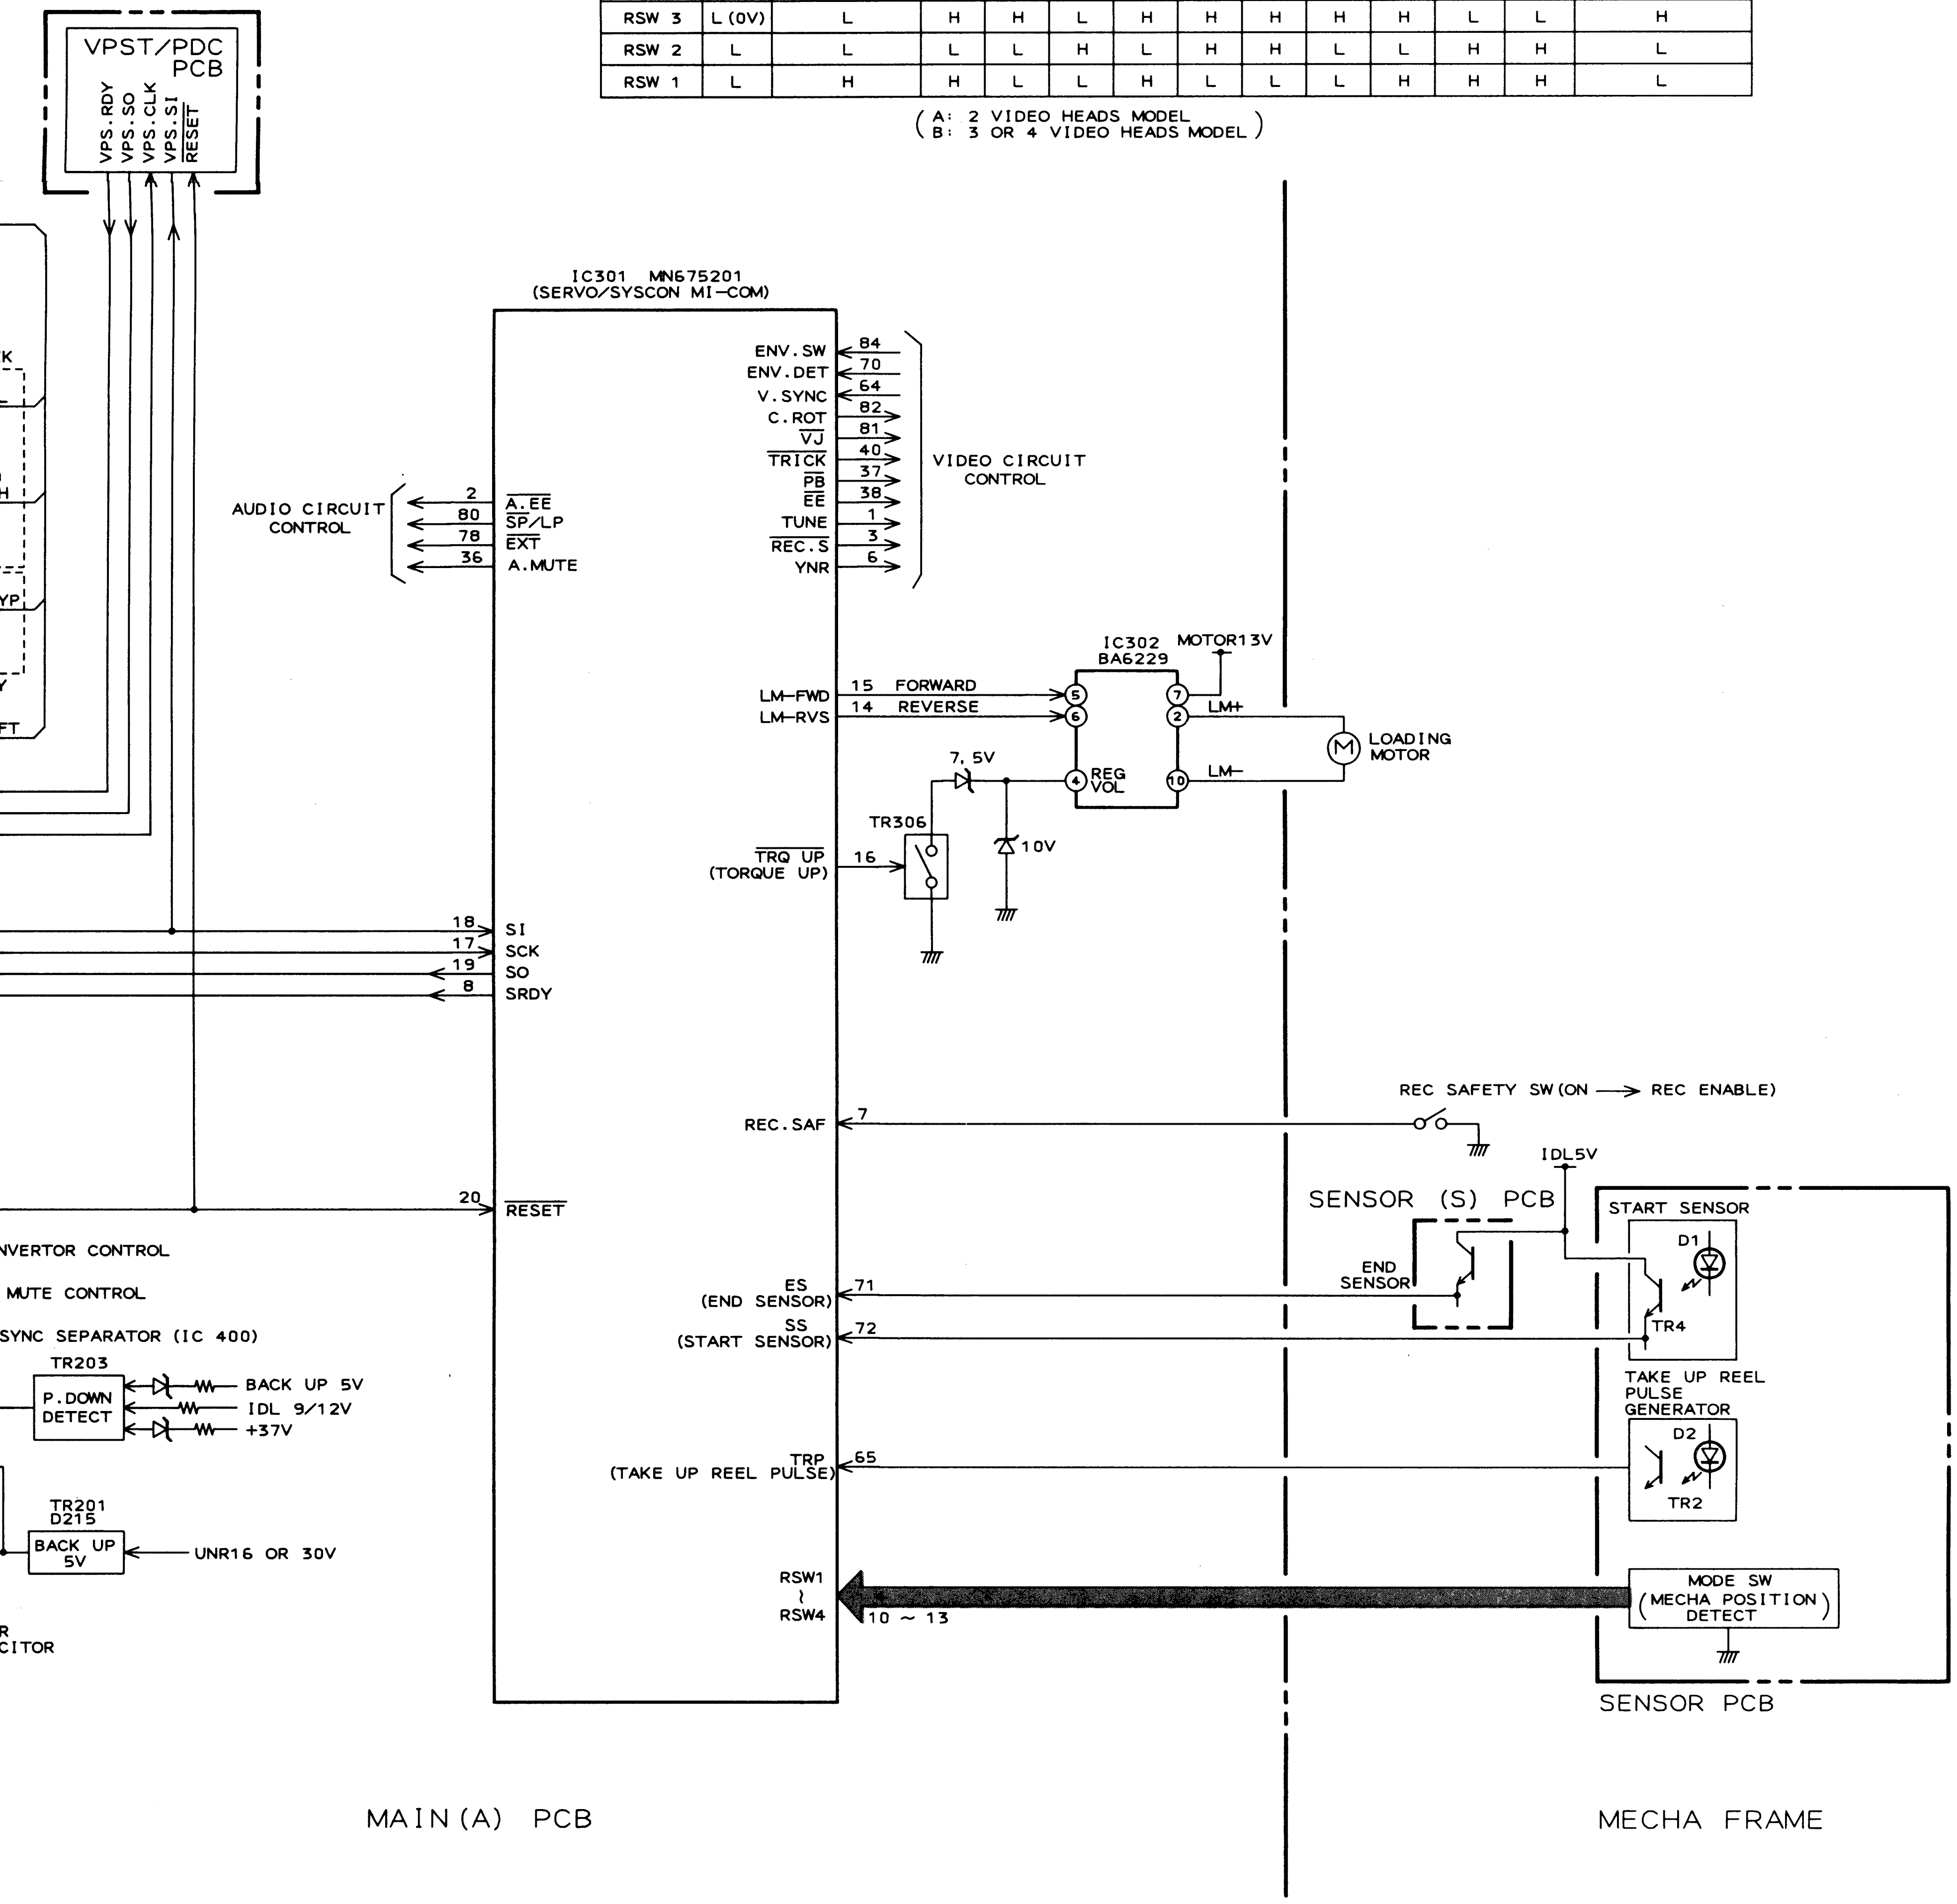
VPST/PDC PCB
VPS.RDY
VPS.SO
VPS.CLK
VPS.SI
RESET
K
H
YP
Y
FT
IC301 MN675201
(SERVO/SYSCON MI–COM)
AUDIO CIRCUIT CONTROL
2 A.EE
80 SP/LP
78 EXT
36 A.MUTE
ENV.SW 84
ENV.DET 70
V.SYNC 64
C.ROT 82
VJ 81
TRICK 40
PB 37
EE 38
TUNE 1
REC.S 3
YNR 6
VIDEO CIRCUIT CONTROL
IC302 BA6229
MOTOR13V
LM–FWD 15 FORWARD
LM–RVS 14 REVERSE
5
6
7
2
4
10
REG VOL
LM+
LM–
LOADING MOTOR
7, 5V
10V
TR306
TRQ UP (TORQUE UP) 16
18 SI
17 SCK
19 SO
8 SRDY
REC.SAF 7
REC SAFETY SW (ON ⟶ REC ENABLE)
IDL5V
SENSOR (S) PCB
END SENSOR
START SENSOR
D1
TR4
20 RESET
NVERTOR CONTROL
MUTE CONTROL
SYNC SEPARATOR (IC 400)
TR203
P.DOWN DETECT
BACK UP 5V
IDL 9/12V
+37V
TR201
D215
BACK UP 5V
UNR16 OR 30V
R
CITOR
ES (END SENSOR) 71
SS (START SENSOR) 72
TRP (TAKE UP REEL PULSE) 65
TAKE UP REEL PULSE GENERATOR
D2
TR2
RSW1 ~ RSW4
10 ~ 13
MODE SW (MECHA POSITION DETECT)
SENSOR PCB
MAIN (A) PCB
MECHA FRAME

JFX–L
OPERATION (A) & SYSCON
BLOCK DIAGRAM
No.7–1 V115251M A2

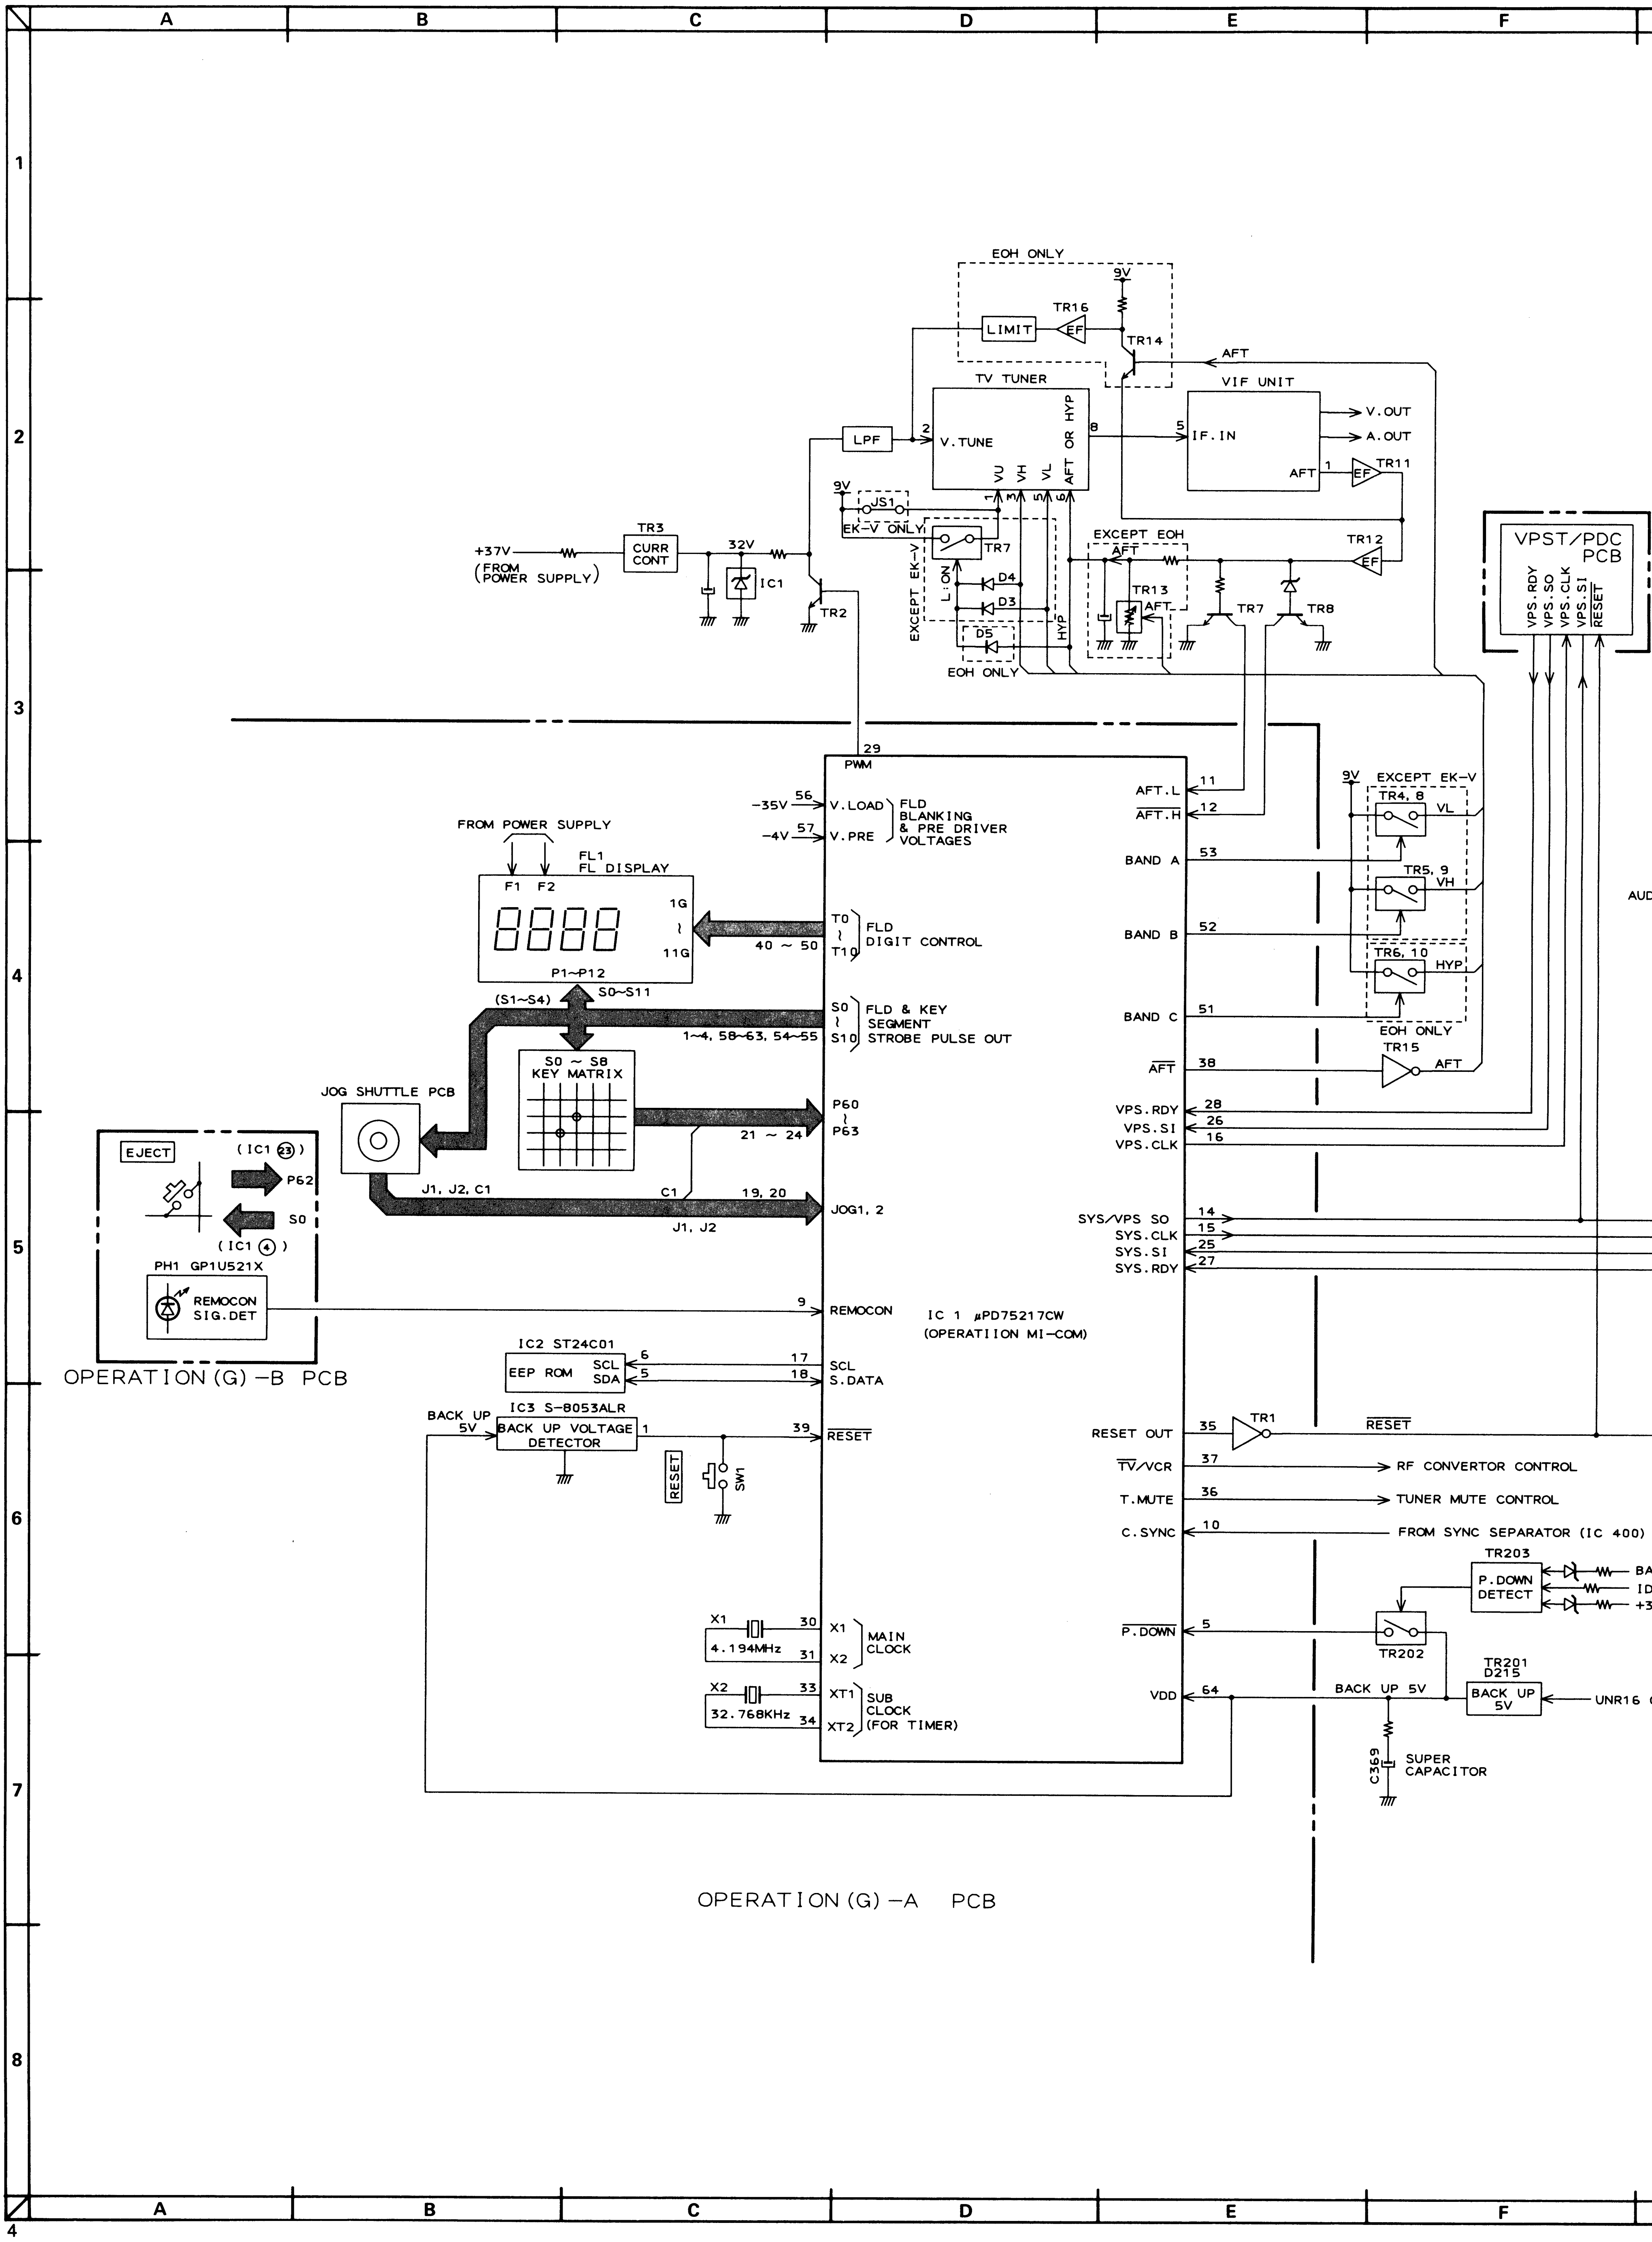
A
B
C
D
E
F
1
2
3
4
5
6
7
8
EOH ONLY
9V
TR16
LIMIT
EF
TR14
AFT
TV TUNER
VIF UNIT
V.TUNE
AFT OR HYP
IF.IN
V.OUT
A.OUT
AFT
TR11
LPF
VU
VH
VL
HYP
9V
JS1
EK-V ONLY
TR7
+37V
(FROM POWER SUPPLY)
TR3
CURR CONT
32V
IC1
TR2
EXCEPT EK-V
L:ON
D4
D3
D5
EOH ONLY
EXCEPT EOH
AFT
TR13
TR12
TR7
TR8
VPST/PDC PCB
VPS.RDY
VPS.SO
VPS.CLK
VPS.SI
RESET
29
PWM
AFT.L
AFT.H
11
12
-35V
56
V.LOAD
-4V
57
V.PRE
FLD BLANKING & PRE DRIVER VOLTAGES
FROM POWER SUPPLY
FL1
FL DISPLAY
F1
F2
1G
11G
P1~P12
T0
T10
FLD DIGIT CONTROL
40 ~ 50
BAND A
53
BAND B
52
BAND C
51
9V
EXCEPT EK-V
TR4, 8
VL
TR5, 9
VH
TR6, 10
HYP
EOH ONLY
TR15
AFT
38
AUD
(S1~S4)
S0~S11
S0
S10
FLD & KEY SEGMENT STROBE PULSE OUT
1~4, 58~63, 54~55
S0 ~ S8
KEY MATRIX
JOG SHUTTLE PCB
P60
P63
21 ~ 24
VPS.RDY
VPS.SI
VPS.CLK
28
26
16
EJECT
(IC1 ㉓)
P62
S0
(IC1 ④)
J1, J2, C1
C1
19, 20
JOG1, 2
J1, J2
SYS/VPS SO
SYS.CLK
SYS.SI
SYS.RDY
14
15
25
27
PH1 GP1U521X
REMOCON SIG.DET
9
REMOCON
IC 1 μPD75217CW
(OPERATIION MI-COM)
OPERATION(G)-B PCB
IC2 ST24C01
EEP ROM
SCL
SDA
6
5
17
18
SCL
S.DATA
IC3 S-8053ALR
BACK UP 5V
BACK UP VOLTAGE DETECTOR
1
39
RESET
RESET OUT
35
TR1
RESET
RESET
SW1
TV/VCR
37
RF CONVERTOR CONTROL
T.MUTE
36
TUNER MUTE CONTROL
C.SYNC
10
FROM SYNC SEPARATOR (IC 400)
TR203
P.DOWN DETECT
BA
ID
+3
X1
4.194MHz
30
31
X1
X2
MAIN CLOCK
P.DOWN
5
TR202
X2
32.768KHz
33
34
XT1
XT2
SUB CLOCK (FOR TIMER)
VDD
64
BACK UP 5V
TR201
D215
BACK UP 5V
UNR16
C369
SUPER CAPACITOR
OPERATION(G)-A PCB

MODE SWITCH TRUTH TABLE

MODE / OUTPUT	EJECT	STOP (TAPE LOADED)	PAUSE/PLAY A	PAUSE/PLAY B	PLAY A	PLAY B	REVIEW A	REVIEW B	CUE A	CUE B	FF	REW	POWER OFF (WITH CASSETTE)
RSW 4	H (5V)	L	L	L	L	L	L	H	L	L	L	L	H
RSW 3	L (0V)	L	H	H	L	H	H	H	H	H	L	L	H
RSW 2	L	L	L	L	H	L	H	H	L	L	H	H	L
RSW 1	L	H	H	L	L	H	L	L	L	H	H	H	L

(A: 2 VIDEO HEADS MODEL
B: 3 OR 4 VIDEO HEADS MODEL)

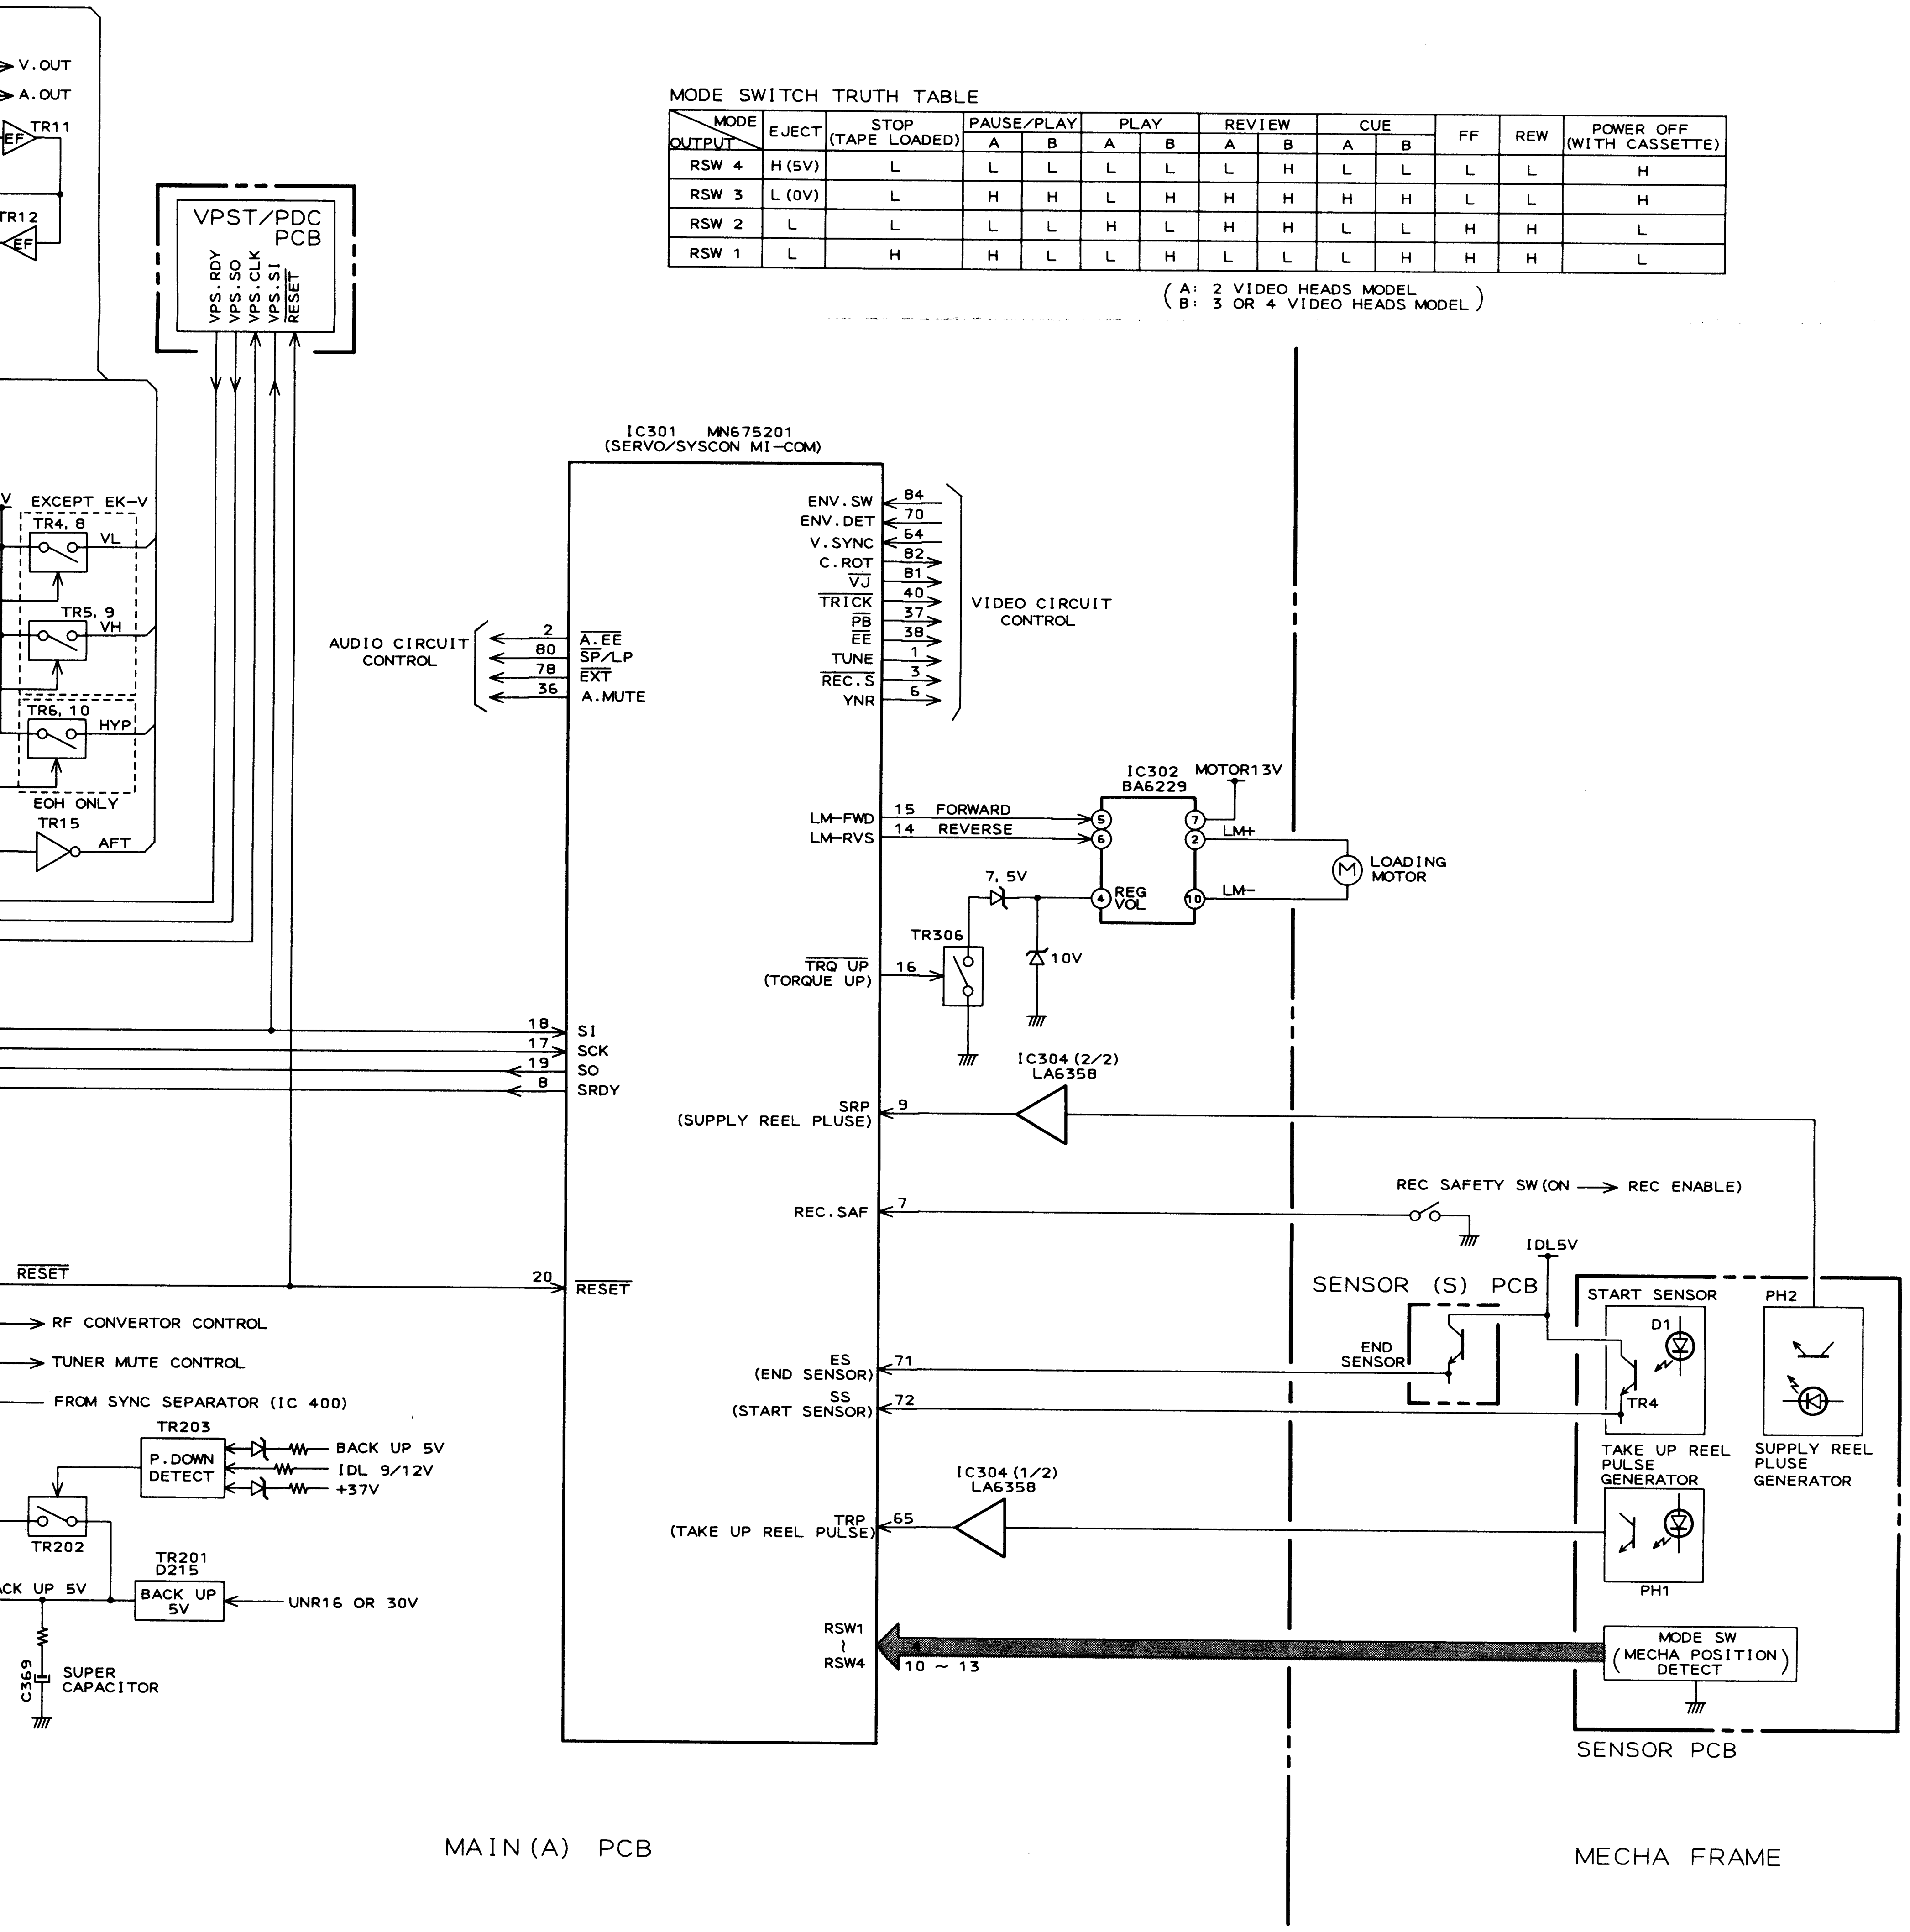
V.OUT
A.OUT
TR11
EF
TR12
EF
VPST/PDC PCB
VPS.RDY
VPS.SO
VPS.CLK
VPS.SI
RESET
EXCEPT EK-V
TR4, 8
VL
TR5, 9
VH
TR6, 10
HYP
EOH ONLY
TR15
AFT
IC301 MN675201
(SERVO/SYSCON MI-COM)
AUDIO CIRCUIT CONTROL
2
80
78
36
A.EE
SP/LP
EXT
A.MUTE
ENV.SW
ENV.DET
V.SYNC
C.ROT
VJ
TRICK
PB
EE
TUNE
REC.S
YNR
84
70
64
82
81
40
37
38
1
3
6
VIDEO CIRCUIT CONTROL
LM-FWD
LM-RVS
15 FORWARD
14 REVERSE
IC302 BA6229
MOTOR13V
LM+
LM-
REG VOL
LOADING MOTOR
7, 5V
TR306
10V
TRQ UP
(TORQUE UP)
16
18
17
19
8
SI
SCK
SO
SRDY
IC304 (2/2) LA6358
SRP
(SUPPLY REEL PLUSE)
9
REC.SAF
7
REC SAFETY SW (ON → REC ENABLE)
IDL5V
RESET
20
RESET
SENSOR (S) PCB
END SENSOR
START SENSOR
D1
TR4
PH2
TAKE UP REEL PULSE GENERATOR
SUPPLY REEL PLUSE GENERATOR
ES
(END SENSOR)
71
SS
(START SENSOR)
72
RF CONVERTOR CONTROL
TUNER MUTE CONTROL
FROM SYNC SEPARATOR (IC 400)
TR203
P.DOWN DETECT
BACK UP 5V
IDL 9/12V
+37V
TR202
TR201
D215
BACK UP 5V
UNR16 OR 30V
ACK UP 5V
C369
SUPER CAPACITOR
IC304 (1/2) LA6358
TRP
(TAKE UP REEL PULSE)
65
PH1
RSW1 ~ RSW4
10 ~ 13
MODE SW (MECHA POSITION DETECT)
SENSOR PCB
MAIN (A) PCB
MECHA FRAME

JFX
OPERATION (G) & SYSCON
BLOCK DIAGRAM
No.7-2 V115252M
A2

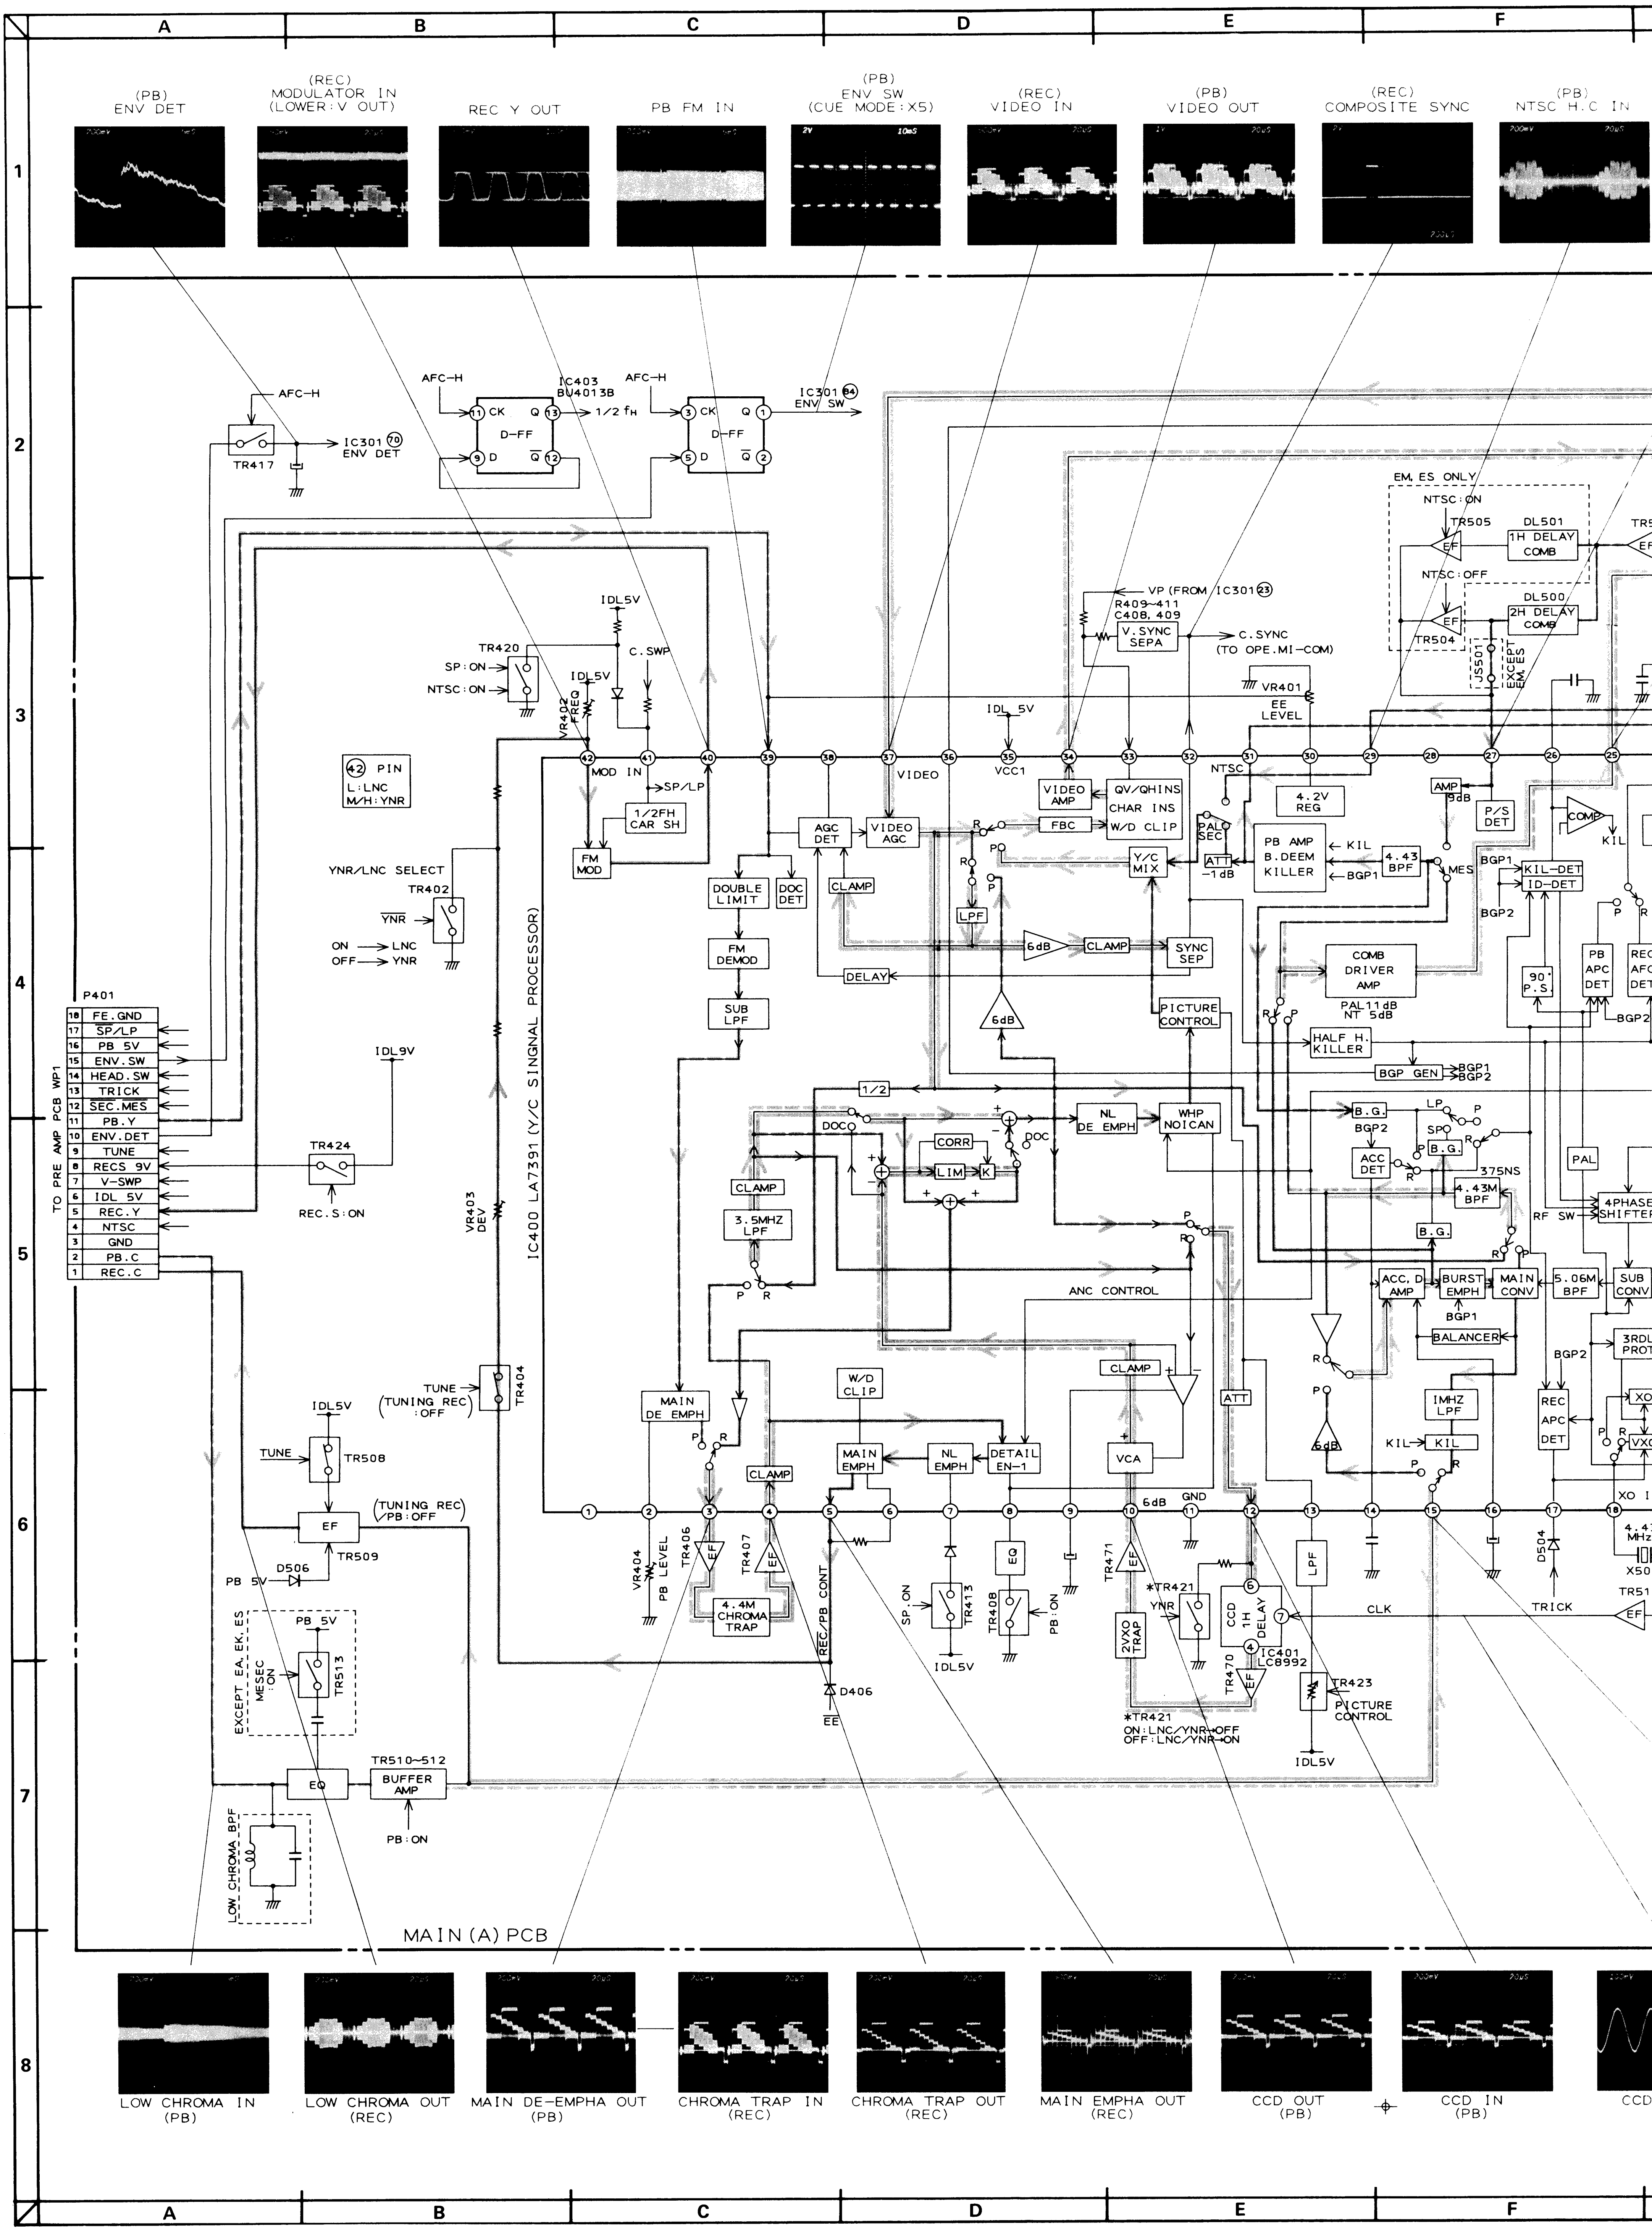
A
B
C
D
E
F
1
2
3
4
5
6
7
8
(PB) ENV DET
(REC) MODULATOR IN (LOWER:V OUT)
REC Y OUT
PB FM IN
(PB) ENV SW (CUE MODE:X5)
(REC) VIDEO IN
(PB) VIDEO OUT
(REC) COMPOSITE SYNC
(PB) NTSC H.C IN
AFC-H
TR417
IC301 (70) ENV DET
IC403 BU4013B
CK
D-FF
Q
1/2 fH
IC301 (64) ENV SW
EM, ES ONLY
NTSC:ON
TR505
DL501
1H DELAY COMB
NTSC:OFF
DL500
2H DELAY COMB
TR504
JS501
EXCEPT EM, ES
VP (FROM IC301 (23))
R409~411 C408, 409
V.SYNC SEPA
C.SYNC (TO OPE.MI-COM)
VR401
EE LEVEL
IDL5V
TR420
SP:ON
NTSC:ON
C.SWP
VR402 FREQ
MOD IN
SP/LP
1/2FH CAR SH
FM MOD
(42) PIN
L:LNC
M/H:YNR
VIDEO
VCC1
NTSC
AGC DET
VIDEO AGC
VIDEO AMP
QV/QHINS CHAR INS W/D CLIP
FBC
Y/C MIX
4.2V REG
AMP 9dB
P/S DET
COMP
KIL
PAL SEC
ATT -1dB
PB AMP B.DEEM KILLER
4.43 BPF
MES
BGP1
KIL-DET
ID-DET
BGP2
DOUBLE LIMIT
DOC DET
CLAMP
LPF
6dB
SYNC SEP
FM DEMOD
DELAY
COMB DRIVER AMP
PAL11dB NT 5dB
90° P.S.
PB APC DET
REC AFC DET
YNR/LNC SELECT
TR402
YNR
ON → LNC
OFF → YNR
SUB LPF
PICTURE CONTROL
HALF H. KILLER
BGP GEN
P401
18 FE.GND
17 SP/LP
16 PB 5V
15 ENV.SW
14 HEAD.SW
13 TRICK
12 SEC.MES
11 PB.Y
10 ENV.DET
9 TUNE
8 RECS 9V
7 V-SWP
6 IDL 5V
5 REC.Y
4 NTSC
3 GND
2 PB.C
1 REC.C
TO PRE AMP PCB WP1
IDL9V
TR424
REC.S:ON
IC400 LA7391 (Y/C SINGNAL PROCESSOR)
VR403 DEV
1/2
DOC
CORR
LIM
K
NL DE EMPH
WHP NOICAN
B.G.
LP
SP
ACC DET
375NS
4.43M BPF
PAL
4PHASE SHIFTER
RF SW
3.5MHZ LPF
ANC CONTROL
ACC. D AMP
BURST EMPH
MAIN CONV
5.06M BPF
SUB CONV
BALANCER
3RD PROT
TUNE
(TUNING REC :OFF)
TR404
IDL5V
TUNE
TR508
MAIN DE EMPH
W/D CLIP
MAIN EMPH
NL EMPH
DETAIL EN-1
VCA
ATT
IMHZ LPF
KIL
REC APC DET
XO
VXO
XO I
EF
(TUNING REC /PB:OFF)
TR509
PB 5V
D506
VR404 PB LEVEL
TR406
TR407
4.4M CHROMA TRAP
REC/PB CONT
SP.ON
TR413
TR408
EQ
PB:ON
TR471
2VXO TRAP
GND
*TR421
YNR
CCD 1H DELAY
IC401 LC8992
TR470
LPF
TR423
PICTURE CONTROL
CLK
TRICK
D504
4.43 MHz
X50
TR51
EXCEPT EA, EK, ES
MESEC :ON
TR513
D406
EE
*TR421
ON:LNC/YNR→OFF
OFF:LNC/YNR→ON
IDL5V
TR510~512
BUFFER AMP
PB:ON
LOW CHROMA BPF
MAIN (A) PCB
LOW CHROMA IN (PB)
LOW CHROMA OUT (REC)
MAIN DE-EMPHA OUT (PB)
CHROMA TRAP IN (REC)
CHROMA TRAP OUT (REC)
MAIN EMPHA OUT (REC)
CCD OUT (PB)
CCD IN (PB)
CCD

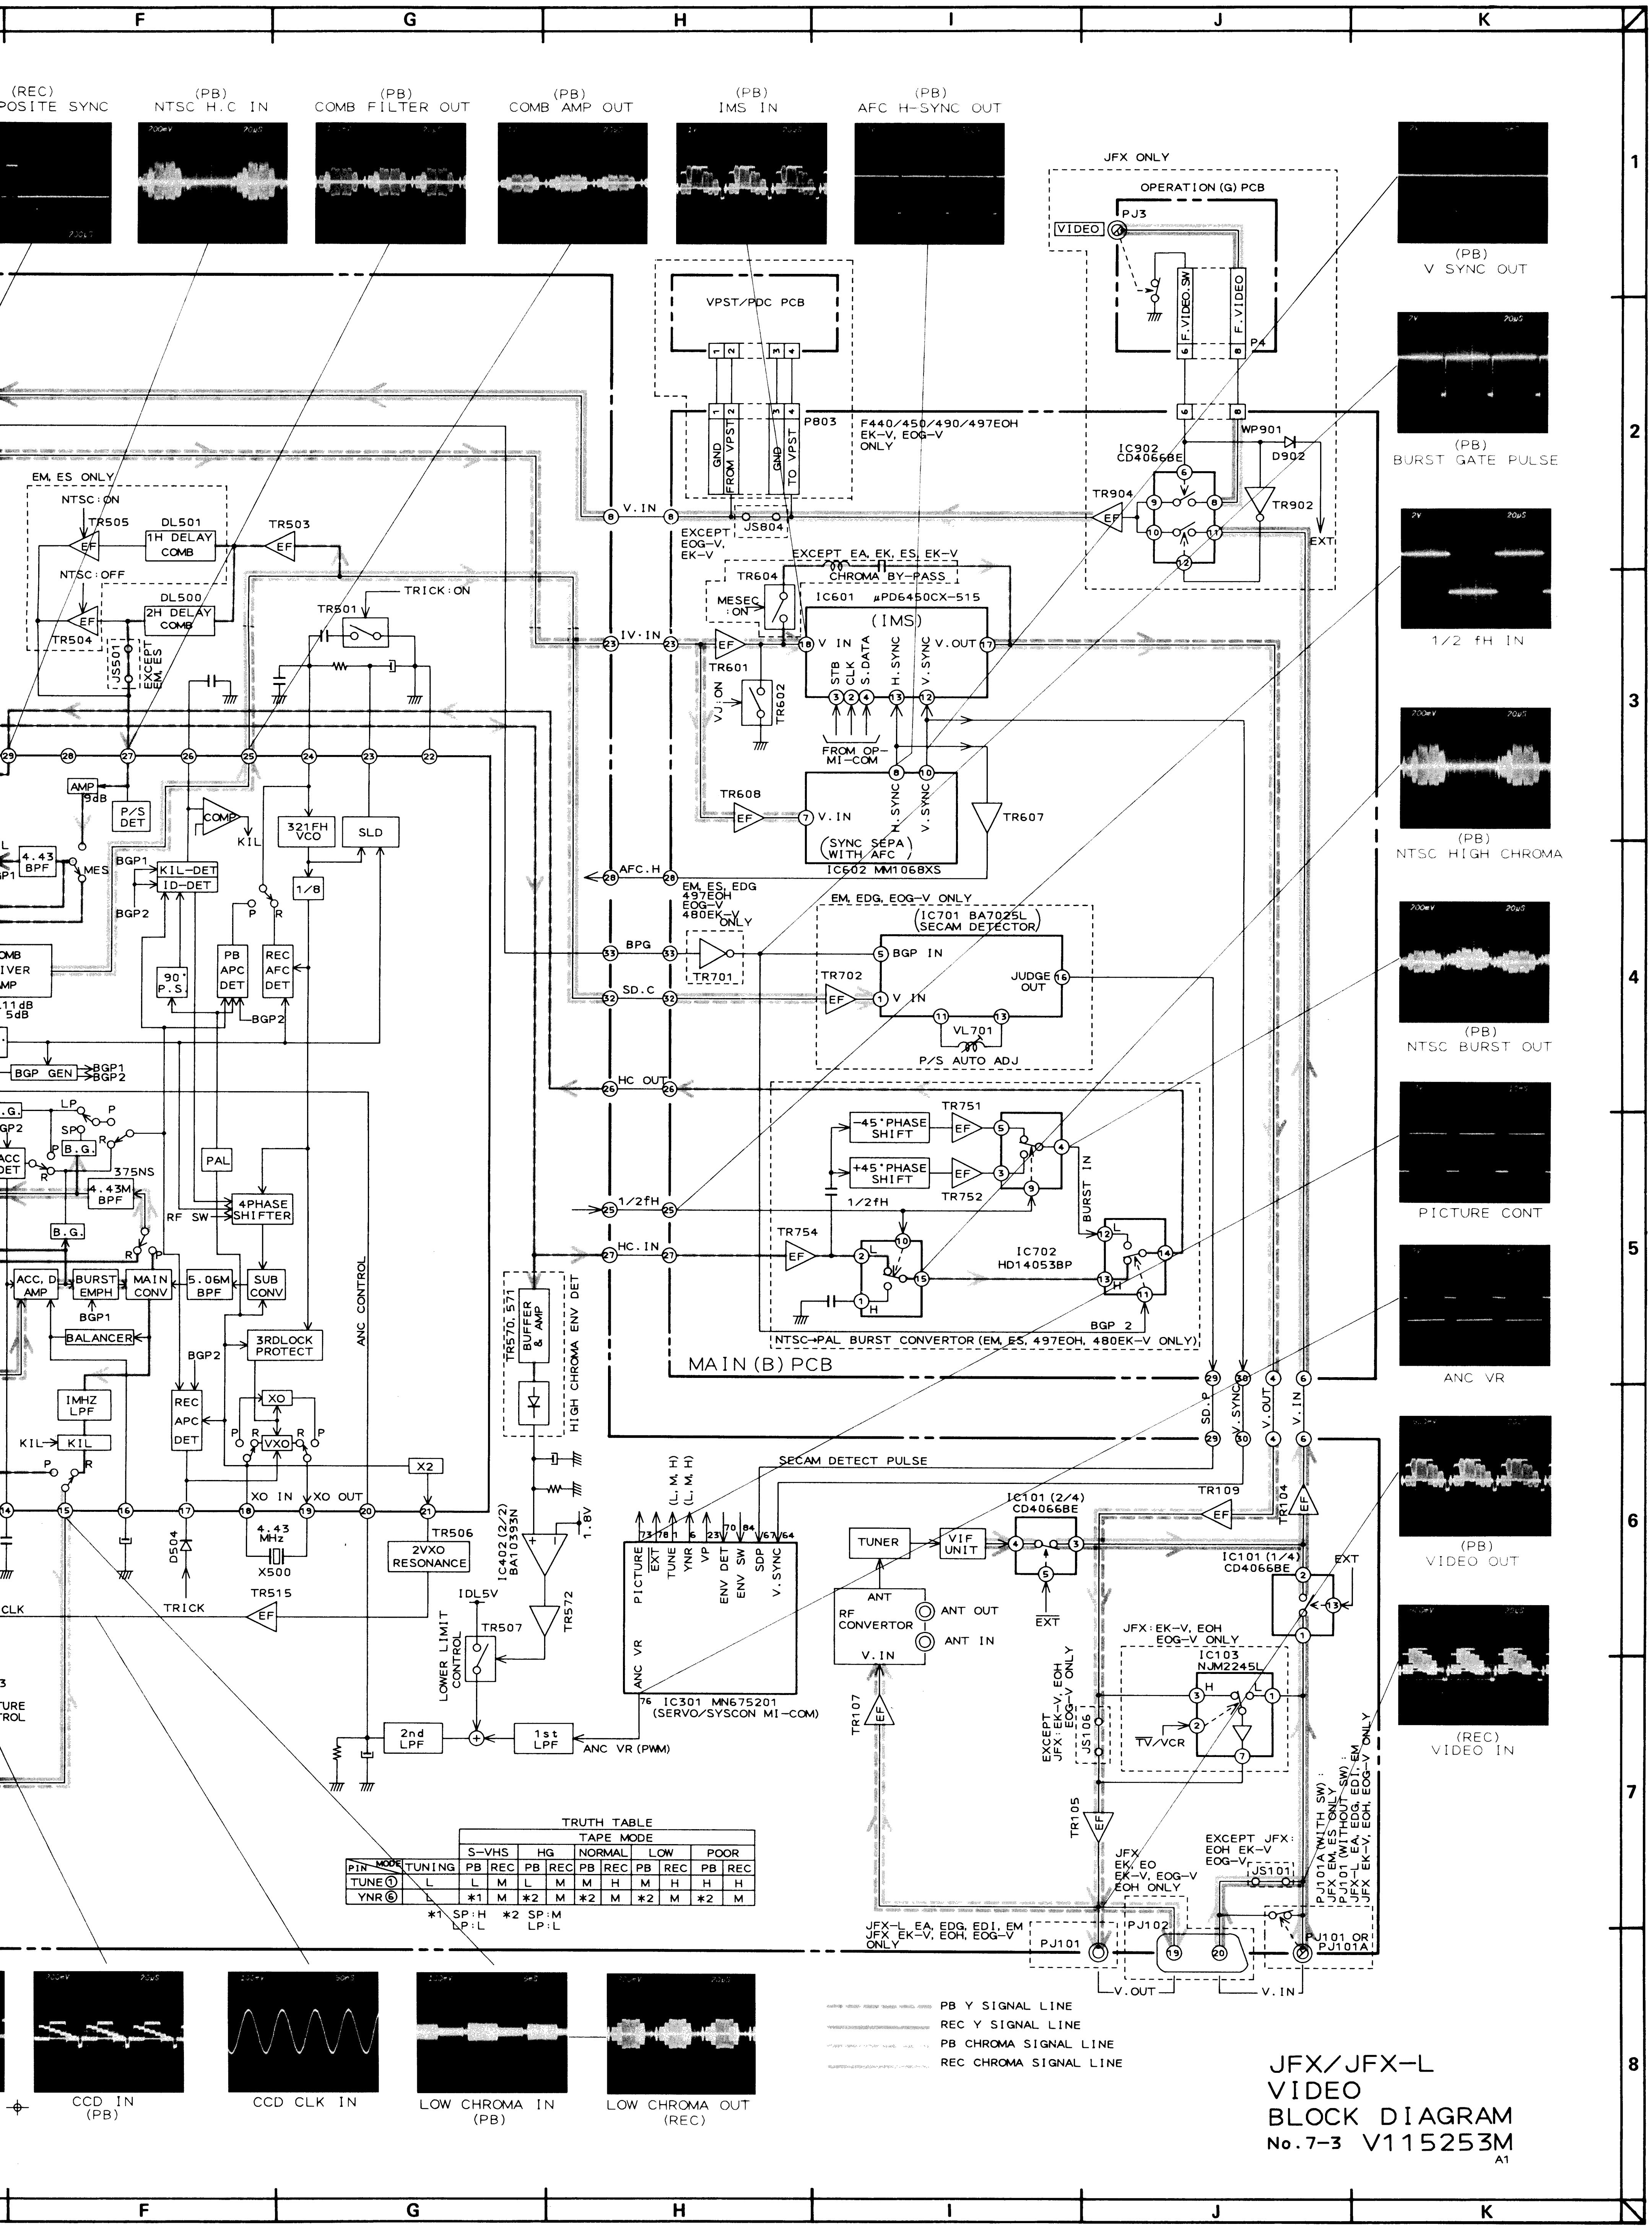
F
G
H
I
J
K
1
2
3
4
5
6
7
8
(REC) POSITE SYNC
(PB) NTSC H.C IN
(PB) COMB FILTER OUT
(PB) COMB AMP OUT
(PB) IMS IN
(PB) AFC H-SYNC OUT
(PB) V SYNC OUT
(PB) BURST GATE PULSE
1/2 fH IN
(PB) NTSC HIGH CHROMA
(PB) NTSC BURST OUT
PICTURE CONT
ANC VR
(PB) VIDEO OUT
(REC) VIDEO IN
CCD IN (PB)
CCD CLK IN
LOW CHROMA IN (PB)
LOW CHROMA OUT (REC)
JFX ONLY
OPERATION (G) PCB
VIDEO
PJ3
F.VIDEO.SW
F.VIDEO
P4
VPST/PDC PCB
GND
FROM VPST
TO VPST
P803
F440/450/490/497EOH EK-V, EOG-V ONLY
WP901
IC902 CD4066BE
D902
TR904
TR902
EXT
EM, ES ONLY
NTSC : ON
TR505
DL501
1H DELAY COMB
TR503
NTSC : OFF
DL500
2H DELAY COMB
TR504
JS501
EXCEPT EM, ES
TRICK : ON
TR501
V. IN
EXCEPT EOG-V, EK-V
JS804
EXCEPT EA, EK, ES, EK-V
CHROMA BY-PASS
TR604
MESEC : ON
IC601 µPD6450CX-515
(IMS)
IV. IN
V IN
V. OUT
STB
CLK
S.DATA
H. SYNC
V. SYNC
TR601
VJ. ON
TR602
FROM OP-MI-COM
TR608
TR607
(SYNC SEPA WITH AFC)
IC602 MM1068XS
AMP
9dB
P/S DET
COMP
KIL
321FH VCO
SLD
4.43 BPF
MES
BGP1
KIL-DET
ID-DET
BGP2
1/8
P
R
COMB DRIVER AMP
11dB 5dB
90° P.S.
PB APC DET
REC AFC DET
AFC.H
EM, ES, EDG 497EOH EOG-V 480EK-V ONLY
BPG
TR701
SD.C
EM, EDG, EOG-V ONLY
IC701 BA7025L SECAM DETECTOR
BGP IN
JUDGE OUT
TR702
VL701
P/S AUTO ADJ
BGP GEN
BGP1
BGP2
HC OUT
LP
SP
B.G.
ACC DET
375NS
4.43M BPF
PAL
TR751
-45° PHASE SHIFT
+45° PHASE SHIFT
TR752
1/2fH
BURST IN
RF SW
4PHASE SHIFTER
ACC, D AMP
BURST EMPH
MAIN CONV
5.06M BPF
SUB CONV
HC. IN
TR754
IC702 HD14053BP
BGP 2
NTSC→PAL BURST CONVERTOR (EM, ES, 497EOH, 480EK-V ONLY)
MAIN (B) PCB
BALANCER
3RDLOCK PROTECT
ANC CONTROL
TR570, 571
BUFFER & AMP
HIGH CHROMA ENV DET
SD. P
V. SYNC
V. OUT
V. IN
IMHZ LPF
REC APC DET
XO
VXO
KIL
X2
SECAM DETECT PULSE
(L, M, H)
1.8V
IC402 (2/2) BA10393N
TR109
TR104
D504
XO IN
XO OUT
4.43 MHz
X500
TR506
2VXO RESONANCE
PICTURE
EXT
TUNE
YNR
VP
ENV DET
ENV SW
SDP
V.SYNC
TUNER
VIF UNIT
IC101 (2/4) CD4066BE
IC101 (1/4) CD4066BE
EXT
CLK
TRICK
TR515
IDL5V
TR507
TR572
LOWER LIMIT CONTROL
ANC VR
ANT
RF CONVERTOR
ANT OUT
ANT IN
V. IN
JFX : EK-V, EOH EOG-V ONLY
IC103 NJM2245L
TV/VCR
IC301 MN675201 (SERVO/SYSCON MI-COM)
2nd LPF
1st LPF
ANC VR (PWM)
TR107
JS106
EXCEPT JFX EK-V, EOH EOG-V ONLY
TR105
EXCEPT JFX: EOH EK-V EOG-V
JS101
JFX EK, EO EK-V, EOG-V EOH ONLY
PJ101A (WITH SW) : JFX EM, ES ONLY
PJ101 (WITHOUT SW) : JFX-L EA, EDG, EDI, EM JFX EK-V, EOH, EOG-V ONLY
JFX-L EA, EDG, EDI, EM JFX EK-V, EOH, EOG-V ONLY
PJ101
PJ102
PJ101 OR PJ101A
V. OUT
V. IN
PB Y SIGNAL LINE
REC Y SIGNAL LINE
PB CHROMA SIGNAL LINE
REC CHROMA SIGNAL LINE

TRUTH TABLE

PIN \ MODE	TUNING	TAPE MODE									
		S-VHS		HG		NORMAL		LOW		POOR	
		PB	REC	PB	REC	PB	REC	PB	REC	PB	REC
TUNE ①	L	L	M	L	M	M	H	M	H	H	H
YNR ⑥	L	*1	M	*2	M	*2	M	*2	M	*2	M

*1 SP : H
LP : L

*2 SP : M
LP : L

JFX/JFX-L
VIDEO
BLOCK DIAGRAM
No.7-3 V115253M
A1

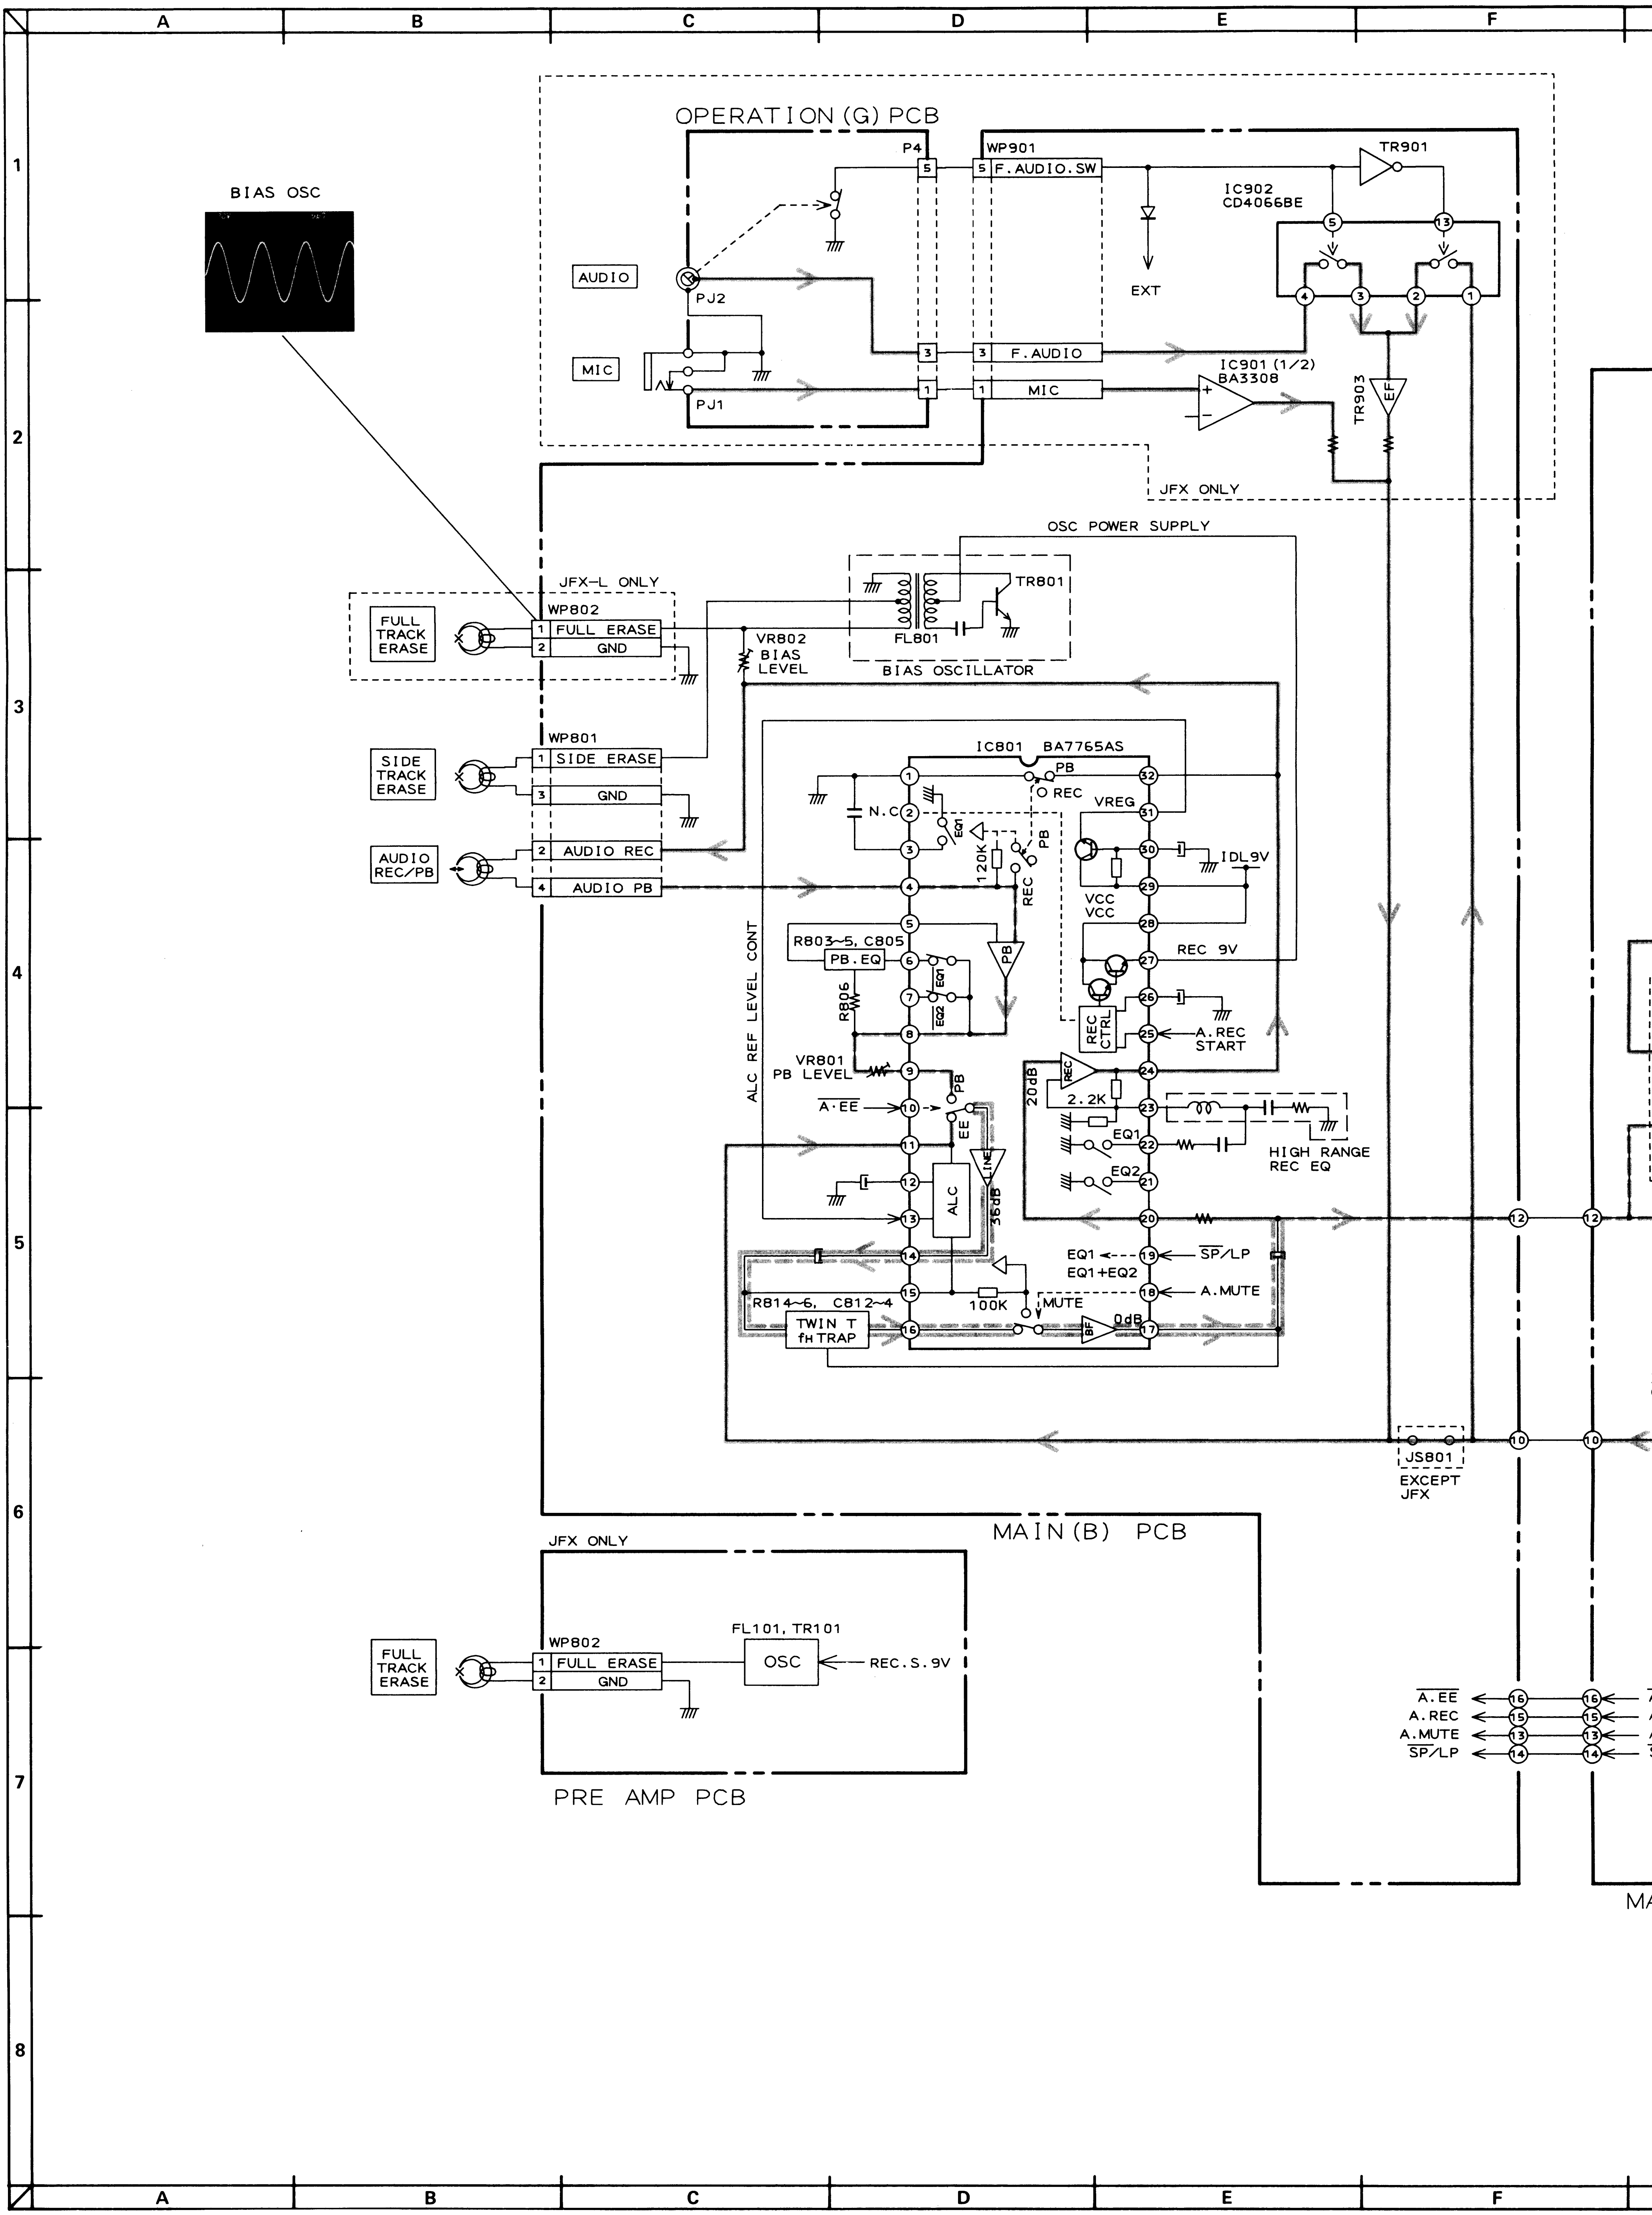
A
B
C
D
E
F
1
2
3
4
5
6
7
8
BIAS OSC
OPERATION (G) PCB
P4
WP901
F. AUDIO. SW
F. AUDIO
MIC
AUDIO
PJ2
PJ1
EXT
TR901
IC902
CD4066BE
IC901 (1/2)
BA3308
TR903
EF
JFX ONLY
OSC POWER SUPPLY
JFX-L ONLY
WP802
FULL ERASE
GND
FULL TRACK ERASE
TR801
FL801
VR802
BIAS LEVEL
BIAS OSCILLATOR
WP801
SIDE ERASE
SIDE TRACK ERASE
AUDIO REC
AUDIO PB
AUDIO REC/PB
IC801 BA7765AS
PB
REC
VREG
N.C
EQ1
EQ2
120K
IDL9V
VCC
R803~5, C805
PB. EQ
R806
REC 9V
REC CTRL
A. REC START
ALC REF LEVEL CONT
VR801
PB LEVEL
A·EE
EE
LINE
ALC
36dB
20dB
2.2K
HIGH RANGE REC EQ
EQ1 ← EQ1+EQ2
SP/LP
A. MUTE
MUTE
100K
R814~6, C812~4
TWIN T fH TRAP
BF
0dB
JS801
EXCEPT JFX
MAIN (B) PCB
FL101, TR101
OSC
REC. S. 9V
PRE AMP PCB
A.EE
A.REC
A.MUTE
SP/LP
MA

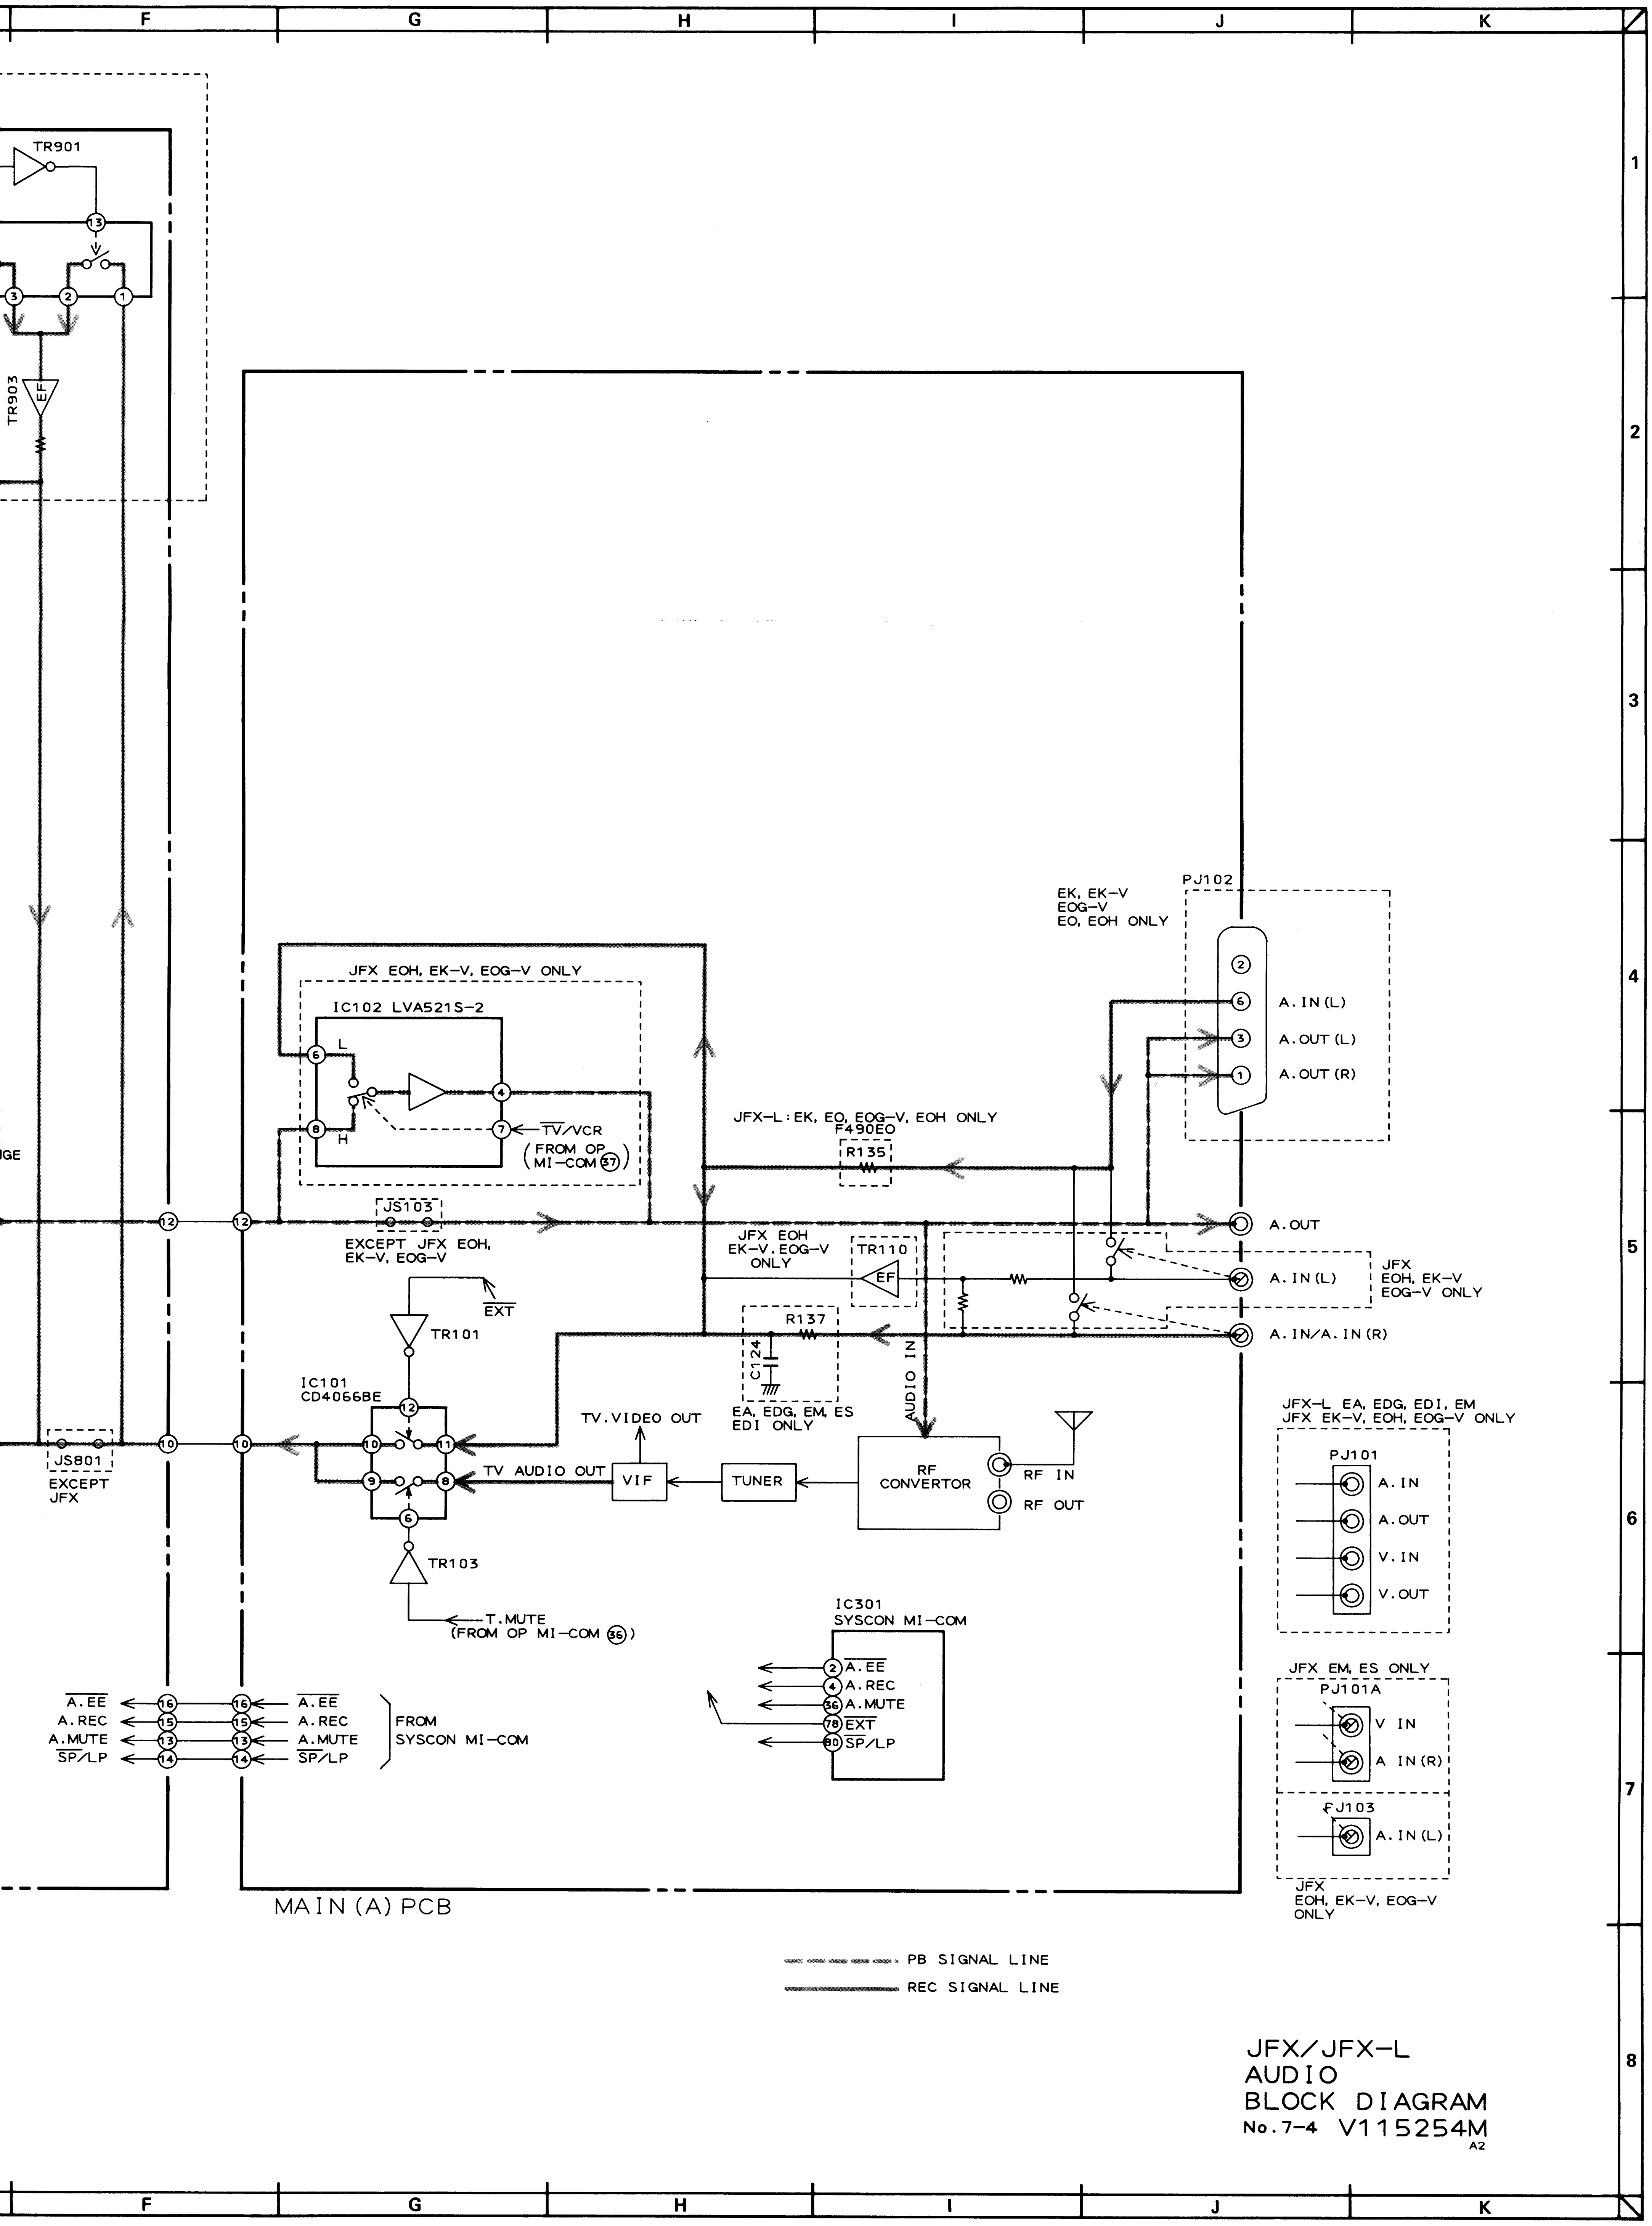
F
G
H
I
J
K
1
2
3
4
5
6
7
8
TR901
TR903
EF
IGE
JFX EOH, EK-V, EOG-V ONLY
IC102 LVA521S-2
L
H
TV/VCR
(FROM OP MI-COM 57)
JS103
EXCEPT JFX EOH, EK-V, EOG-V
EXT
TR101
IC101
CD4066BE
TR103
T.MUTE
(FROM OP MI-COM 56)
JS801
EXCEPT JFX
TV.VIDEO OUT
TV AUDIO OUT
VIF
TUNER
RF CONVERTOR
RF IN
RF OUT
AUDIO IN
R137
C124
EA, EDG, EM, ES EDI ONLY
JFX EOH EK-V, EOG-V ONLY
TR110
JFX-L : EK, EO, EOG-V, EOH ONLY
F490EO
R135
EK, EK-V
EOG-V
EO, EOH ONLY
PJ102
A.IN (L)
A.OUT (L)
A.OUT (R)
A.OUT
A.IN (L)
A.IN/A.IN (R)
JFX
EOH, EK-V
EOG-V ONLY
JFX-L EA, EDG, EDI, EM
JFX EK-V, EOH, EOG-V ONLY
PJ101
A.IN
A.OUT
V.IN
V.OUT
JFX EM, ES ONLY
PJ101A
V IN
A IN (R)
PJ103
A.IN (L)
JFX
EOH, EK-V, EOG-V
ONLY
IC301
SYSCON MI-COM
A.EE
A.REC
A.MUTE
EXT
SP/LP
A.EE
A.REC
A.MUTE
SP/LP
FROM
SYSCON MI-COM
MAIN (A) PCB
PB SIGNAL LINE
REC SIGNAL LINE

JFX/JFX-L
AUDIO
BLOCK DIAGRAM
No.7-4 V115254M
A2

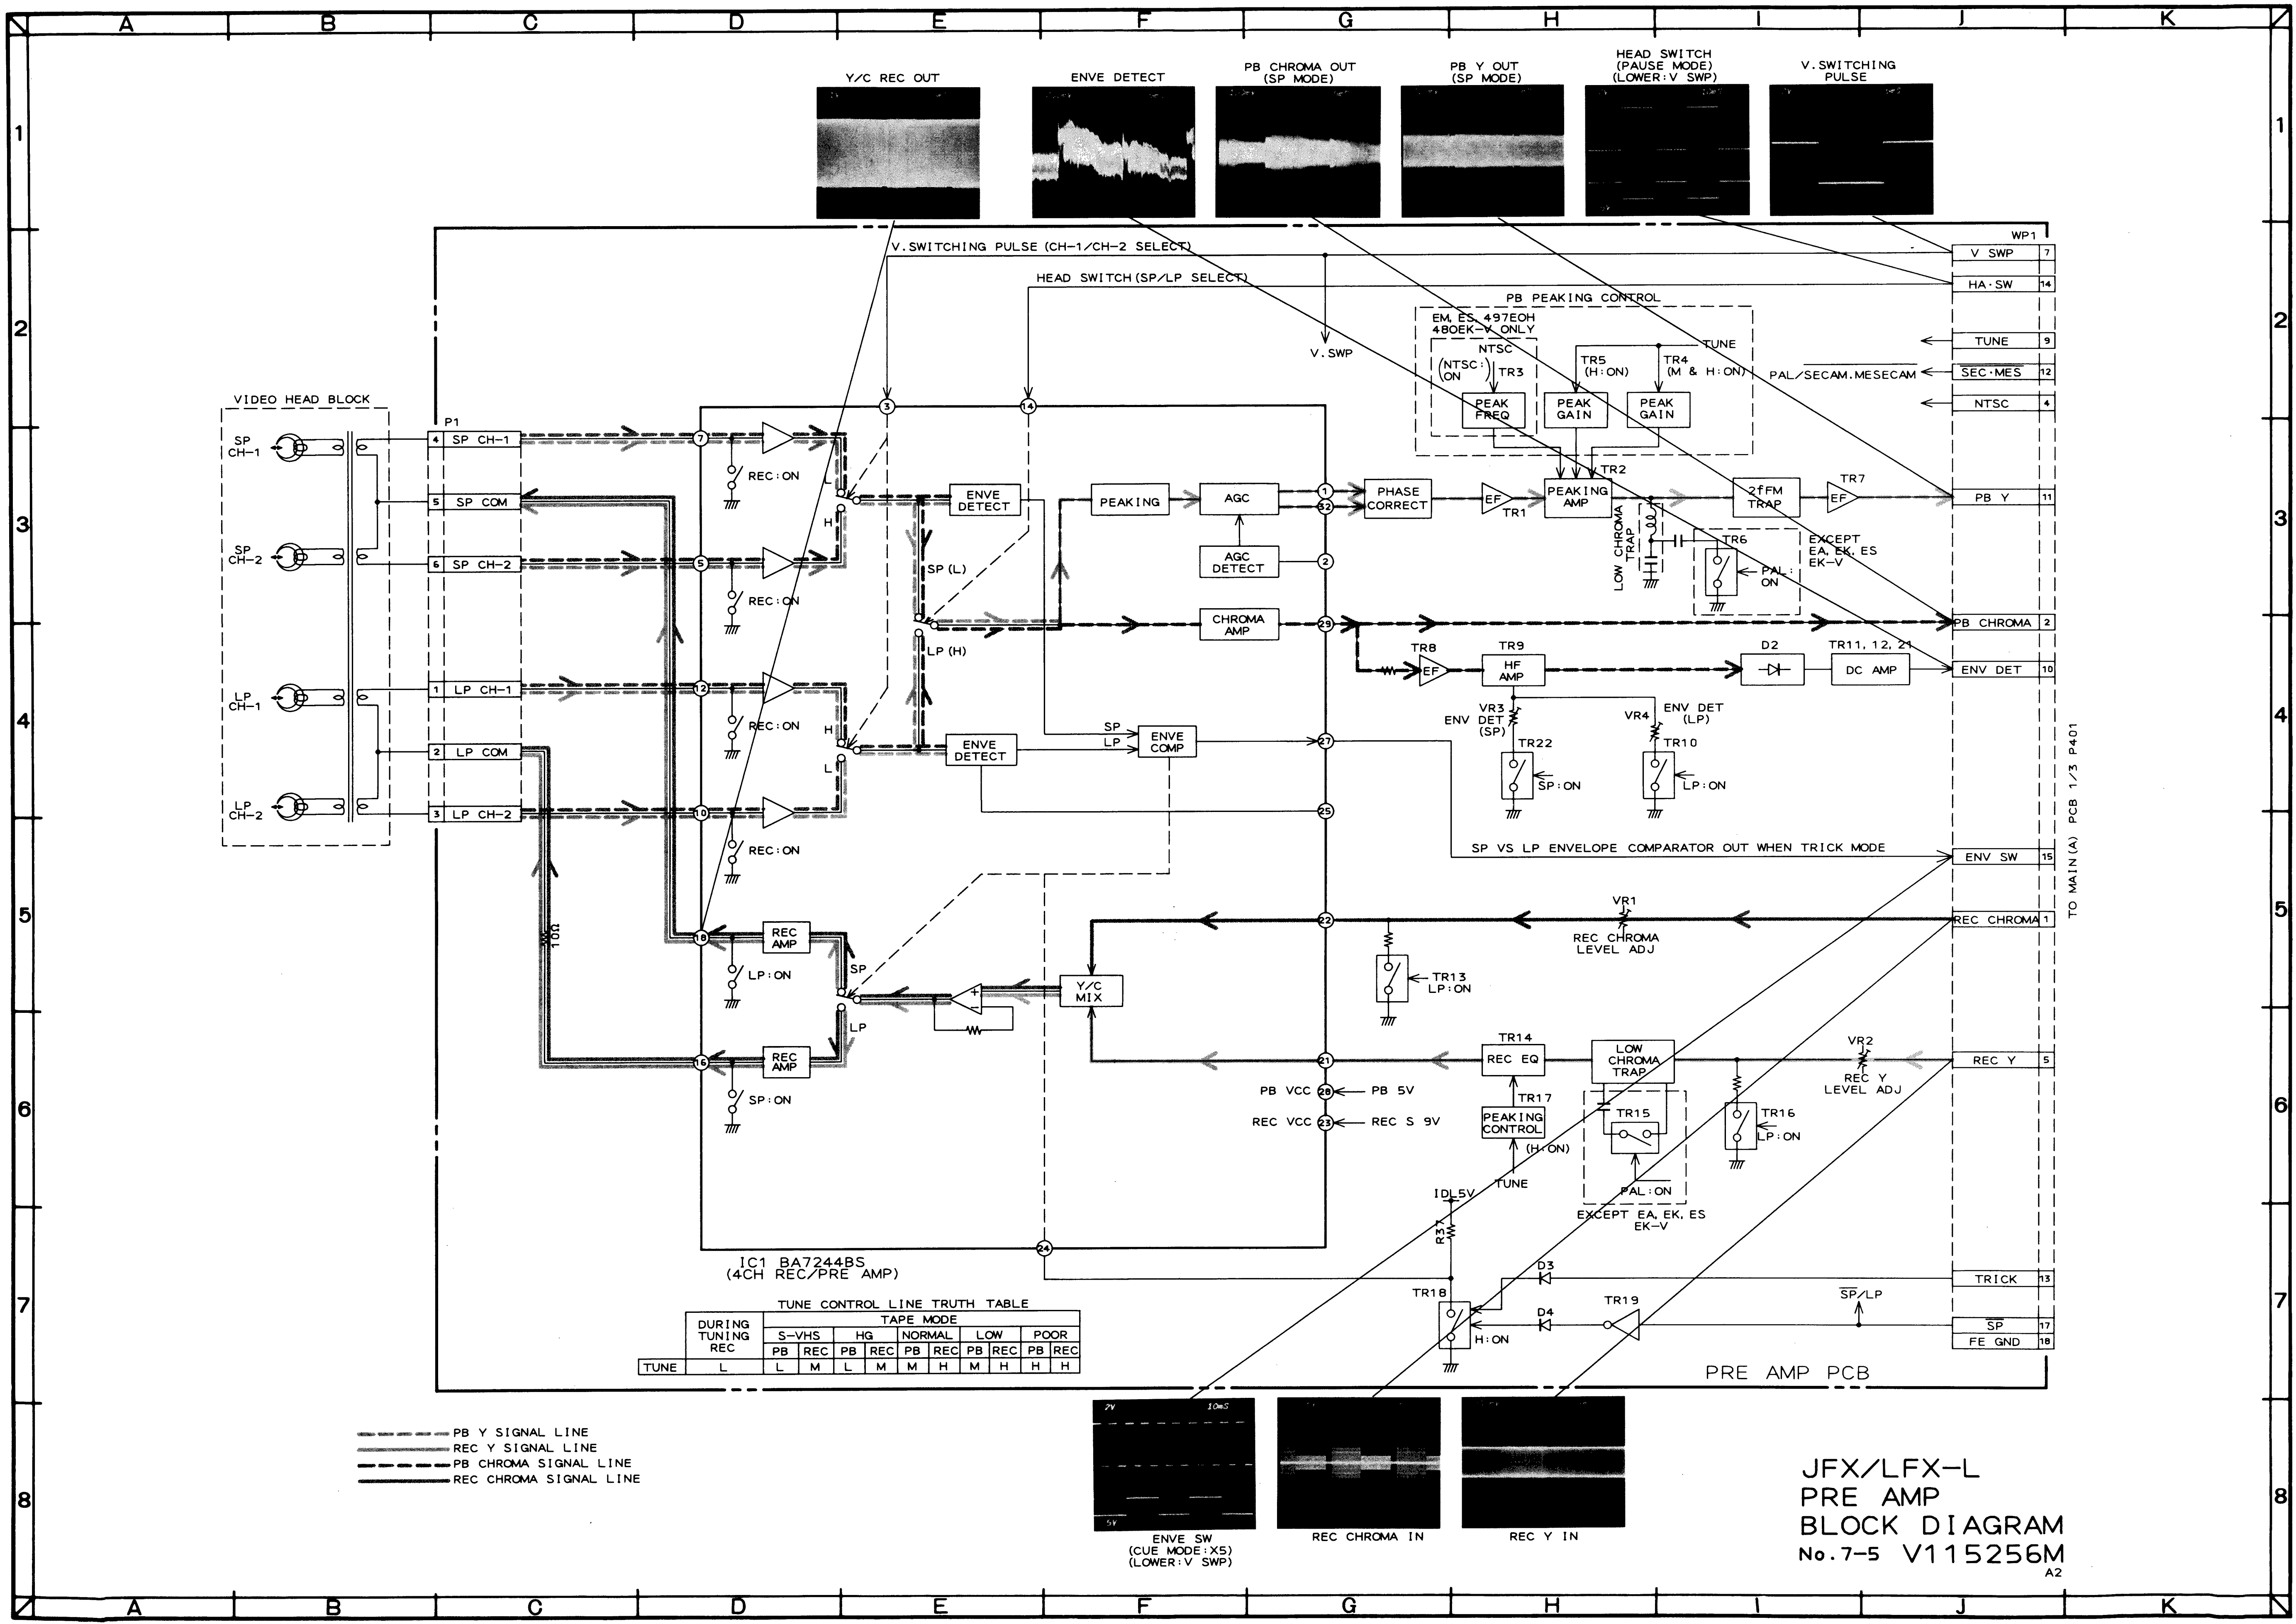
A
B
C
D
E
F
G
H
I
J
K
1
2
3
4
5
6
7
8
Y/C REC OUT
ENVE DETECT
PB CHROMA OUT (SP MODE)
PB Y OUT (SP MODE)
HEAD SWITCH (PAUSE MODE) (LOWER:V SWP)
V.SWITCHING PULSE
V.SWITCHING PULSE (CH-1/CH-2 SELECT)
HEAD SWITCH(SP/LP SELECT)
V.SWP
PB PEAKING CONTROL
EM, ES, 497EOH 480EK-V ONLY
NTSC
(NTSC: ON
TR3
PEAK FREQ
TR5 (H:ON)
TR4 (M & H:ON)
TUNE
PEAK GAIN
PEAK GAIN
PAL/SECAM.MESECAM
WP1
V SWP 7
HA·SW 14
TUNE 9
SEC·MES 12
NTSC 4
PB Y 11
PB CHROMA 2
ENV DET 10
ENV SW 15
REC CHROMA 1
REC Y 5
TRICK 13
SP 17
FE GND 18
TO MAIN (A) PCB 1/3 P401
VIDEO HEAD BLOCK
SP CH-1
SP CH-2
LP CH-1
LP CH-2
P1
4 SP CH-1
5 SP COM
6 SP CH-2
1 LP CH-1
2 LP COM
3 LP CH-2
10Ω
REC:ON
REC:ON
REC:ON
REC:ON
H
L
SP (L)
LP (H)
ENVE DETECT
ENVE DETECT
PEAKING
AGC
AGC DETECT
CHROMA AMP
PHASE CORRECT
EF
TR1
PEAKING AMP
TR2
LOW CHROMA TRAP
2fFM TRAP
TR7
EF
TR6
EXCEPT EA, EK, ES EK-V
PAL: ON
TR8
EF
TR9
HF AMP
D2
TR11, 12, 21
DC AMP
VR3
ENV DET (SP)
TR22
SP:ON
VR4
ENV DET (LP)
TR10
LP:ON
SP
LP
ENVE COMP
SP VS LP ENVELOPE COMPARATOR OUT WHEN TRICK MODE
VR1
REC CHROMA LEVEL ADJ
TR13
LP:ON
REC AMP
LP:ON
SP
LP
Y/C MIX
REC AMP
SP:ON
TR14
REC EQ
LOW CHROMA TRAP
VR2
REC Y LEVEL ADJ
TR17
PEAKING CONTROL
(H:ON)
TUNE
TR15
PAL:ON
EXCEPT EA, EK, ES EK-V
TR16
LP:ON
PB VCC
PB 5V
REC VCC
REC S 9V
IDL5V
R37
D3
D4
TR18
H:ON
TR19
SP/LP
IC1 BA7244BS (4CH REC/PRE AMP)
3
14
7
5
12
10
18
16
1
32
2
29
27
25
22
21
28
23
24
PRE AMP PCB
ENVE SW (CUE MODE:X5) (LOWER:V SWP)
REC CHROMA IN
REC Y IN
2V
10mS
5V

TUNE CONTROL LINE TRUTH TABLE

	DURING TUNING REC	TAPE MODE									
		S-VHS		HG		NORMAL		LOW		POOR	
		PB	REC	PB	REC	PB	REC	PB	REC	PB	REC
TUNE	L	L	M	L	M	M	H	M	H	H	H

- PB Y SIGNAL LINE
- REC Y SIGNAL LINE
- PB CHROMA SIGNAL LINE
- REC CHROMA SIGNAL LINE

JFX/LFX-L
PRE AMP
BLOCK DIAGRAM
No.7-5 V115256M
A2

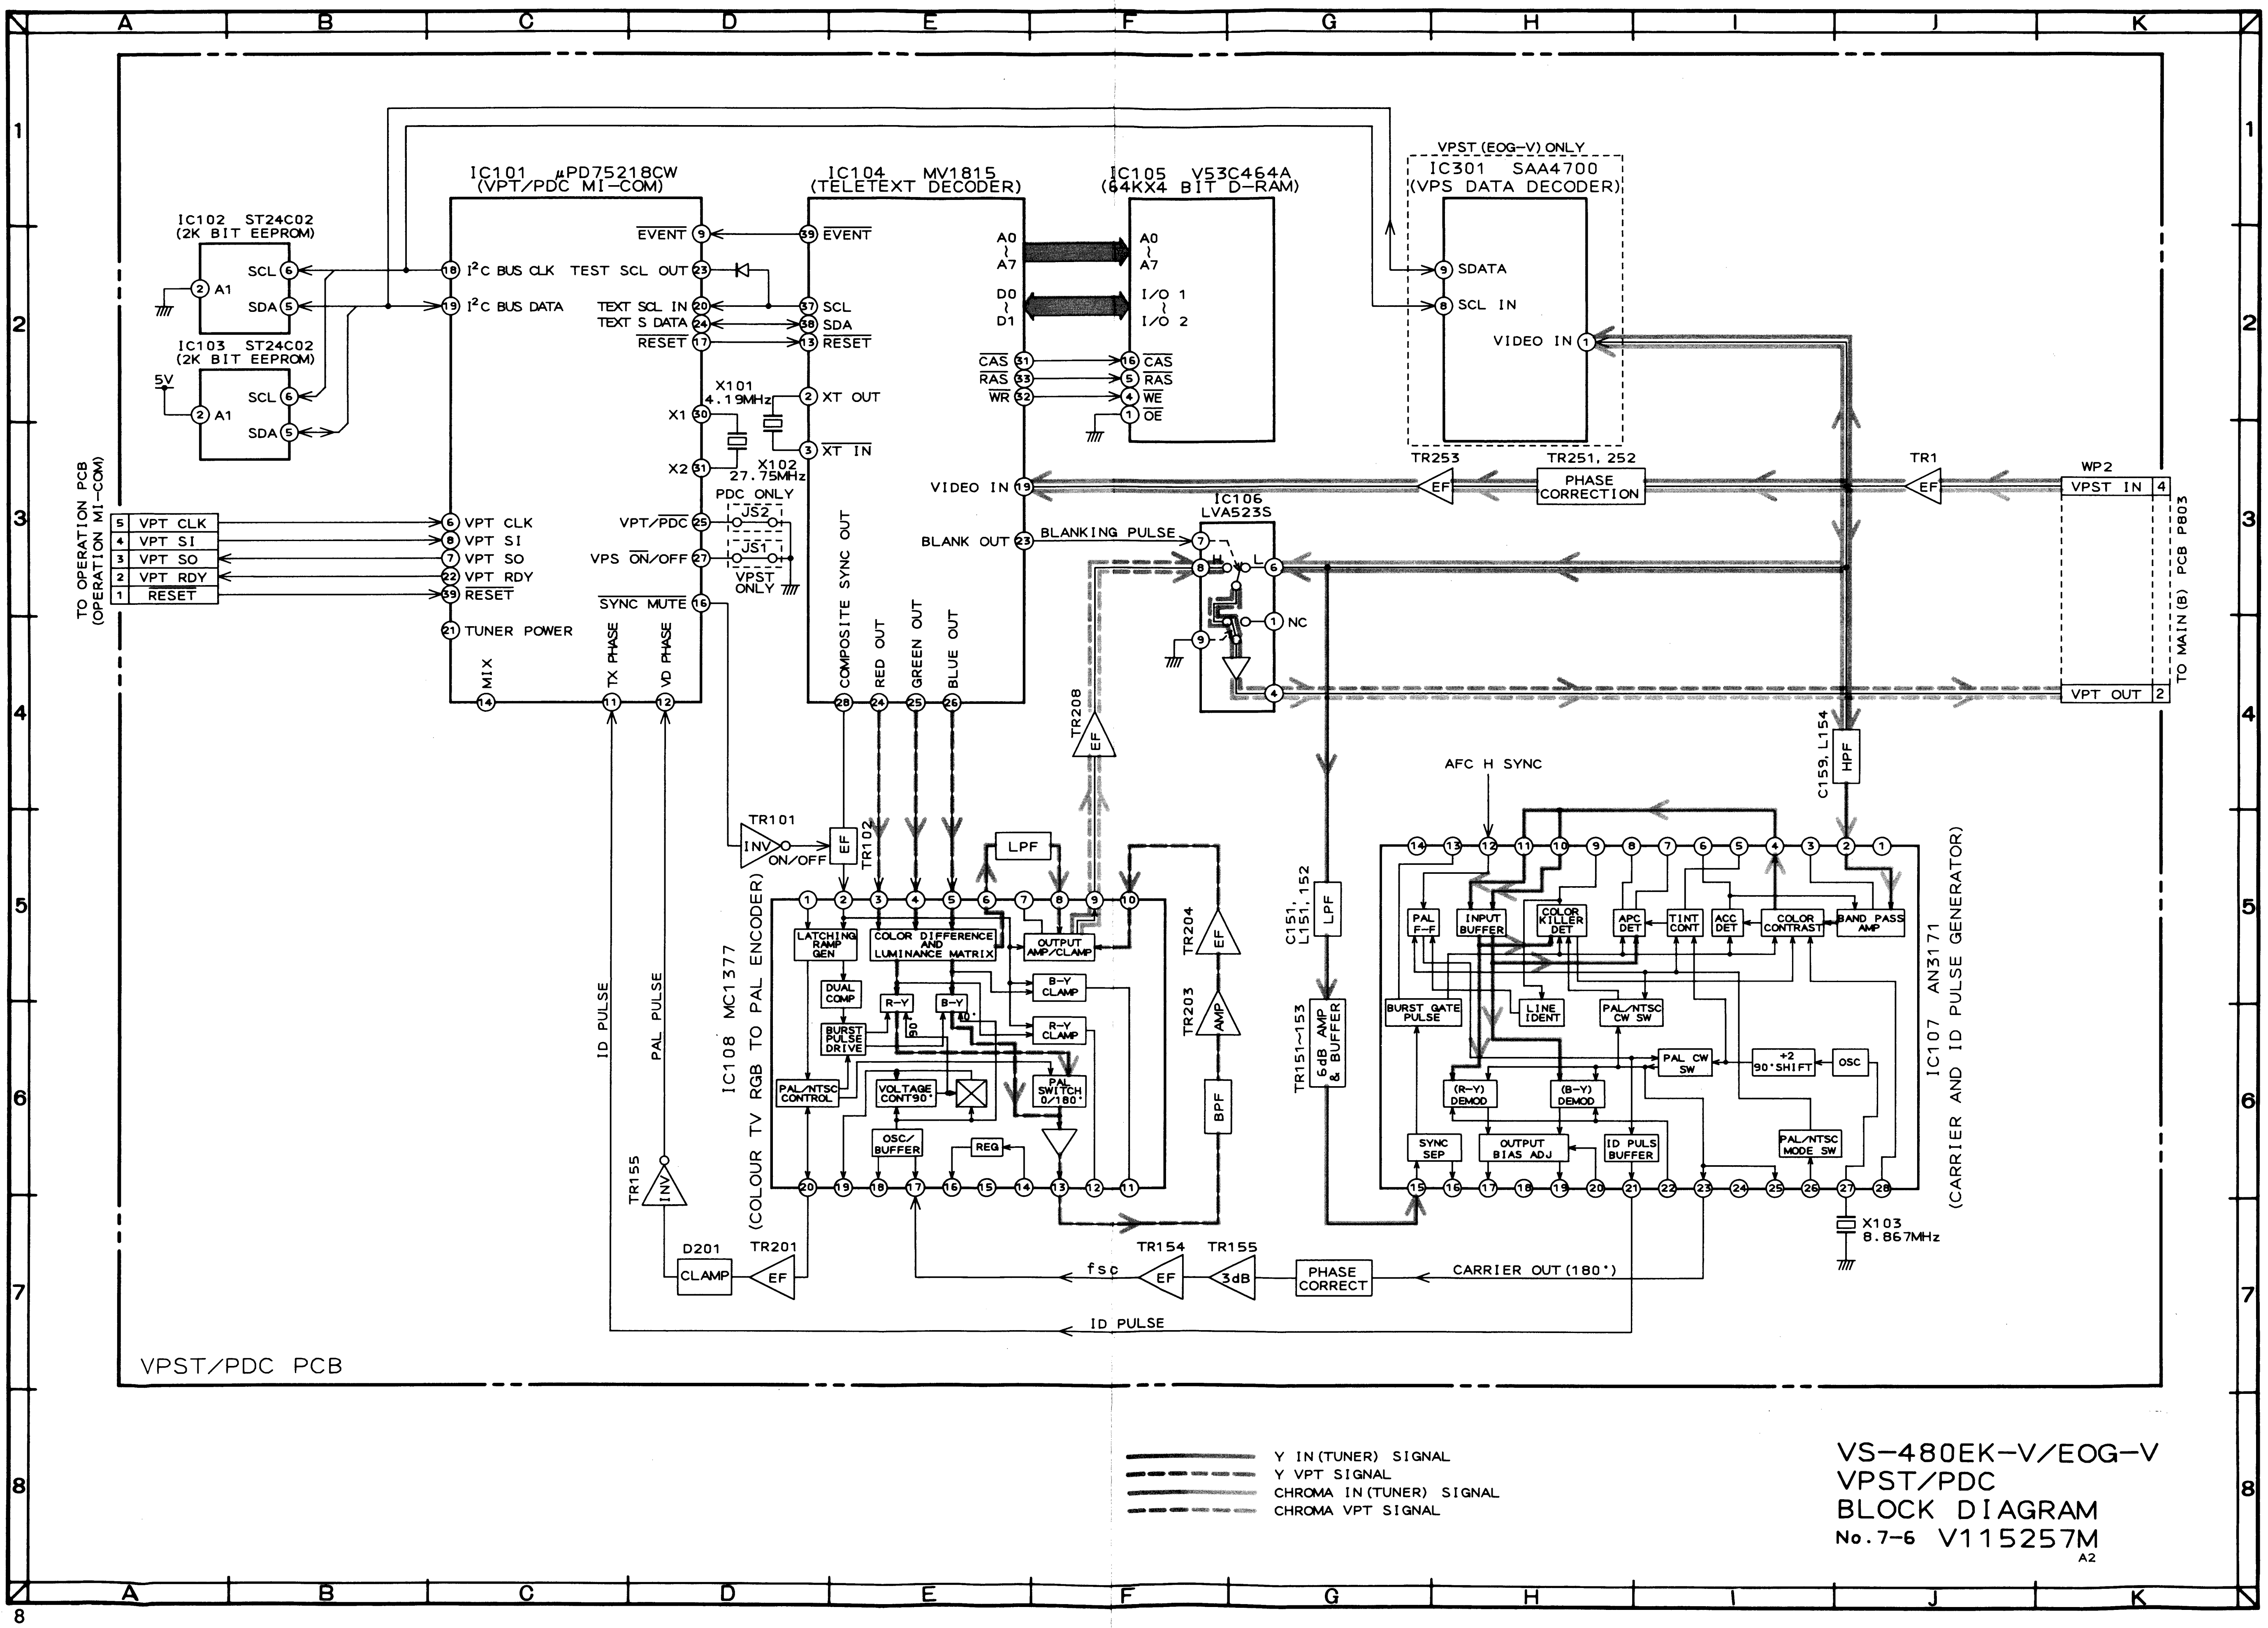
A B C D E F G H I J K
1 2 3 4 5 6 7 8
IC101 µPD75218CW (VPT/PDC MI-COM)
IC102 ST24C02 (2K BIT EEPROM)
IC103 ST24C02 (2K BIT EEPROM)
IC104 MV1815 (TELETEXT DECODER)
IC105 V53C464A (64KX4 BIT D-RAM)
VPST (EOG-V) ONLY
IC301 SAA4700 (VPS DATA DECODER)
SCL SDA A1 5V
EVENT
I²C BUS CLK
I²C BUS DATA
TEST SCL OUT
TEXT SCL IN
TEXT S DATA
RESET
SCL SDA RESET
A0 ~ A7
D0 ~ D1
I/O 1 ~ I/O 2
CAS RAS WR WE OE
XT OUT XT IN
X101 4.19MHz
X102 27.75MHz
X1 X2
PDC ONLY
JS2 JS1
VPST ONLY
VPT/PDC
VPS ON/OFF
SYNC MUTE
TUNER POWER
MIX TX PHASE VD PHASE
SDATA
SCL IN
VIDEO IN
VIDEO IN
BLANK OUT
BLANKING PULSE
COMPOSITE SYNC OUT
RED OUT GREEN OUT BLUE OUT
TO OPERATION PCB (OPERATION MI-COM)
VPT CLK
VPT SI
VPT SO
VPT RDY
RESET
TR253 EF
TR251, 252 PHASE CORRECTION
TR1 EF
WP2
VPST IN
VPT OUT
TO MAIN (B) PCB P803
IC106 LVA523S
H L NC
TR208 EF
C159, L154 HPF
AFC H SYNC
TR101 INV ON/OFF
TR102 EF
LPF
IC108 MC1377 (COLOUR TV RGB TO PAL ENCODER)
LATCHING RAMP GEN
COLOR DIFFERENCE AND LUMINANCE MATRIX
OUTPUT AMP/CLAMP
DUAL COMP
B-Y CLAMP
R-Y CLAMP
R-Y B-Y
BURST PULSE DRIVE
PAL/NTSC CONTROL
VOLTAGE CONT90°
PAL SWITCH 0/180°
OSC/BUFFER
REG
TR204 EF
TR203 AMP
BPF
C151, L151, 152 LPF
TR151~153 6dB AMP & BUFFER
IC107 AN3171 (CARRIER AND ID PULSE GENERATOR)
PAL F-F
INPUT BUFFER
COLOR KILLER DET
APC DET
TINT CONT
ACC DET
COLOR CONTRAST
BAND PASS AMP
BURST GATE PULSE
LINE IDENT
PAL/NTSC CW SW
PAL CW SW
÷2 90°SHIFT
OSC
(R-Y) DEMOD
(B-Y) DEMOD
SYNC SEP
OUTPUT BIAS ADJ
ID PULS BUFFER
PAL/NTSC MODE SW
X103 8.867MHz
ID PULSE
PAL PULSE
TR155 INV
D201 CLAMP
TR201 EF
fsc
TR154 EF
TR155 3dB
PHASE CORRECT
CARRIER OUT (180°)
ID PULSE
VPST/PDC PCB

Y IN (TUNER) SIGNAL
Y VPT SIGNAL
CHROMA IN (TUNER) SIGNAL
CHROMA VPT SIGNAL

VS-480EK-V/EOG-V
VPST/PDC
BLOCK DIAGRAM
No.7-6 V115257M
A2

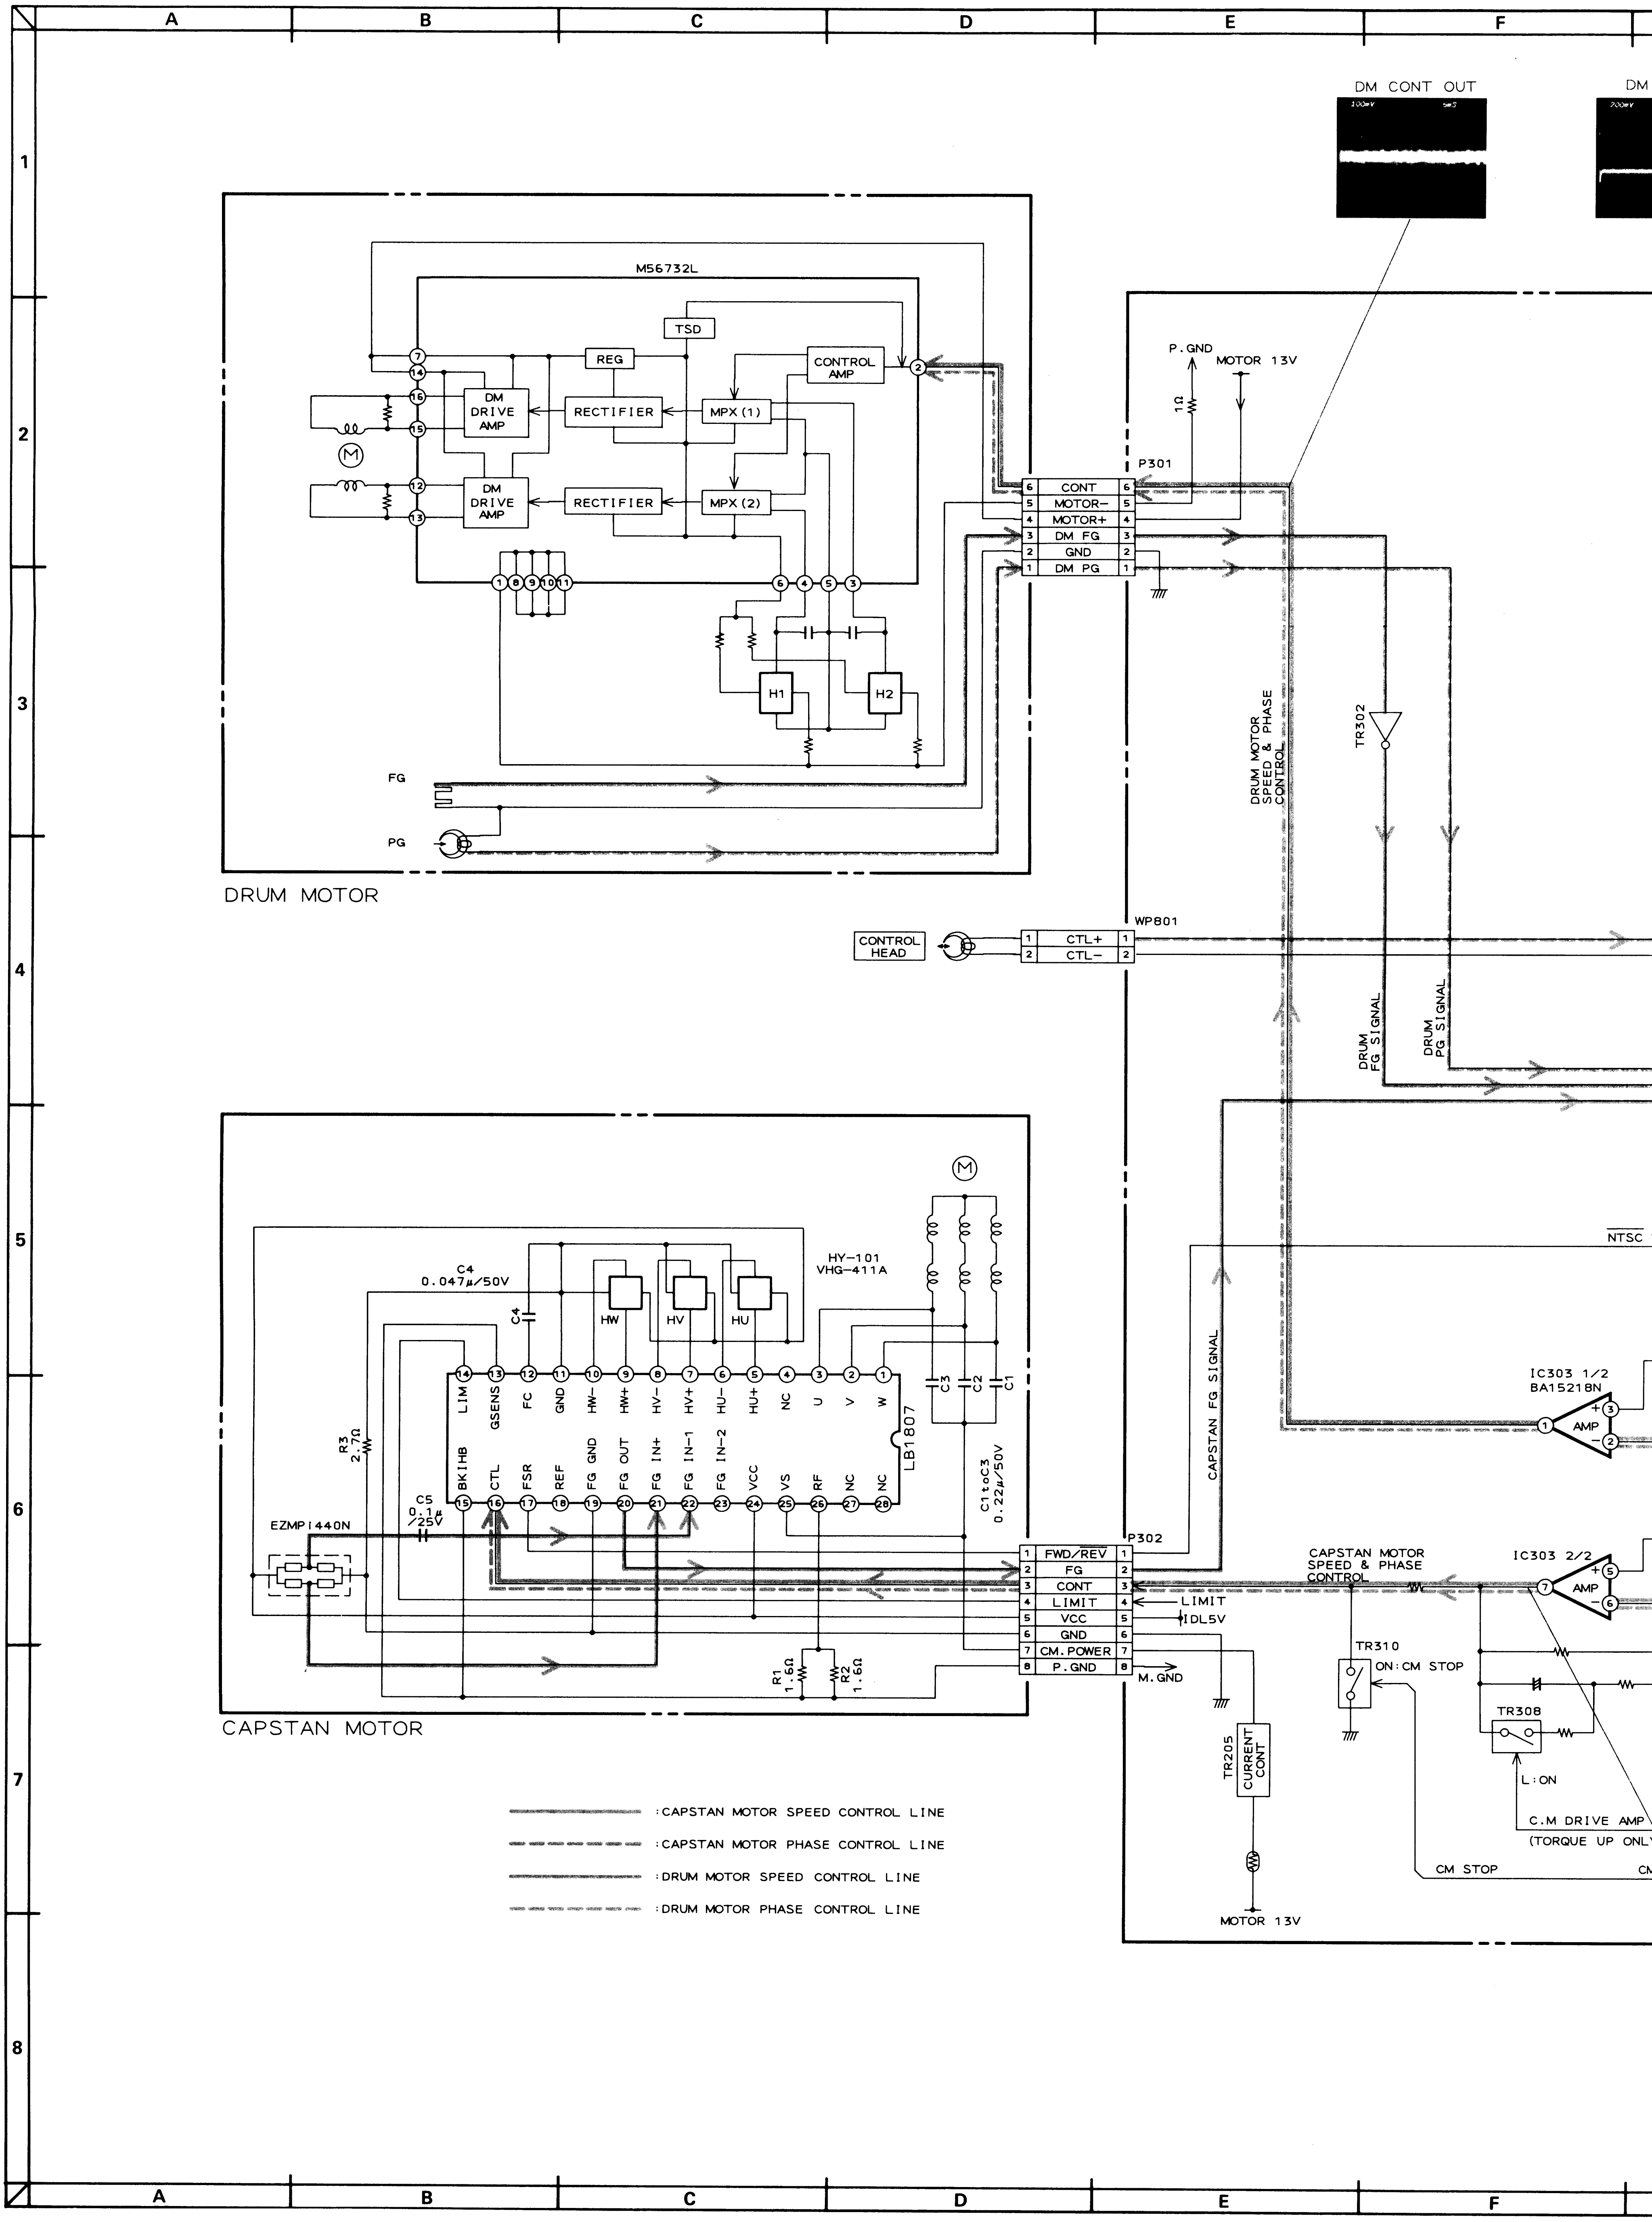
A
B
C
D
E
F
1
2
3
4
5
6
7
8
DM CONT OUT
DM
M56732L
TSD
REG
CONTROL AMP
DM DRIVE AMP
RECTIFIER
MPX (1)
MPX (2)
M
H1
H2
FG
PG
DRUM MOTOR
P.GND
MOTOR 13V
1Ω
P301
CONT
MOTOR−
MOTOR+
DM FG
GND
DM PG
DRUM MOTOR SPEED & PHASE CONTROL
TR302
CONTROL HEAD
WP801
CTL+
CTL−
DRUM FG SIGNAL
DRUM PG SIGNAL
HY-101
VHG-411A
C4 0.047μ/50V
HW
HV
HU
LIM
GSENS
FC
GND
HW−
HW+
HV−
HV+
HU−
HU+
NC
U
V
W
BKIHB
CTL
FSR
REF
FG GND
FG OUT
FG IN+
FG IN−1
FG IN−2
VCC
VS
RF
NC
NC
LB1807
C3
C2
C1
C1toC3 0.22μ/50V
R3 2.7Ω
C5 0.1μ /25V
EZMPI440N
R1 1.6Ω
R2 1.6Ω
CAPSTAN MOTOR
P302
FWD/REV
FG
CONT
LIMIT
VCC
GND
CM.POWER
P.GND
LIMIT
IDL5V
M.GND
CAPSTAN FG SIGNAL
CAPSTAN MOTOR SPEED & PHASE CONTROL
NTSC
IC303 1/2
BA15218N
AMP
IC303 2/2
TR310
ON:CM STOP
TR308
L:ON
C.M DRIVE AMP
(TORQUE UP ONL
CM STOP
CM
TR205
CURRENT CONT
MOTOR 13V
:CAPSTAN MOTOR SPEED CONTROL LINE
:CAPSTAN MOTOR PHASE CONTROL LINE
:DRUM MOTOR SPEED CONTROL LINE
:DRUM MOTOR PHASE CONTROL LINE

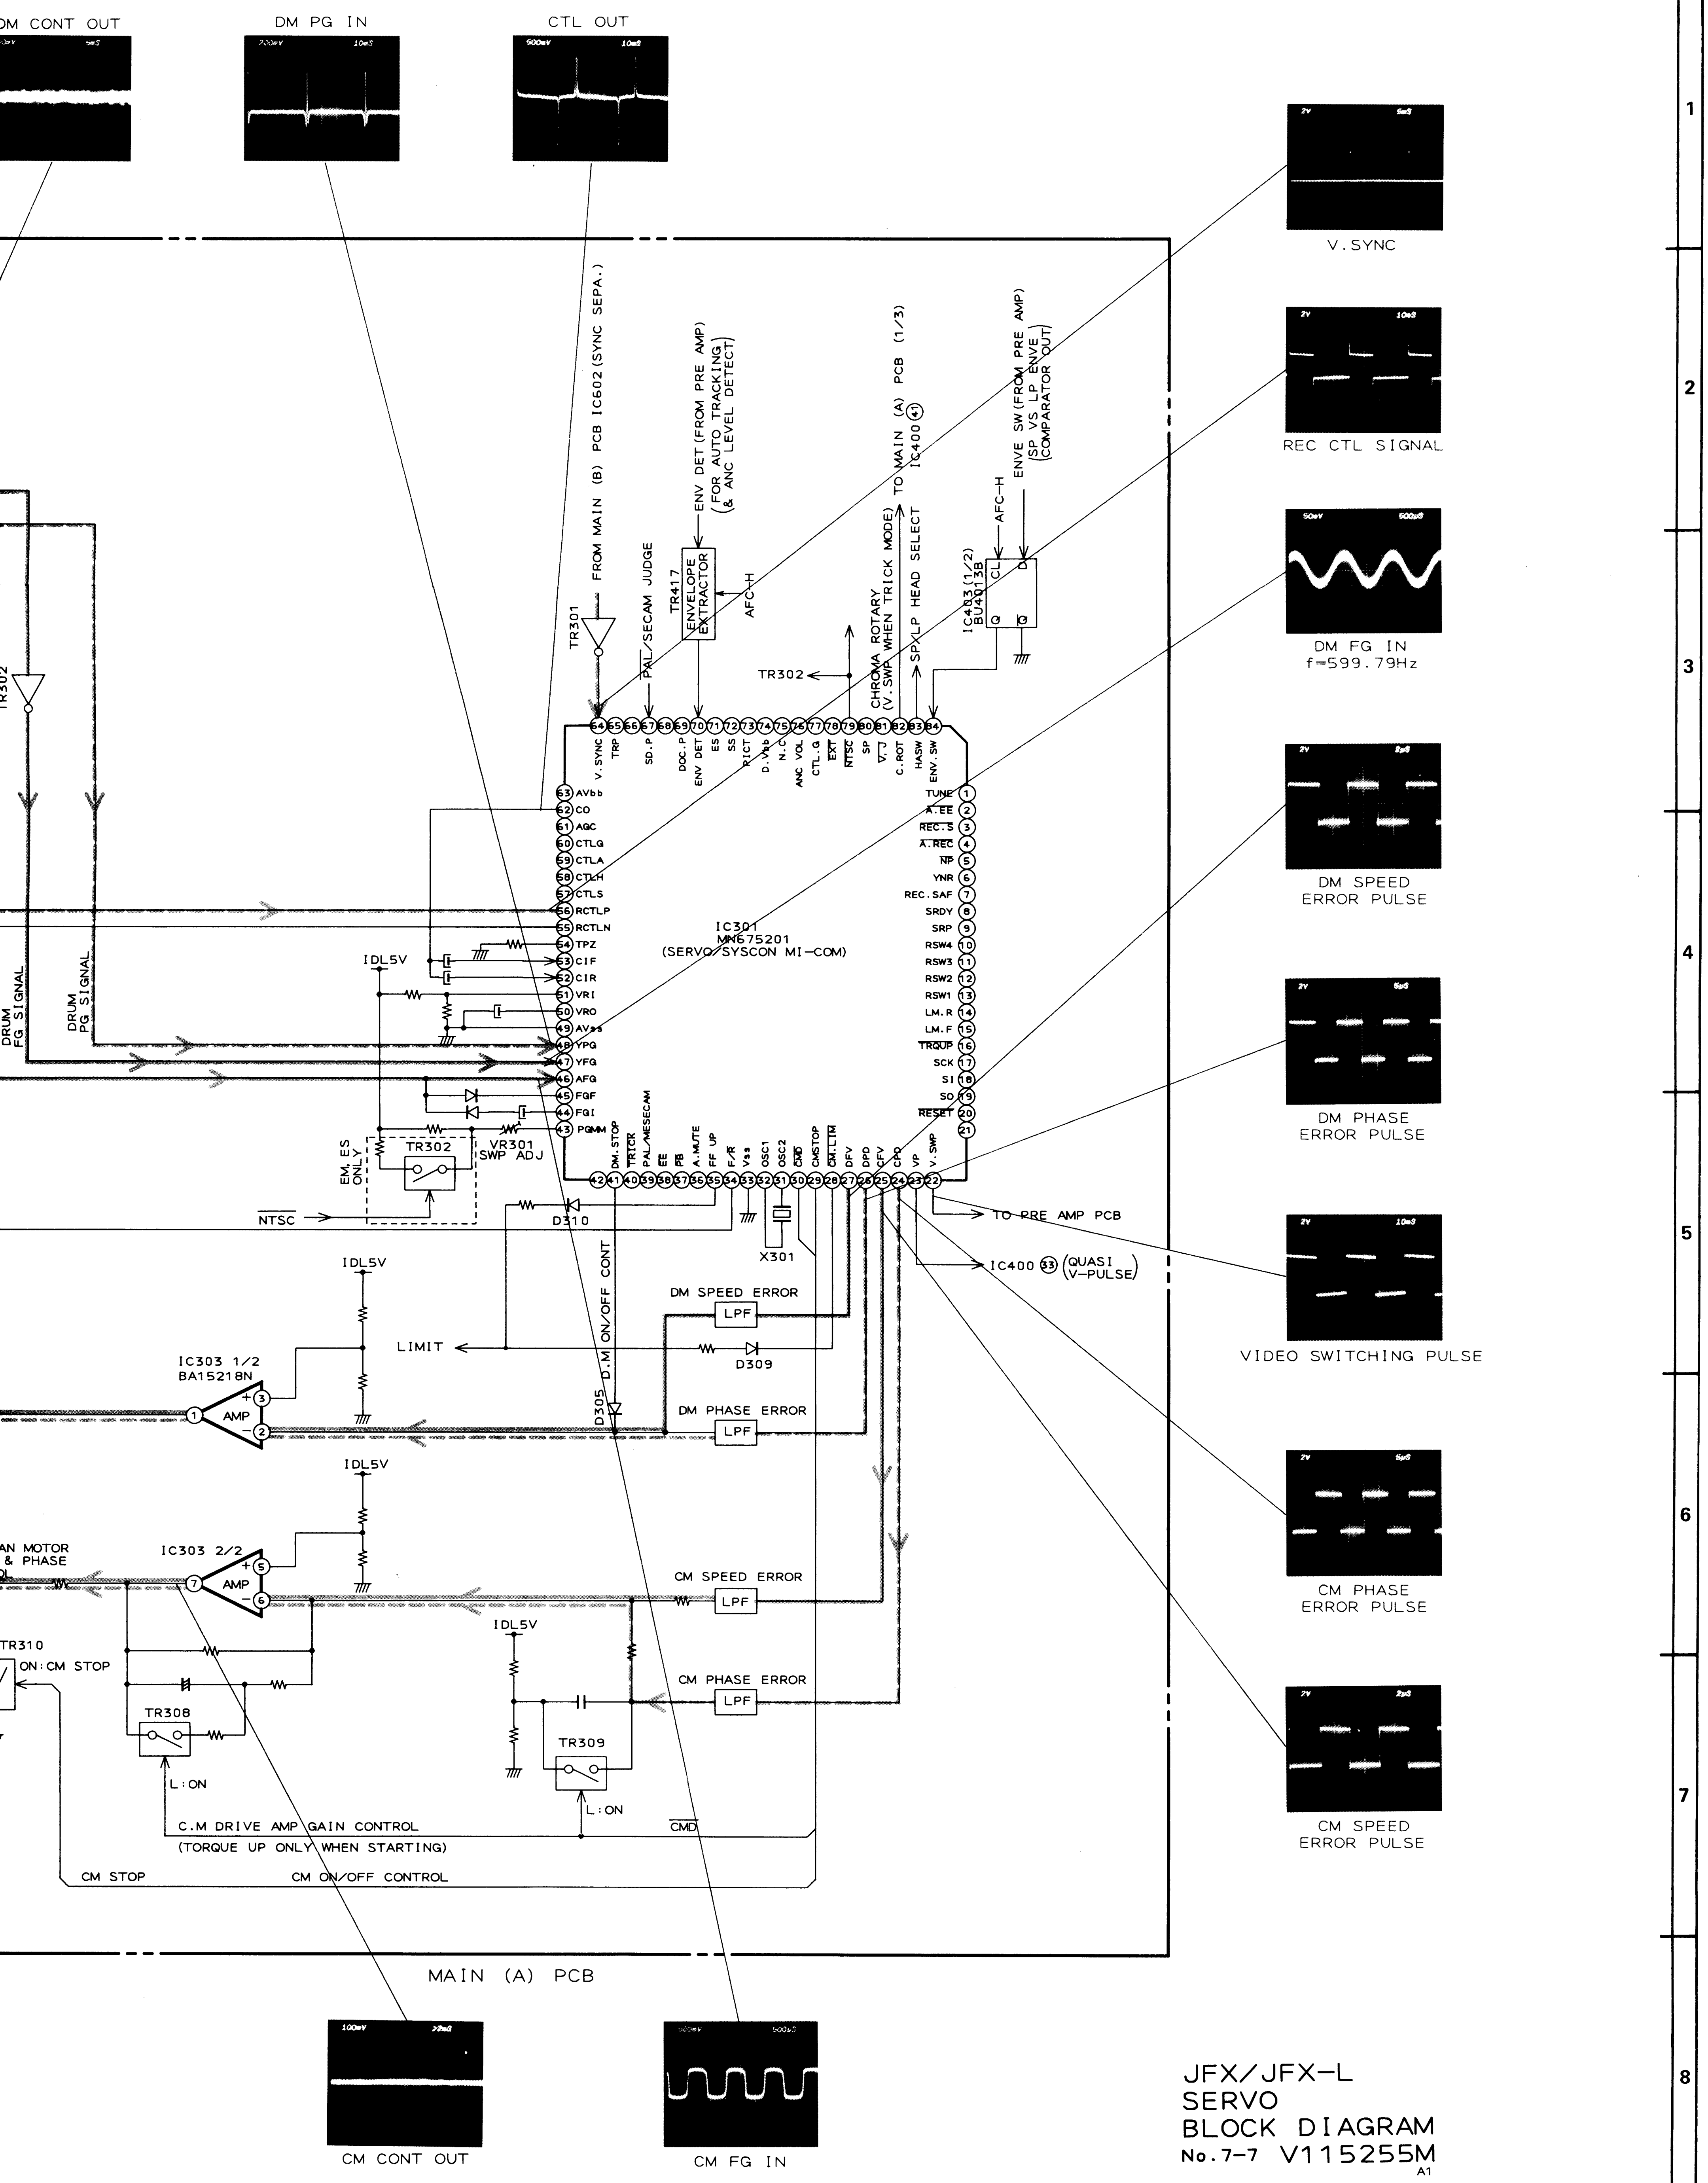
DM CONT OUT
DM PG IN
CTL OUT
V.SYNC
REC CTL SIGNAL
DM FG IN
f=599.79Hz
DM SPEED
ERROR PULSE
DM PHASE
ERROR PULSE
VIDEO SWITCHING PULSE
CM PHASE
ERROR PULSE
CM SPEED
ERROR PULSE
CM CONT OUT
CM FG IN
MAIN (A) PCB
FROM MAIN (B) PCB IC602 (SYNC SEPA.)
TR301
PAL/SECAM JUDGE
TR417
ENVELOPE EXTRACTOR
ENV DET (FROM PRE AMP)
(FOR AUTO TRACKING & ANC LEVEL DETECT)
AFC-H
TR302
CHROMA ROTARY
(V.SWP WHEN TRICK MODE)
SP/LP HEAD SELECT
TO MAIN (A) PCB (1/3) IC400 ㊶
IC403(1/2)
BU4013B
CL
D
Q
ENVE SW (FROM PRE AMP)
(SP VS LP ENVE COMPARATOR OUT)
IC301
MN675201
(SERVO/SYSCON MI-COM)
V.SYNC
TRP
SD.P
DOC.P
ENV DET
ES
SS
PICT
D.Vdd
N.C
ANC VOL
CTL.G
EXT
NTSC
SP
V.J
C.ROT
HASW
ENV.SW
AVdd
CO
AGC
CTLG
CTLA
CTLH
CTLS
RCTLP
RCTLN
TPZ
CIF
CIR
VRI
VRO
AVss
YPG
YFG
AFG
FGF
FGI
PGMM
TUNE
A.EE
REC.S
A.REC
NP
YNR
REC.SAF
SRDY
SRP
RSW4
RSW3
RSW2
RSW1
LM.R
LM.F
TRQUP
SCK
SI
SO
RESET
DM.STOP
TRICR
PAL/MESECAM
EE
PB
A.MUTE
FF UP
F/R
Vss
OSC1
OSC2
CMD
CMSTOP
CM.LIM
DFV
DPD
CFV
CPD
VP
V.SWP
DRUM FG SIGNAL
DRUM PG SIGNAL
IDL5V
EM, ES ONLY
TR302
VR301
SWP ADJ
NTSC
D310
X301
TO PRE AMP PCB
IC400 ㉝ (QUASI V-PULSE)
D.M ON/OFF CONT
LIMIT
DM SPEED ERROR
LPF
D309
IC303 1/2
BA15218N
AMP
D305
DM PHASE ERROR
IC303 2/2
CM SPEED ERROR
CM PHASE ERROR
AN MOTOR
& PHASE
TR310
ON:CM STOP
TR308
TR309
L:ON
CMD
C.M DRIVE AMP GAIN CONTROL
(TORQUE UP ONLY WHEN STARTING)
CM STOP
CM ON/OFF CONTROL
F
G
H
I
J
K
1
2
3
4
5
6
7
8

JFX/JFX-L
SERVO
BLOCK DIAGRAM
No.7-7 V115255M
A1

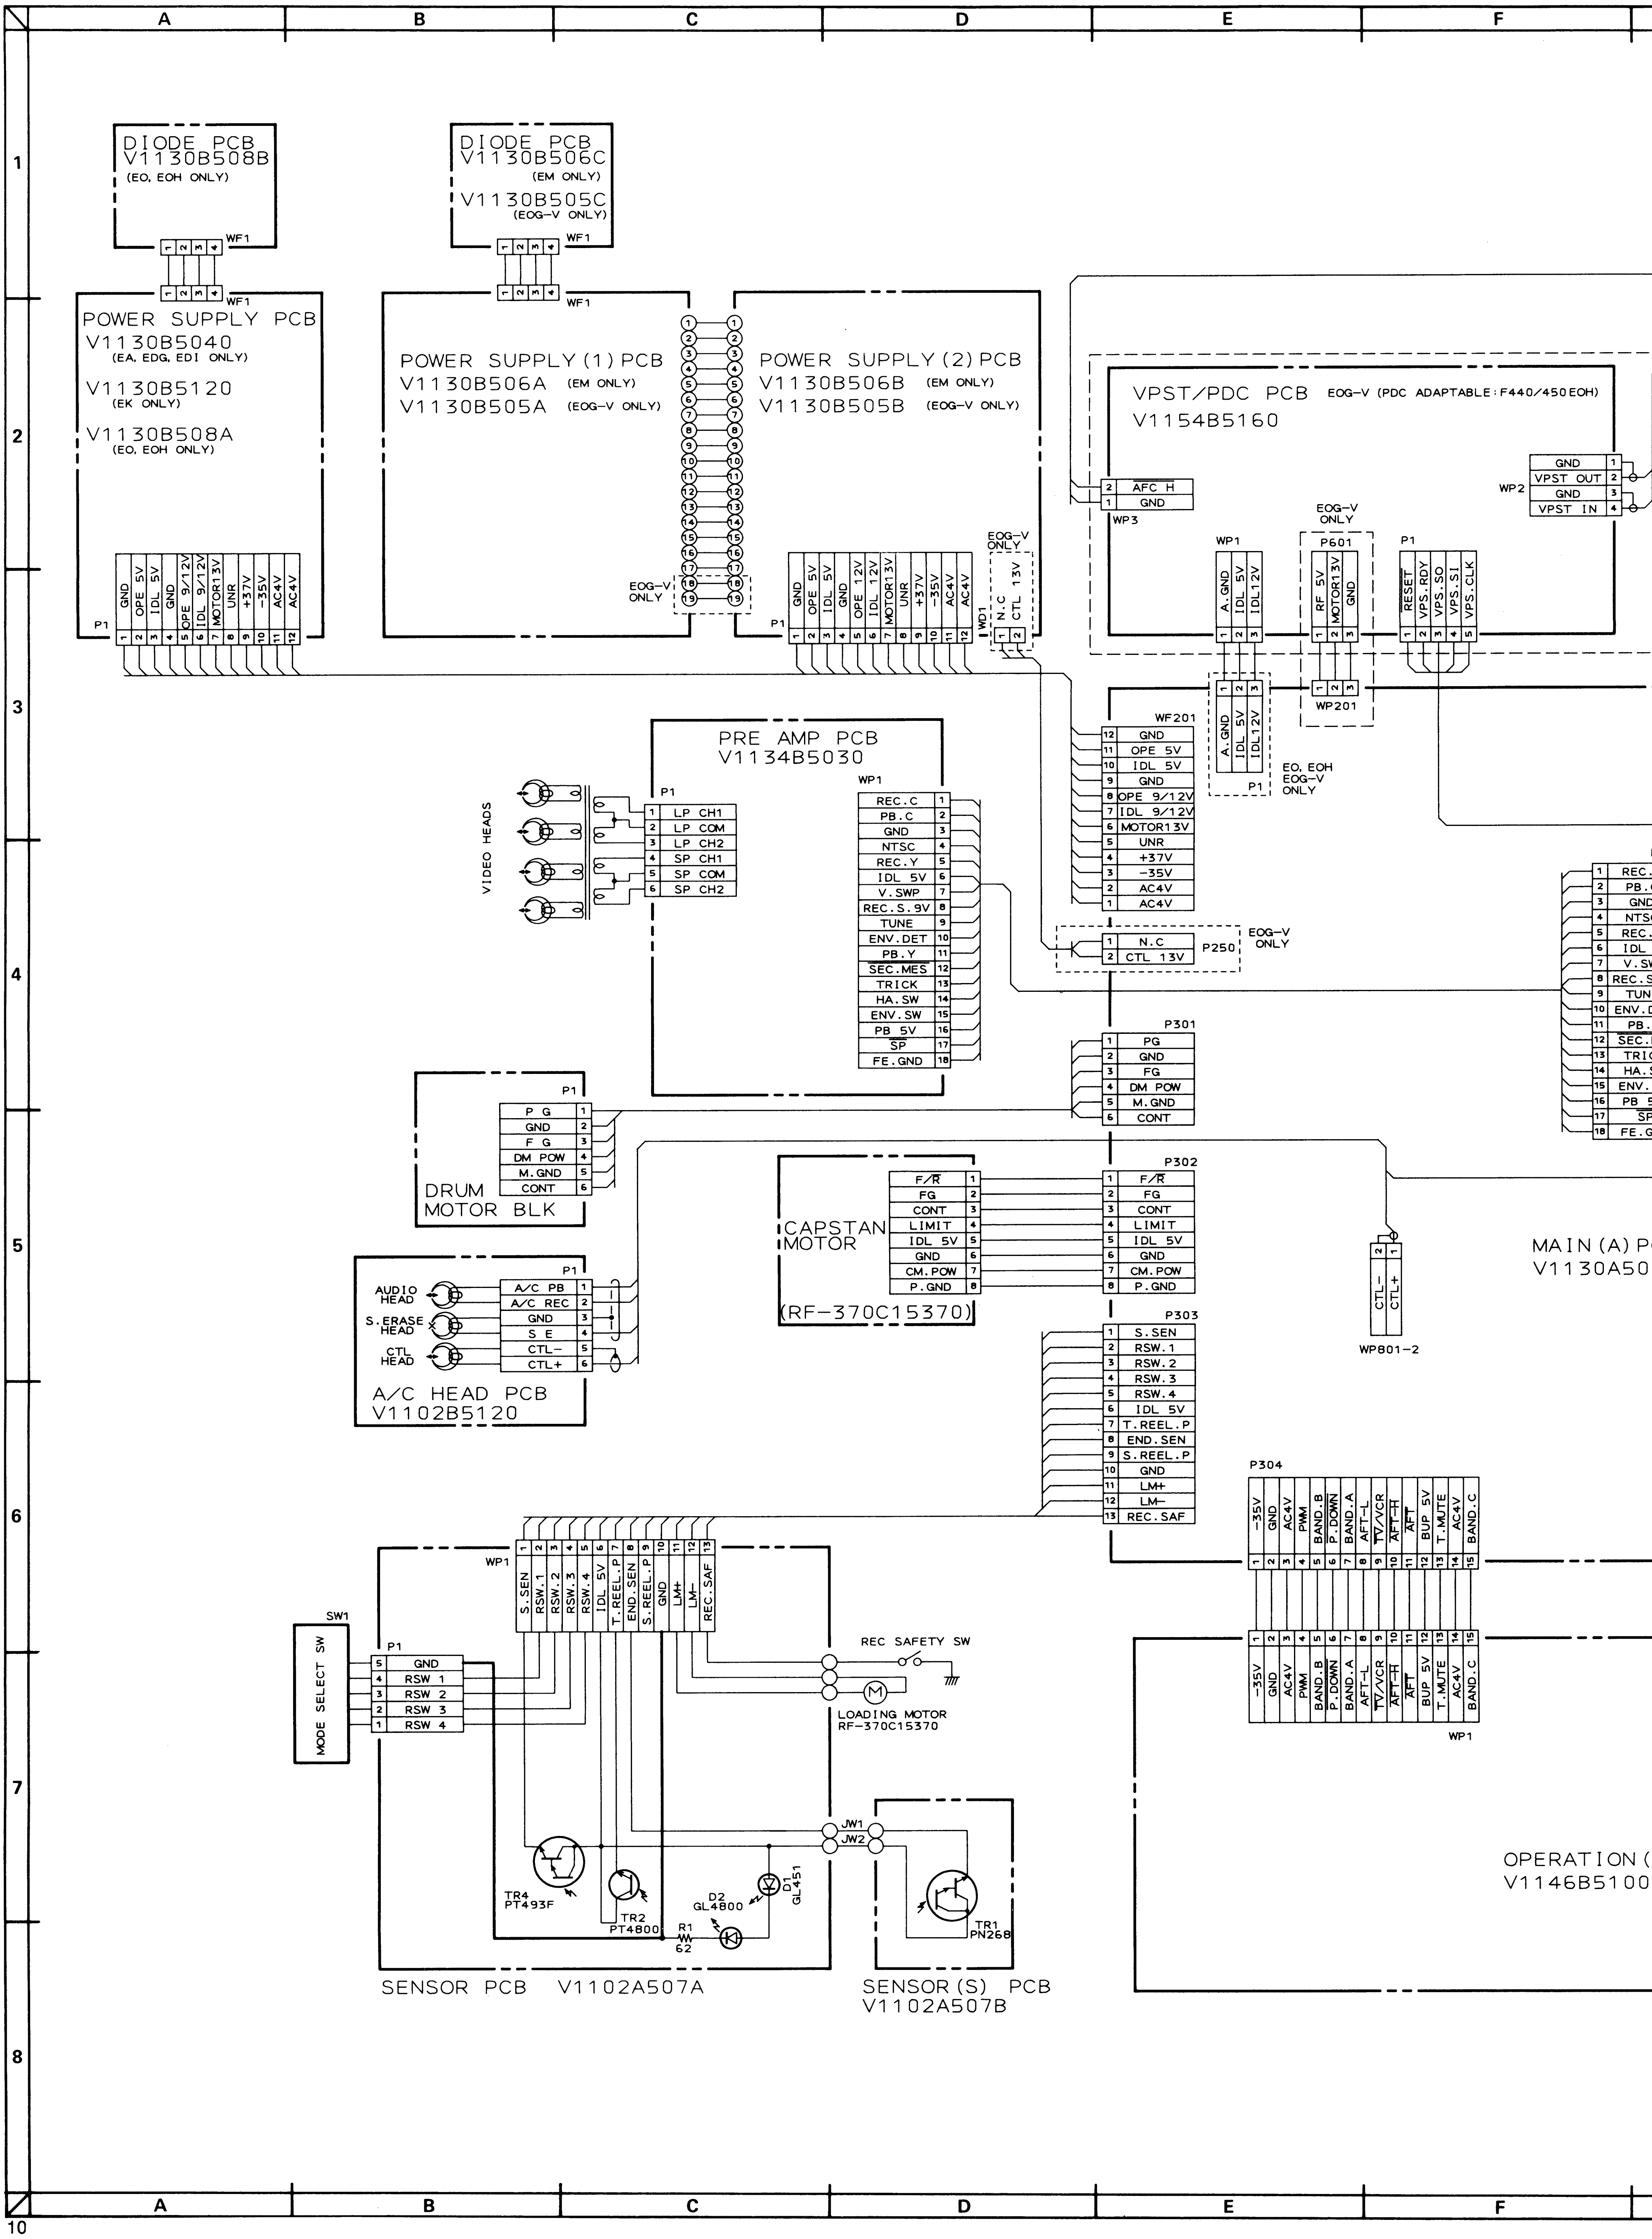
A
B
C
D
E
F
1
2
3
4
5
6
7
8
DIODE PCB
V1130B508B
(EO, EOH ONLY)
WF1
DIODE PCB
V1130B506C
(EM ONLY)
V1130B505C
(EOG-V ONLY)
WF1
POWER SUPPLY PCB
V1130B5040
(EA, EDG, EDI ONLY)
V1130B5120
(EK ONLY)
V1130B508A
(EO, EOH ONLY)
P1
GND
OPE 5V
IDL 5V
GND
OPE 9/12V
IDL 9/12V
MOTOR13V
UNR
+37V
-35V
AC4V
AC4V
POWER SUPPLY (1) PCB
V1130B506A (EM ONLY)
V1130B505A (EOG-V ONLY)
POWER SUPPLY (2) PCB
V1130B506B (EM ONLY)
V1130B505B (EOG-V ONLY)
EOG-V ONLY
WD1
N.C
CTL 13V
EOG-V ONLY
VPST/PDC PCB EOG-V (PDC ADAPTABLE: F440/450EOH)
V1154B5160
AFC H
GND
WP3
GND
VPST OUT
GND
VPST IN
WP2
WP1
A.GND
IDL 5V
IDL12V
EOG-V ONLY
P601
RF 5V
MOTOR13V
GND
P1
RESET
VPS.RDY
VPS.SO
VPS.SI
VPS.CLK
WP201
EO, EOH
EOG-V
ONLY
WF201
GND
OPE 5V
IDL 5V
GND
OPE 9/12V
IDL 9/12V
MOTOR13V
UNR
+37V
-35V
AC4V
AC4V
PRE AMP PCB
V1134B5030
VIDEO HEADS
P1
LP CH1
LP COM
LP CH2
SP CH1
SP COM
SP CH2
WP1
REC.C
PB.C
GND
NTSC
REC.Y
IDL 5V
V.SWP
REC.S.9V
TUNE
ENV.DET
PB.Y
SEC.MES
TRICK
HA.SW
ENV.SW
PB 5V
SP
FE.GND
P250
N.C
CTL 13V
EOG-V ONLY
P301
PG
GND
FG
DM POW
M.GND
CONT
DRUM MOTOR BLK
P G
GND
F G
DM POW
M.GND
CONT
P302
F/R
FG
CONT
LIMIT
IDL 5V
GND
CM.POW
P.GND
CAPSTAN MOTOR
(RF-370C15370)
A/C HEAD PCB
V1102B5120
AUDIO HEAD
S.ERASE HEAD
CTL HEAD
A/C PB
A/C REC
GND
S E
CTL-
CTL+
CTL-
CTL+
WP801-2
MAIN (A) P
V1130A50
P303
S.SEN
RSW.1
RSW.2
RSW.3
RSW.4
IDL 5V
T.REEL.P
END.SEN
S.REEL.P
GND
LM+
LM-
REC.SAF
P304
-35V
GND
AC4V
PWM
BAND.B
P.DOWN
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
AC4V
BAND.C
WP1
SENSOR PCB V1102A507A
WP1
S.SEN
RSW.1
RSW.2
RSW.3
RSW.4
IDL 5V
T.REEL.P
END.SEN
S.REEL.P
GND
LM+
LM-
REC.SAF
SW1
MODE SELECT SW
P1
GND
RSW 1
RSW 2
RSW 3
RSW 4
REC SAFETY SW
LOADING MOTOR
RF-370C15370
JW1
JW2
TR4
PT493F
TR2
PT4800
R1
62
D2
GL4800
D1
GL451
SENSOR (S) PCB
V1102A507B
TR1
PN268
OPERATION (
V1146B5100

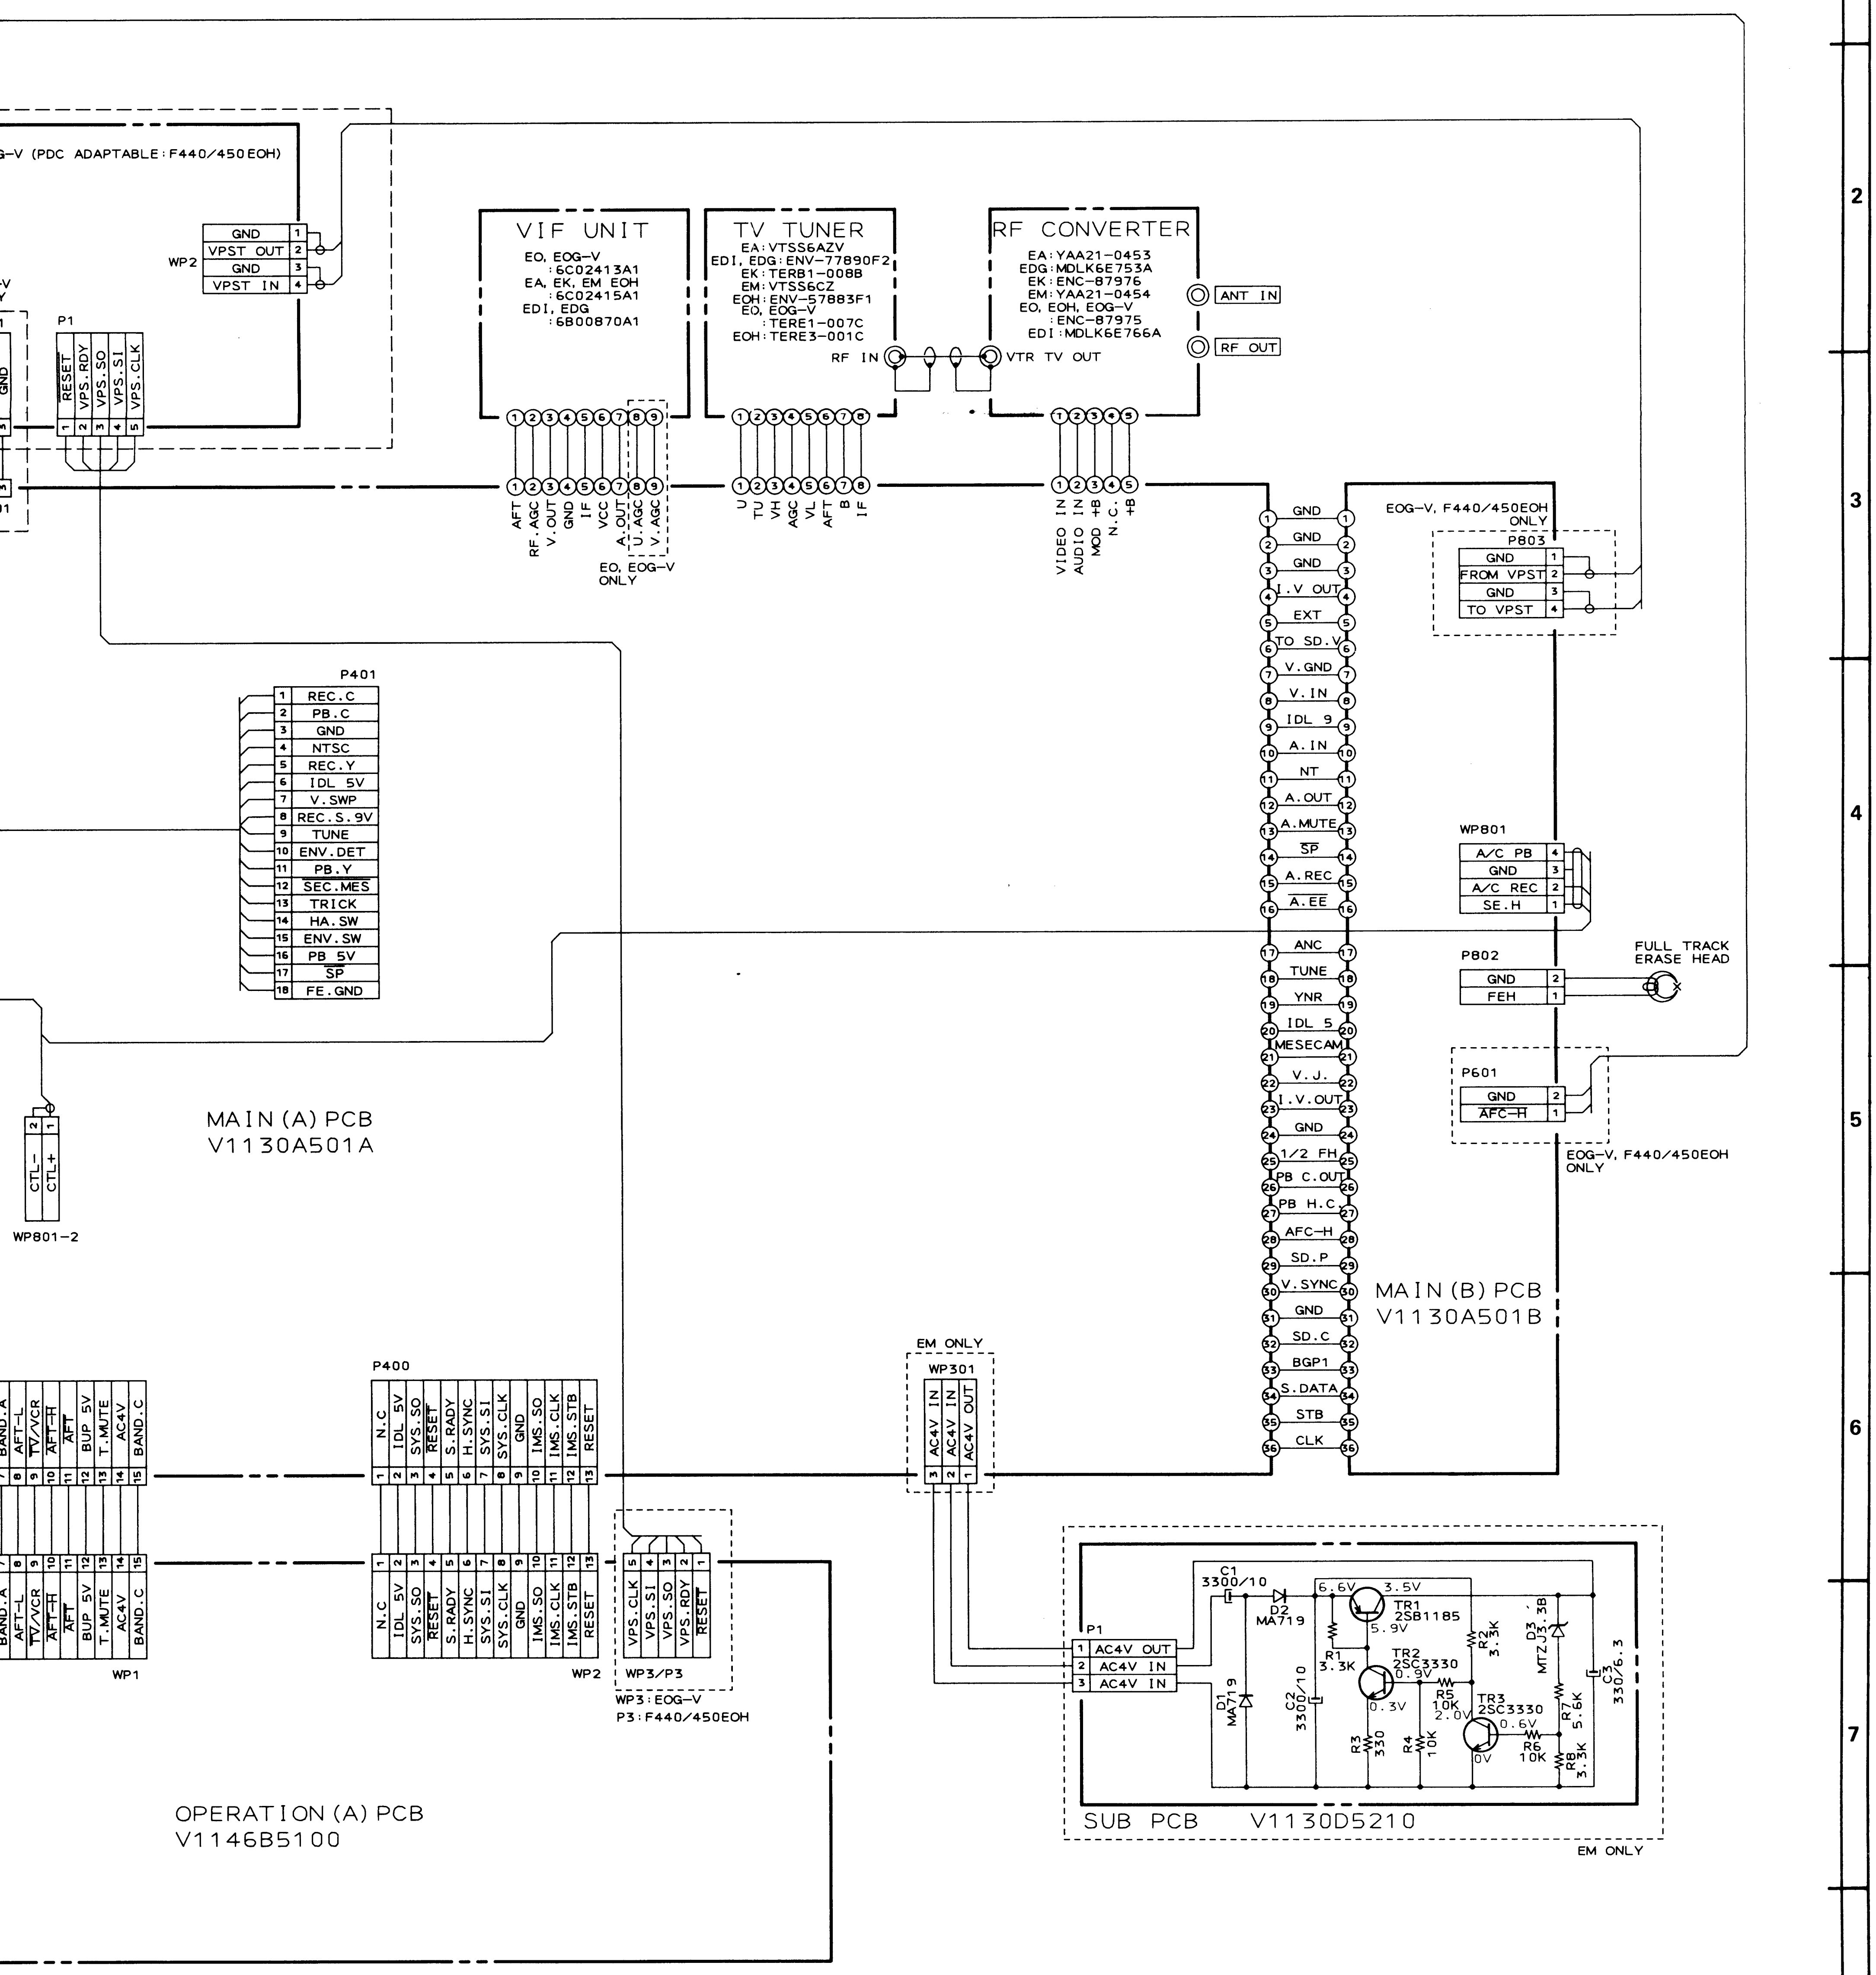
G-V (PDC ADAPTABLE:F440/450EOH)
WP2
GND
VPST OUT
GND
VPST IN
P1
RESET
VPS.RDY
VPS.SO
VPS.SI
VPS.CLK
VIF UNIT
EO, EOG-V :6C02413A1
EA, EK, EM EOH :6C02415A1
EDI, EDG :6B00870A1
TV TUNER
EA:VTSS6AZV
EDI, EDG:ENV-77890F2
EK:TERB1-008B
EM:VTSS6CZ
EOH:ENV-57883F1
EO, EOG-V :TERE1-007C
EOH:TERE3-001C
RF IN
RF CONVERTER
EA:YAA21-0453
EDG:MDLK6E753A
EK:ENC-87976
EM:YAA21-0454
EO, EOH, EOG-V :ENC-87975
EDI:MDLK6E766A
VTR TV OUT
ANT IN
RF OUT
AFT
RF.AGC
V.OUT
GND
IF
VCC
A.OUT
U.AGC
V.AGC
EO, EOG-V ONLY
U
TU
VH
AGC
VL
AFT
B
IF
VIDEO IN
AUDIO IN
MOD +B
N.C.
+B
GND
GND
GND
I.V OUT
EXT
TO SD.V
V.GND
V.IN
IDL 9
A.IN
NT
A.OUT
A.MUTE
SP
A.REC
A.EE
ANC
TUNE
YNR
IDL 5
MESECAM
V.J.
I.V.OUT
GND
1/2 FH
PB C.OUT
PB H.C
AFC-H
SD.P
V.SYNC
GND
SD.C
BGP1
S.DATA
STB
CLK
EOG-V, F440/450EOH ONLY
P803
GND
FROM VPST
GND
TO VPST
P401
REC.C
PB.C
GND
NTSC
REC.Y
IDL 5V
V.SWP
REC.S.9V
TUNE
ENV.DET
PB.Y
SEC.MES
TRICK
HA.SW
ENV.SW
PB 5V
SP
FE.GND
WP801
A/C PB
GND
A/C REC
SE.H
P802
GND
FEH
FULL TRACK ERASE HEAD
P601
GND
AFC-H
EOG-V, F440/450EOH ONLY
MAIN (A) PCB
V1130A501A
CTL-
CTL+
WP801-2
MAIN (B) PCB
V1130A501B
EM ONLY
WP301
AC4V IN
AC4V IN
AC4V OUT
P400
N.C
IDL 5V
SYS.SO
RESET
S.RADY
H.SYNC
SYS.SI
SYS.CLK
GND
IMS.SO
IMS.CLK
IMS.STB
RESET
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
AC4V
BAND.C
WP1
WP2
VPS.CLK
VPS.SI
VPS.SO
VPS.RDY
RESET
WP3/P3
WP3:EOG-V
P3:F440/450EOH
P1
AC4V OUT
AC4V IN
AC4V IN
C1 3300/10
D2 MA719
6.6V
3.5V
TR1 2SB1185
5.9V
R1 3.3K
TR2 2SC3330
0.9V
R2 3.3K
D3 MTZJ3.3B
C3 330/6.3
D1 MA719
C2 3300/10
0.3V
R5 10K
2.0V
TR3 2SC3330
0.6V
R7 5.6K
R3 330
R4 10K
0V
R6 10K
R8 3.3K
SUB PCB V1130D5210
EM ONLY
OPERATION (A) PCB
V1146B5100

INDICATED VOLTAGES IN THE SUB PCB WERE MEASURED IN PB MODE.
(CONNECTED DC VOLTMETER'S GROUND TO THE P1 ③ PIN WHEN WEASURED)

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF (M)

VS-F440EA/EDG/EDI/EK/
EM/EO/EOH/EOG-V
VS-F441EA, F450EOH, F455EOH
CONNECTION DIAGRAM

No.21-1 V115201M

SENSOR(S) PCB
V1102A507B

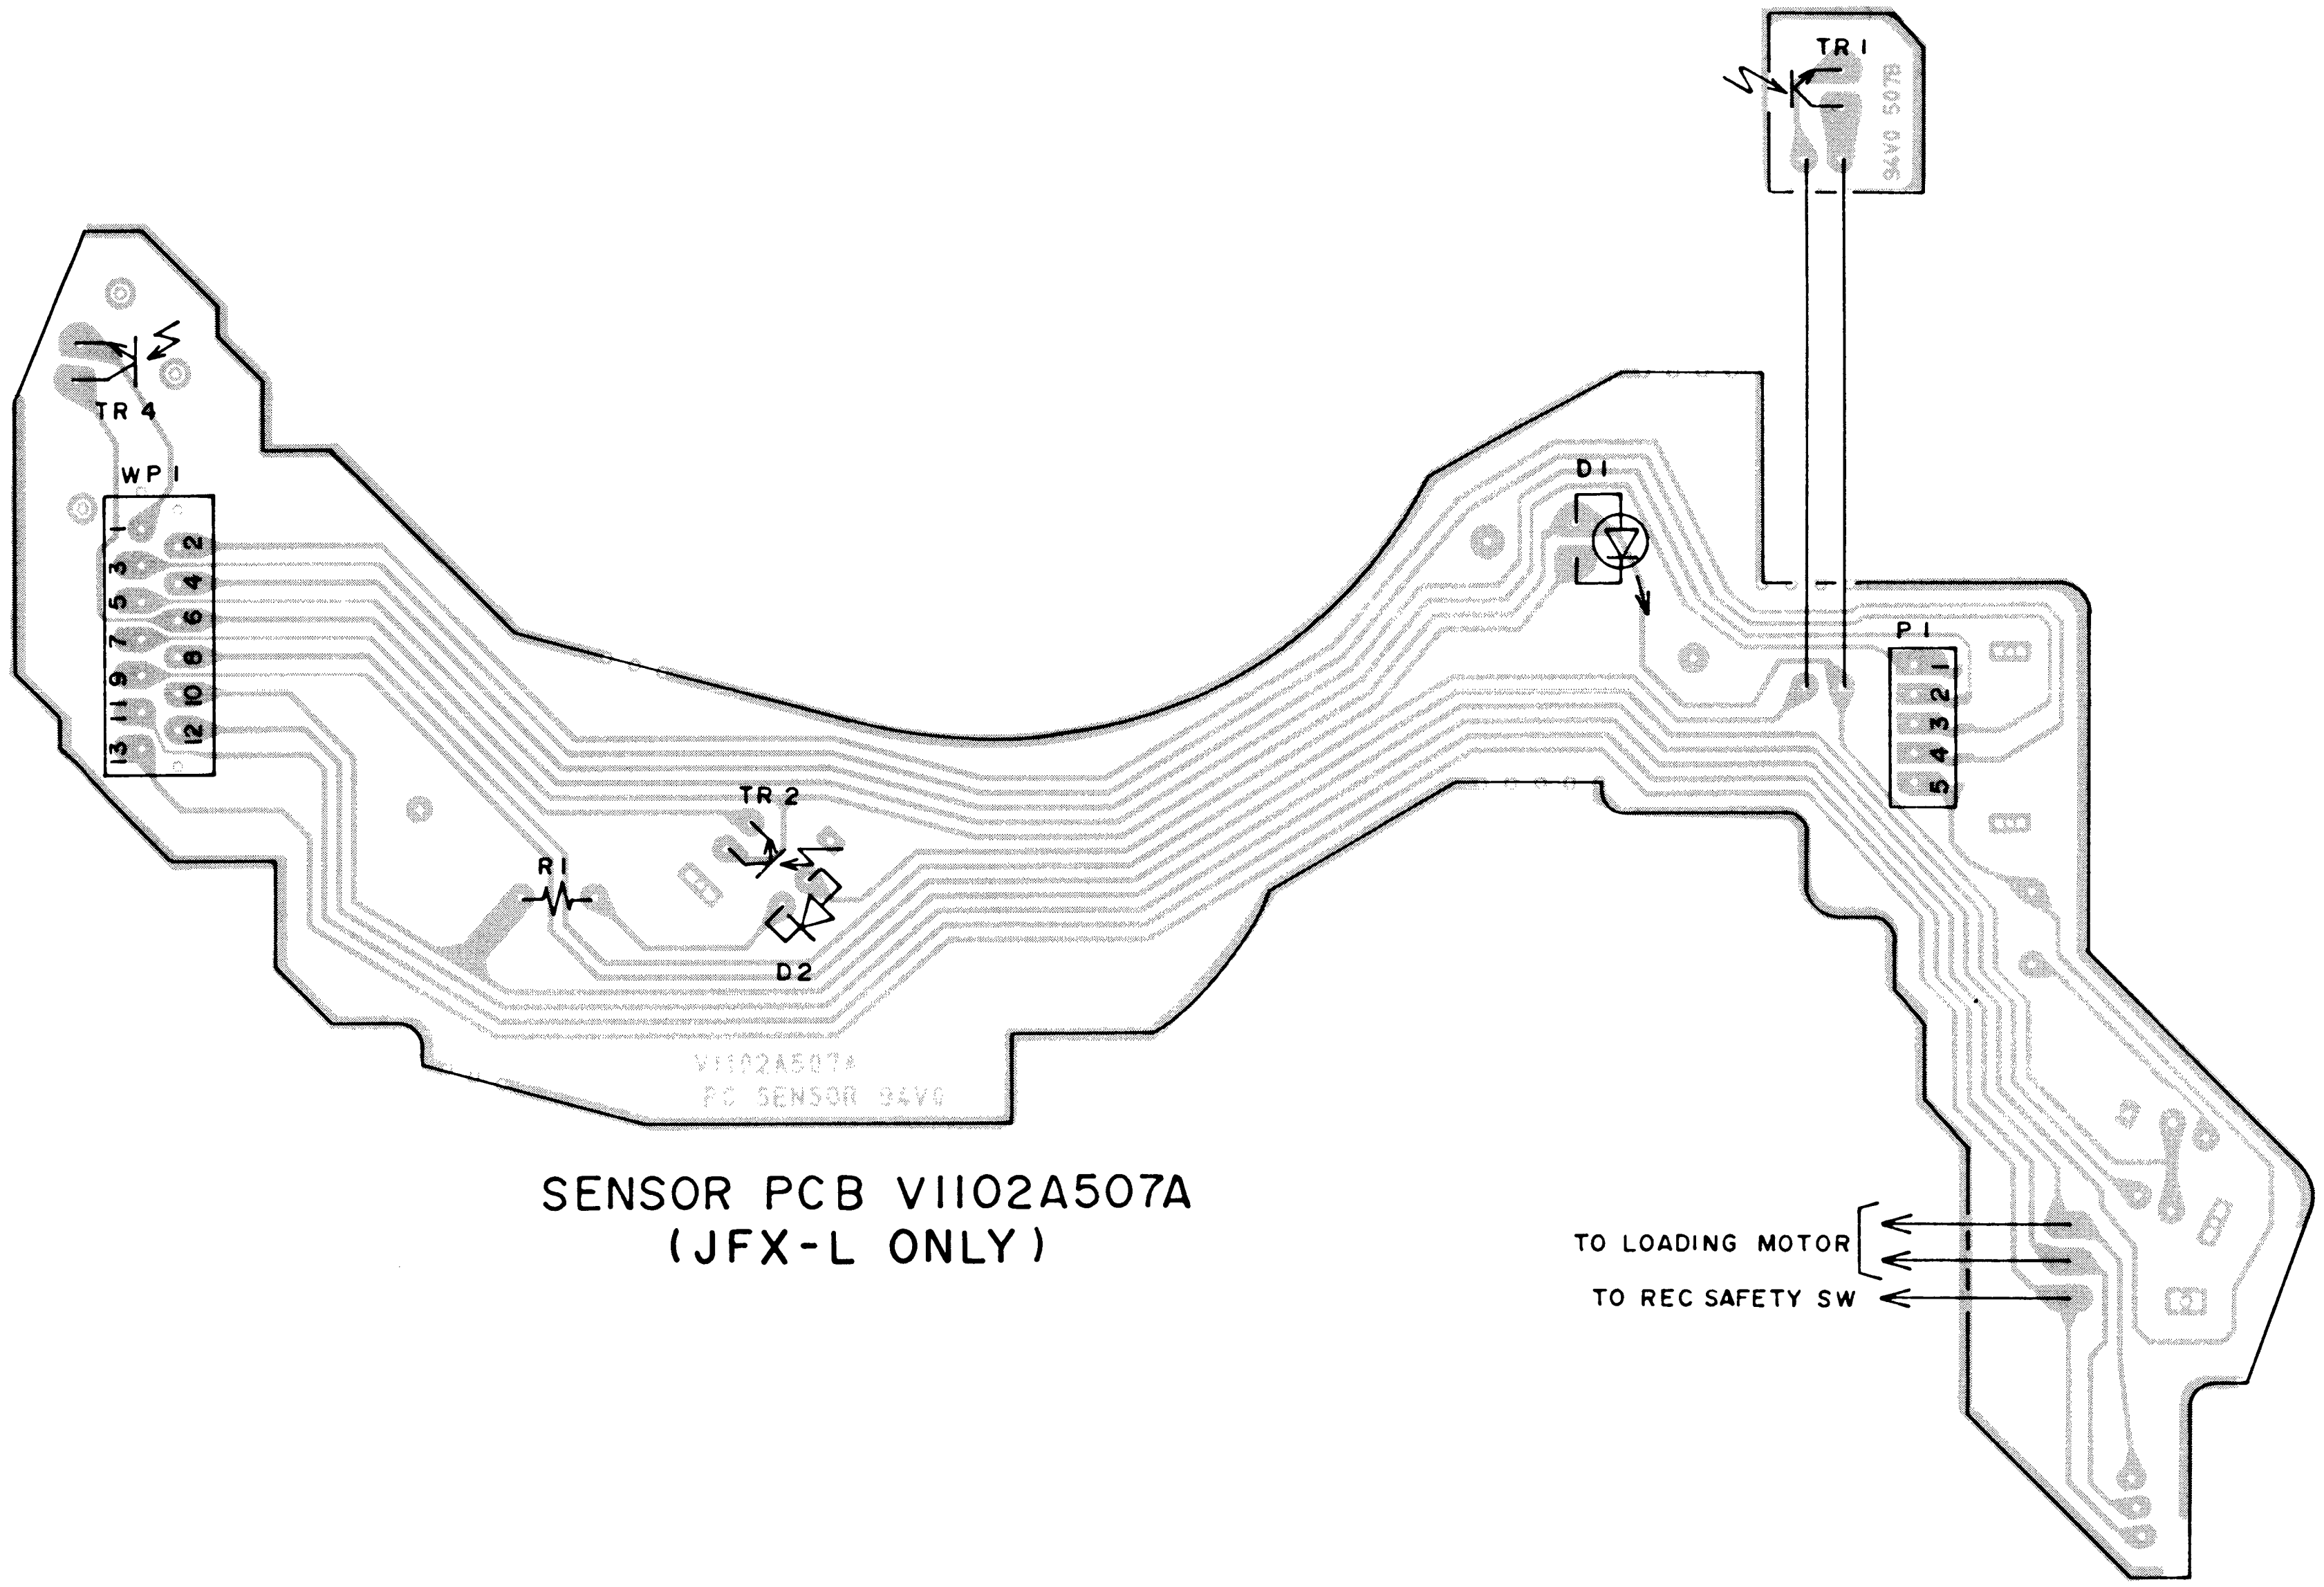
TR1
94V0 507B
TR4
WP1
1 2 3 4 5 6 7 8 9 10 11 12 13
D1
P1
1 2 3 4 5
TR2
R1
D2
V1102A507A
PC SENSOR 94V0
TO LOADING MOTOR
TO REC SAFETY SW

SENSOR PCB V1102A507A
(JFX-L ONLY)

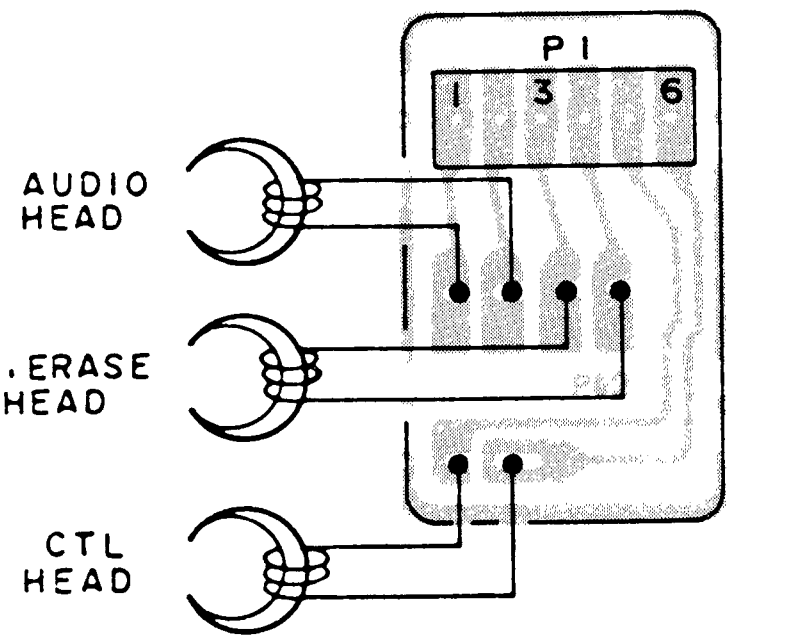
P1
1 3 6
AUDIO HEAD
S.ERASE HEAD
CTL HEAD

A/C HEAD PCB
V1102B5120(J1)

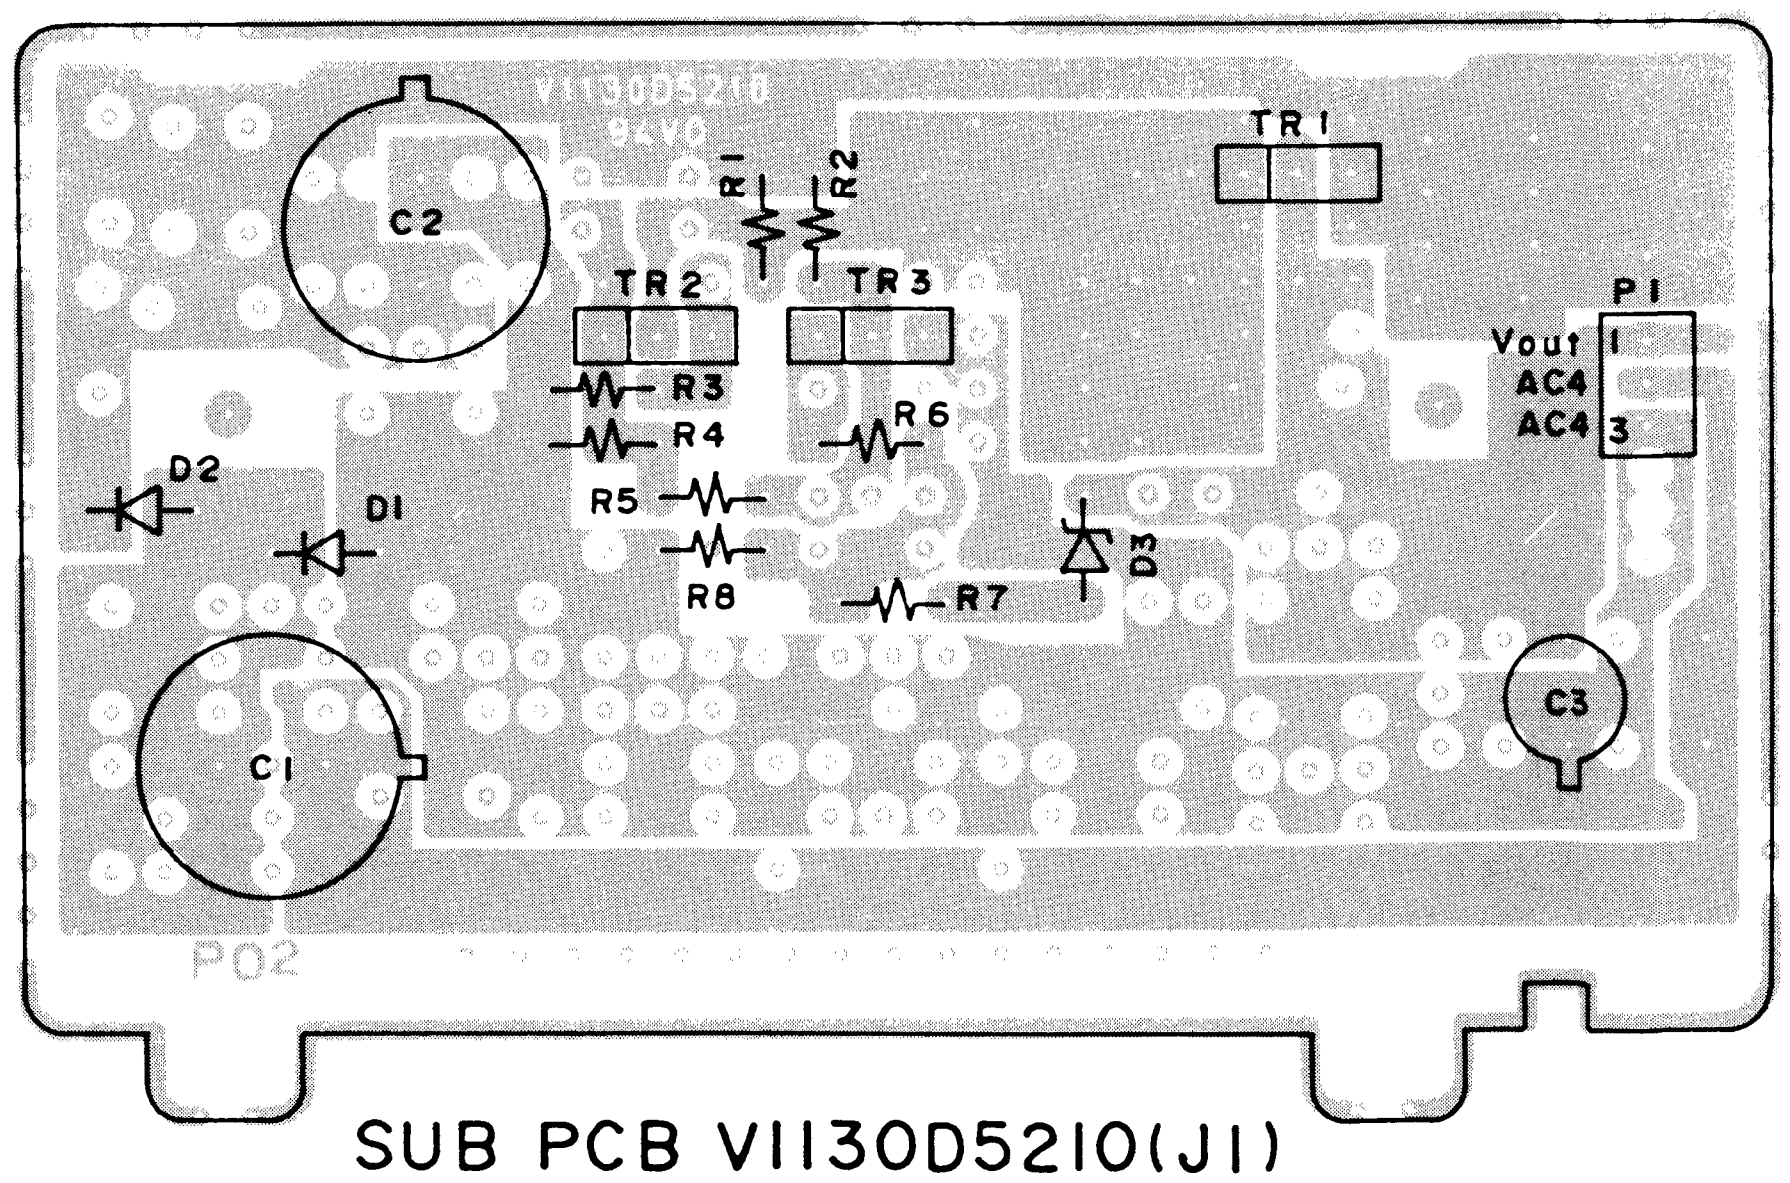
V1130D5210
94V0
C2
R1
R2
TR1
TR2
TR3
R3
R4
R5
R6
R7
R8
D1
D2
D3
P1
Vout 1
AC4
AC4 3
C1
C3
P02

SUB PCB V1130D5210(J1)
(EM ONLY)

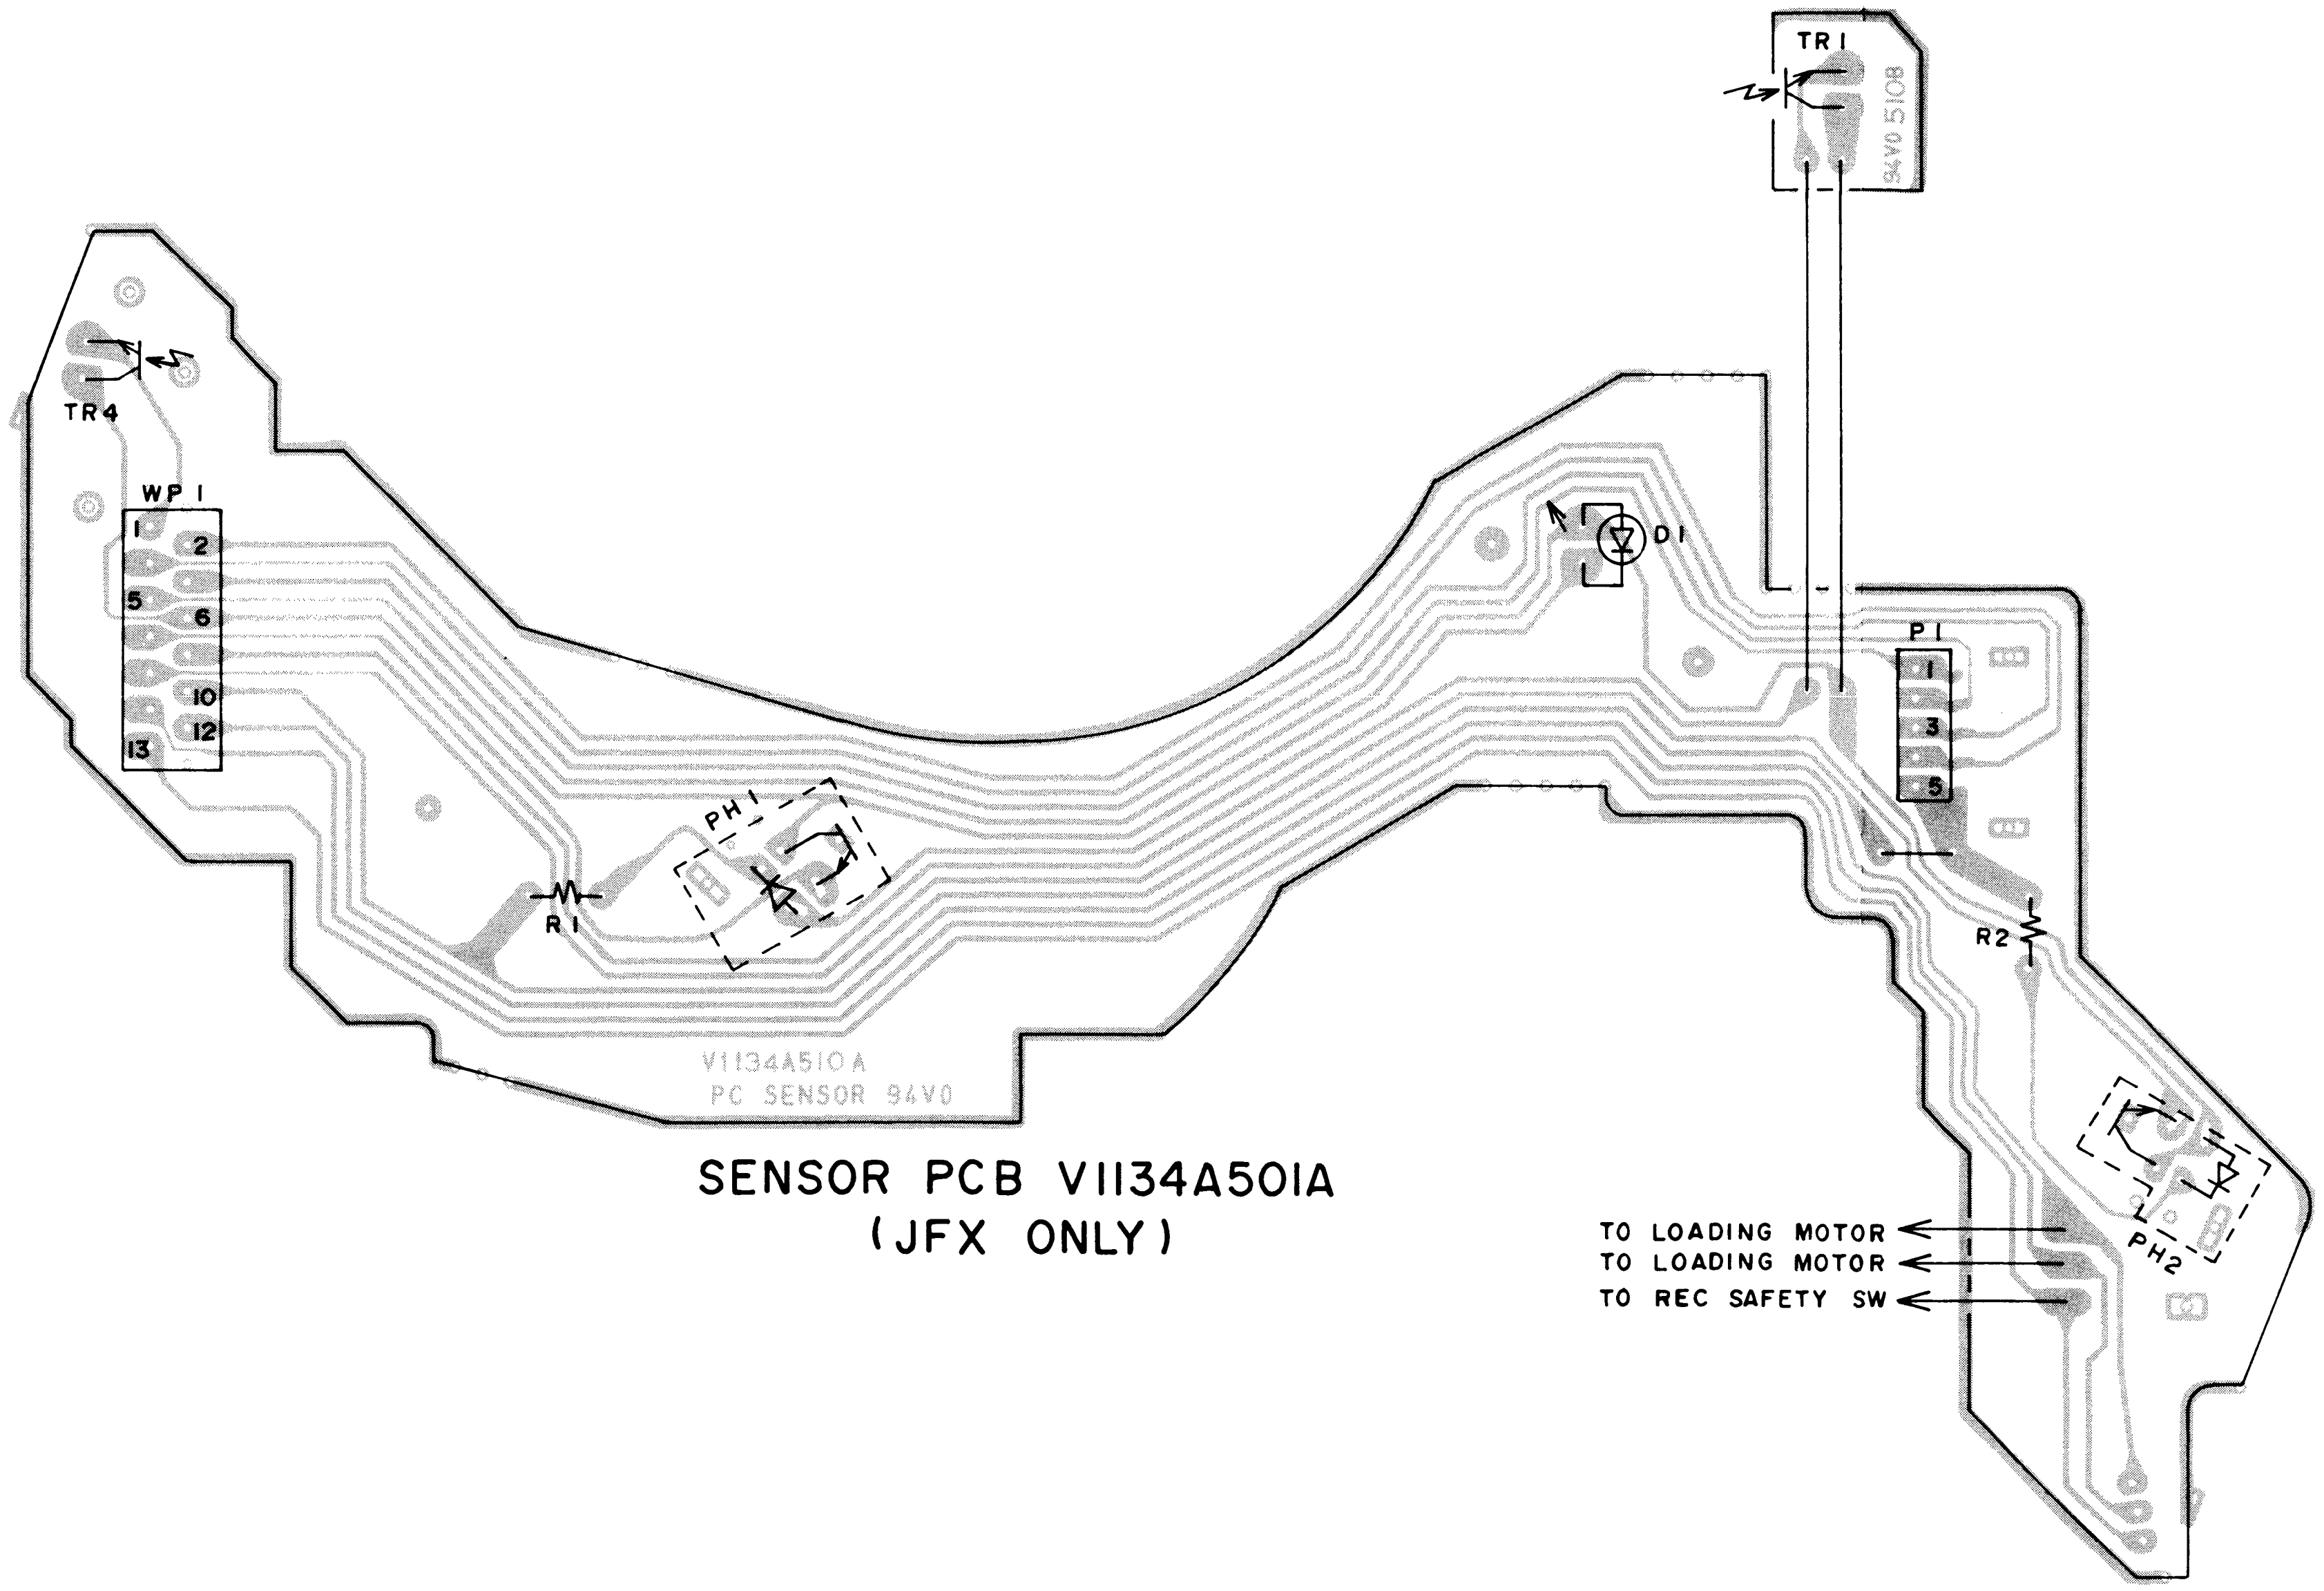
TR1
94V0 5108
TR4
WP1
1
2
5
6
10
12
13
R1
PH1
D1
P1
1
3
5
R2
PH2
V1134A510A
PC SENSOR 94V0
TO LOADING MOTOR
TO LOADING MOTOR
TO REC SAFETY SW

SENSOR(S) PCB
V1134A501A

SENSOR PCB V1134A501A
(JFX ONLY)

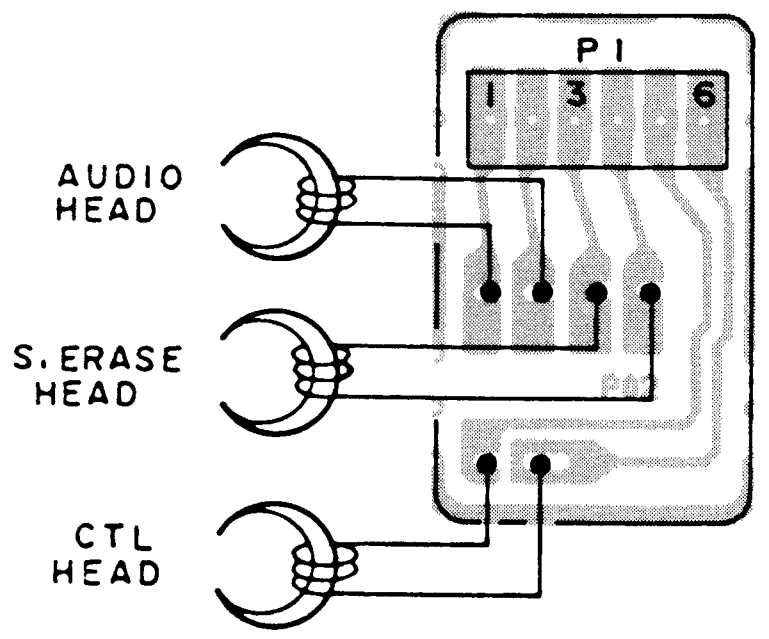
P1
1
3
6
AUDIO HEAD
S.ERASE HEAD
CTL HEAD

A/C HEAD PCB
V1102B5120(J1)

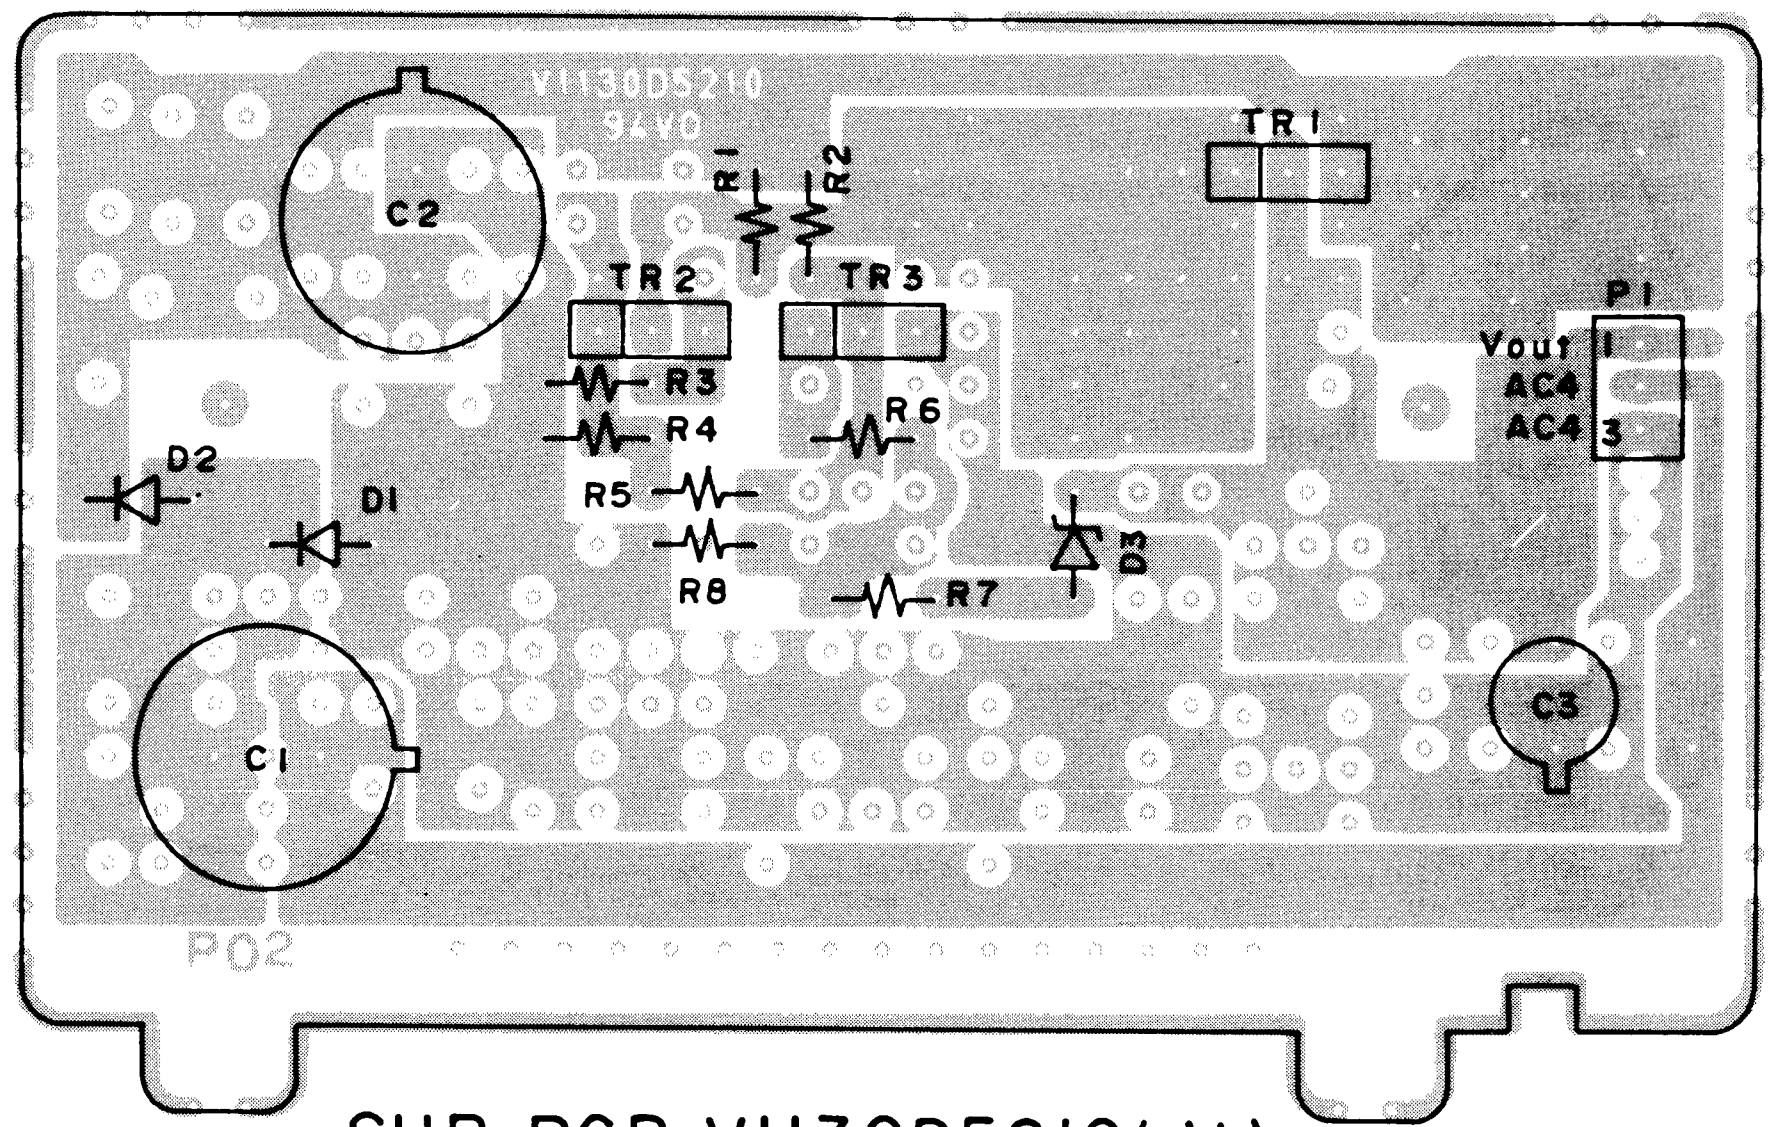
V1130D5210
94V0
C2
R1
R2
TR1
TR2
TR3
R3
R4
R6
R5
R8
R7
D2
D1
D3
P1
Vout 1
AC4
AC4 3
C1
C3
P02

SUB PCB V1130D5210(J1)
(EM ONLY)

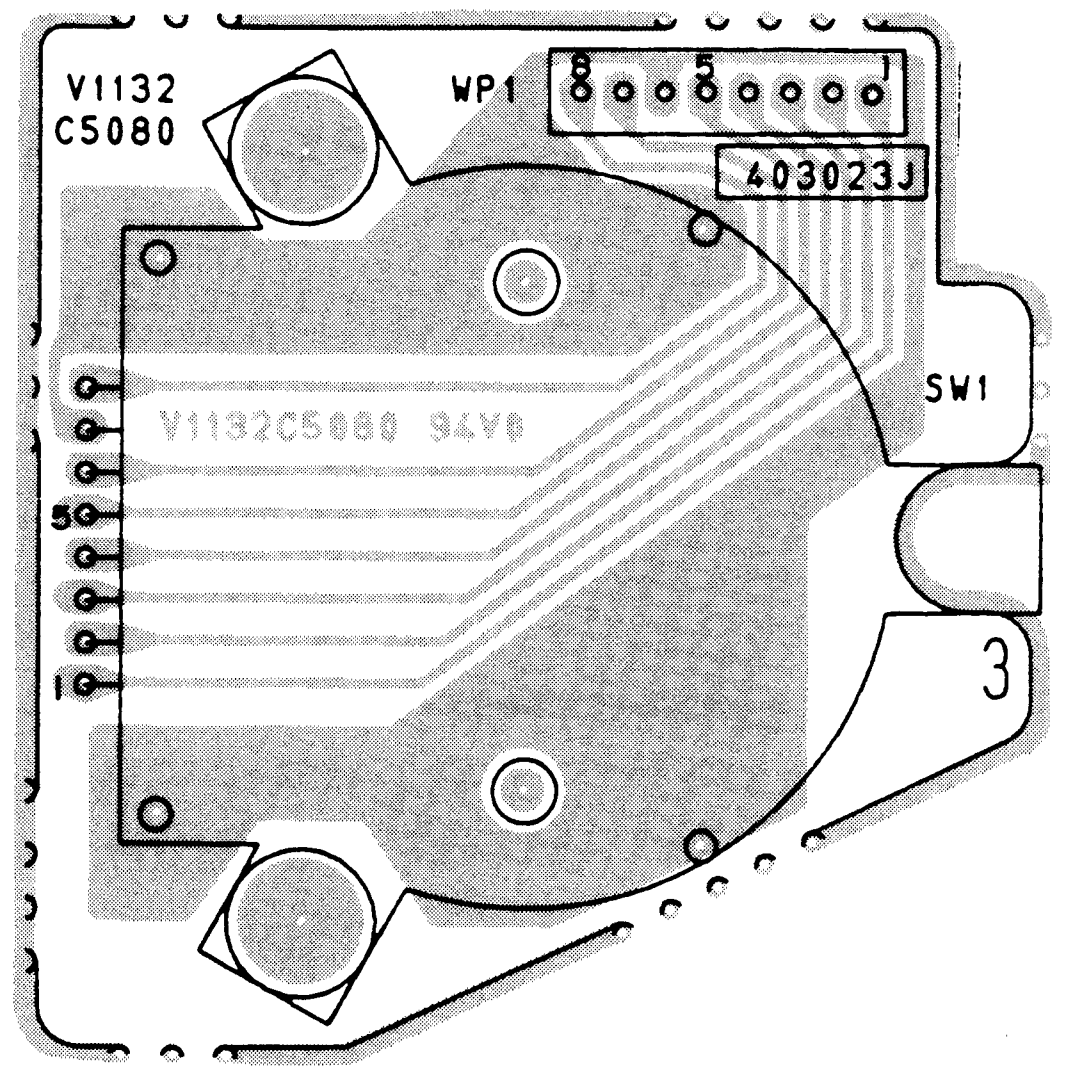
V1132
C5080
WP1
8
5
1
403023J
V1132C5080 94V0
SW1
5
1
3

JOG SHUTTLE PCB V1132C5080

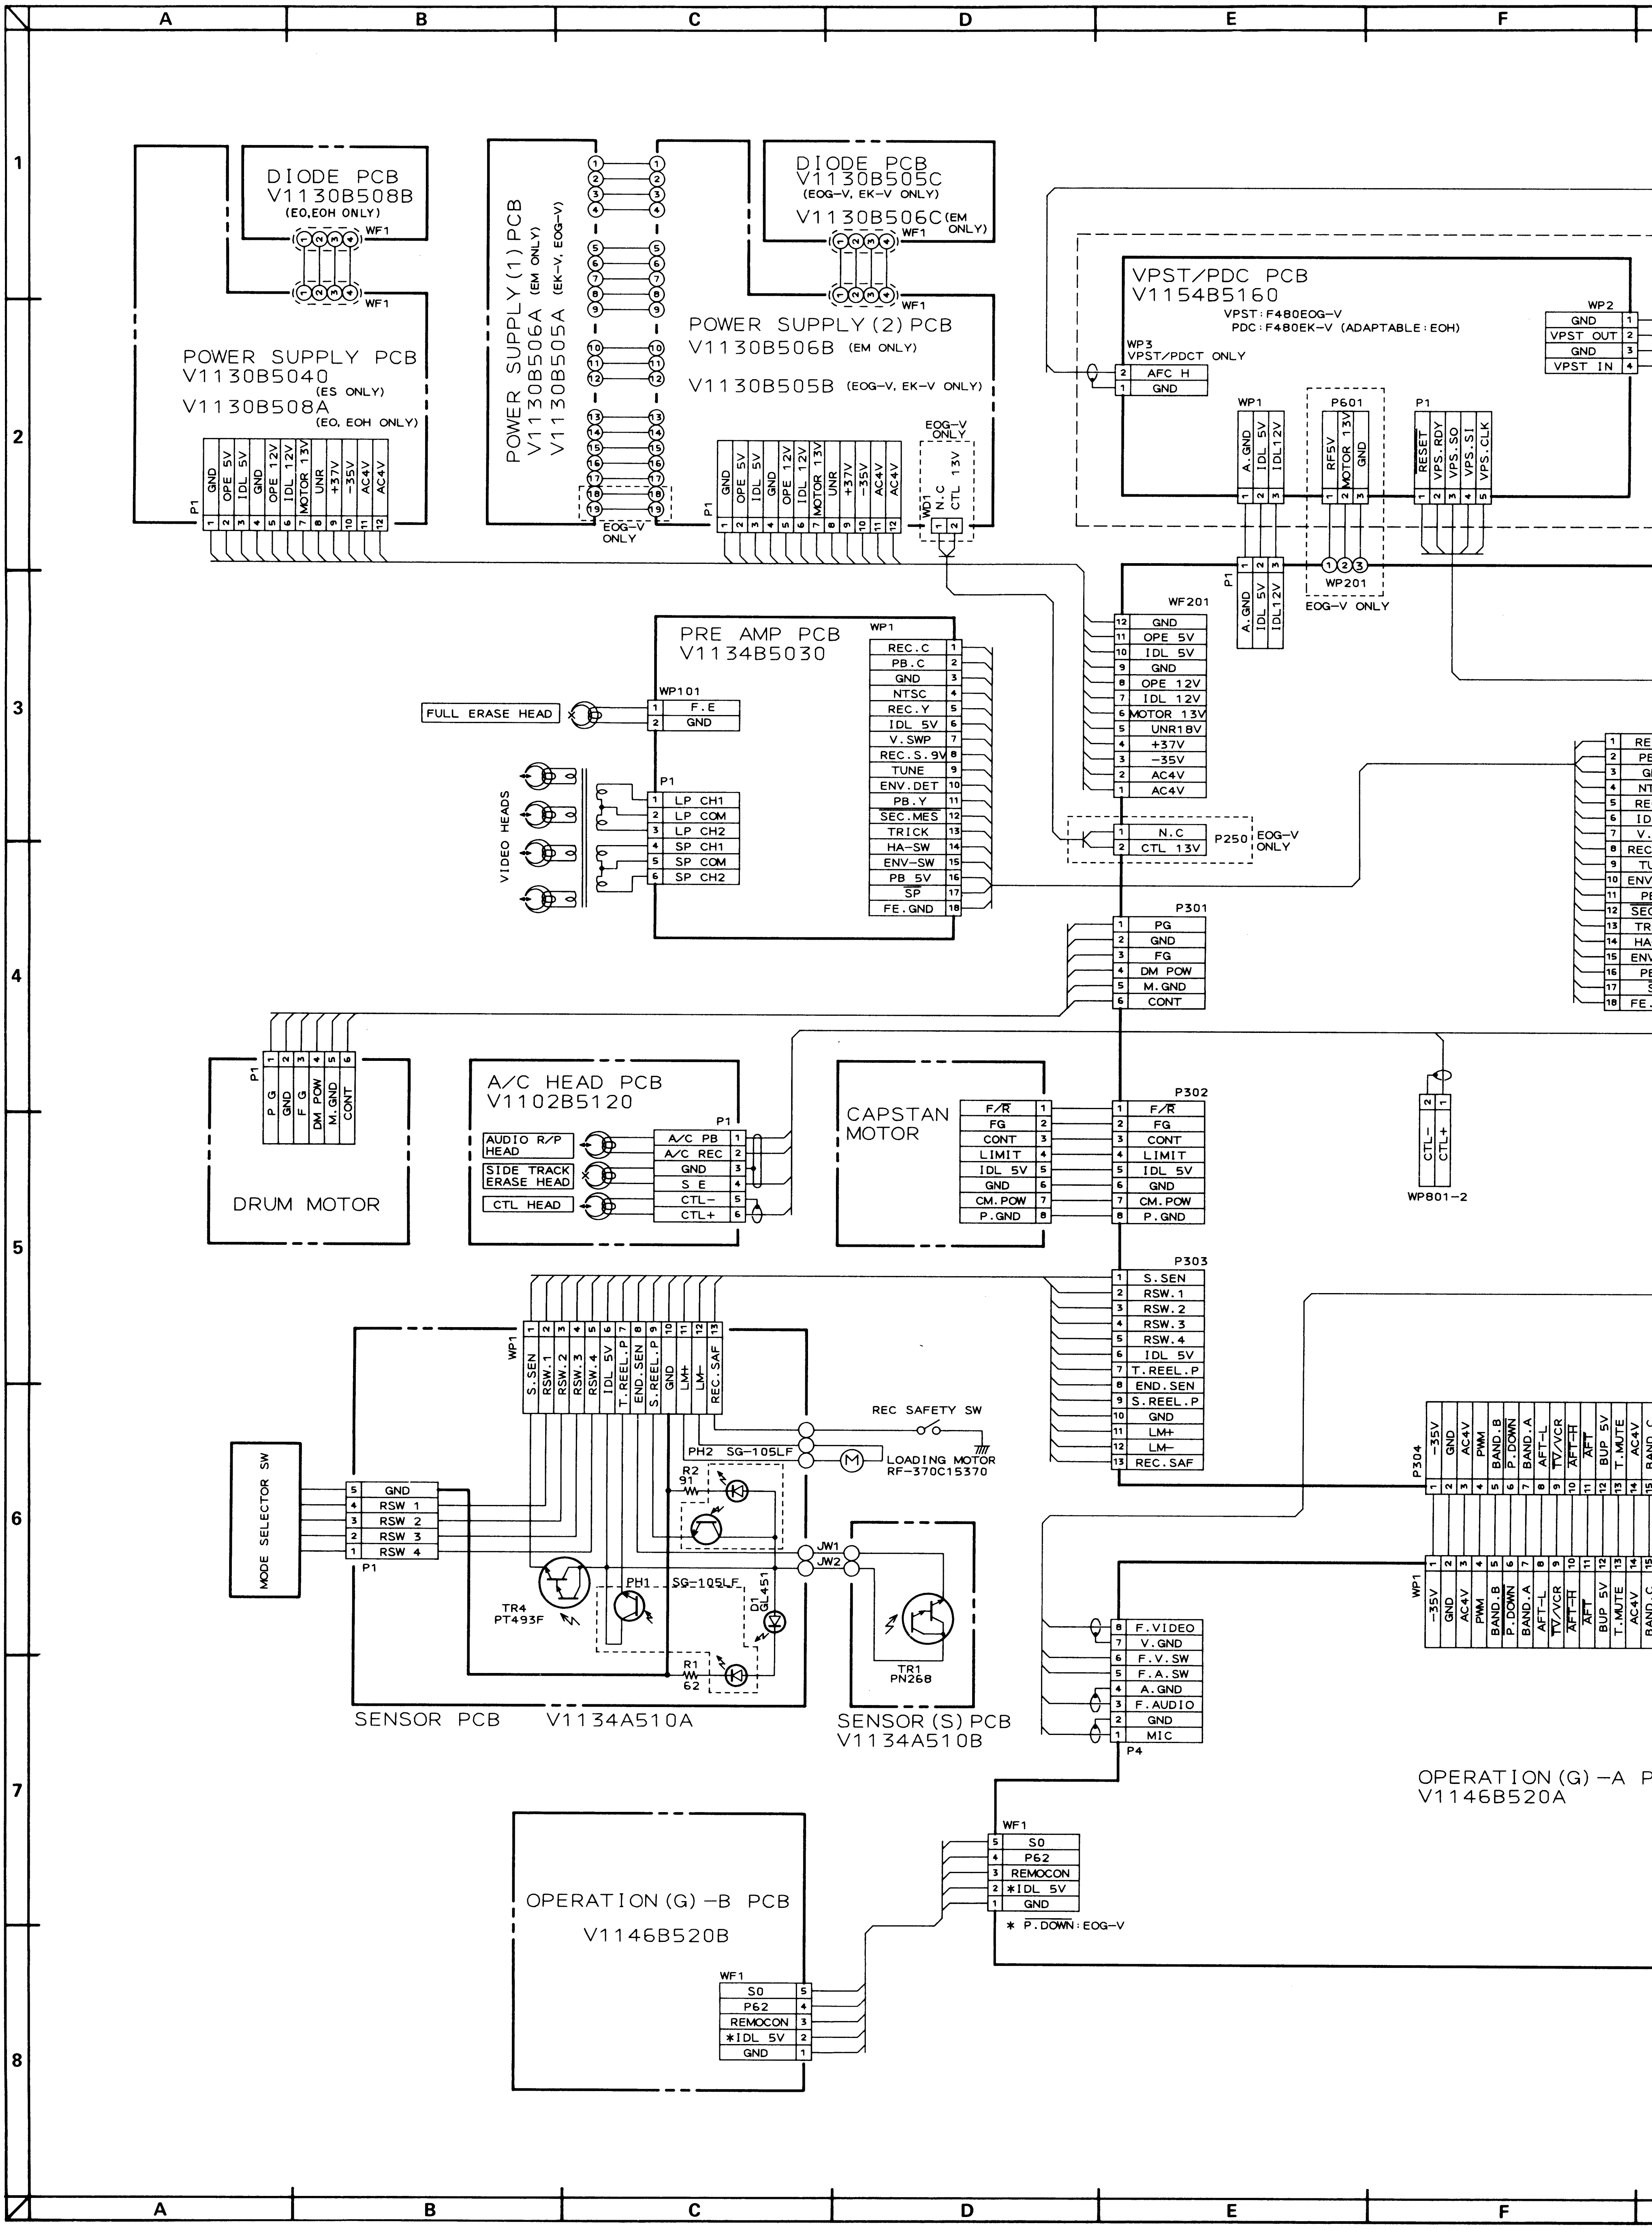
A
B
C
D
E
F
1
2
3
4
5
6
7
8
DIODE PCB
V1130B508B
(EO,EOH ONLY)
WF1
POWER SUPPLY PCB
V1130B5040
(ES ONLY)
V1130B508A
(EO, EOH ONLY)
P1
GND
OPE 5V
IDL 5V
GND
OPE 12V
IDL 12V
MOTOR 13V
UNR
+37V
−35V
AC4V
AC4V
POWER SUPPLY (1) PCB
V1130B506A (EM ONLY)
V1130B505A (EK-V, EOG-V)
EOG-V ONLY
DIODE PCB
V1130B505C
(EOG-V, EK-V ONLY)
V1130B506C (EM ONLY)
POWER SUPPLY (2) PCB
V1130B506B (EM ONLY)
V1130B505B (EOG-V, EK-V ONLY)
EOG-V ONLY
WD1
N.C
CTL 13V
VPST/PDC PCB
V1154B5160
VPST: F480EOG-V
PDC: F480EK-V (ADAPTABLE: EOH)
WP3
VPST/PDCT ONLY
AFC H
GND
WP2
GND
VPST OUT
GND
VPST IN
WP1
A.GND
IDL 5V
IDL12V
P601
RF5V
MOTOR 13V
GND
RESET
VPS.RDY
VPS.SO
VPS.SI
VPS.CLK
WP201
EOG-V ONLY
WF201
PRE AMP PCB
V1134B5030
WP101
F.E
GND
FULL ERASE HEAD
VIDEO HEADS
LP CH1
LP COM
LP CH2
SP CH1
SP COM
SP CH2
REC.C
PB.C
NTSC
REC.Y
V.SWP
REC.S.9V
TUNE
ENV.DET
PB.Y
SEC.MES
TRICK
HA-SW
ENV-SW
PB 5V
SP
FE.GND
UNR18V
P250
EOG-V ONLY
P301
PG
FG
DM POW
M.GND
CONT
DRUM MOTOR
A/C HEAD PCB
V1102B5120
AUDIO R/P HEAD
SIDE TRACK ERASE HEAD
CTL HEAD
A/C PB
A/C REC
S E
CTL−
CTL+
CAPSTAN MOTOR
F/R
LIMIT
CM.POW
P.GND
P302
WP801-2
P303
S.SEN
RSW.1
RSW.2
RSW.3
RSW.4
T.REEL.P
END.SEN
S.REEL.P
LM+
LM−
REC.SAF
REC SAFETY SW
LOADING MOTOR
RF-370C15370
PH2 SG-105LF
R2
91
PH1 SG-105LF
D1 GL451
TR4
PT493F
R1
62
JW1
JW2
TR1
PN268
MODE SELECTOR SW
RSW 1
RSW 2
RSW 3
RSW 4
SENSOR PCB V1134A510A
SENSOR (S) PCB
V1134A510B
P304
−35V
PWM
BAND.B
P.DOWN
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
F.VIDEO
V.GND
F.V.SW
F.A.SW
A.GND
F.AUDIO
MIC
P4
OPERATION (G) −A P
V1146B520A
OPERATION (G) −B PCB
V1146B520B
S0
P62
REMOCON
*IDL 5V
* P.DOWN: EOG-V

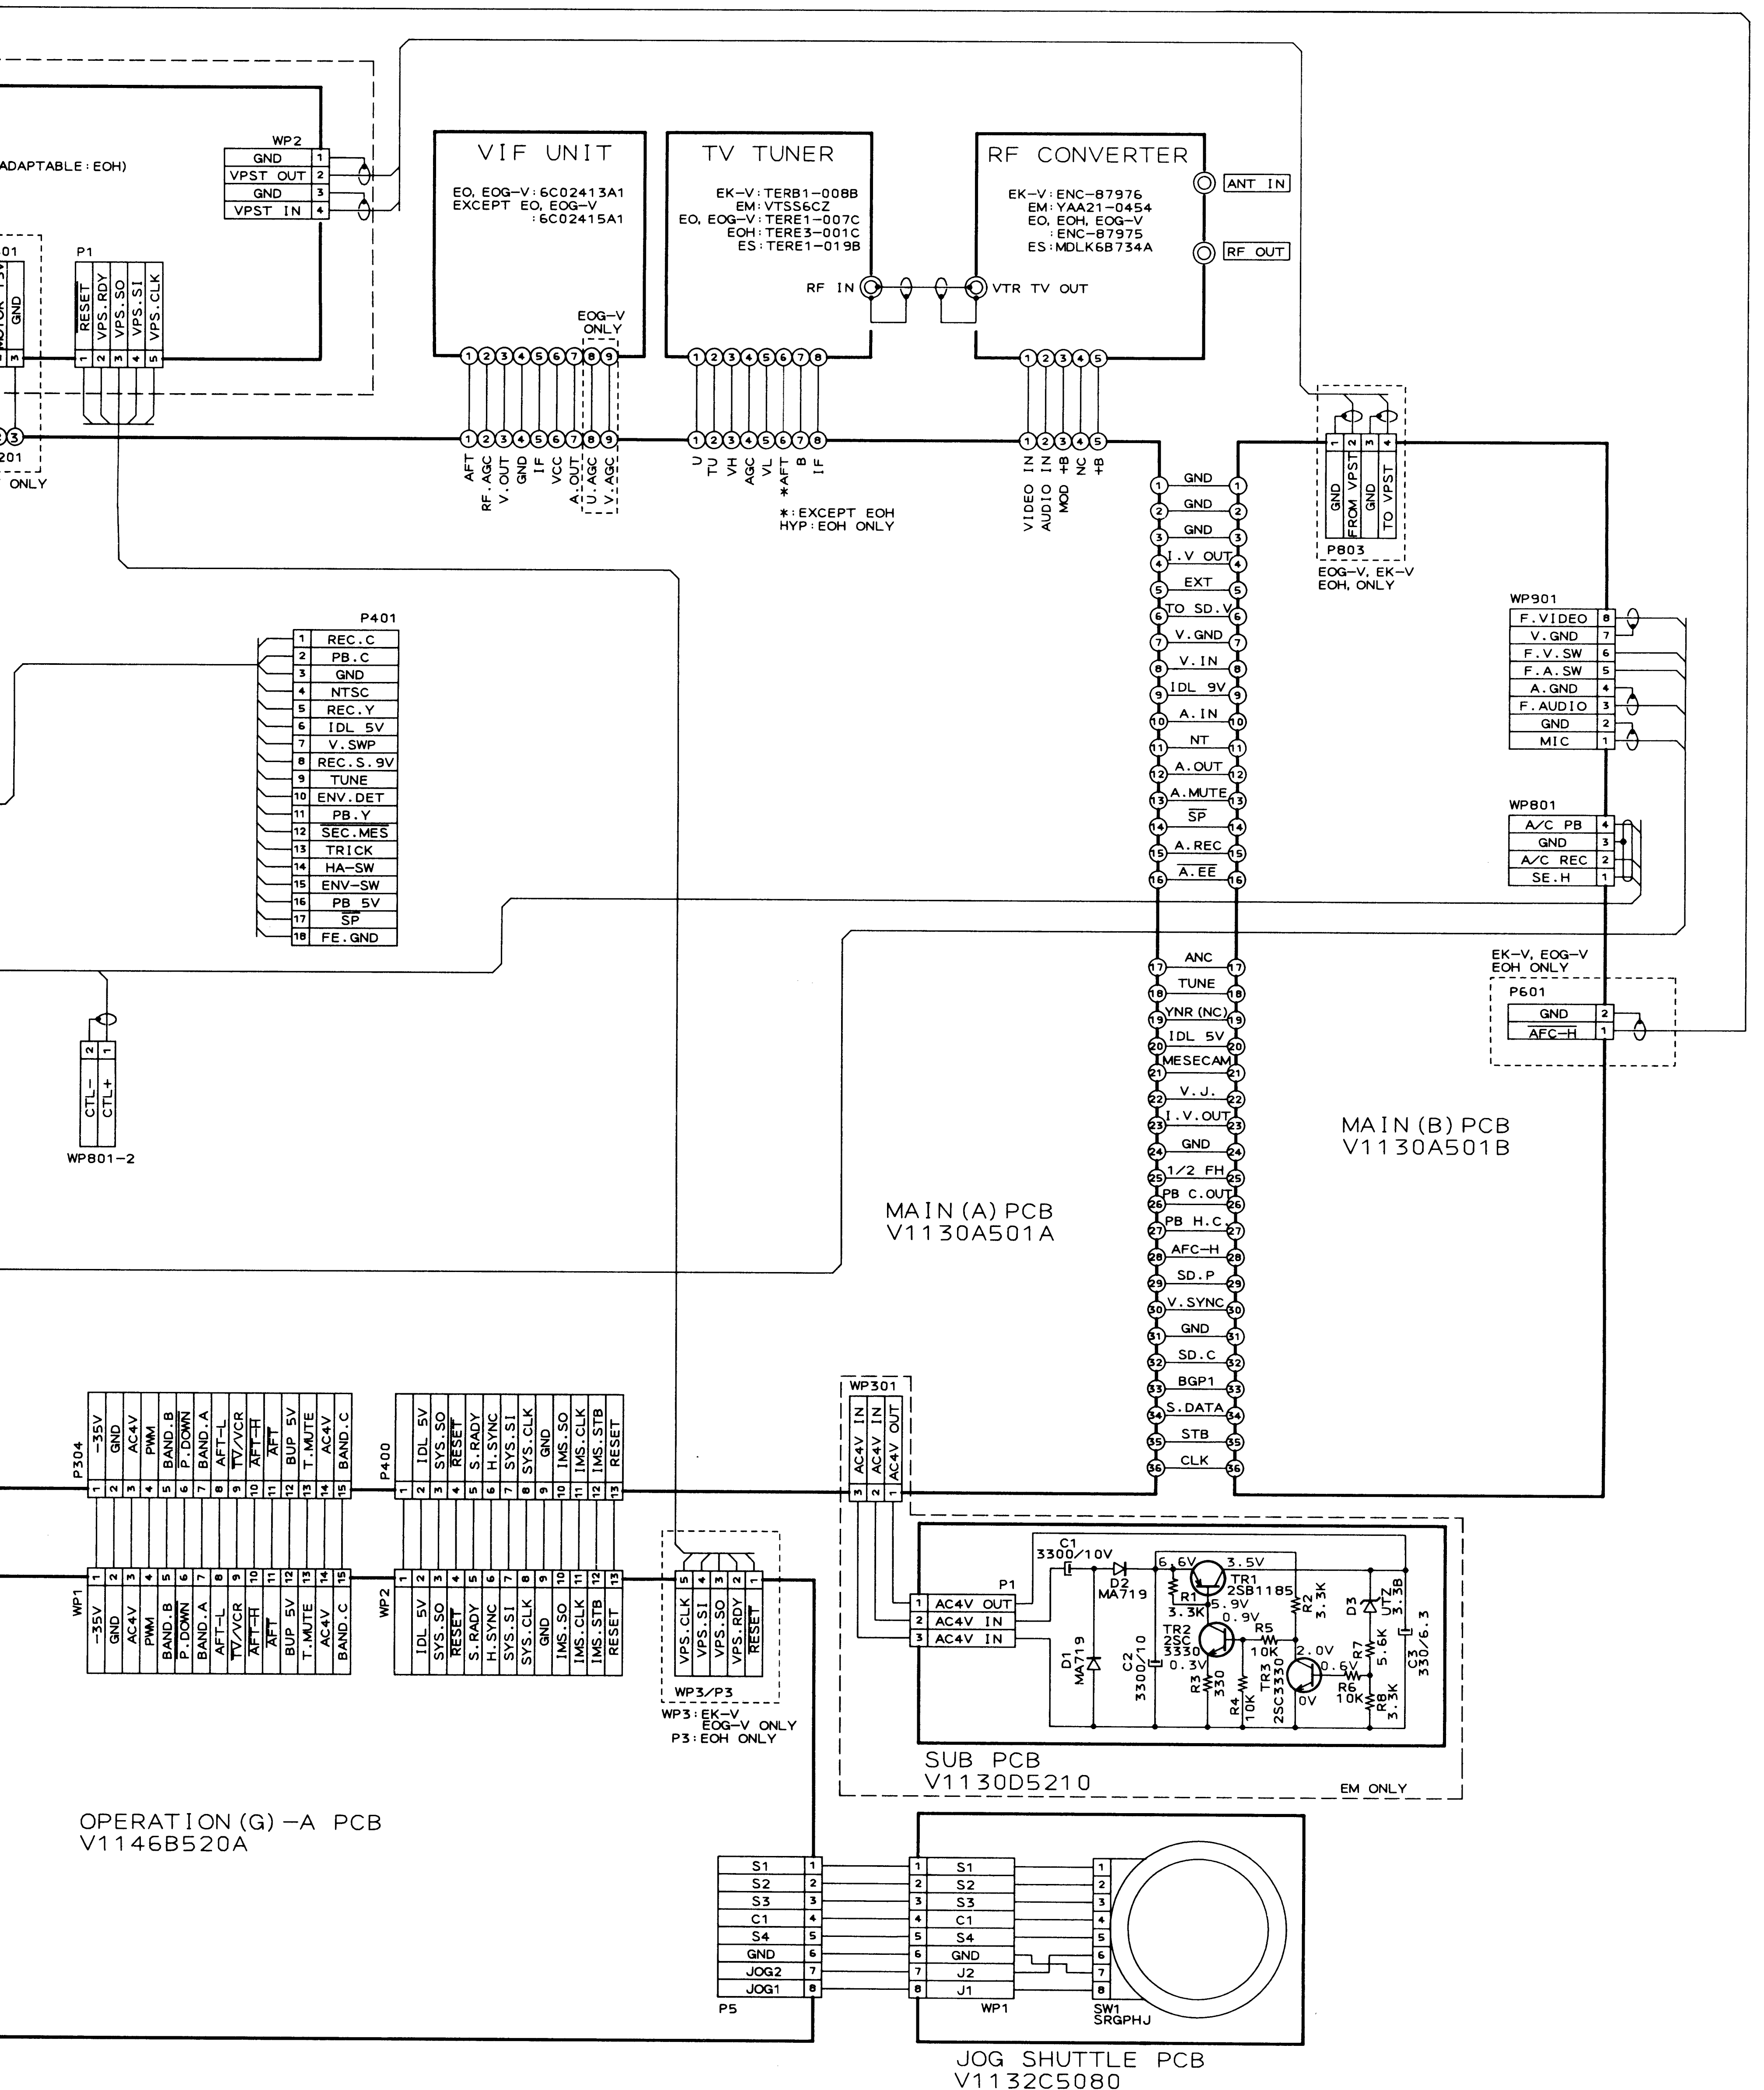
ADAPTABLE : EOH)
WP2
GND
VPST OUT
GND
VPST IN
P1
RESET
VPS.RDY
VPS.SO
VPS.SI
VPS.CLK
EOG-V ONLY
ONLY
VIF UNIT
EO, EOG-V : 6C02413A1
EXCEPT EO, EOG-V : 6C02415A1
AFT
RF.AGC
V.OUT
GND
IF
VCC
A.OUT
U.AGC
V.AGC
TV TUNER
EK-V : TERB1-008B
EM : VTSS6CZ
EO, EOG-V : TERE1-007C
EOH : TERE3-001C
ES : TERE1-019B
RF IN
U
TU
VH
AGC
VL
*AFT
B
IF
*: EXCEPT EOH
HYP : EOH ONLY
RF CONVERTER
EK-V : ENC-87976
EM : YAA21-0454
EO, EOH, EOG-V : ENC-87975
ES : MDLK6B734A
VTR TV OUT
ANT IN
RF OUT
VIDEO IN
AUDIO IN
MOD
+B
NC
+B
GND
FROM VPST
GND
TO VPST
P803
EOG-V, EK-V EOH, ONLY
P401
REC.C
PB.C
GND
NTSC
REC.Y
IDL 5V
V.SWP
REC.S.9V
TUNE
ENV.DET
PB.Y
SEC.MES
TRICK
HA-SW
ENV-SW
PB 5V
SP
FE.GND
GND
GND
GND
I.V OUT
EXT
TO SD.V
V.GND
V.IN
IDL 9V
A.IN
NT
A.OUT
A.MUTE
SP
A.REC
A.EE
ANC
TUNE
YNR (NC)
IDL 5V
MESECAM
V.J.
I.V.OUT
GND
1/2 FH
PB C.OUT
PB H.C
AFC-H
SD.P
V.SYNC
GND
SD.C
BGP1
S.DATA
STB
CLK
WP901
F.VIDEO
V.GND
F.V.SW
F.A.SW
A.GND
F.AUDIO
GND
MIC
WP801
A/C PB
GND
A/C REC
SE.H
EK-V, EOG-V EOH ONLY
P601
GND
AFC-H
CTL-
CTL+
WP801-2
MAIN (B) PCB
V1130A501B
MAIN (A) PCB
V1130A501A
P304
-35V
GND
AC4V
PWM
BAND.B
P.DOWN
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
AC4V
BAND.C
P400
IDL 5V
SYS.SO
RESET
S.RADY
H.SYNC
SYS.SI
SYS.CLK
GND
IMS.SO
IMS.CLK
IMS.STB
RESET
WP301
AC4V IN
AC4V IN
AC4V OUT
WP1
WP2
VPS.CLK
VPS.SI
VPS.SO
VPS.RDY
RESET
WP3/P3
WP3 : EK-V
EOG-V ONLY
P3 : EOH ONLY
P1
AC4V OUT
AC4V IN
AC4V IN
C1 3300/10V
D2 MA719
6.6V
3.5V
TR1 2SB1185
R1 3.3K
5.9V
R2 3.3K
D3 UTZ 3.3B
0.9V
TR2 2SC 3330
R5 10K
0.3V
2.0V
0.6V
R7 5.6K
C3 330/6.3
D1 MA719
C2 3300/10
R3 330
R4 10K
TR3 2SC3330
0V
R6 10K
R8 3.3K
SUB PCB
V1130D5210
EM ONLY
OPERATION (G) -A PCB
V1146B520A
S1
S2
S3
C1
S4
GND
JOG2
JOG1
P5
S1
S2
S3
C1
S4
GND
J2
J1
WP1
SW1 SRGPHJ
JOG SHUTTLE PCB
V1132C5080

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN µF 50 WV (K)
ALL INDUCTORS IN µH (K)

INDICATED VOLTAGE IN THE SUB PCB WERE MEASURED IN PB MODE.
(CONNECTED DC VOLTMETER'S GROUND TO THE P1 ③ PIN WHEN MEASURED)

VS-F480EK-V/EOG-V
VS-F490EM/EO/EOH/ES
VS-F497EOH
CONNECTION DIAGRAM
No. 21-2 V115202M
A1

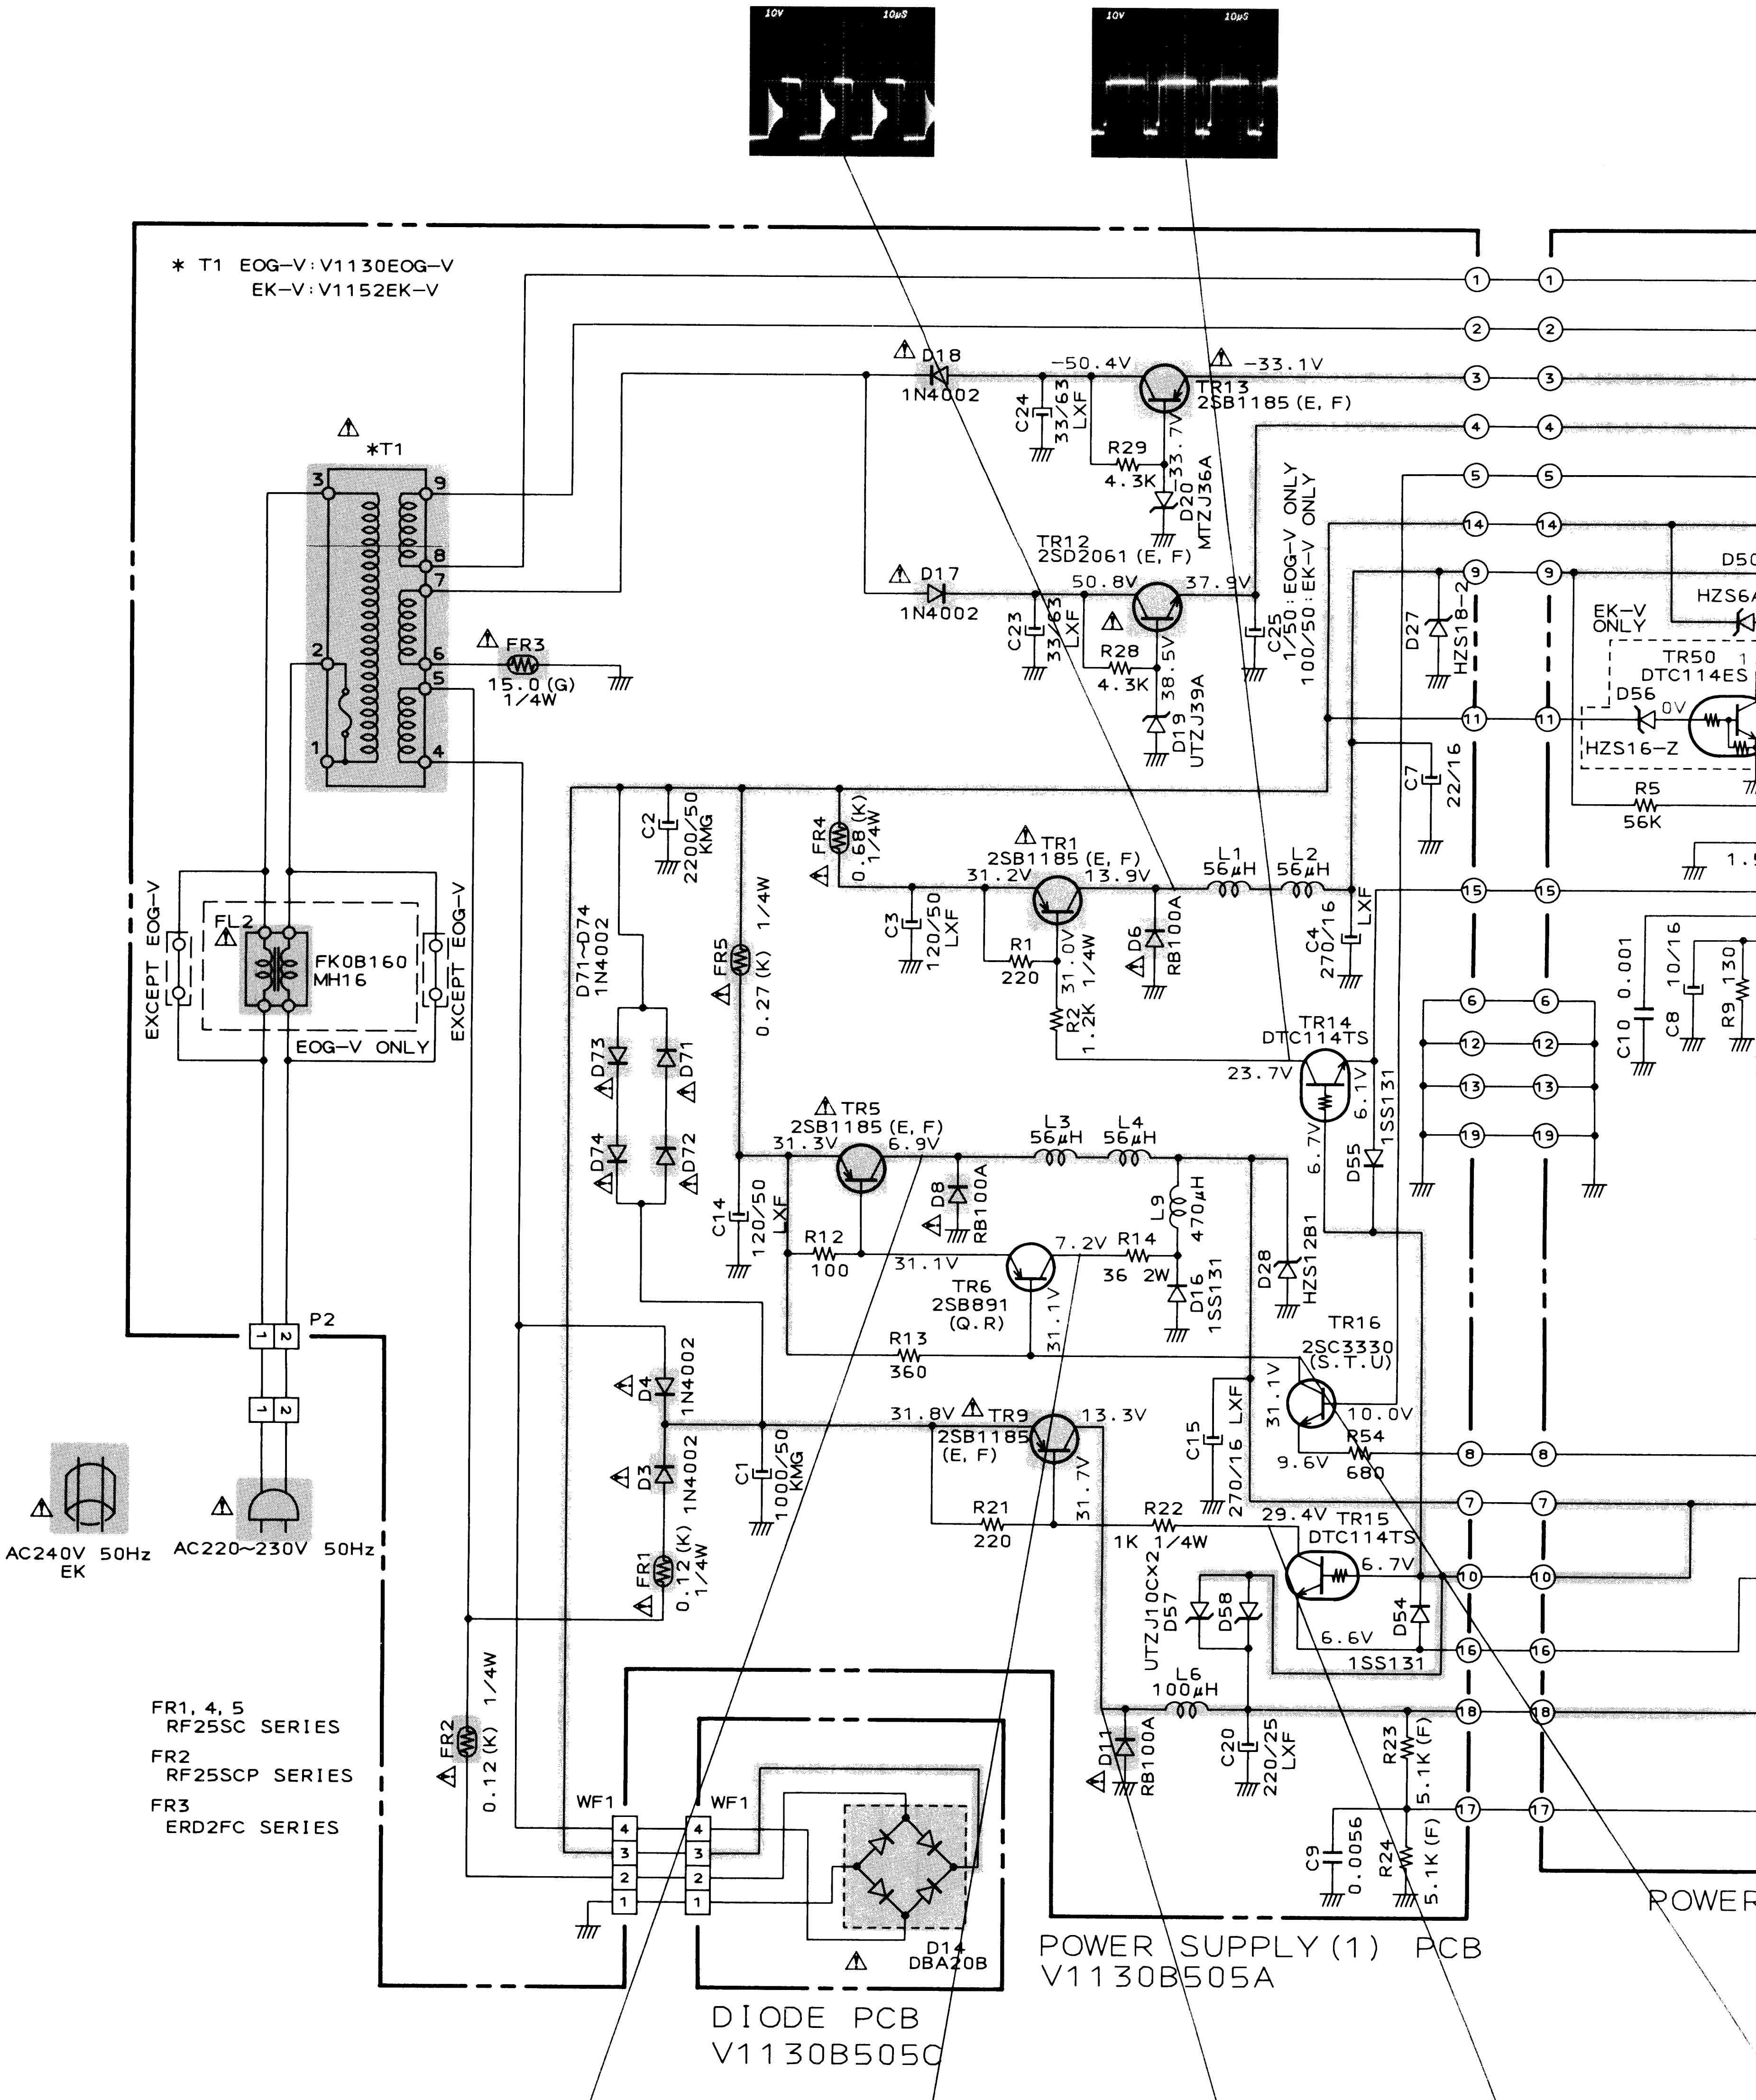

* T1 EOG-V:V1130EOG-V
EK-V:V1152EK-V
*T1
FL2
FK0B160
MH16
EXCEPT EOG-V
EOG-V ONLY
FR3
15.0 (G)
1/4W
P2
AC240V 50Hz
EK
AC220~230V 50Hz
FR1, 4, 5
RF25SC SERIES
FR2
RF25SCP SERIES
FR3
ERD2FC SERIES
FR2
0.12 (K) 1/4W
D18
1N4002
D17
1N4002
C24
33/63
LXF
C23
33/63
LXF
TR13
2SB1185 (E, F)
-50.4V
-33.1V
R29
4.3K
D20
MTZJ36A
33.7V
TR12
2SD2061 (E, F)
50.8V
37.9V
R28
4.3K
D19
UTZJ39A
38.5V
C25
1/50:EOG-V ONLY
100/50:EK-V ONLY
D27
HZS18-2
C7
22/16
C2
2200/50
KMG
FR4
0.68 (K)
1/4W
D71~D74
1N4002
D73
D71
D74
D72
FR5
0.27 (K) 1/4W
TR1
2SB1185 (E, F)
31.2V
13.9V
C3
120/50
LXF
R1
220
R2
1.2K 1/4W
31.0V
D6
RB100A
L1
56μH
L2
56μH
C4
270/16
LXF
TR14
DTC114TS
23.7V
6.1V
6.7V
D55
1SS131
TR5
2SB1185 (E, F)
31.3V
6.9V
C14
120/50
LXF
R12
100
D8
RB100A
L3
56μH
L4
56μH
L9
470μH
TR6
2SB891
(Q.R)
31.1V
7.2V
R14
36 2W
D16
1SS131
31.1V
R13
360
D28
HZS12B1
TR16
2SC3330
(S.T.U)
31.1V
10.0V
9.6V
R54
680
D4
1N4002
D3
1N4002
C1
1000/50
KMG
FR1
0.12 (K)
1/4W
TR9
2SB1185
(E, F)
31.8V
13.3V
31.7V
R21
220
R22
1K 1/4W
C15
270/16
LXF
29.4V
TR15
DTC114TS
6.7V
6.6V
D54
1SS131
D57
UTZJ10CX2
D58
L6
100μH
D11
RB100A
C20
220/25
LXF
R23
5.1K (F)
C9
0.0056
R24
5.1K (F)
WF1
WF1
D14
DBA20B
POWER SUPPLY (1) PCB
V1130B505A
DIODE PCB
V1130B505C
EK-V
ONLY
TR50
DTC114ES
D56
0V
HZS16-Z
D50
HZS6A
R5
56K
C10
0.001
C8
10/16
R9
130
1.5
POWER
10V
10μS

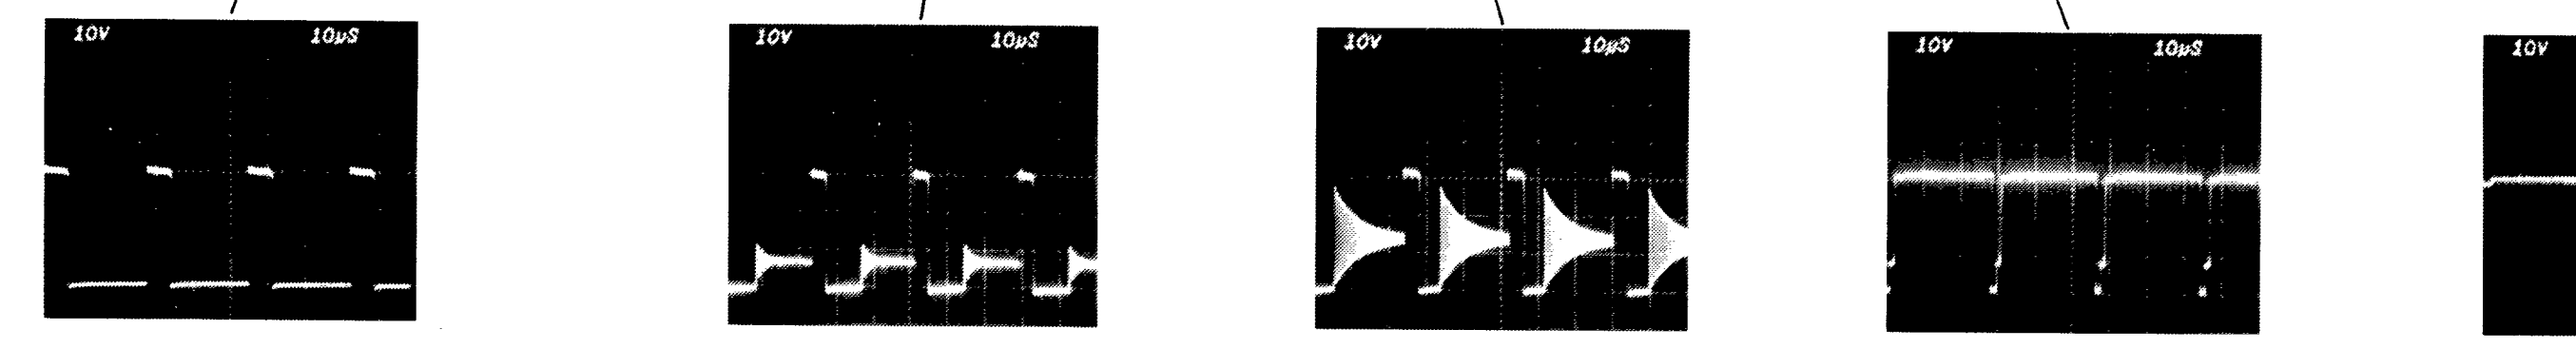

CAUTION
DO NOT TURN ON THE POWER WHILE THE FLAT CABLE IN THE POWER BLK IS DISCONNECTED AS THIS WILL DAMAGE THE POWER CIRCUIT. MAKE SURE THAT THE FLAT CABLE IS CONNECTED BEFORE TURNING ON THE POWER.

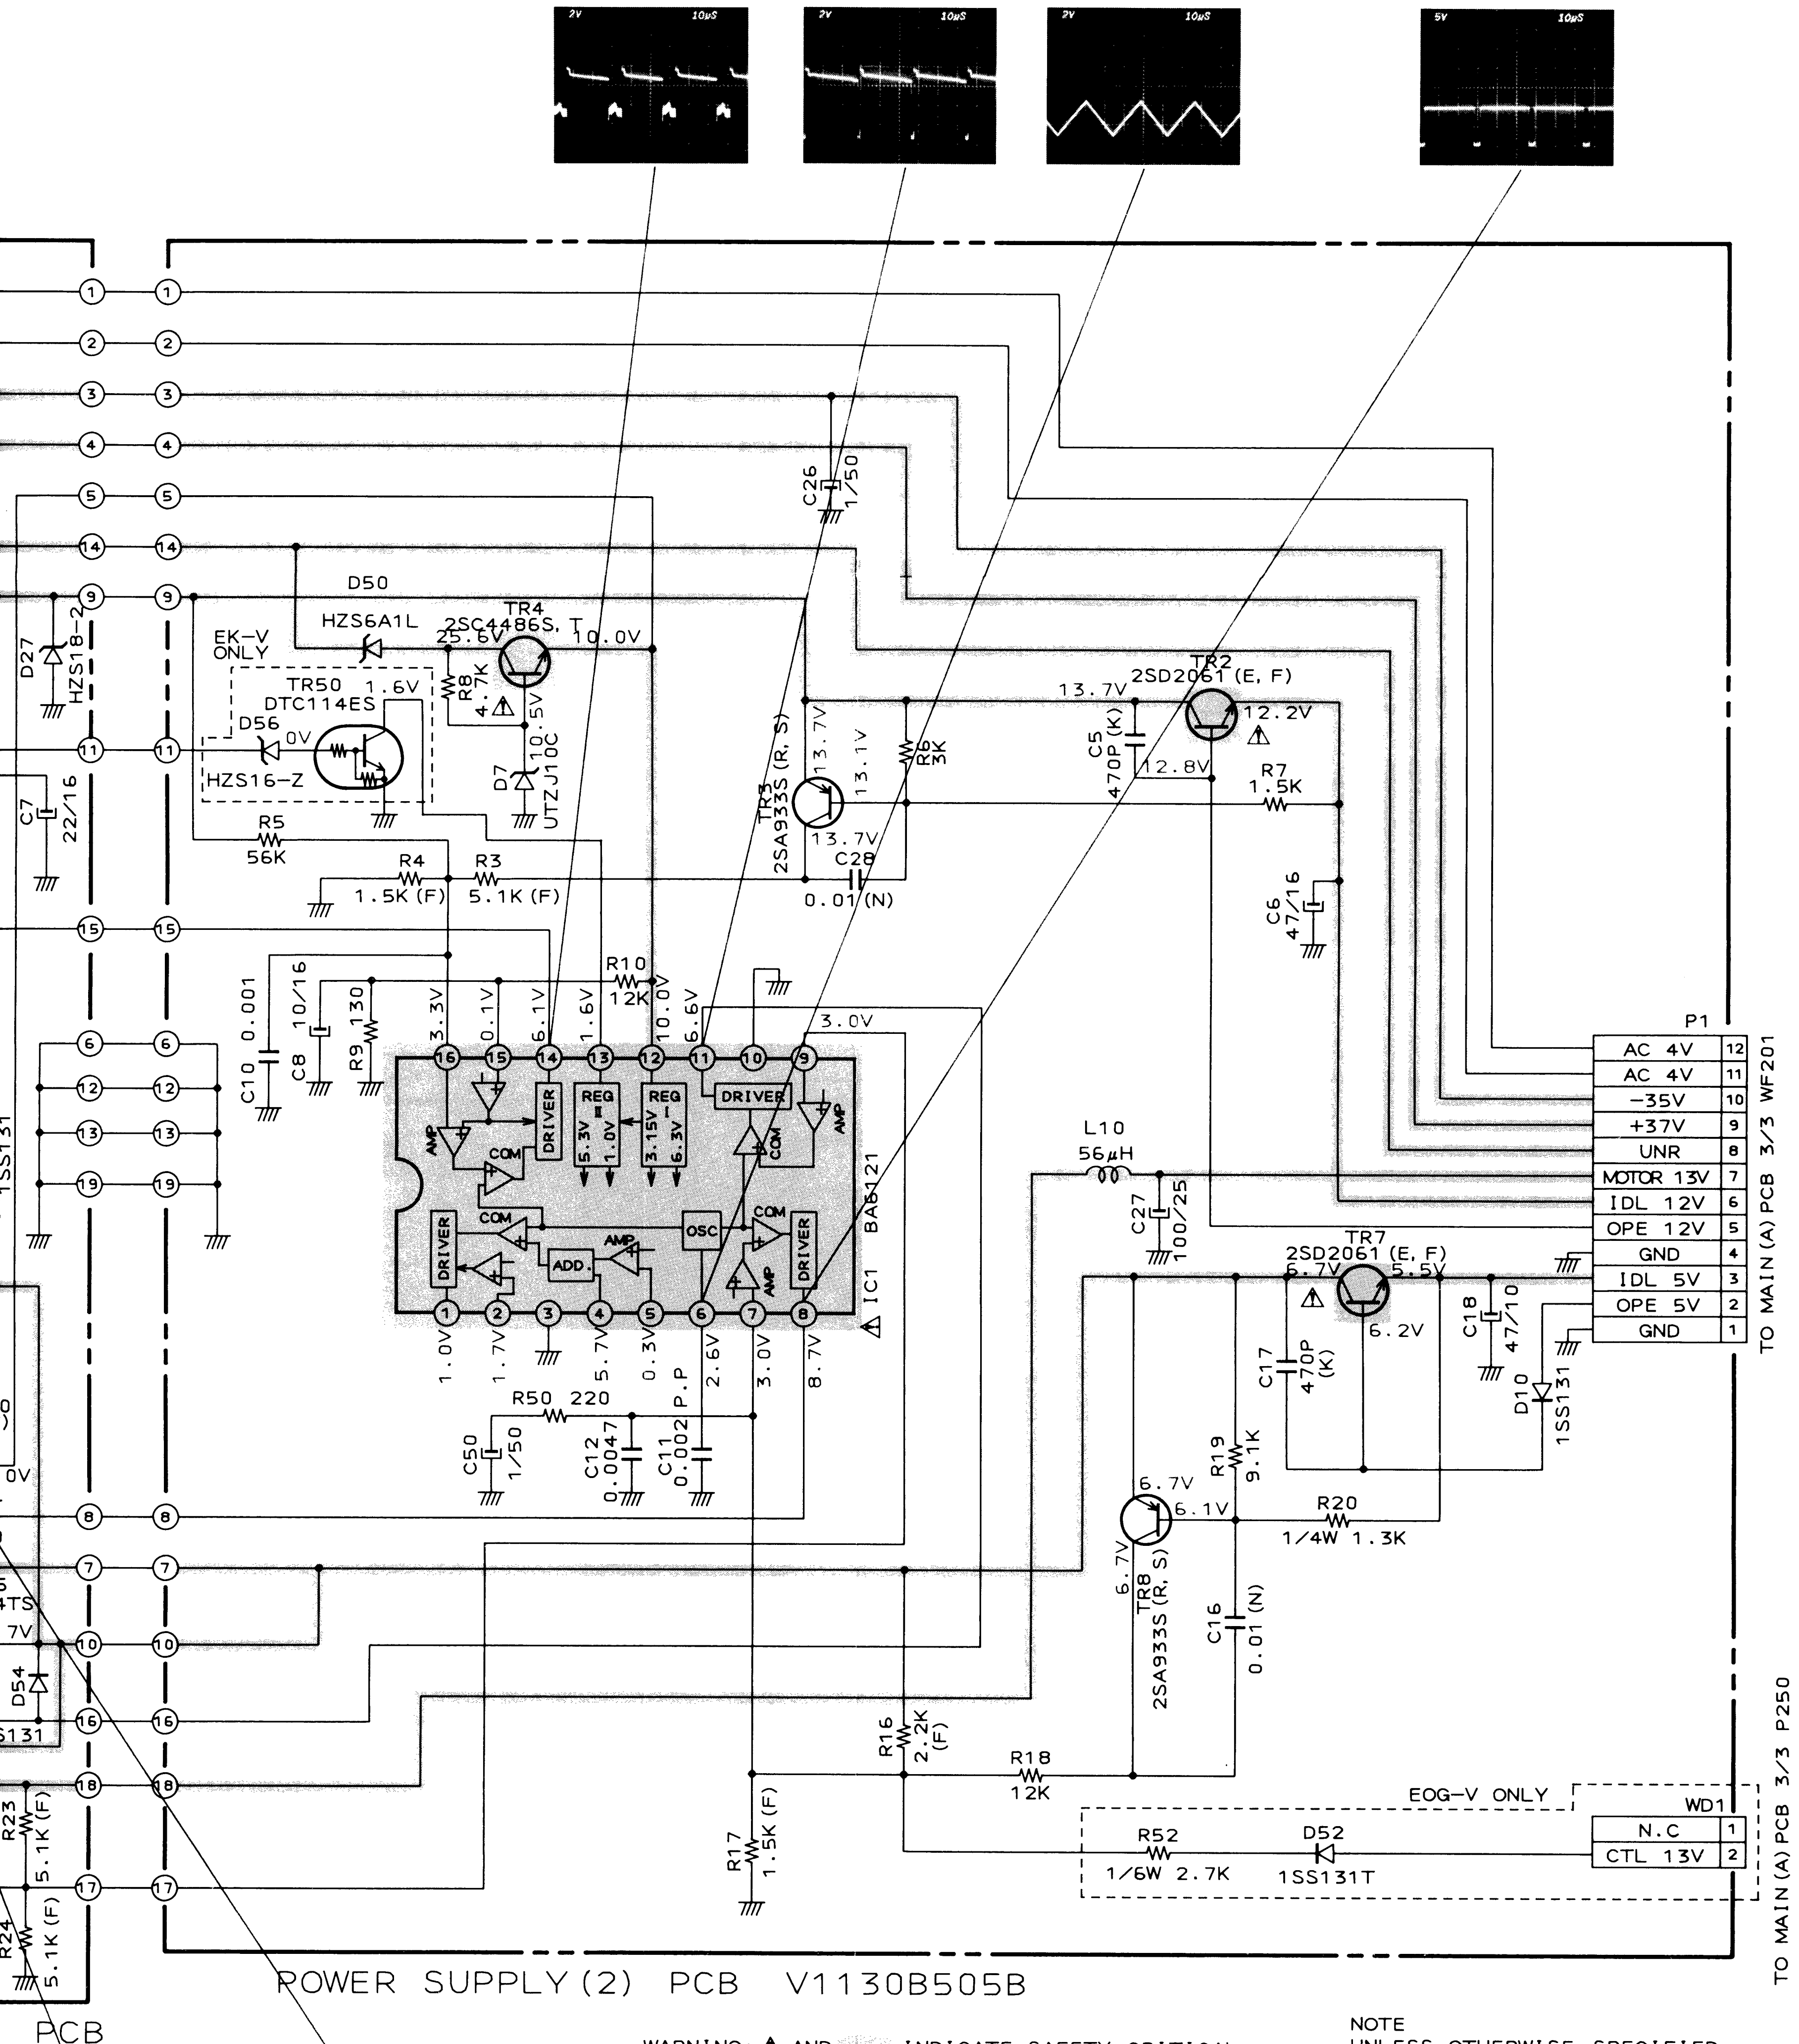
F
G
H
I
J
K
1
2
3
4
5
6
7
2V 10μS
2V 10μS
2V 10μS
5V 10μS
D50
HZS6A1L
TR4
2SC4486S, T
25.6V
10.0V
EK-V ONLY
TR50
DTC114ES
1.6V
D56
0V
HZS16-Z
R8 4.7K
D7 UTZJ10C
10.5V
D27 HZS18-2
C7 22/16
R5 56K
R4 1.5K (F)
R3 5.1K (F)
C26 1/50
TR3 2SA933S (R, S)
13.7V
13.1V
R6 3K
C28 0.01 (N)
TR2 2SD2061 (E, F)
13.7V
12.2V
12.8V
C5 470P (K)
R7 1.5K
C6 47/16
C10 0.001
C8 10/16
R9 130
R10 12K
3.3V
0.1V
6.1V
1.6V
10.0V
6.6V
3.0V
DRIVER
REG
REG
5.3V
1.0V
3.15V
6.3V
AMP
COM
OSC
ADD
IC1 BA6121
1.0V
1.7V
5.7V
0.3V
2.6V
3.0V
8.7V
R50 220
C50 1/50
C12 0.0047
C11 0.002
P.P
L10 56μH
C27 100/25
P1
AC 4V 12
AC 4V 11
-35V 10
+37V 9
UNR 8
MOTOR 13V 7
IDL 12V 6
OPE 12V 5
GND 4
IDL 5V 3
OPE 5V 2
GND 1
TO MAIN (A) PCB 3/3 WF201
TR7 2SD2061 (E, F)
6.7V
5.5V
6.2V
C17 470P (K)
C18 47/10
D10 1SS131
R19 9.1K
TR8 2SA933S (R, S)
6.7V
6.1V
R20 1/4W 1.3K
C16 0.01 (N)
R16 2.2K (F)
R18 12K
R17 1.5K (F)
EOG-V ONLY
WD1
N.C 1
CTL 13V 2
R52 1/6W 2.7K
D52 1SS131T
TO MAIN (A) PCB 3/3 P250
D54
1SS131
R23 5.1K (F)
R24 5.1K (F)
POWER SUPPLY (2) PCB V1130B505B
PCB

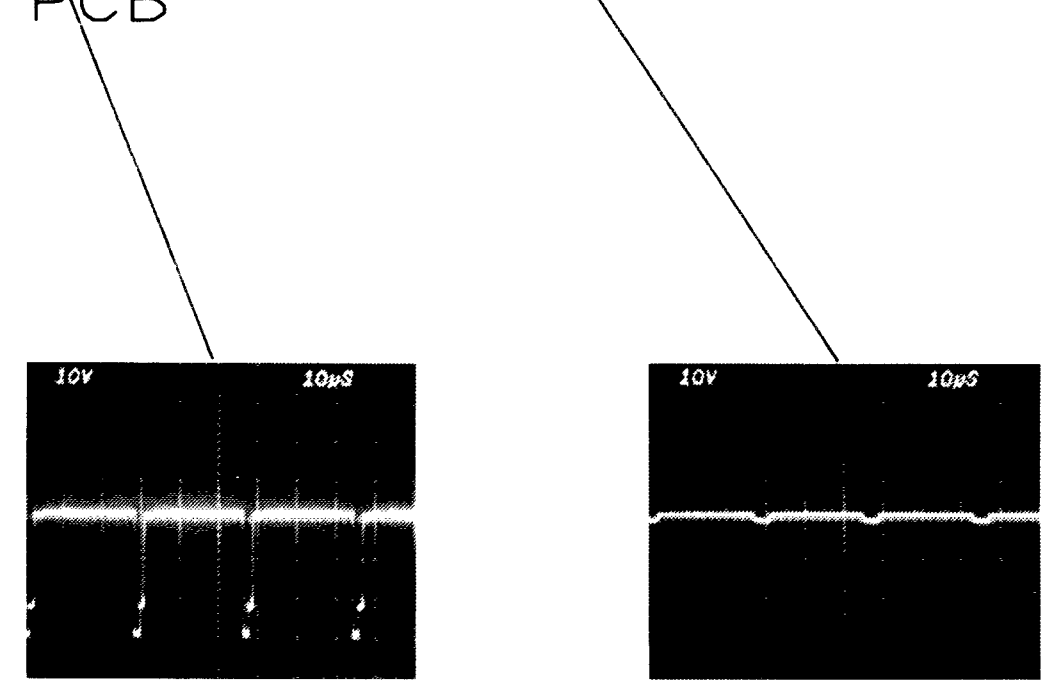

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ▨ , ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF50 WV (M)

* INDICATED VOLTAGE WERE MEASURED DURING E-E MODE.

* PHOTOGRAPHS WERE TAKEN DURING E-E MODE. THE SCREEN'S FIRST LINE FROM THE BOTTOM IS DC 0V.

▨ :B (POWER SUPPLY) LINE

VS-F440EOG-V
VS-F480EOG-V/EK-V
POWER SUPPLY(1), (2) & DIODE
SCHEMATIC DIAGRAM
No.21-3 V115203M
A1

DIODE PCB
V1130B505C(J1)
(EOG-V, EK-V ONLY)

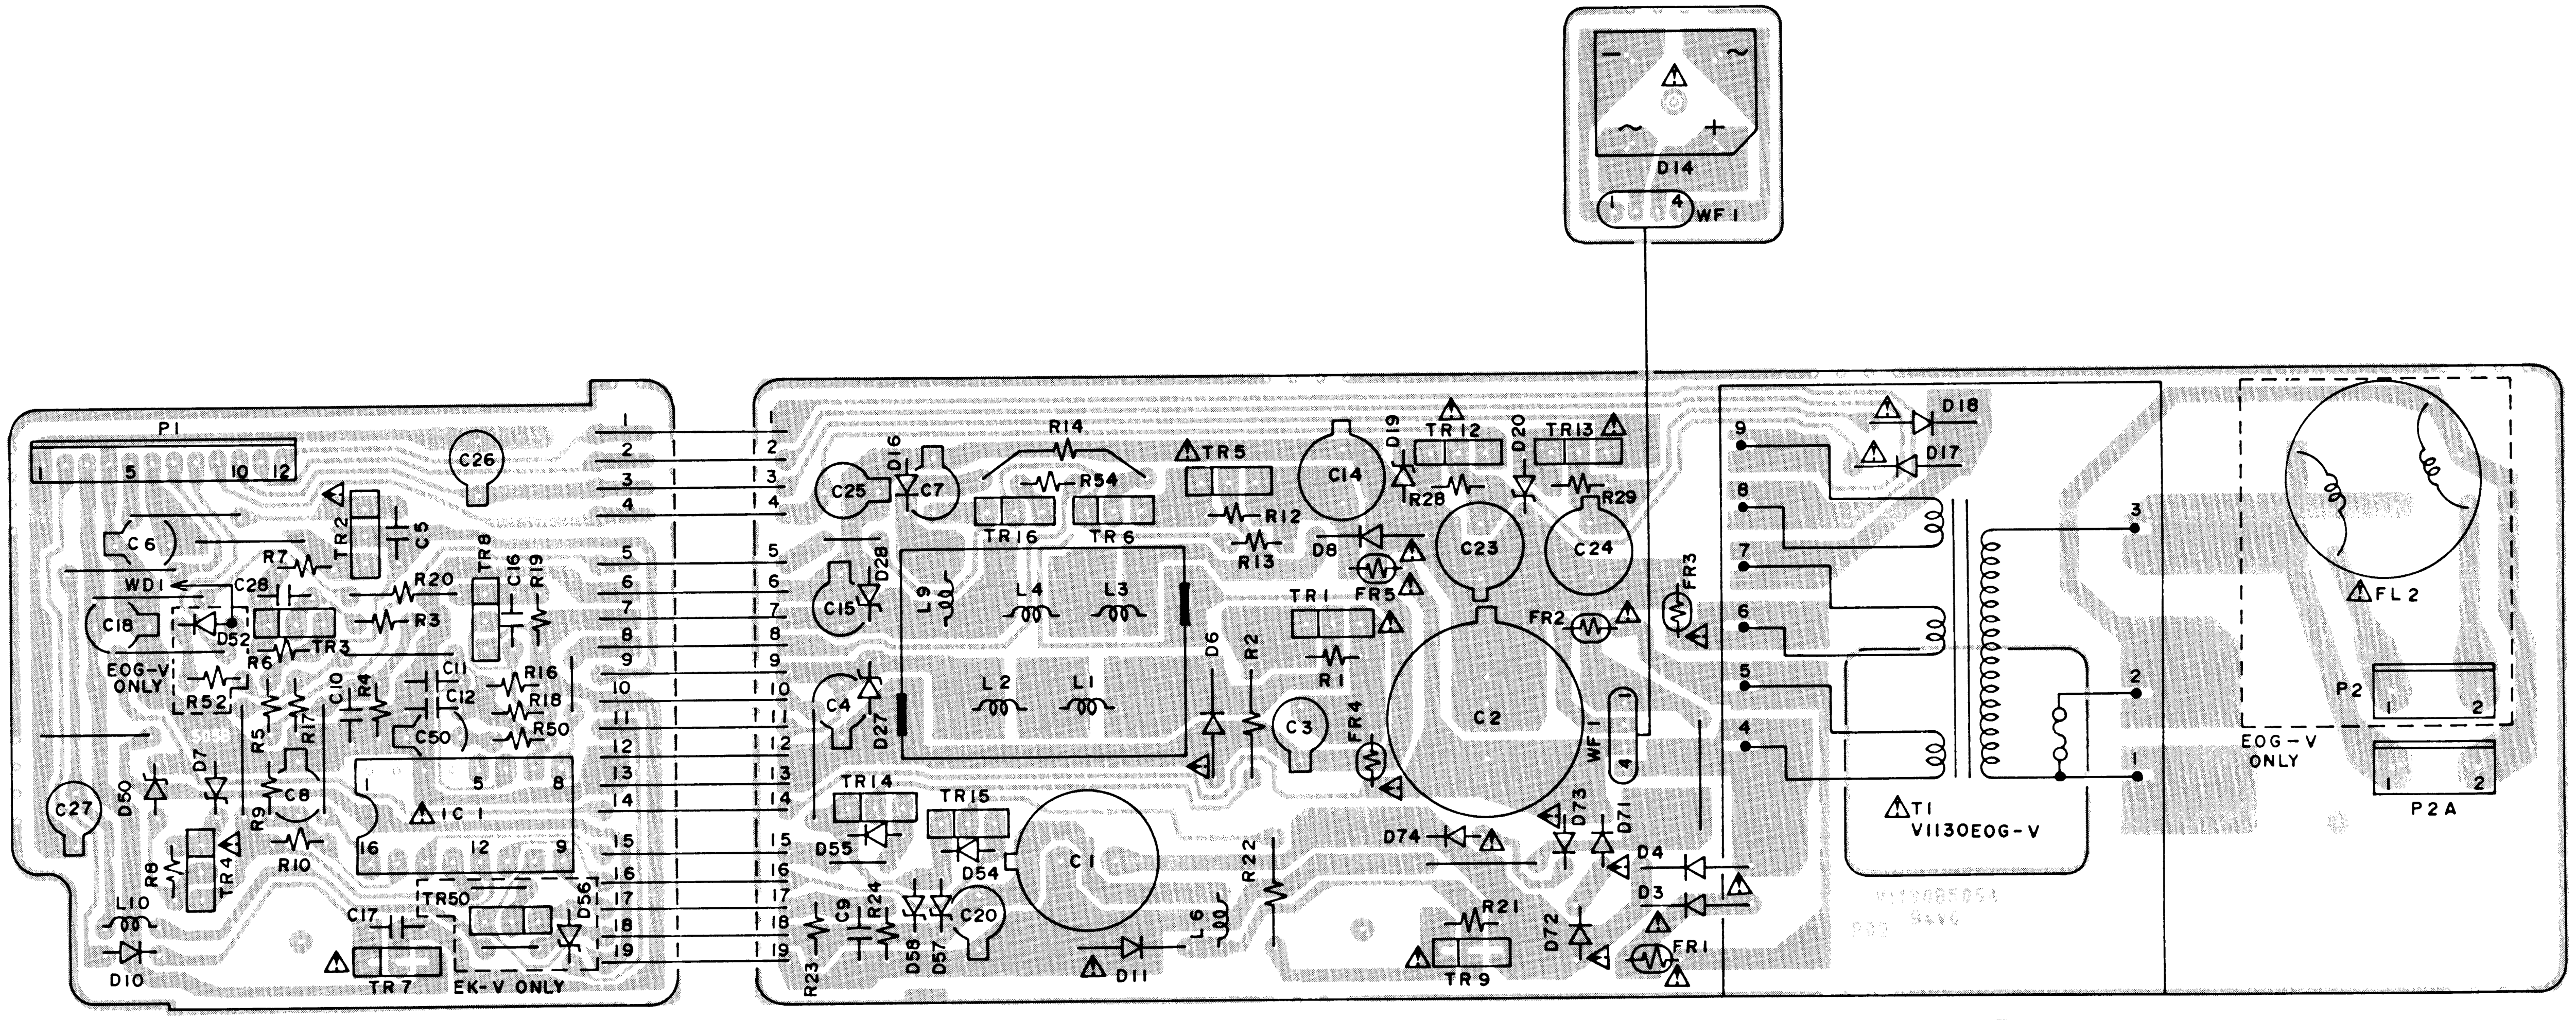
D14
WF1
P1
C26
C6
WD1
C28
C18
D52
TR2
TR3
TR8
R7
R20
R3
R6
R16
R18
R50
C5
C16
R19
C10
R4
C11
C12
C50
R17
R5
C8
R9
R10
R52
EOG-V ONLY
C27
D50
D7
R8
TR4
IC1
L10
D10
C17
TR50
D56
TR7
EK-V ONLY
R14
R54
TR16
TR6
TR5
R12
R13
D8
C14
D19
TR12
R28
D20
TR13
R29
C23
C24
C25
D16
C7
D28
C15
L9
L4
L3
L2
L1
C4
D27
D6
R2
C3
TR1
FR5
R1
FR4
C2
FR2
FR3
WF1
TR14
TR15
D55
D54
C1
R22
D74
D73
D71
D4
D3
C9
R24
R23
D58
D57
C20
D11
L6
R21
D72
FR1
TR9
D18
D17
T1
V1130E0G-V
FL2
P2
EOG-V ONLY
P2A

POWER SUPPLY(2) PCB
V1130B505B(J1)
(EOG-V, EK-V ONLY)

POWER SUPPLY(1) PCB V1130B505A(J1)
(EOG-V, EK-V ONLY)

WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

DIODE PCB
V1130B506C(J1)(EM ONLY)

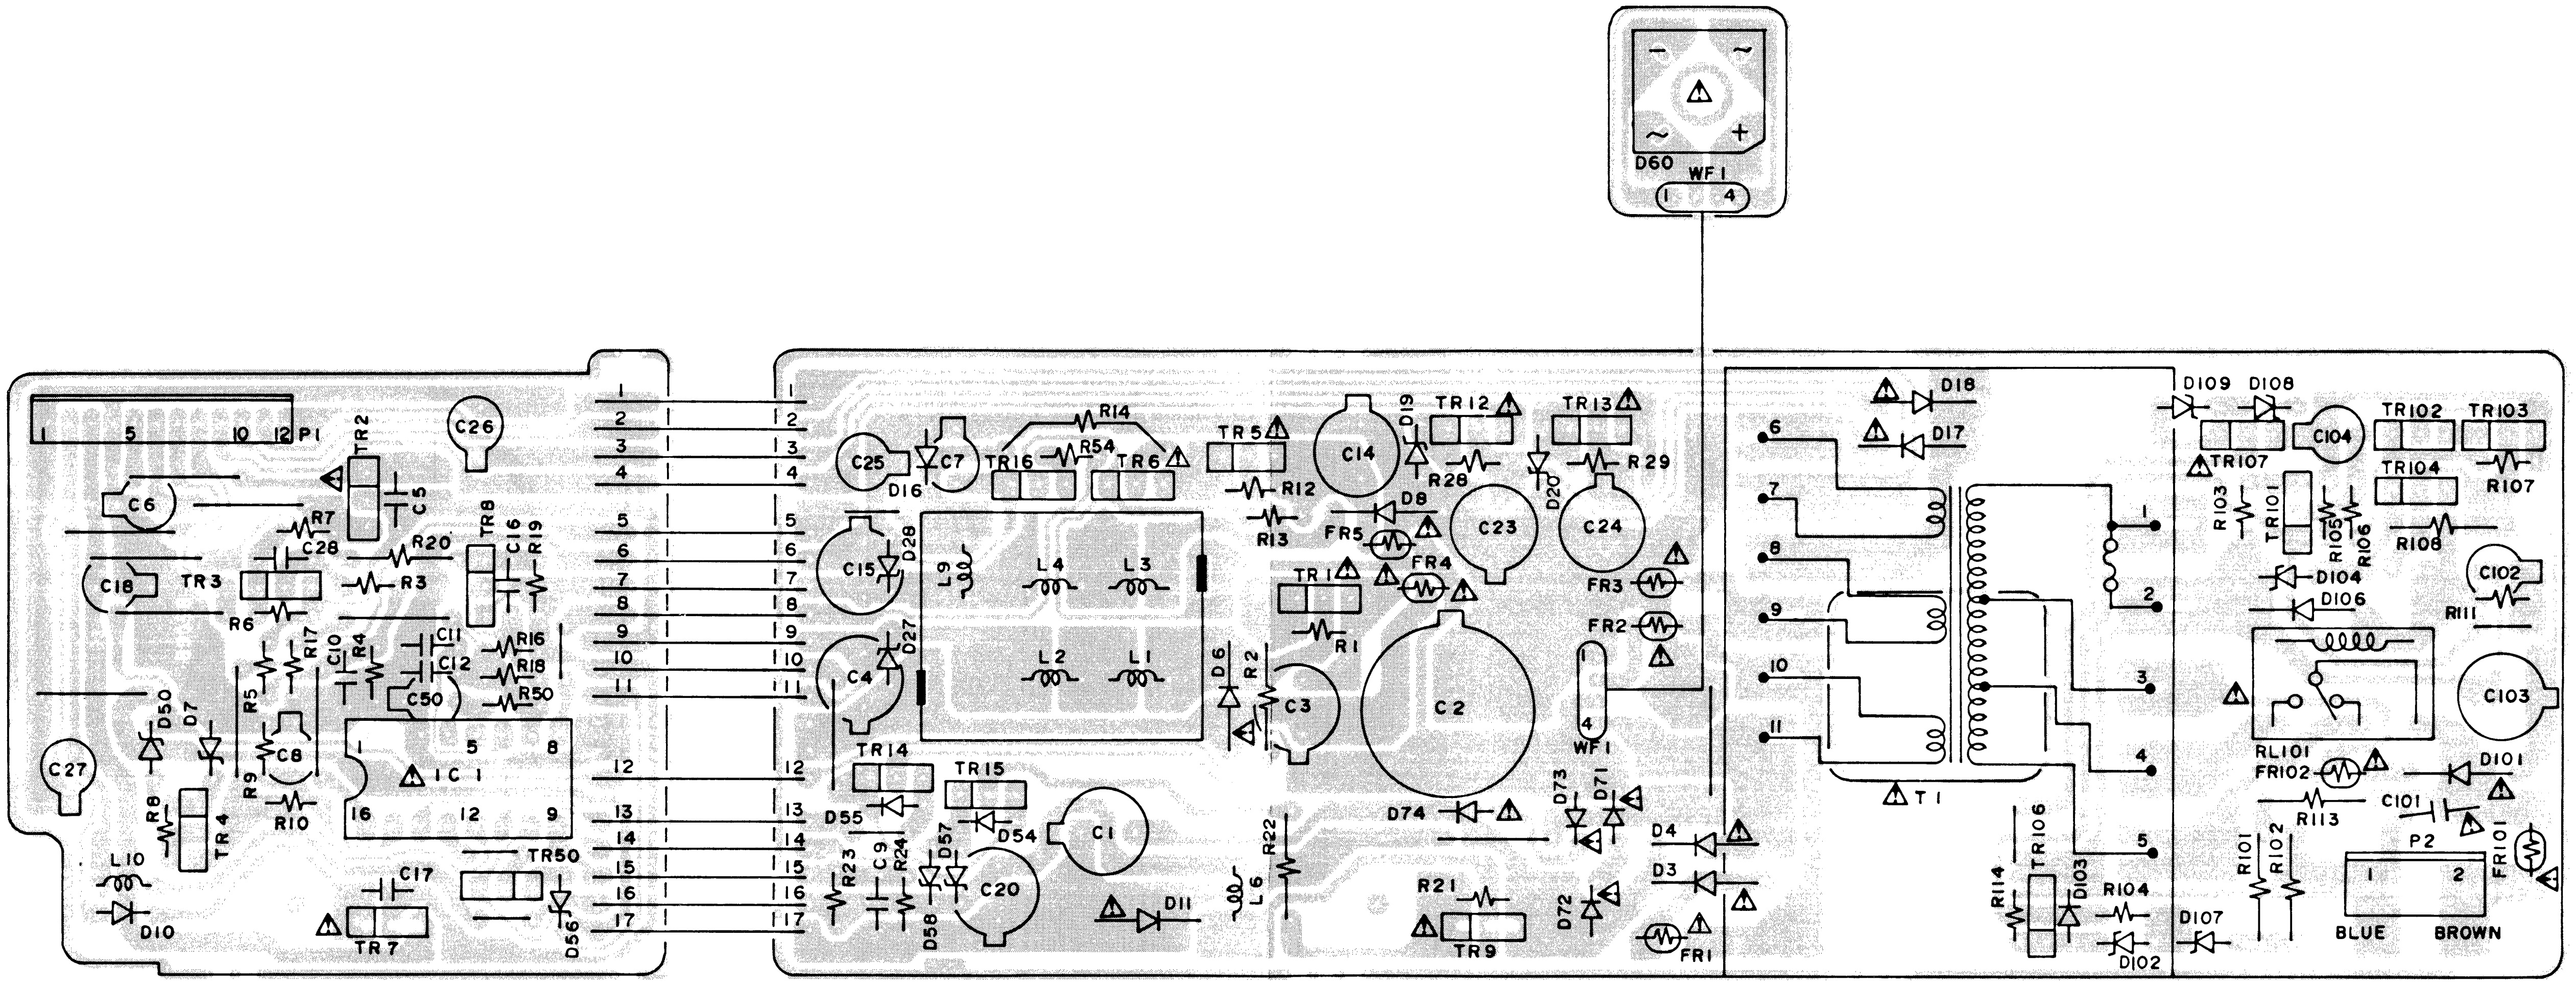
D60
WF1
1
4
P1
C26
TR2
C5
C6
R7
C28
R20
TR8
C16
R19
C18
TR3
R3
R6
R17
R4
C10
C11
C12
R16
R18
R50
C50
R5
D50
D7
C8
R9
R10
IC1
1
5
8
16
12
9
C27
R8
TR4
L10
D10
C17
TR50
TR7
D56
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
R14
R54
C25
C7
TR16
TR6
D16
TR5
C14
D19
TR12
TR13
R28
D20
R29
R12
R13
D8
FR5
C23
C24
FR4
FR3
FR2
C15
D28
L9
L4
L3
TR1
R1
C4
D27
L2
L1
D6
R2
C3
C2
WF1
TR14
TR15
D55
D54
C1
R23
C9
R24
D57
D58
C20
D11
R22
L6
D74
D73
D71
D72
D4
D3
R21
TR9
FR1
D18
D17
6
7
8
9
10
11
T1
1
2
3
4
5
TR106
R114
D103
R104
D102
D109
D108
TR107
C104
TR102
TR103
TR104
R107
R103
TR101
R105
R106
R108
D104
D106
C102
R111
C103
RL101
FR102
D101
R113
C101
R101
R102
P2
1
2
FR101
D107
BLUE
BROWN

POWER SUPPLY (2) PCB
V1130B506B(J1)(EM ONLY)

POWER SUPPLY(1) PCB V1130B506A(J1)(EM ONLY)

WARNING: ⚠INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: ⚠IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

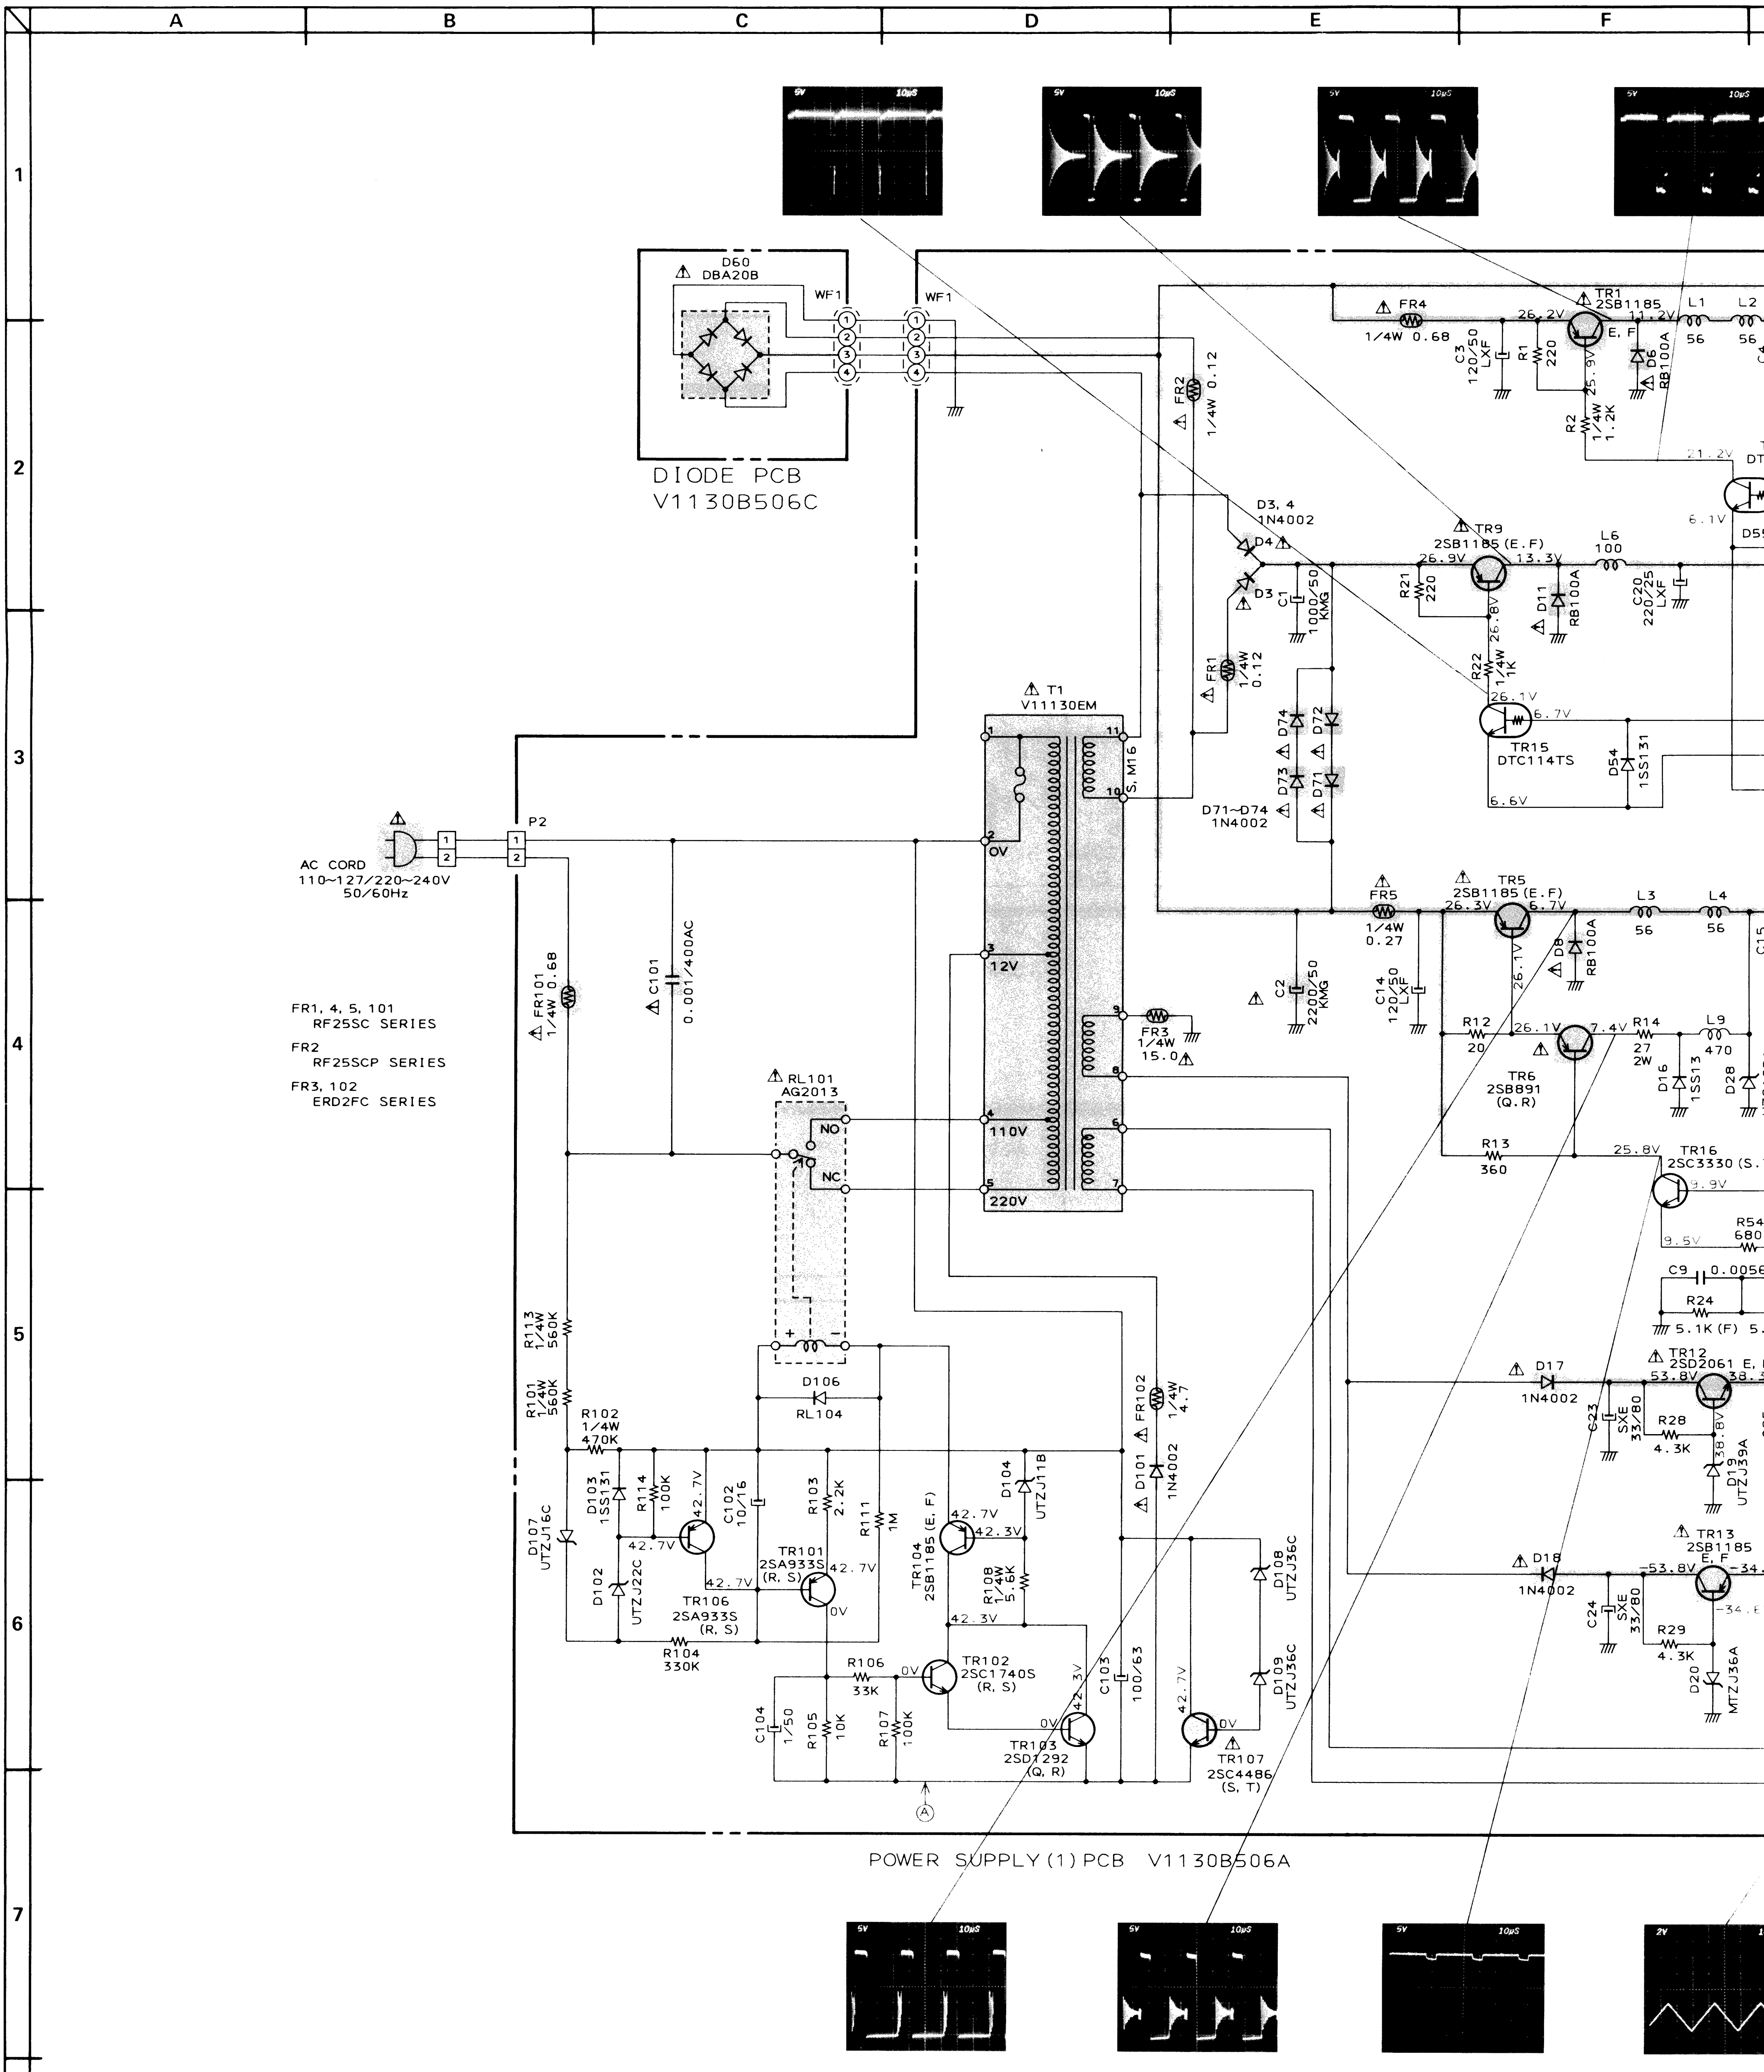

DIODE PCB
V1130B506C
D60
DBA20B
WF1
AC CORD
110~127/220~240V
50/60Hz
P2
FR1, 4, 5, 101
RF25SC SERIES
FR2
RF25SCP SERIES
FR3, 102
ERD2FC SERIES
C101
0.001/400AC
FR101
1/4W 0.68
RL101
AG2013
NO
NC
T1
V11130EM
0V
12V
110V
220V
S, M16
FR3
1/4W
15.0
FR2
1/4W 0.12
FR1
1/4W
0.12
D3, 4
1N4002
C1
100/50
KMG
D71~D74
1N4002
FR4
1/4W 0.68
C3
120/50
LXF
R1
220
TR1
2SB1185
E, F
26.2V
11.2V
L1
56
L2
56
D6
RB100A
R2
1/4W
1.2K
21.2V
6.1V
TR9
2SB1185 (E.F)
26.9V
13.3V
R21
220
D11
RB100A
L6
100
C20
220/25
LXF
R22
1/4W
1K
26.8V
26.1V
6.7V
TR15
DTC114TS
D54
1SS131
6.6V
FR5
1/4W
0.27
TR5
2SB1185 (E.F)
26.3V
6.7V
C2
2200/50
KMG
C14
120/50
LXF
D8
RB100A
L3
56
L4
56
26.1V
R12
20
26.1V
7.4V
R14
27
2W
L9
470
TR6
2SB891
(Q.R)
D16
1SS131
D28
R13
360
25.8V
TR16
2SC3330 (S.
9.9V
R54
680
9.5V
C9
0.0056
R24
5.1K (F)
D17
1N4002
TR12
2SD2061 E,
53.8V
38.
C23
SXE
33/80
R28
4.3K
38.8V
D19
UTZJ39A
D18
1N4002
TR13
2SB1185
E, F
-53.8V
-34.
C24
SXE
33/80
R29
4.3K
D20
MTZJ36A
R113
1/4W
560K
R101
1/4W
560K
R102
1/4W
470K
D107
UTZJ16C
D103
1SS131
R114
100K
D102
UTZJ22C
42.7V
C102
10/16
TR106
2SA933S
(R, S)
R104
330K
D106
RL104
R103
2.2K
R111
1M
TR101
2SA933S
(R, S)
0V
TR104
2SB1185 (E, F)
42.3V
R108
1/4W
5.6K
D104
UTZJ11B
TR102
2SC1740S
(R, S)
R106
33K
C104
1/50
R105
10K
R107
100K
TR103
2SD1292
(Q, R)
C103
100/63
FR102
1/4W
4.7
D101
1N4002
D108
UTZJ36C
D109
UTZJ36C
TR107
2SC4486
(S, T)
Ⓐ
POWER SUPPLY (1) PCB V1130B506A
5V
10μS
2V

CAUTION
DO NOT TURN ON THE POWER WHILE THE FLAT CABLE IN THE POWER BLK IS DISCONNECTED AS THIS WILL DAMAGE THE POWER CIRCUIT. MAKE SURE THAT THE FLAT CABLE IS CONNECTED BEFORE TURNING ON THE POWER.

- * INDICATED VOLTAGES WERE MEASURED DURING E-E MOD
  CONNECTED DC VOLTMETER'S NEGATIVE INPUT TO THE
  Ⓐ POINT WHEN MEASURED THE PRIMARY SECTION AND
  PRIMARY INPUT WAS AC 220V.
- * PHOTOGRAPHS WERE TAKEN DURING E-E MODE.
  THE SCREEN'S FIRST LINE FROM THE BOTTOM IS DC

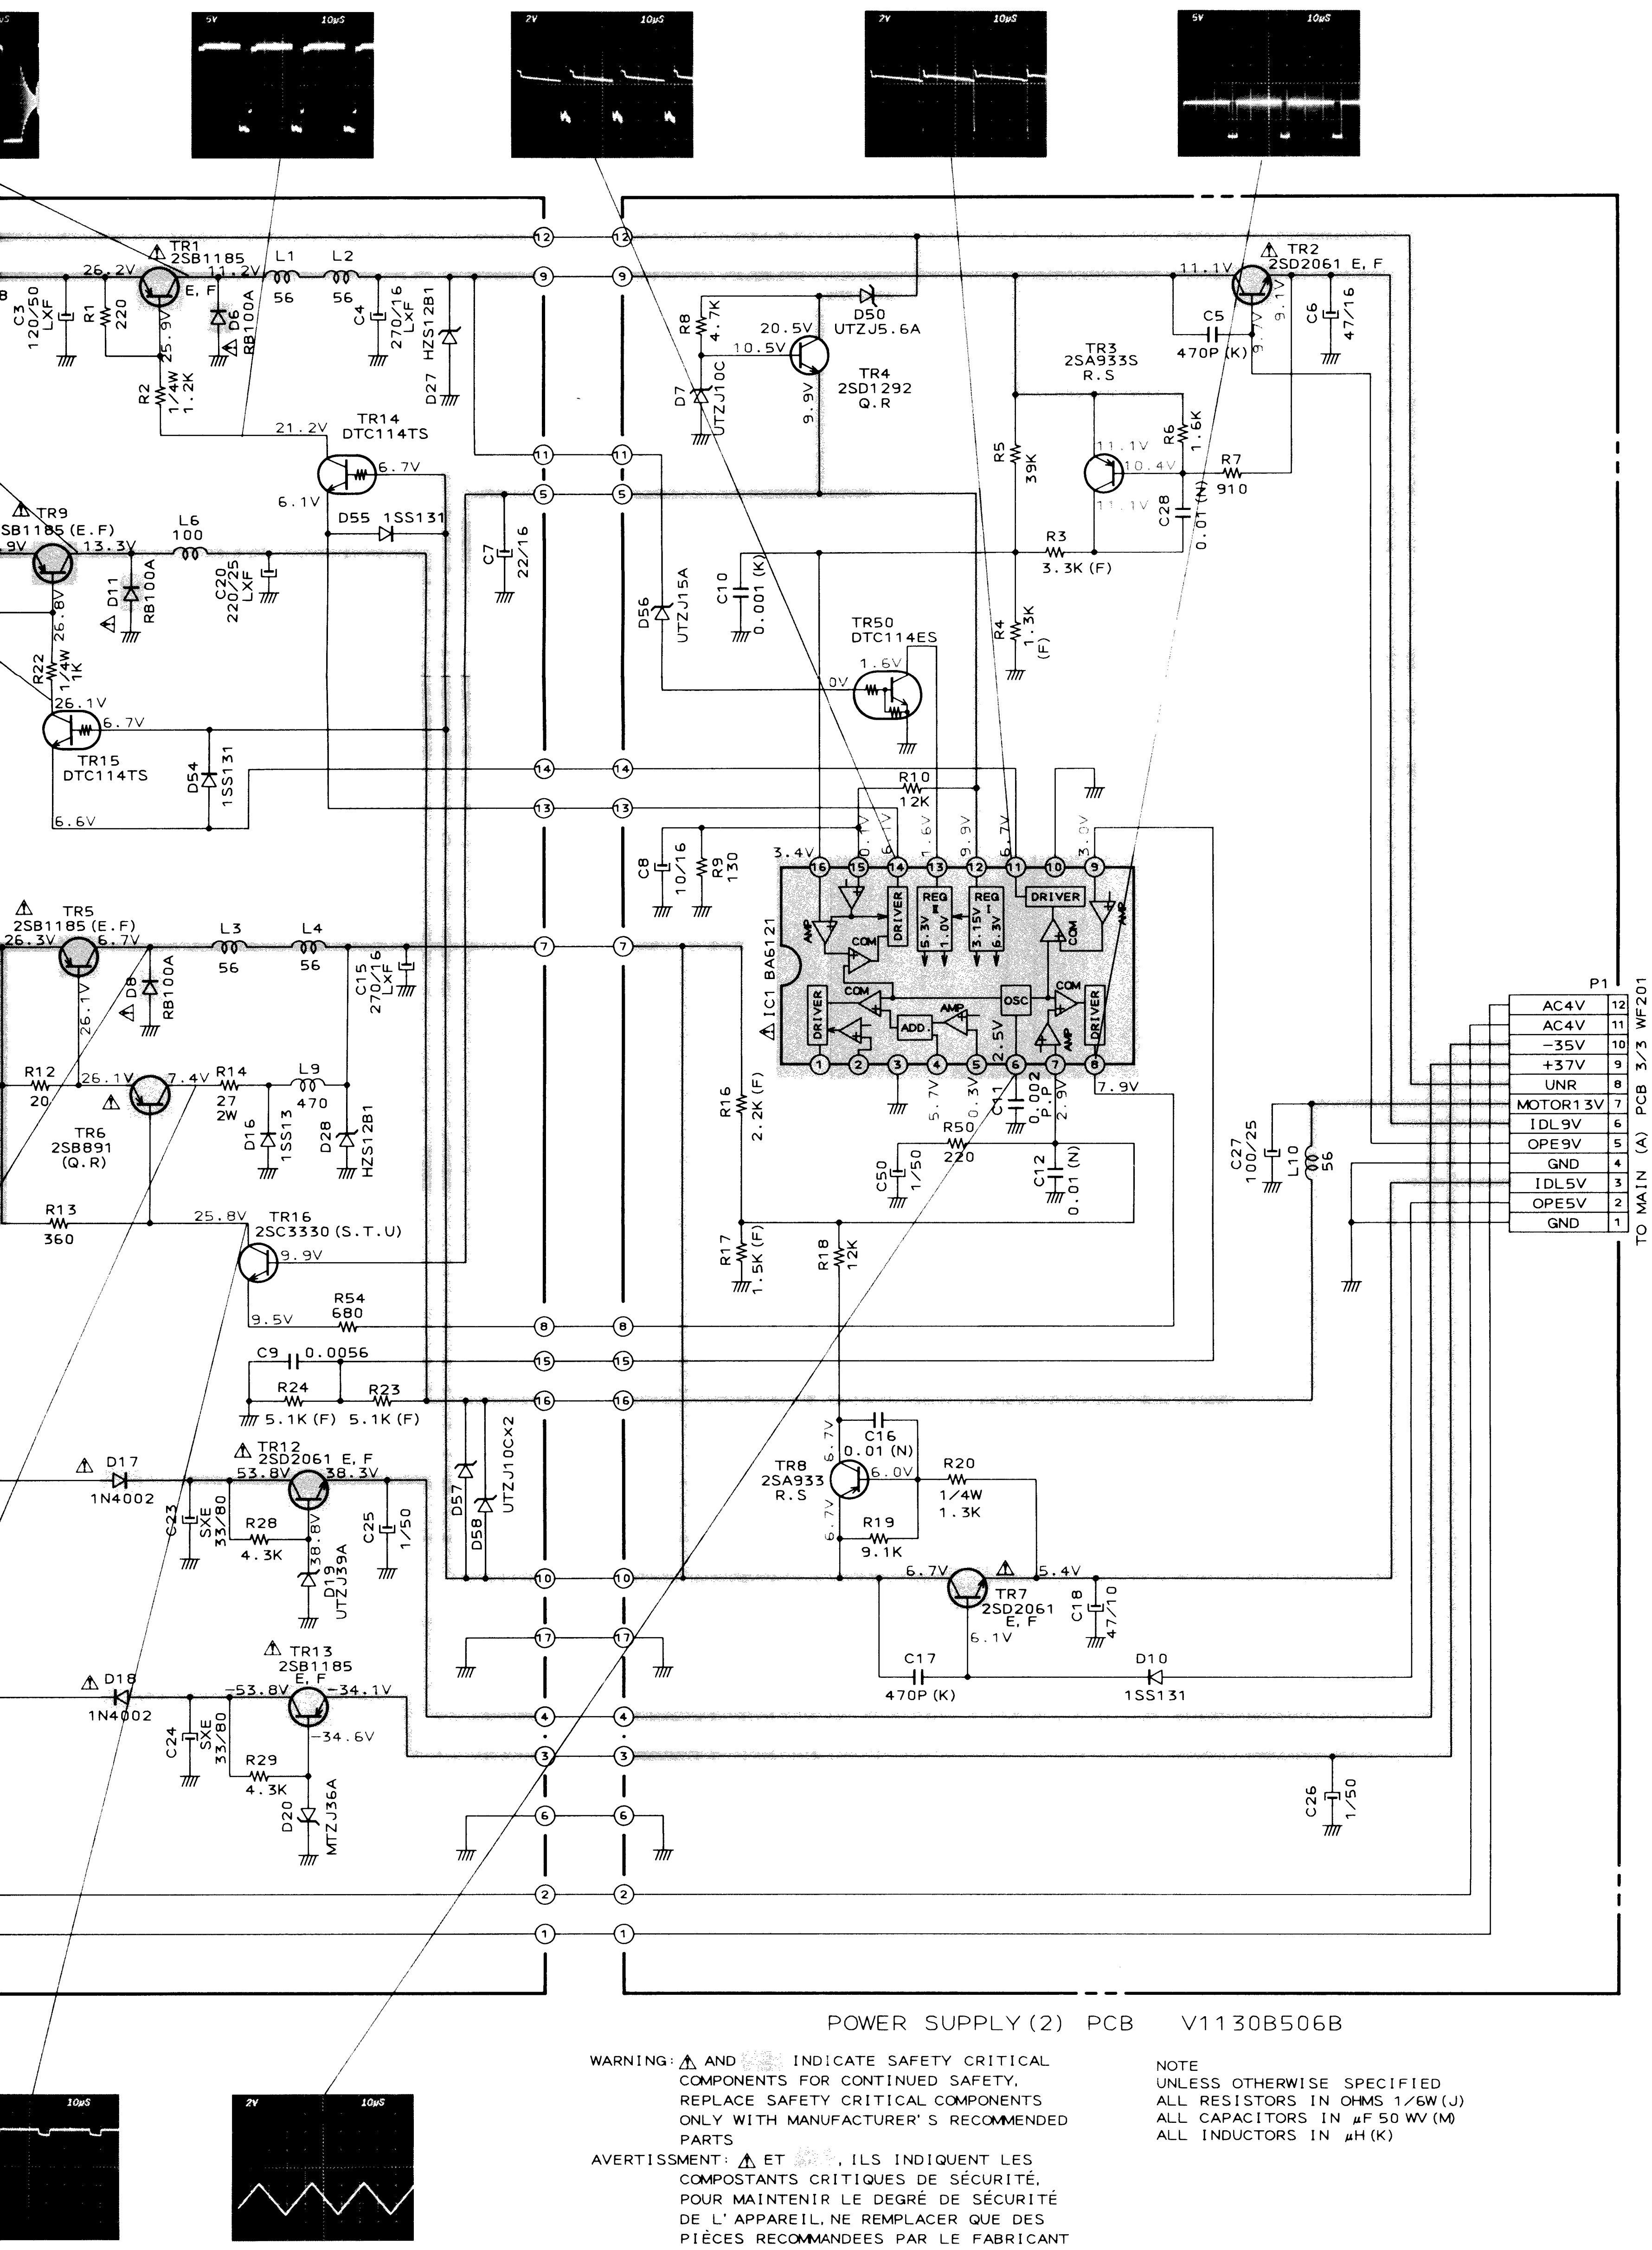
5V 10μS
2V 10μS
2V 10μS
5V 10μS
TR1 2SB1185 E, F
26.2V
11.2V
25.9V
C3 120/50 LXF
R1 220
R2 1/4W 1.2K
D6 RB100A
L1 56
L2 56
C4 270/16 LXF
HZS12B1
D27
21.2V
TR14 DTC114TS
6.7V
6.1V
D55 1SS131
TR9 2SB1185 (E.F)
13.3V
L6 100
D11 RB100A
C20 220/25 LXF
C7 22/16
26.8V
R22 1/4W 1K
26.1V
6.7V
TR15 DTC114TS
D54 1SS131
6.6V
TR5 2SB1185 (E.F)
26.3V
6.7V
L3 56
L4 56
D8 RB100A
C15 270/16 LXF
26.1V
R12 20
26.1V
7.4V
R14 27 2W
L9 470
TR6 2SB891 (Q.R)
D16 1SS133
D28 HZS12B1
R13 360
25.8V
TR16 2SC3330 (S.T.U)
9.9V
9.5V
R54 680
C9 0.0056
R24 5.1K (F)
R23 5.1K (F)
D17 1N4002
TR12 2SD2061 E, F
53.8V
38.3V
C23 SXE 33/80
R28 4.3K
38.8V
D19 UTZJ39A
C25 1/50
D57
D58
UTZJ10C×2
D18 1N4002
TR13 2SB1185 E, F
-53.8V
-34.1V
-34.6V
C24 SXE 33/80
R29 4.3K
D20 MTZJ36A
R8 4.7K
D7 UTZJ10C
20.5V
10.5V
9.9V
D50 UTZJ5.6A
TR4 2SD1292 Q.R
D56 UTZJ15A
C10 0.001 (K)
TR50 DTC114ES
1.6V
0V
R10 12K
C8 10/16
R9 130
3.4V
0.1V
1.6V
9.9V
6.7V
3.0V
IC1 BA6121
AMP
COM
DRIVER
REG II 5.3V 1.0V
REG I 3.15V 6.3V
DRIVER
COM
AMP
DRIVER
COM
ADD
AMP
OSC
2.5V
COM
AMP
DRIVER
5.7V
0.3V
2.9V
7.9V
R16 2.2K (F)
R50 220
C11 0.002 P.P
C50 1/50
C12 0.01 (N)
R17 1.5K (F)
R18 12K
TR2 2SD2061 E, F
11.1V
9.1V
C5 470P (K)
C6 47/16
TR3 2SA933S R.S
11.1V
10.4V
11.1V
R6 1.6K
R7 910
R5 39K
C28 0.01 (N)
R3 3.3K (F)
R4 1.3K (F)
6.7V
C16 0.01 (N)
TR8 2SA933 R.S
6.0V
6.7V
R20 1/4W 1.3K
R19 9.1K
6.7V
5.4V
TR7 2SD2061 E, F
6.1V
C18 47/10
C17 470P (K)
D10 1SS131
C27 100/25
L10 56
C26 1/50
P1
AC4V 12
AC4V 11
-35V 10
+37V 9
UNR 8
MOTOR13V 7
IDL9V 6
OPE9V 5
GND 4
IDL5V 3
OPE5V 2
GND 1
TO MAIN (A) PCB 3/3 WF201
10μS
2V 10μS

POWER SUPPLY (2) PCB V1130B506B

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ▨, ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF 50 WV (M)
ALL INDUCTORS IN μH (K)

▨ B (POWER SUPPLY LINE)

TAGES WERE MEASURED DURING E-E MODE.
VOLTMETER'S NEGATIVE INPUT TO THE
MEASURED THE PRIMARY SECTION AND
WAS AC 220V.
ERE TAKEN DURING E-E MODE.
FIRST LINE FROM THE BOTTOM IS DC 0V.

VS-F440EM, F490EM
POWER SUPPLY (1), (2) & DIODE SCHEMATIC DIAGRAM

No.21-4 V115204M
A1

T1~T1C
T1...V1130EA
T1A..V1130EK
T1B..V1130EO
T1C..V1130EDG
T1D..V1130ES
D1~D12, 17, 18
1N4002

FR2, 4
RF25SC SERIES
FR1, 3
RF25SCP SERIES
FR5
ERD2FC SERIES

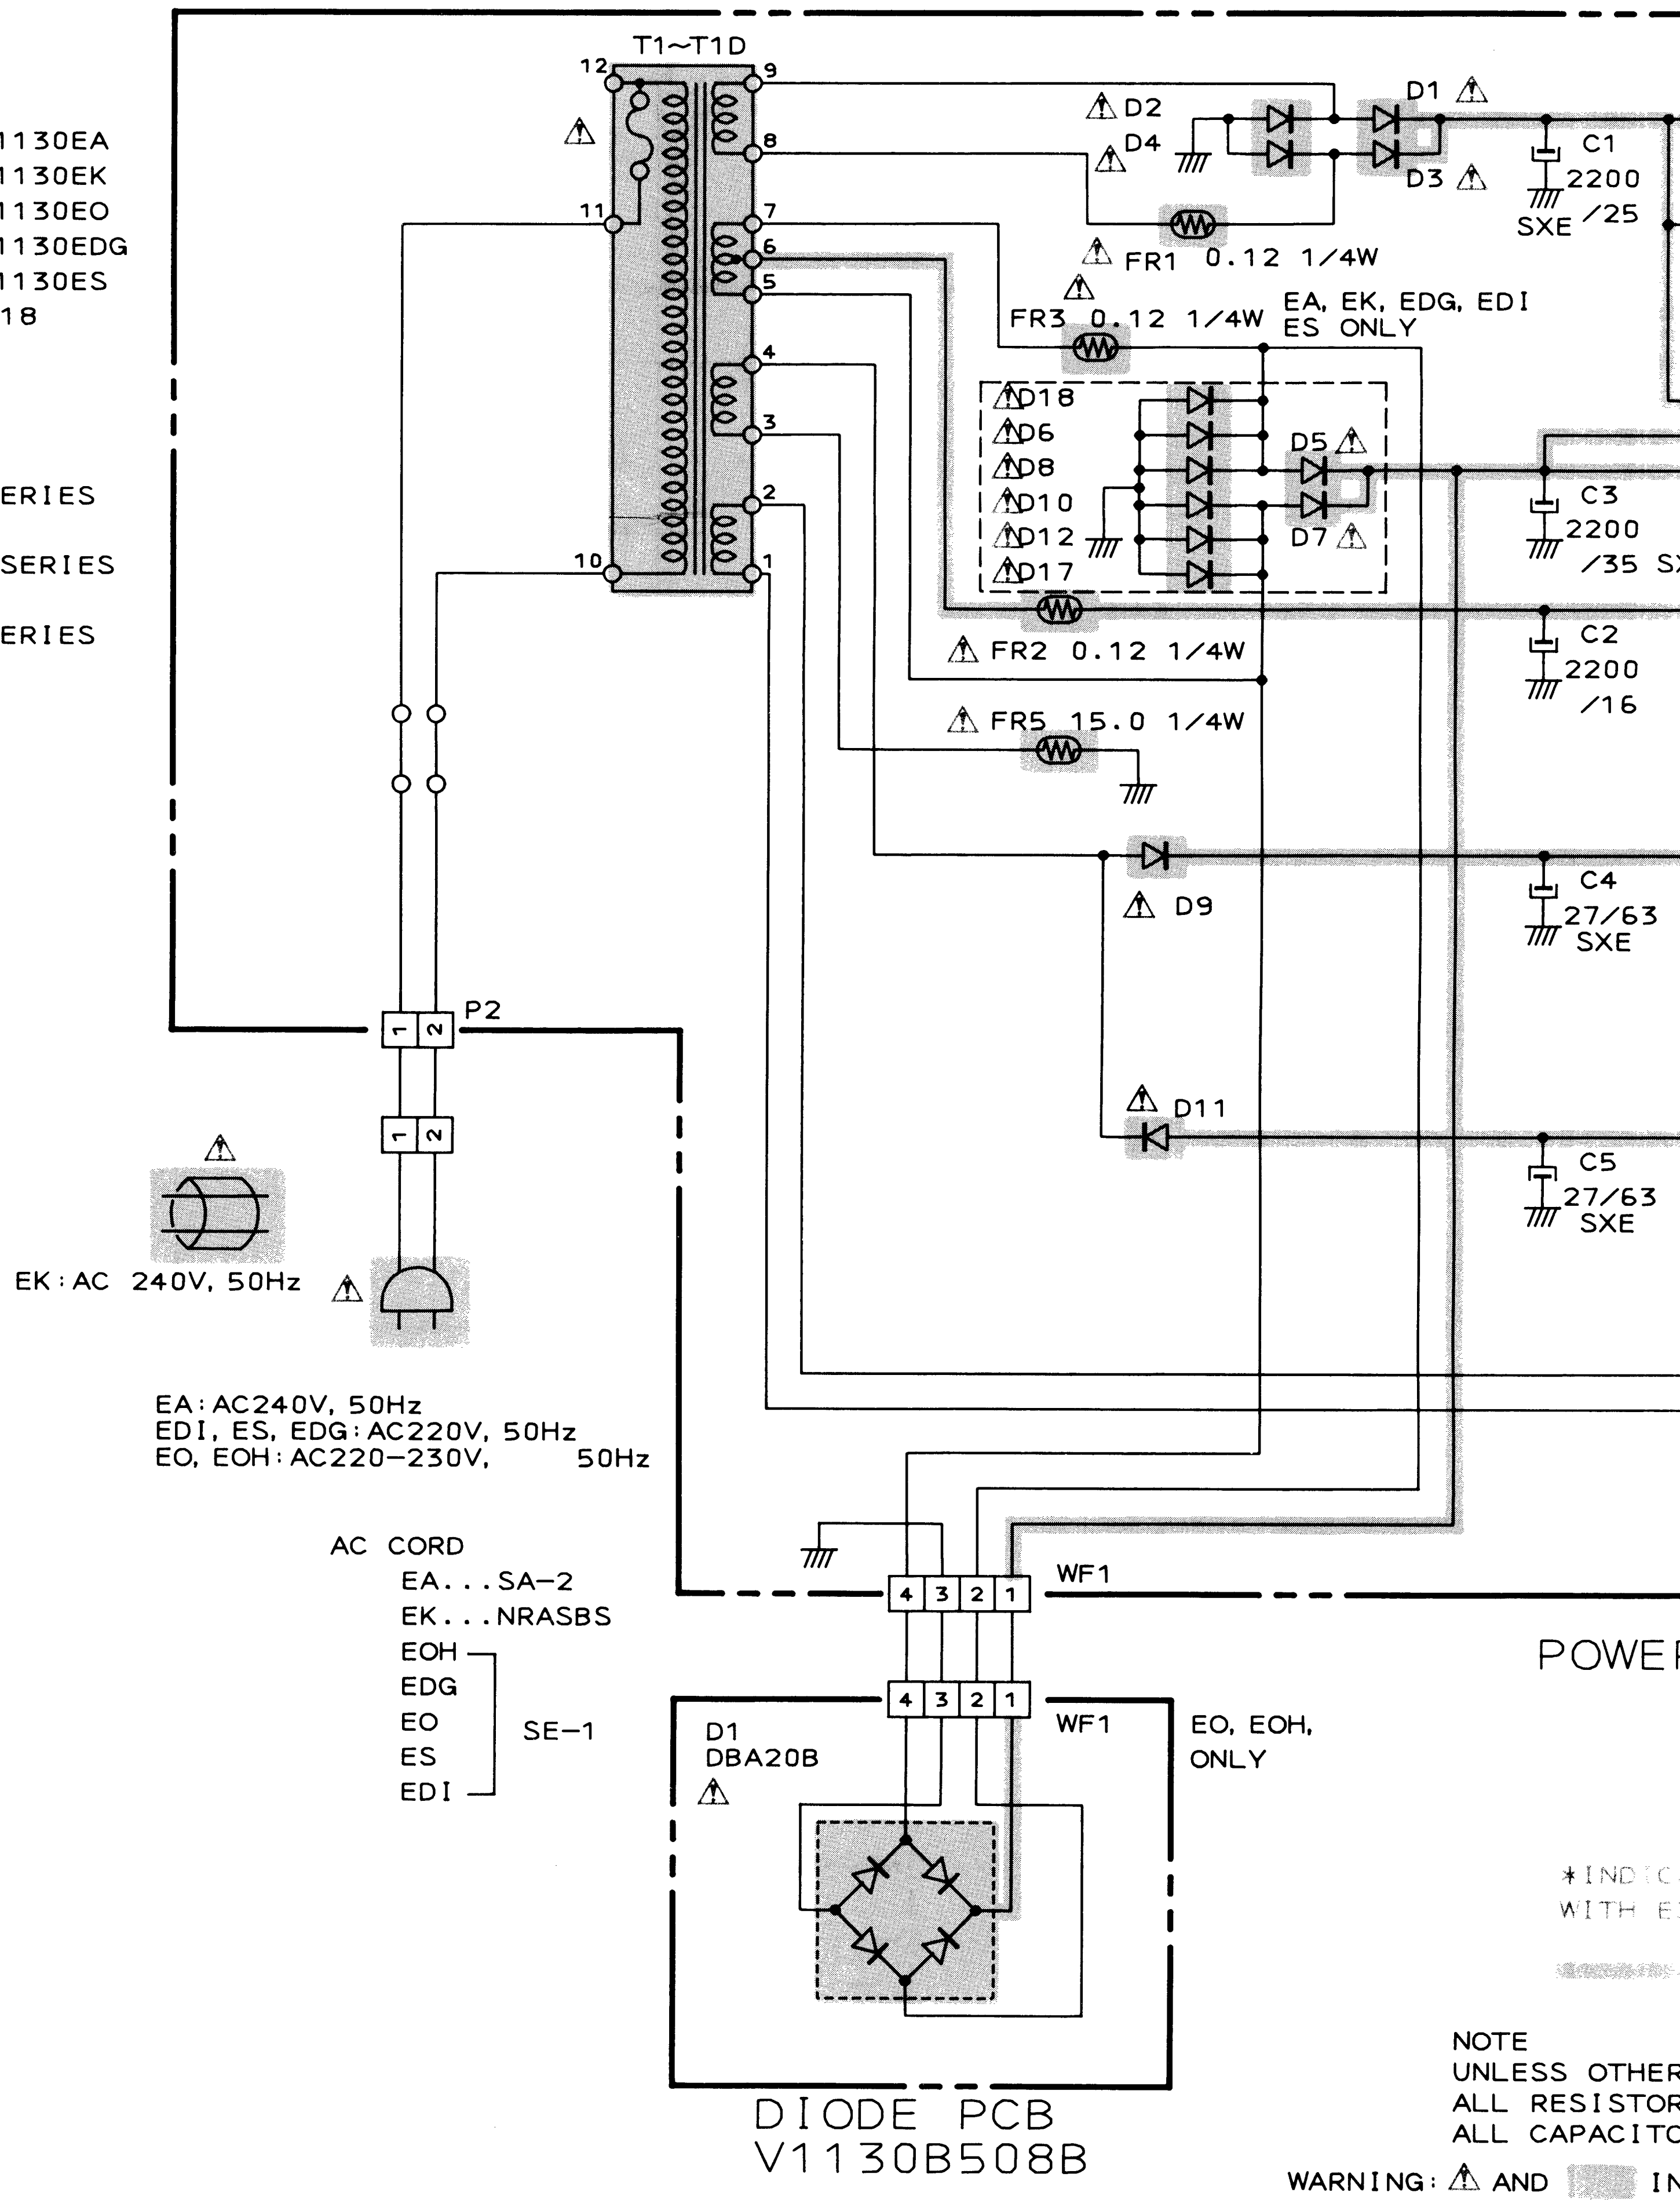
T1~T1D
12
9
8
11
7
6
5
4
3
2
10
1
⚠ D2
⚠ D4
D1 ⚠
D3 ⚠
C1
2200
/25
SXE
⚠ FR1 0.12 1/4W
⚠
FR3 0.12 1/4W
EA, EK, EDG, EDI
ES ONLY
⚠D18
⚠D6
⚠D8
⚠D10
⚠D12
⚠D17
D5 ⚠
D7 ⚠
C3
2200
/35 S
C2
2200
/16
⚠ FR2 0.12 1/4W
⚠ FR5 15.0 1/4W
⚠ D9
C4
27/63
SXE
P2
⚠ D11
C5
27/63
SXE
EK: AC 240V, 50Hz
EA: AC240V, 50Hz
EDI, ES, EDG: AC220V, 50Hz
EO, EOH: AC220-230V, 50Hz
AC CORD
EA...SA-2
EK...NRASBS
EOH
EDG
EO
ES
EDI
SE-1
WF1
4 3 2 1
POWE
D1
DBA20B
⚠
EO, EOH,
ONLY
DIODE PCB
V1130B508B
*INDIC
WITH E

NOTE
UNLESS OTHER
ALL RESISTOR
ALL CAPACITO
WARNING: ⚠ AND ▨ IN
COMPONENTS F
REPLACE SAFE
ONLY WITH MA
PARTS
AVERTISSMENT: ⚠ ET ▨
COMPOSTANTS
POUR MAINTEN
DE L' APPAREI
PIÈCES RECOM

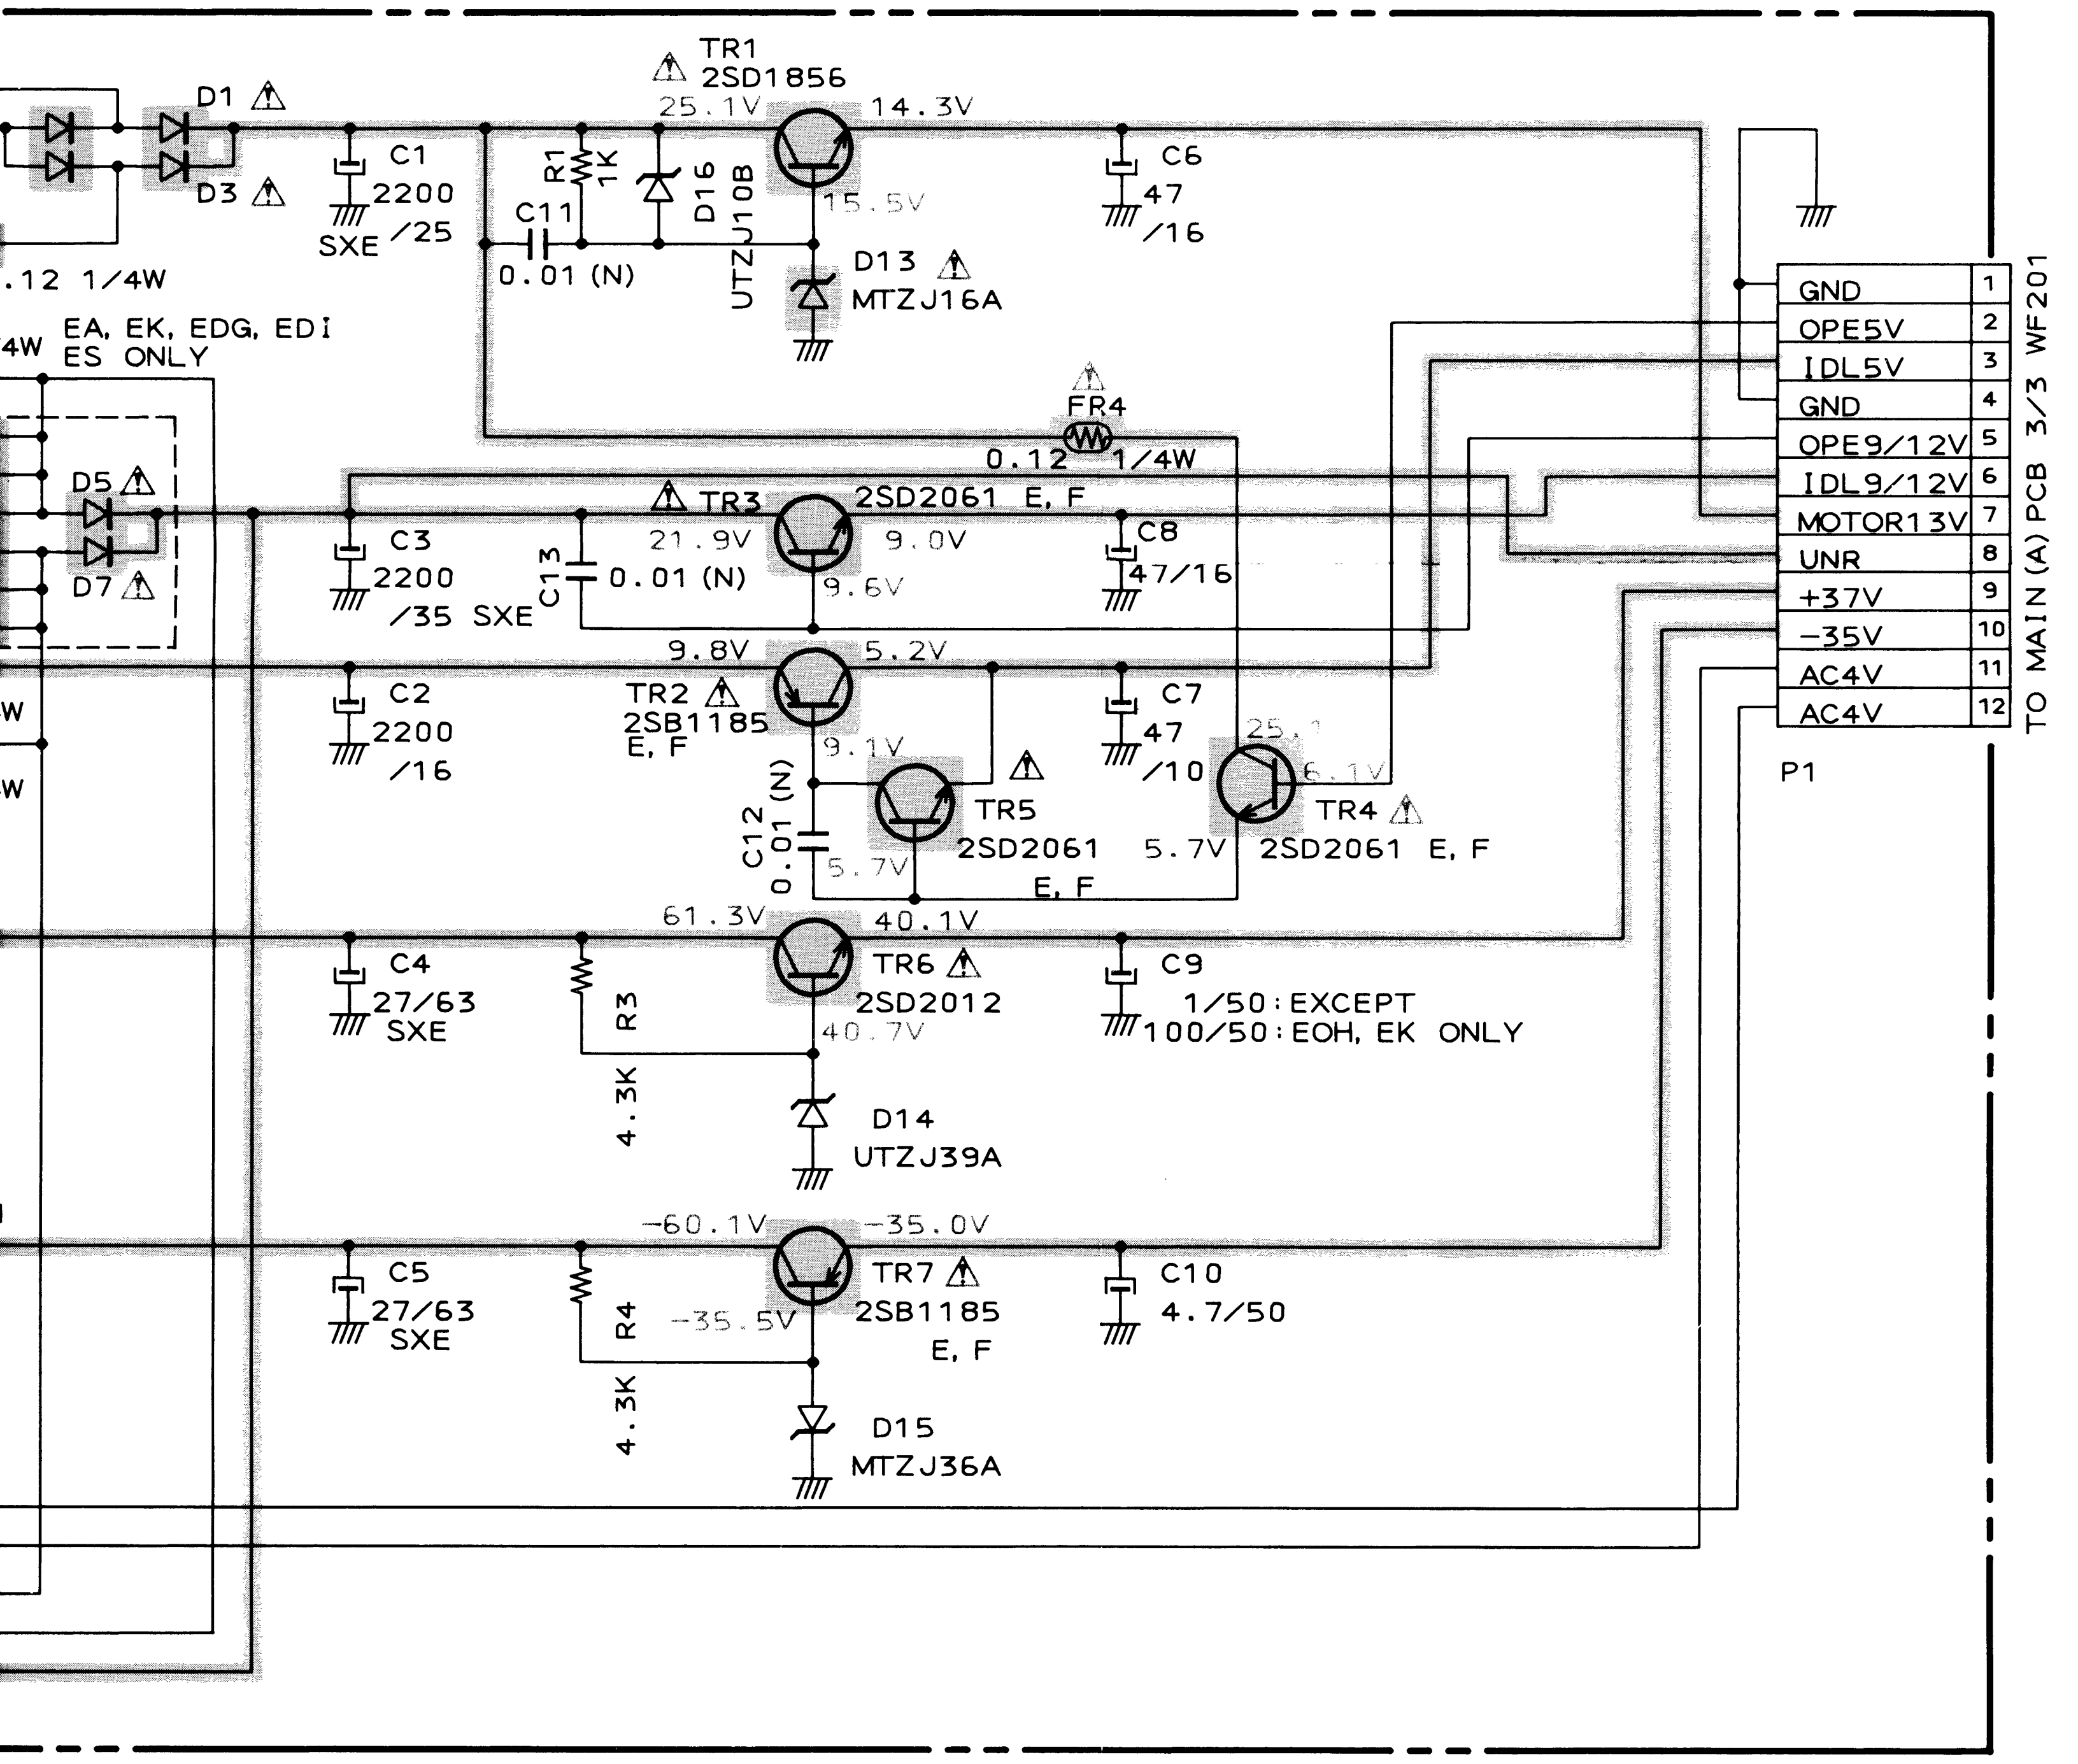
TR1
2SD1856
25.1V
14.3V
D1
D3
C1
2200
SXE /25
R1
1K
C11
0.01 (N)
D16
UTZJ10B
15.5V
D13
MTZJ16A
C6
47
/16
.12 1/4W
4W EA, EK, EDG, EDI
ES ONLY
FR4
0.12 1/4W
D5
D7
TR3
2SD2061 E, F
C3
2200
/35 SXE
C13
0.01 (N)
21.9V
9.0V
9.6V
C8
47/16
9.8V
5.2V
C2
2200
/16
TR2
2SB1185
E, F
9.1V
C12
0.01 (N)
5.7V
TR5
2SD2061
E, F
C7
47
/10
25.1
6.1V
TR4
2SD2061 E, F
5.7V
61.3V
40.1V
C4
27/63
SXE
R3
4.3K
TR6
2SD2012
40.7V
D14
UTZJ39A
C9
1/50: EXCEPT
100/50: EOH, EK ONLY
-60.1V
-35.0V
C5
27/63
SXE
R4
4.3K
-35.5V
TR7
2SB1185
E, F
D15
MTZJ36A
C10
4.7/50
GND 1
OPE5V 2
IDL5V 3
GND 4
OPE9/12V 5
IDL9/12V 6
MOTOR13V 7
UNR 8
+37V 9
-35V 10
AC4V 11
AC4V 12
P1
TO MAIN (A) PCB 3/3 WF201
W
W

POWER SUPPLY PCB V1130B5040 (EA.EDI.EDG.ES ONLY)
V1130B5120 (EK ONLY)
V1130B508A (EO.EOH.ONLY)

D, EOH,
NLY

*INDICATED VOLTAGES WERE MEASURED DURING E-E MODE
WITH EDG MODEL.

▨ B (POWER SUPPLY) LINE

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF 50WV (M)

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL
COMPONENTS FOR CONTINUED SAFETY,
REPLACE SAFETY CRITICAL COMPONENTS
ONLY WITH MANUFACTURER'S RECOMMENDED
PARTS

AVERTISSMENT: ⚠ ET ▨, ILS INDIQUENT LES
COMPOSTANTS CRITIQUES DE SÉCURITÉ,
POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ
DE L'APPAREIL, NE REMPLACER QUE DES
PIÈCES RECOMMANDEES PAR LE FABRICANT

VS-F440EA/EDG/EK/EO/EOH
VS-F441EA, F450EOH, F455EOH
VS-F490EO/EOH/ES, F497EOH
POWER SUPPLY & DIODE
SCHEMATIC DIAGRAM
No.21-5 V115205M A2

DIODE PCB
V1130B508B

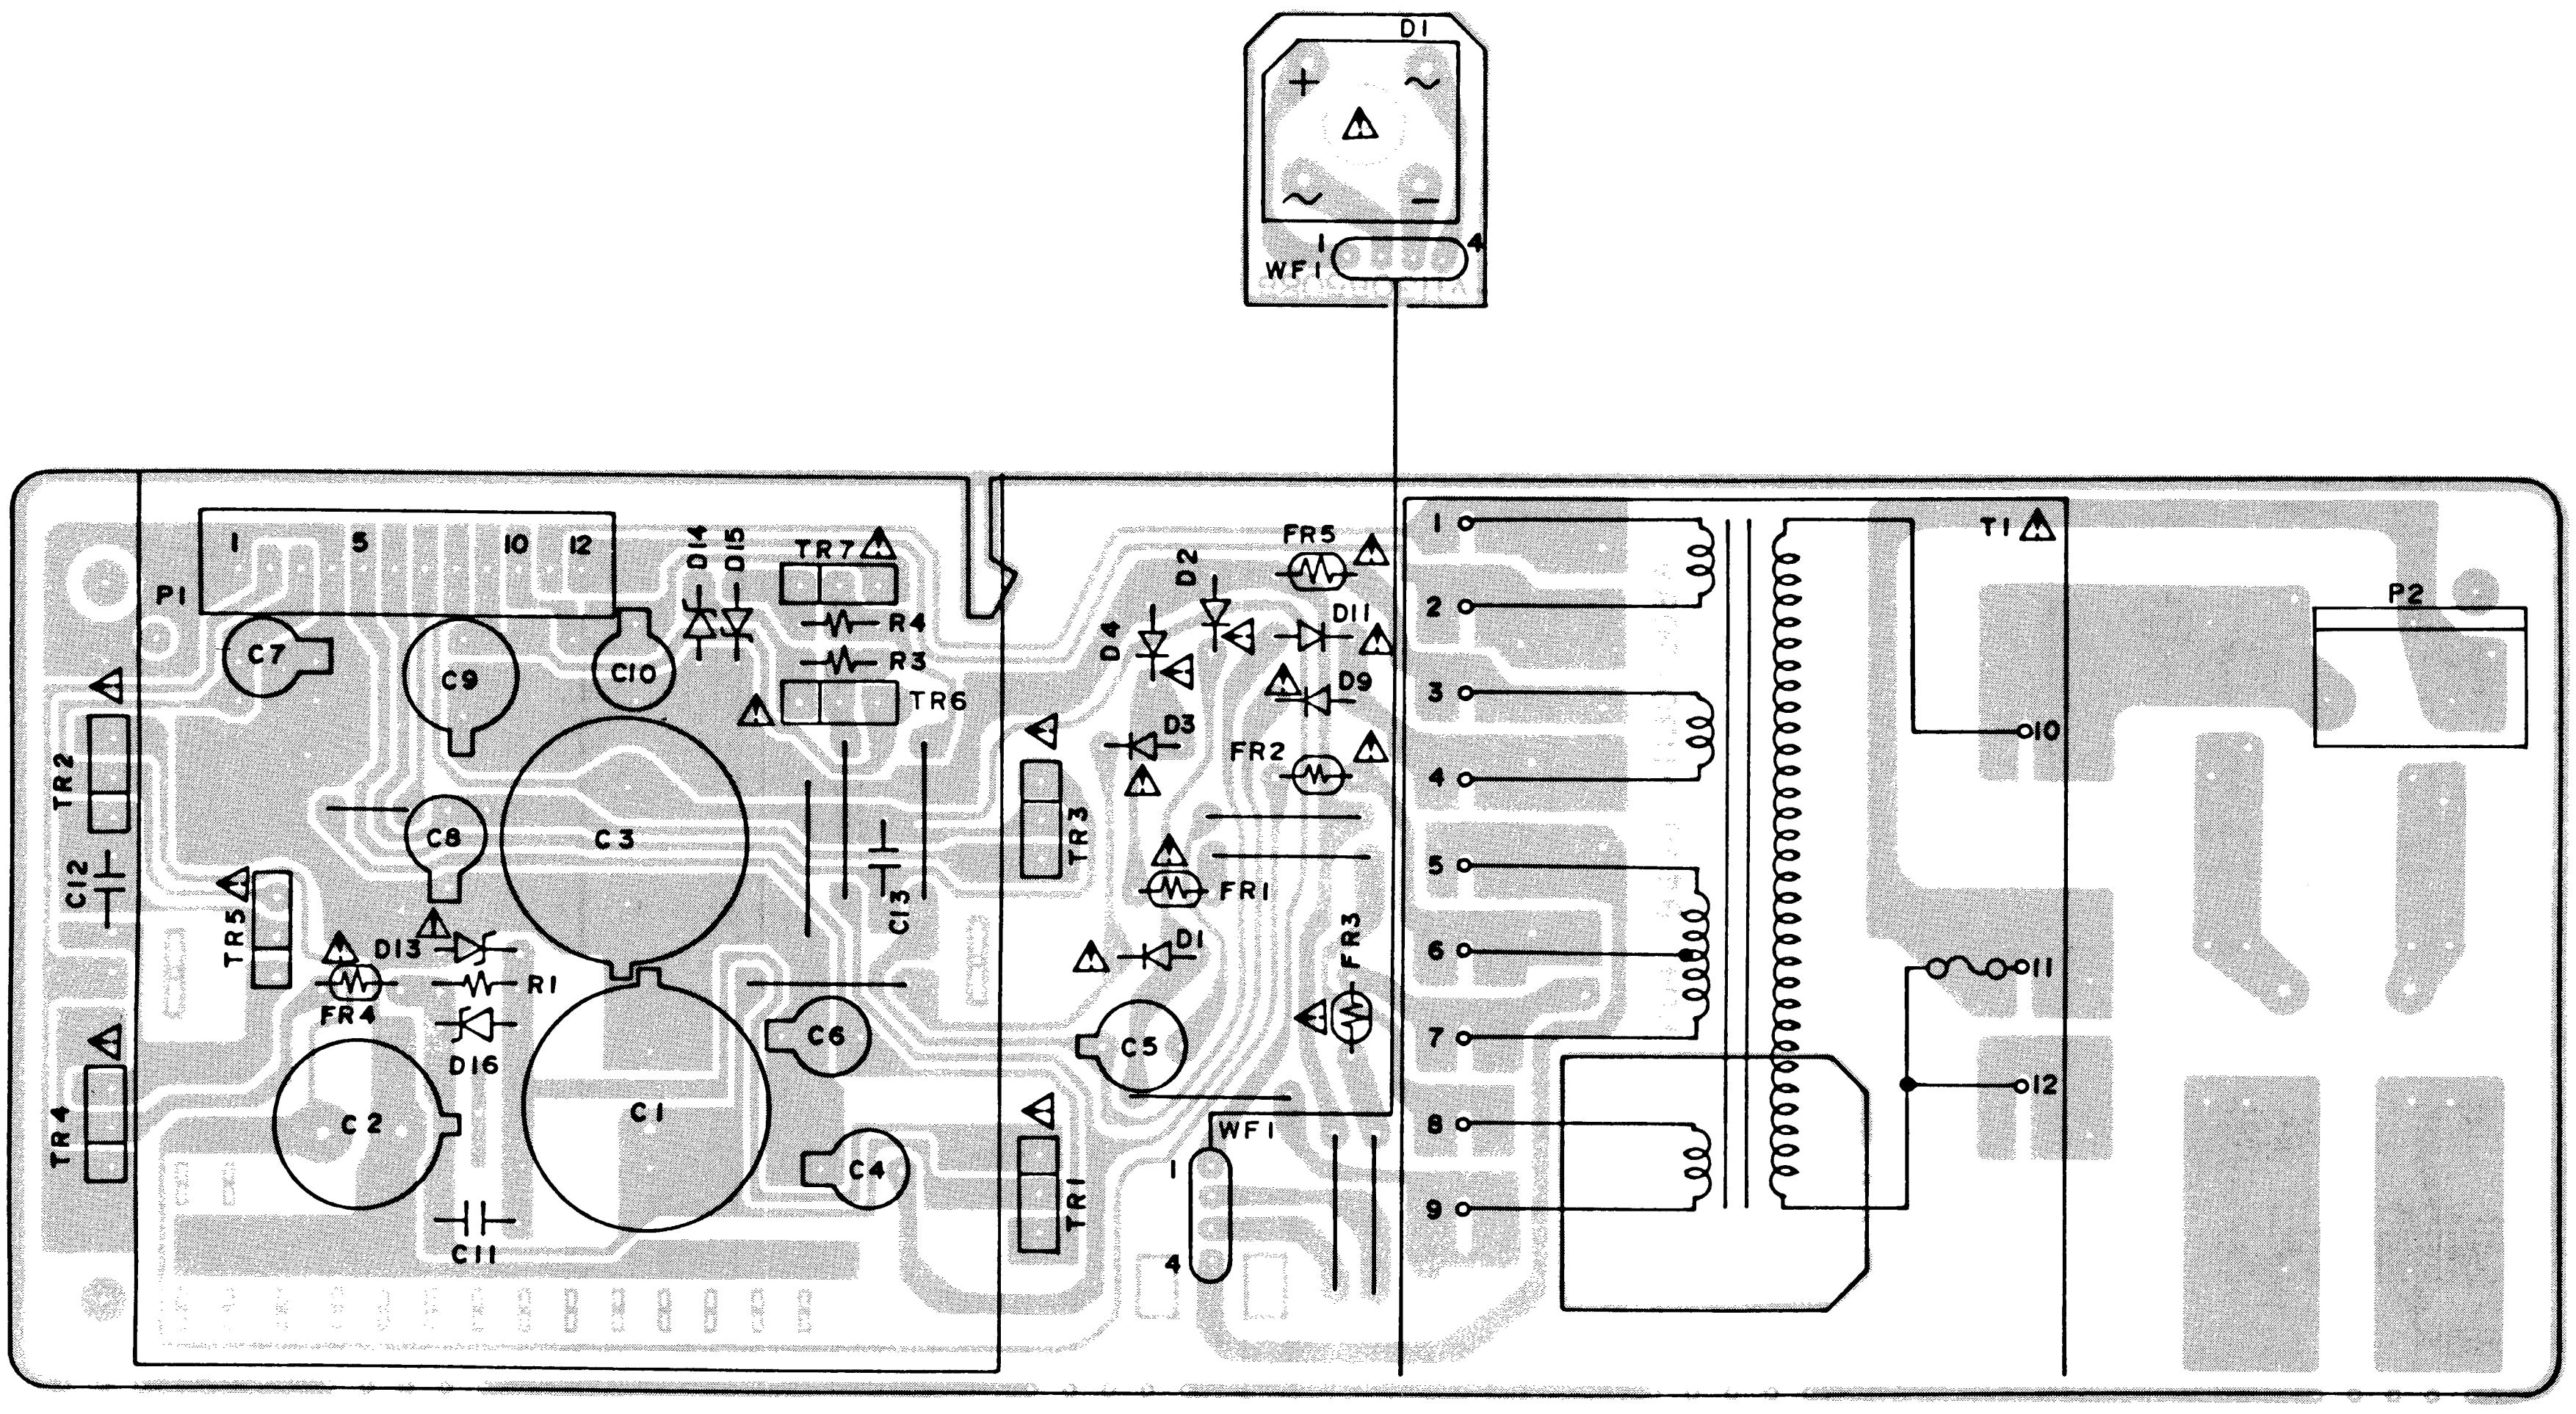
D1
+
~
~
−
WF1
1
4
P1
1
5
10
12
D14
D15
TR7
R4
R3
TR6
C7
C9
C10
C3
C8
TR2
C12
TR5
D13
R1
FR4
D16
C13
C6
C1
C2
C5
C4
C11
TR4
TR3
TR1
D2
D4
FR5
D11
D9
D3
FR2
FR1
D1
FR3
WF1
1
4
T1
1
2
3
4
5
6
7
8
9
10
11
12
P2

POWER SUPPLY PCB V1130B508A(J3)(EO.EOH.ONLY)

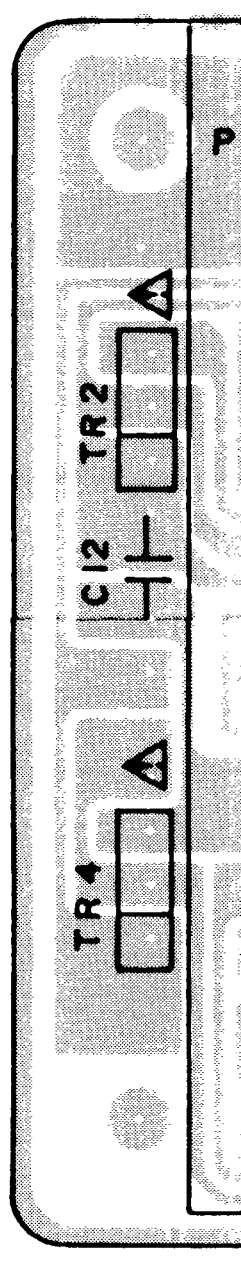
P
TR2
C12
TR4

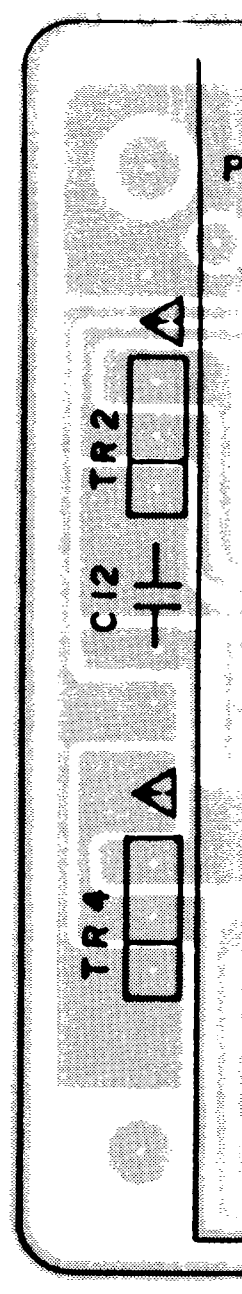
P
TR2
C12
TR4

WARNING: ⚠INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY,
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S
RECOMMENDED PARTS

AVERTISSEMENT: ⚠IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ.
POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL,
NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

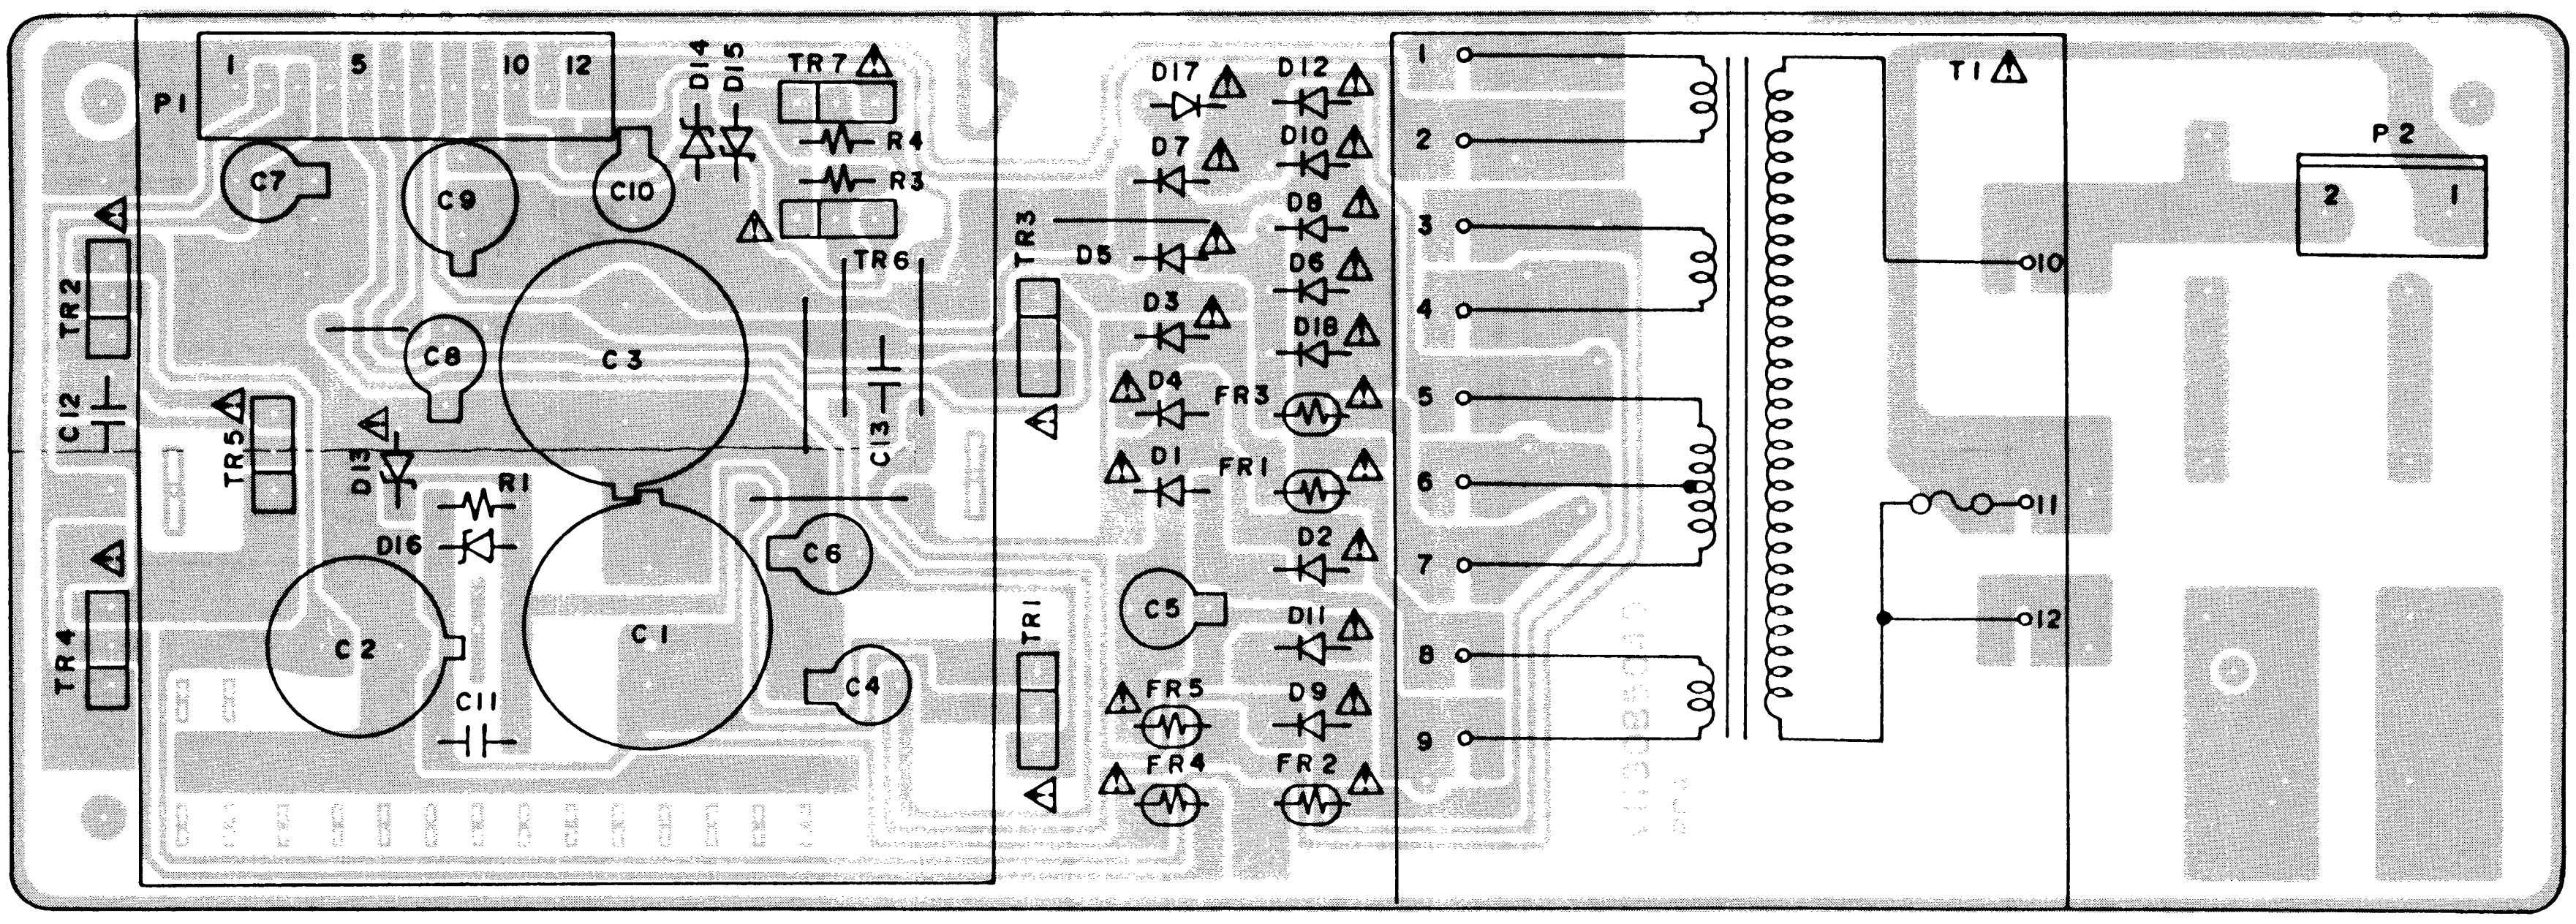
P1
1
5
10
12
D14
D15
TR7
R4
R3
TR6
C7
C9
C10
C3
C8
C12
TR2
TR5
D13
R1
D16
C2
C1
C11
C6
C4
TR4
TR3
TR1
C13
C5
D17
D12
D7
D10
D8
D5
D6
D3
D18
D4
FR3
D1
FR1
D2
D11
FR5
D9
FR4
FR2
1
2
3
4
5
6
7
8
9
T1
10
11
12
P2
2
1

POWER SUPPLY PCB V1130B5040(J3) (EA, ES, EDG, EDI ONLY)

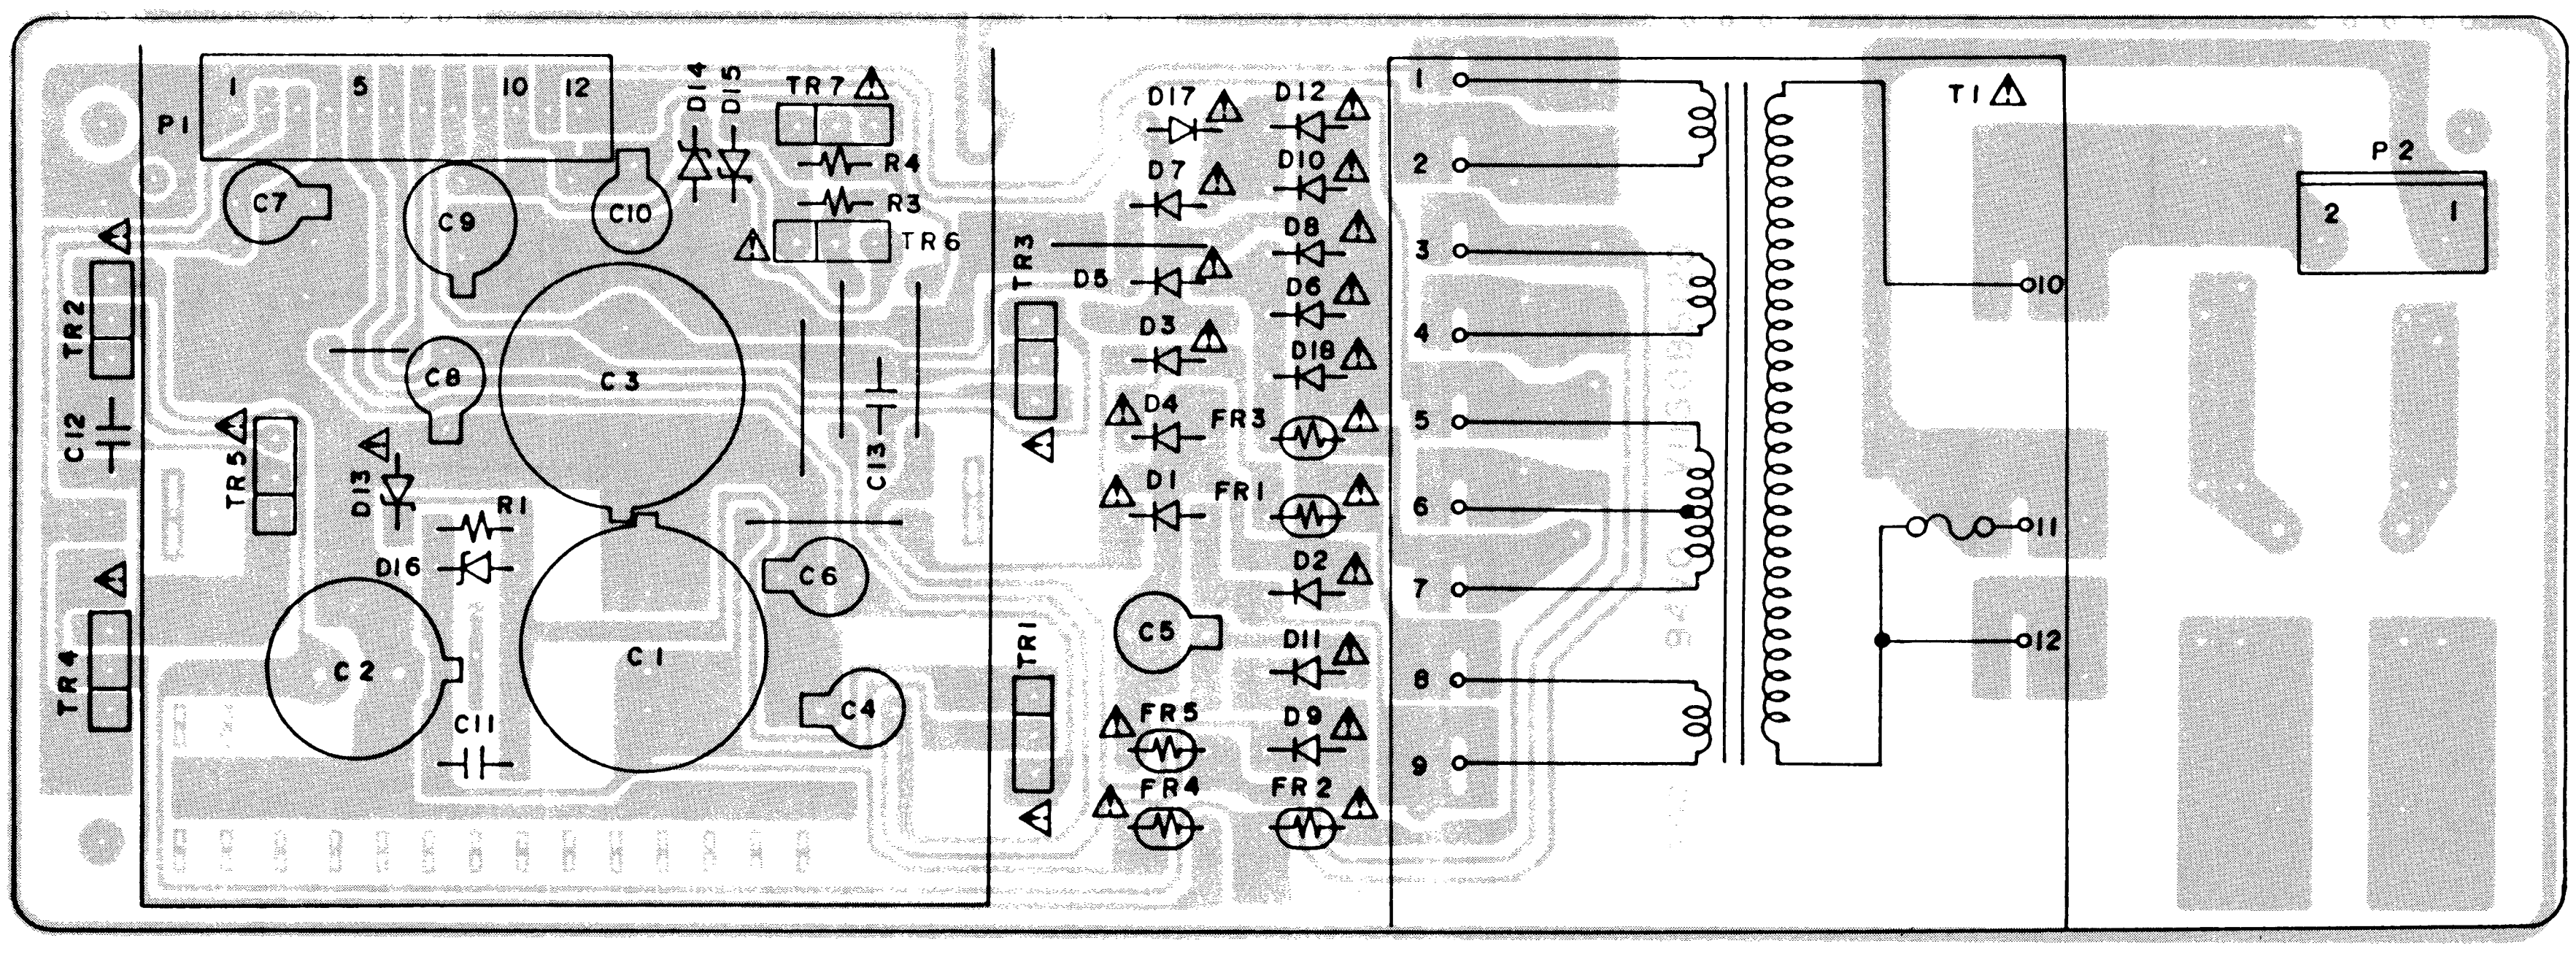
P1
1
5
10
12
D14
D15
TR7
R4
R3
TR6
C7
C9
C10
C3
C8
C12
TR2
TR5
D13
R1
D16
C2
C1
C11
C6
C4
TR4
TR3
TR1
C13
C5
D17
D12
D7
D10
D8
D5
D6
D3
D18
D4
FR3
D1
FR1
D2
D11
FR5
D9
FR4
FR2
1
2
3
4
5
6
7
8
9
T1
10
11
12
P2
2
1

NTINUED SAFETY,
MANUFACTURER'S

SÉCURITÉ.
EIL,
R LE FABRICANT

POWER SUPPLY PCB V1130B5120(J1) (EK ONLY)

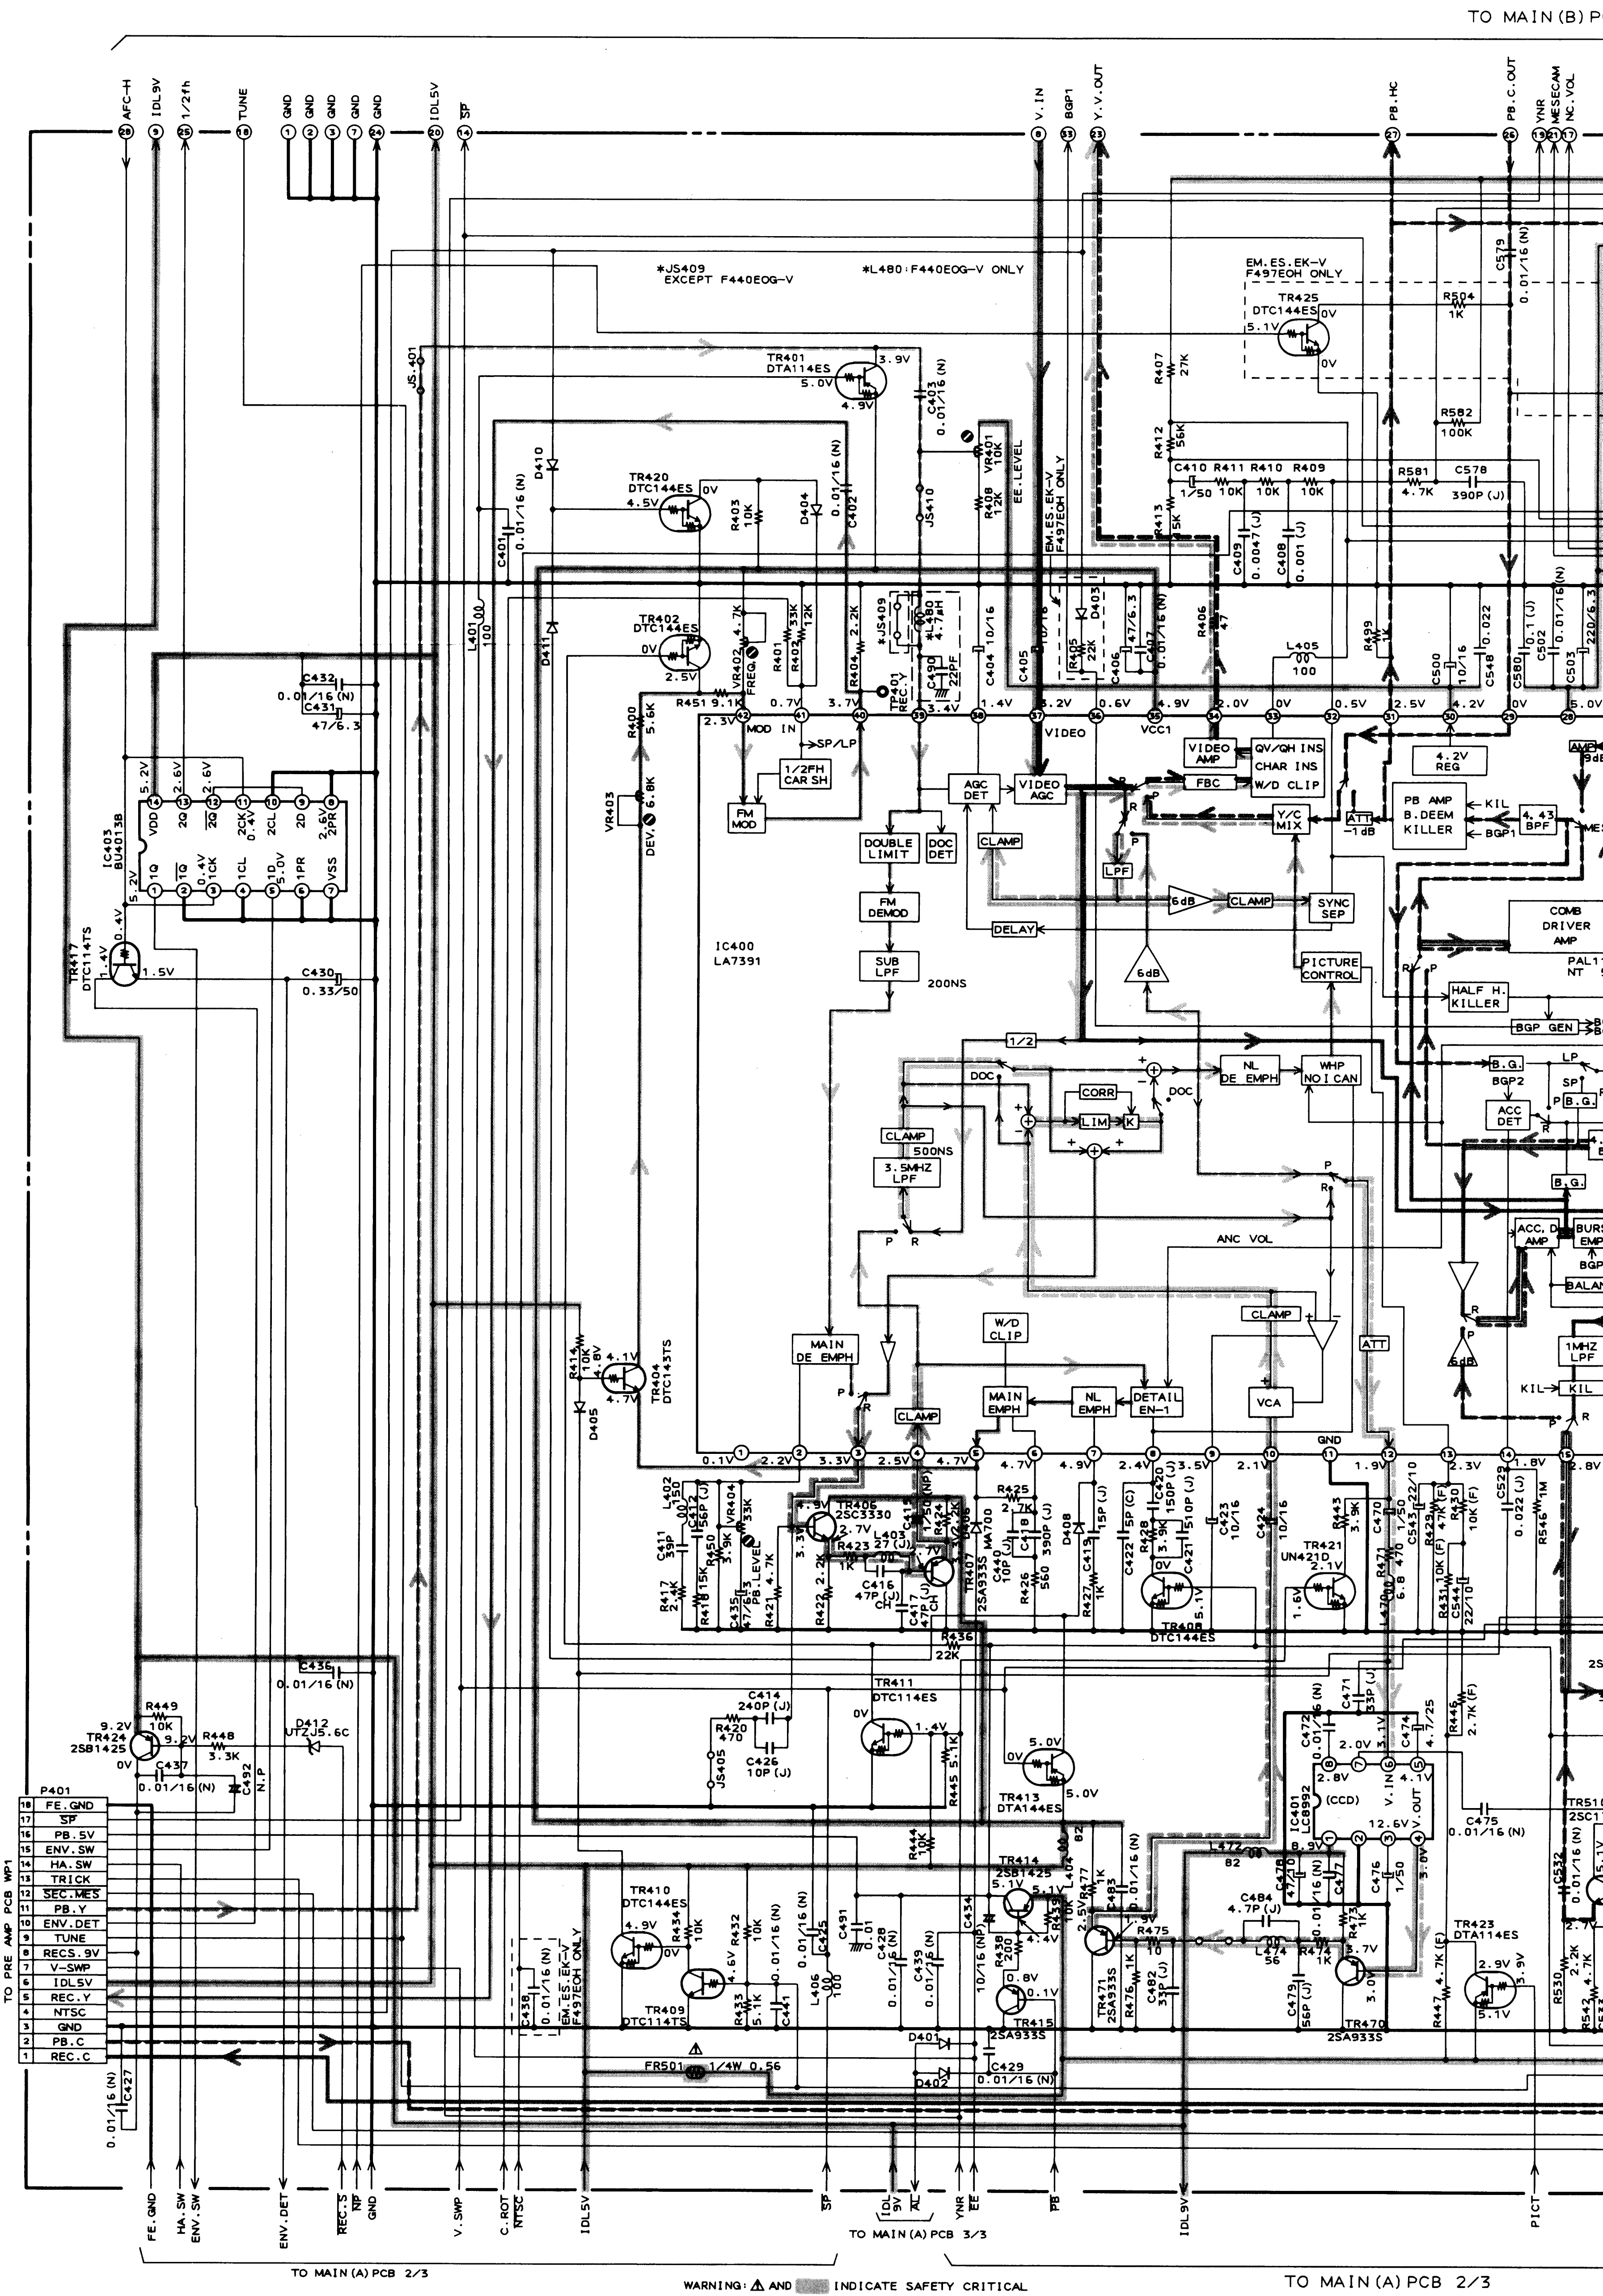
TO MAIN (B) P
AFC-H
IDL9V
1/2fh
TUNE
GND
IDL5V
SP
V.IN
BGP1
Y.V.OUT
PB.HC
PB.C.OUT
YNR
MESECAM
NC.VOL
IC400
LA7391
IC403
BU4013B
IC401
LC8992
(CCD)
TR401 DTA114ES
TR402 DTC144ES
TR404 DTC143TS
TR406 2SC3330
TR407 2SA933S
TR408 DTC144ES
TR409 DTC114TS
TR410 DTC144ES
TR411 DTC114ES
TR413 DTA144ES
TR414 2SB1425
TR415 2SA933S
TR417 DTC114TS
TR420 DTC144ES
TR421 UN421D
TR423 DTA114ES
TR424 2SB1425
TR425 DTC144ES
TR470 2SA933S
TR471 2SA933S
*JS409 EXCEPT F440EOG-V
*L480:F440EOG-V ONLY
EM.ES.EK-V F497EOH ONLY
VIDEO AGC
AGC DET
FM MOD
1/2FH CAR SH
DOUBLE LIMIT
DOC DET
FM DEMOD
SUB LPF
200NS
CLAMP
DELAY
VIDEO AMP
QV/QH INS
CHAR INS
W/D CLIP
FBC
Y/C MIX
SYNC SEP
PICTURE CONTROL
LPF
6dB
PB AMP
B.DEEM
KILLER
4.2V REG
4.43 BPF
COMB DRIVER AMP
HALF H. KILLER
BGP GEN
NL DE EMPH
WHP NOI CAN
CORR
LIM
DOC
3.5MHZ LPF
500NS
ANC VOL
MAIN DE EMPH
W/D CLIP
MAIN EMPH
NL EMPH
DETAIL EN-1
VCA
ATT
ACC DET
B.G.
BGP2
ACC AMP
1MHZ LPF
KIL
VR401 EE.LEVEL
VR402 FREQ.
VR403 DEV.
VR404 PB LEVEL
FR501 1/4W 0.56
D412 UTZJ5.6C
P401
18 FE.GND
17 SP
16 PB.5V
15 ENV.SW
14 HA.SW
13 TRICK
12 SEC.MES
11 PB.Y
10 ENV.DET
9 RECS.9V
8 V-SWP
7 TUNE
6 IDL5V
5 REC.Y
4 NTSC
3 GND
2 PB.C
1 REC.C
TO PRE AMP PCB WP1
FE.GND
HA.SW
ENV.SW
ENV.DET
REC.S
NP
GND
V.SWP
C.ROT
NTSC
IDL5V
SP
IDL 9V
AL
YNR
EE
PB
IDL9V
PICT
TO MAIN (A) PCB 3/3
TO MAIN (A) PCB 2/3
TO MAIN (A) PCB 2/3

MAIN (A) PCB 1/3   V1130A501A

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ▨, ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

INDICATED VO
MEASURED DUR
(TAPE SPEED:
(PLAYING BAC

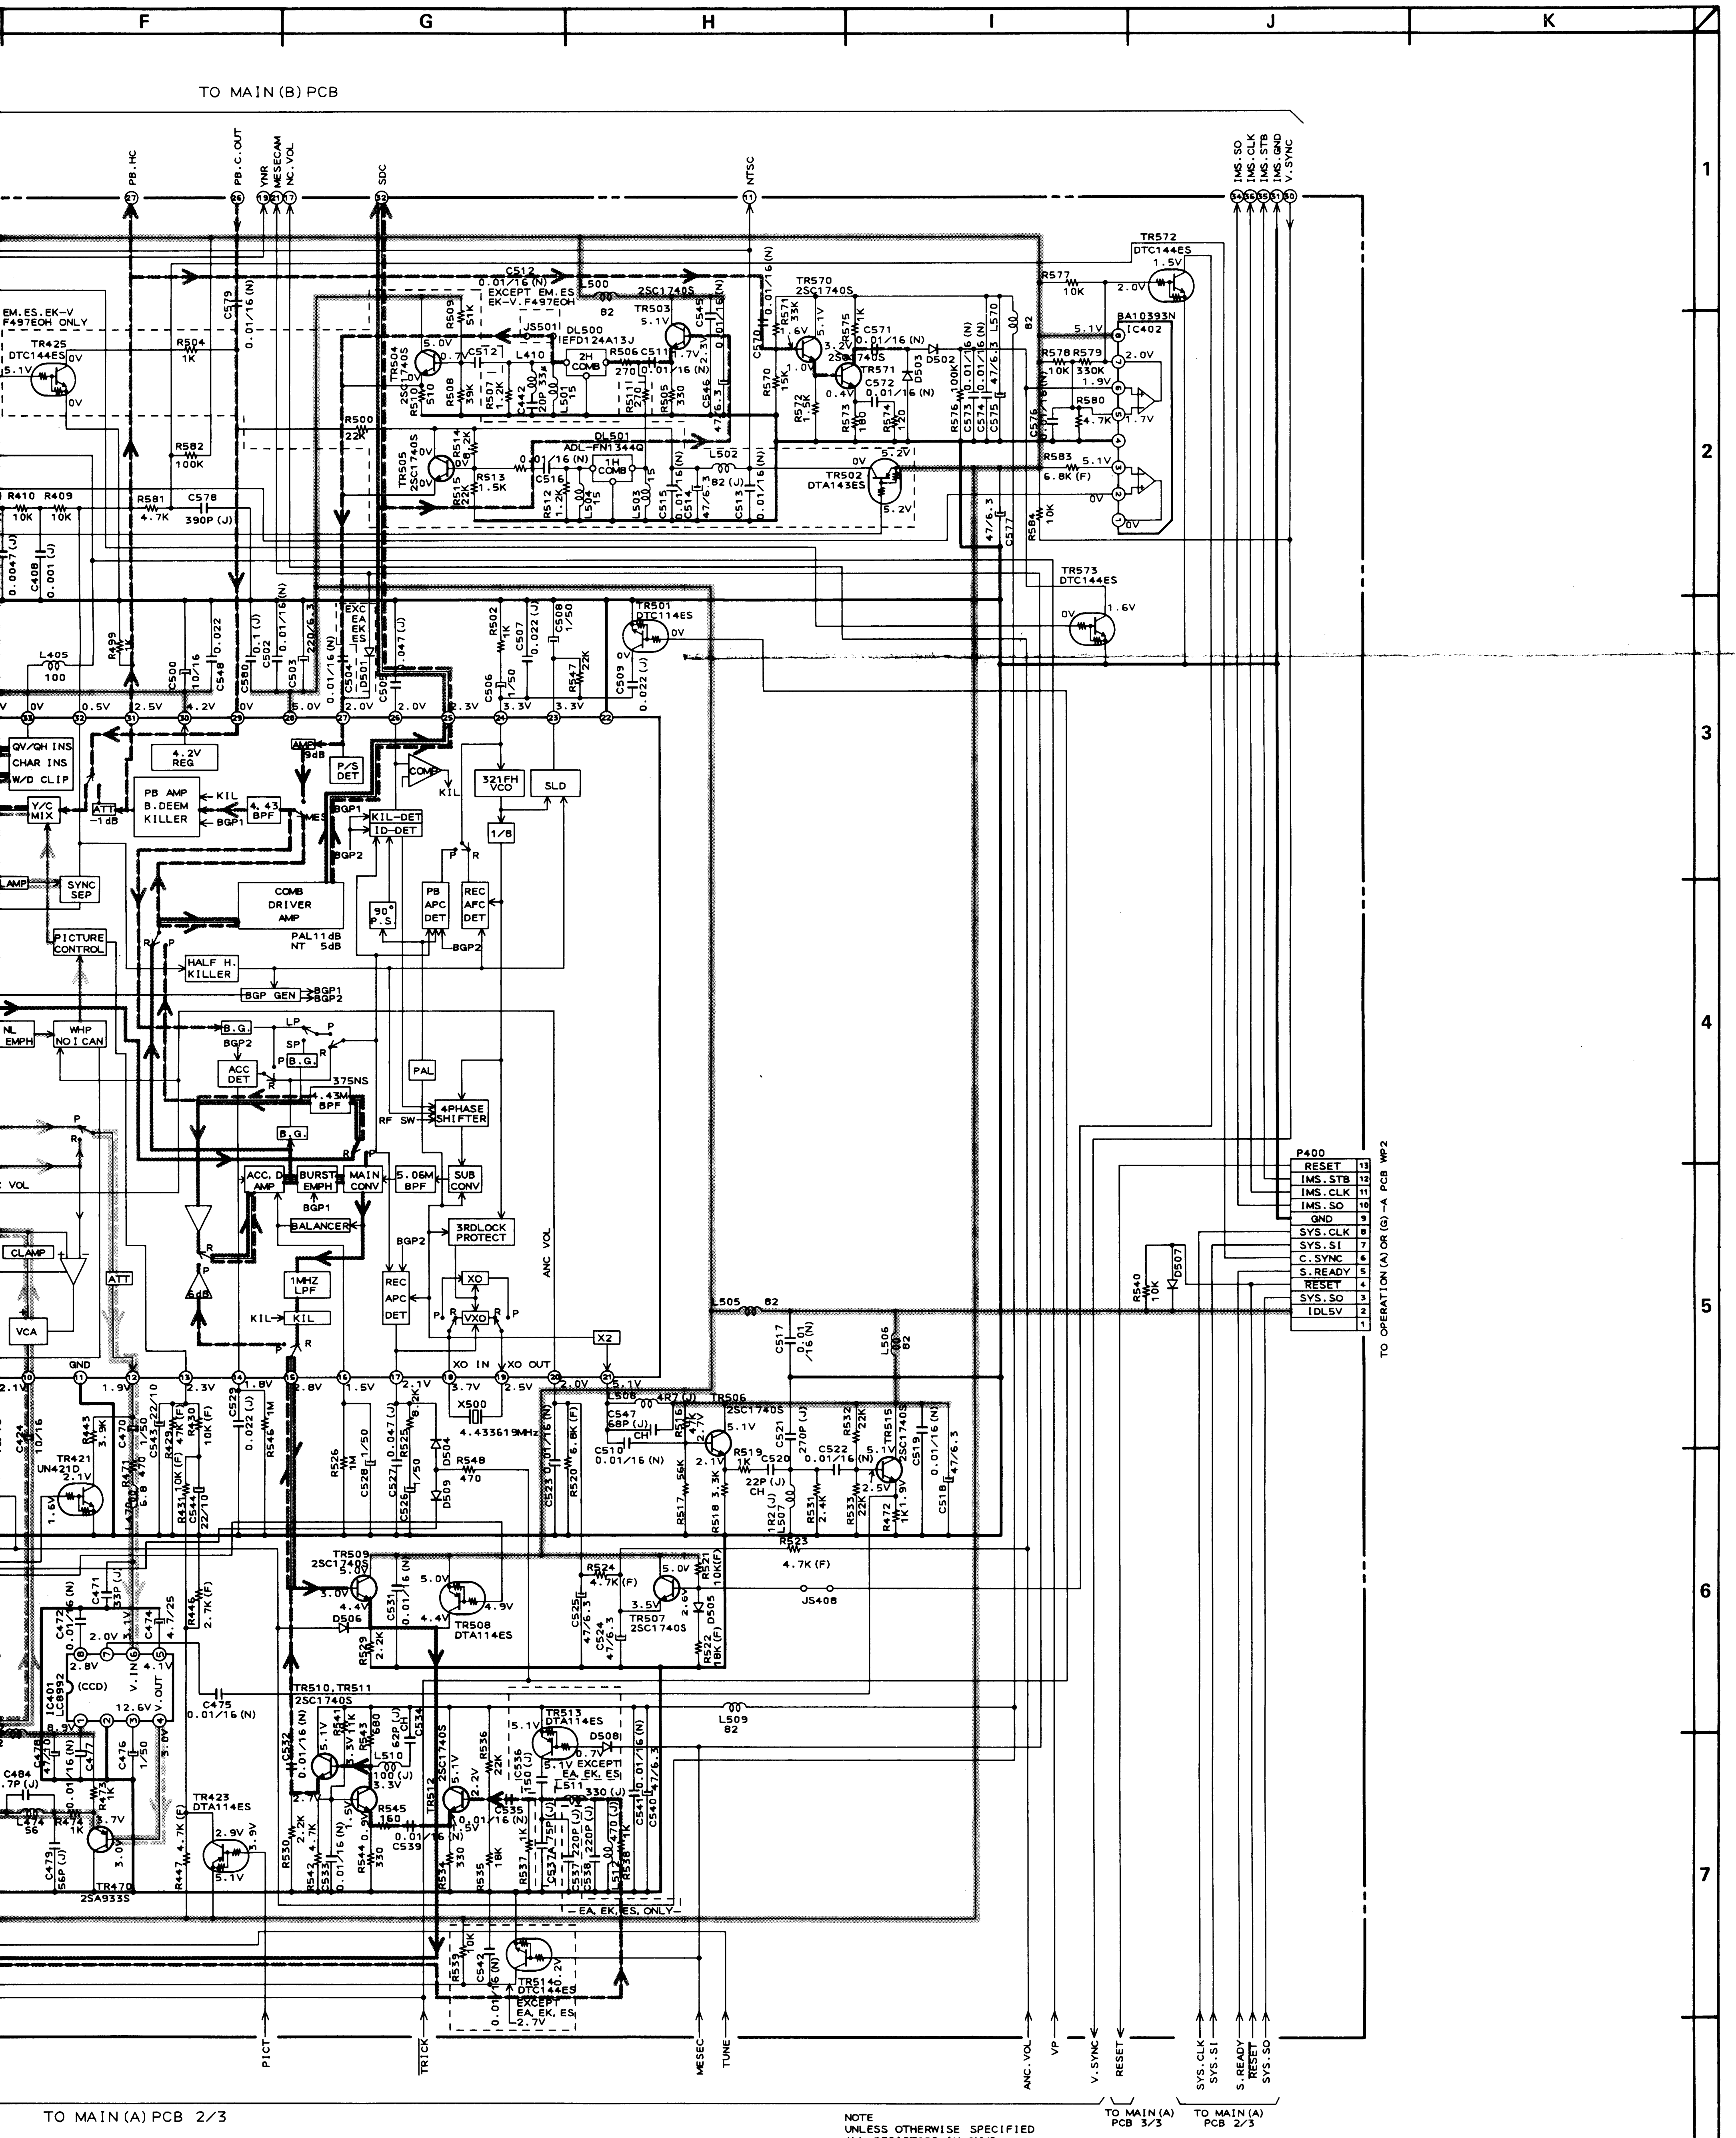
F
G
H
I
J
K
1
2
3
4
5
6
7
8
TO MAIN (B) PCB
PB.HC
PB.C.OUT
VNR
MESECAM
NC.VOL
SDC
NTSC
IMS.SO
IMS.CLK
IMS.STB
IMS.GND
V.SYNC
TR572
DTC144ES
TR570
2SC1740S
TR571
TR503
TR504
TR505
TR502
DTA143ES
TR573
DTC144ES
TR501
DTC114ES
TR425
DTC144ES
BA10393N
IC402
DL500
IEFD124A13J
DL501
ADL-FN1344Q
JS501
2H COMB
1H COMB
EM.ES.EK-V
F497EOH ONLY
EXCEPT EM.ES
EK-V.F497EOH
4.2V REG
PB AMP
B.DEEM
KILLER
4.43 BPF
AMP
P/S DET
COMP
KIL-DET
ID-DET
321FH VCO
SLD
1/8
QV/QH INS
CHAR INS
W/D CLIP
Y/C MIX
ATT
SYNC SEP
COMB DRIVER AMP
PAL11dB
NT 5dB
90° P.S
PB APC DET
REC AFC DET
PICTURE CONTROL
HALF H. KILLER
BGP GEN
NL EMPH
WHP NOI CAN
B.G.
ACC DET
4.43M BPF
375NS
PAL
4PHASE SHIFTER
RF SW
ACC. D AMP
BURST EMPH
MAIN CONV
5.06M BPF
SUB CONV
BALANCER
3RDLOCK PROTECT
1MHZ LPF
KIL
REC APC DET
XO
VXO
X2
XO IN
XO OUT
X500
4.433619MHz
ANC VOL
CLAMP
VCA
TR421
UN421D
IC401
LC8992
(CCD)
V.IN
V.OUT
TR470
2SA933S
TR423
DTA114ES
TR509
2SC1740S
TR508
DTA114ES
TR507
2SC1740S
TR506
2SC1740S
TR515
2SC1740S
TR510, TR511
2SC1740S
TR512
TR513
DTA114ES
TR514
DTC144ES
EXCEPT EA, EK, ES
EA, EK, ES, ONLY
JS408
P400
RESET
IMS.STB
IMS.CLK
IMS.SO
GND
SYS.CLK
SYS.SI
C.SYNC
S.READY
RESET
SYS.SO
IDL5V
TO OPERATION (A) OR (G)-A PCB WP2
D507
R540
PICT
TRICK
MESEC
TUNE
ANC.VOL
VP
V.SYNC
RESET
SYS.CLK
SYS.SI
S.READY
RESET
SYS.SO
TO MAIN (A) PCB 2/3
TO MAIN (A) PCB 3/3
TO MAIN (A) PCB 2/3

INDICATED VOLTAGES WERE
MEASURED DURING PB MODE.
(TAPE SPEED:SP)
(PLAYING BACK PAL RECODED TAPE)

▨	B (POWER SUPPLY) LINE
▨	PB Y SIGNAL LINE
▨	REC Y SIGNAL LINE
▬ ▬	PB CHROMA SIGNAL LINE
▬ ▬	REC CHROMA SIGNAL LINE

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF
ALL INDUCTORS IN μH (K)
ALL DIODES ARE 1SS131T
TRANSISTORS 2SA933S AND 2SC1740 CAN BE
SUBSTITUTED FOR 2SA1317 AND 2SC3330 RESPECTIVELY.

JFX/JFX-L
MAIN (A) 1/3
SCHEMATIC DIAGRAM
No. 21-6 V115206M
A0

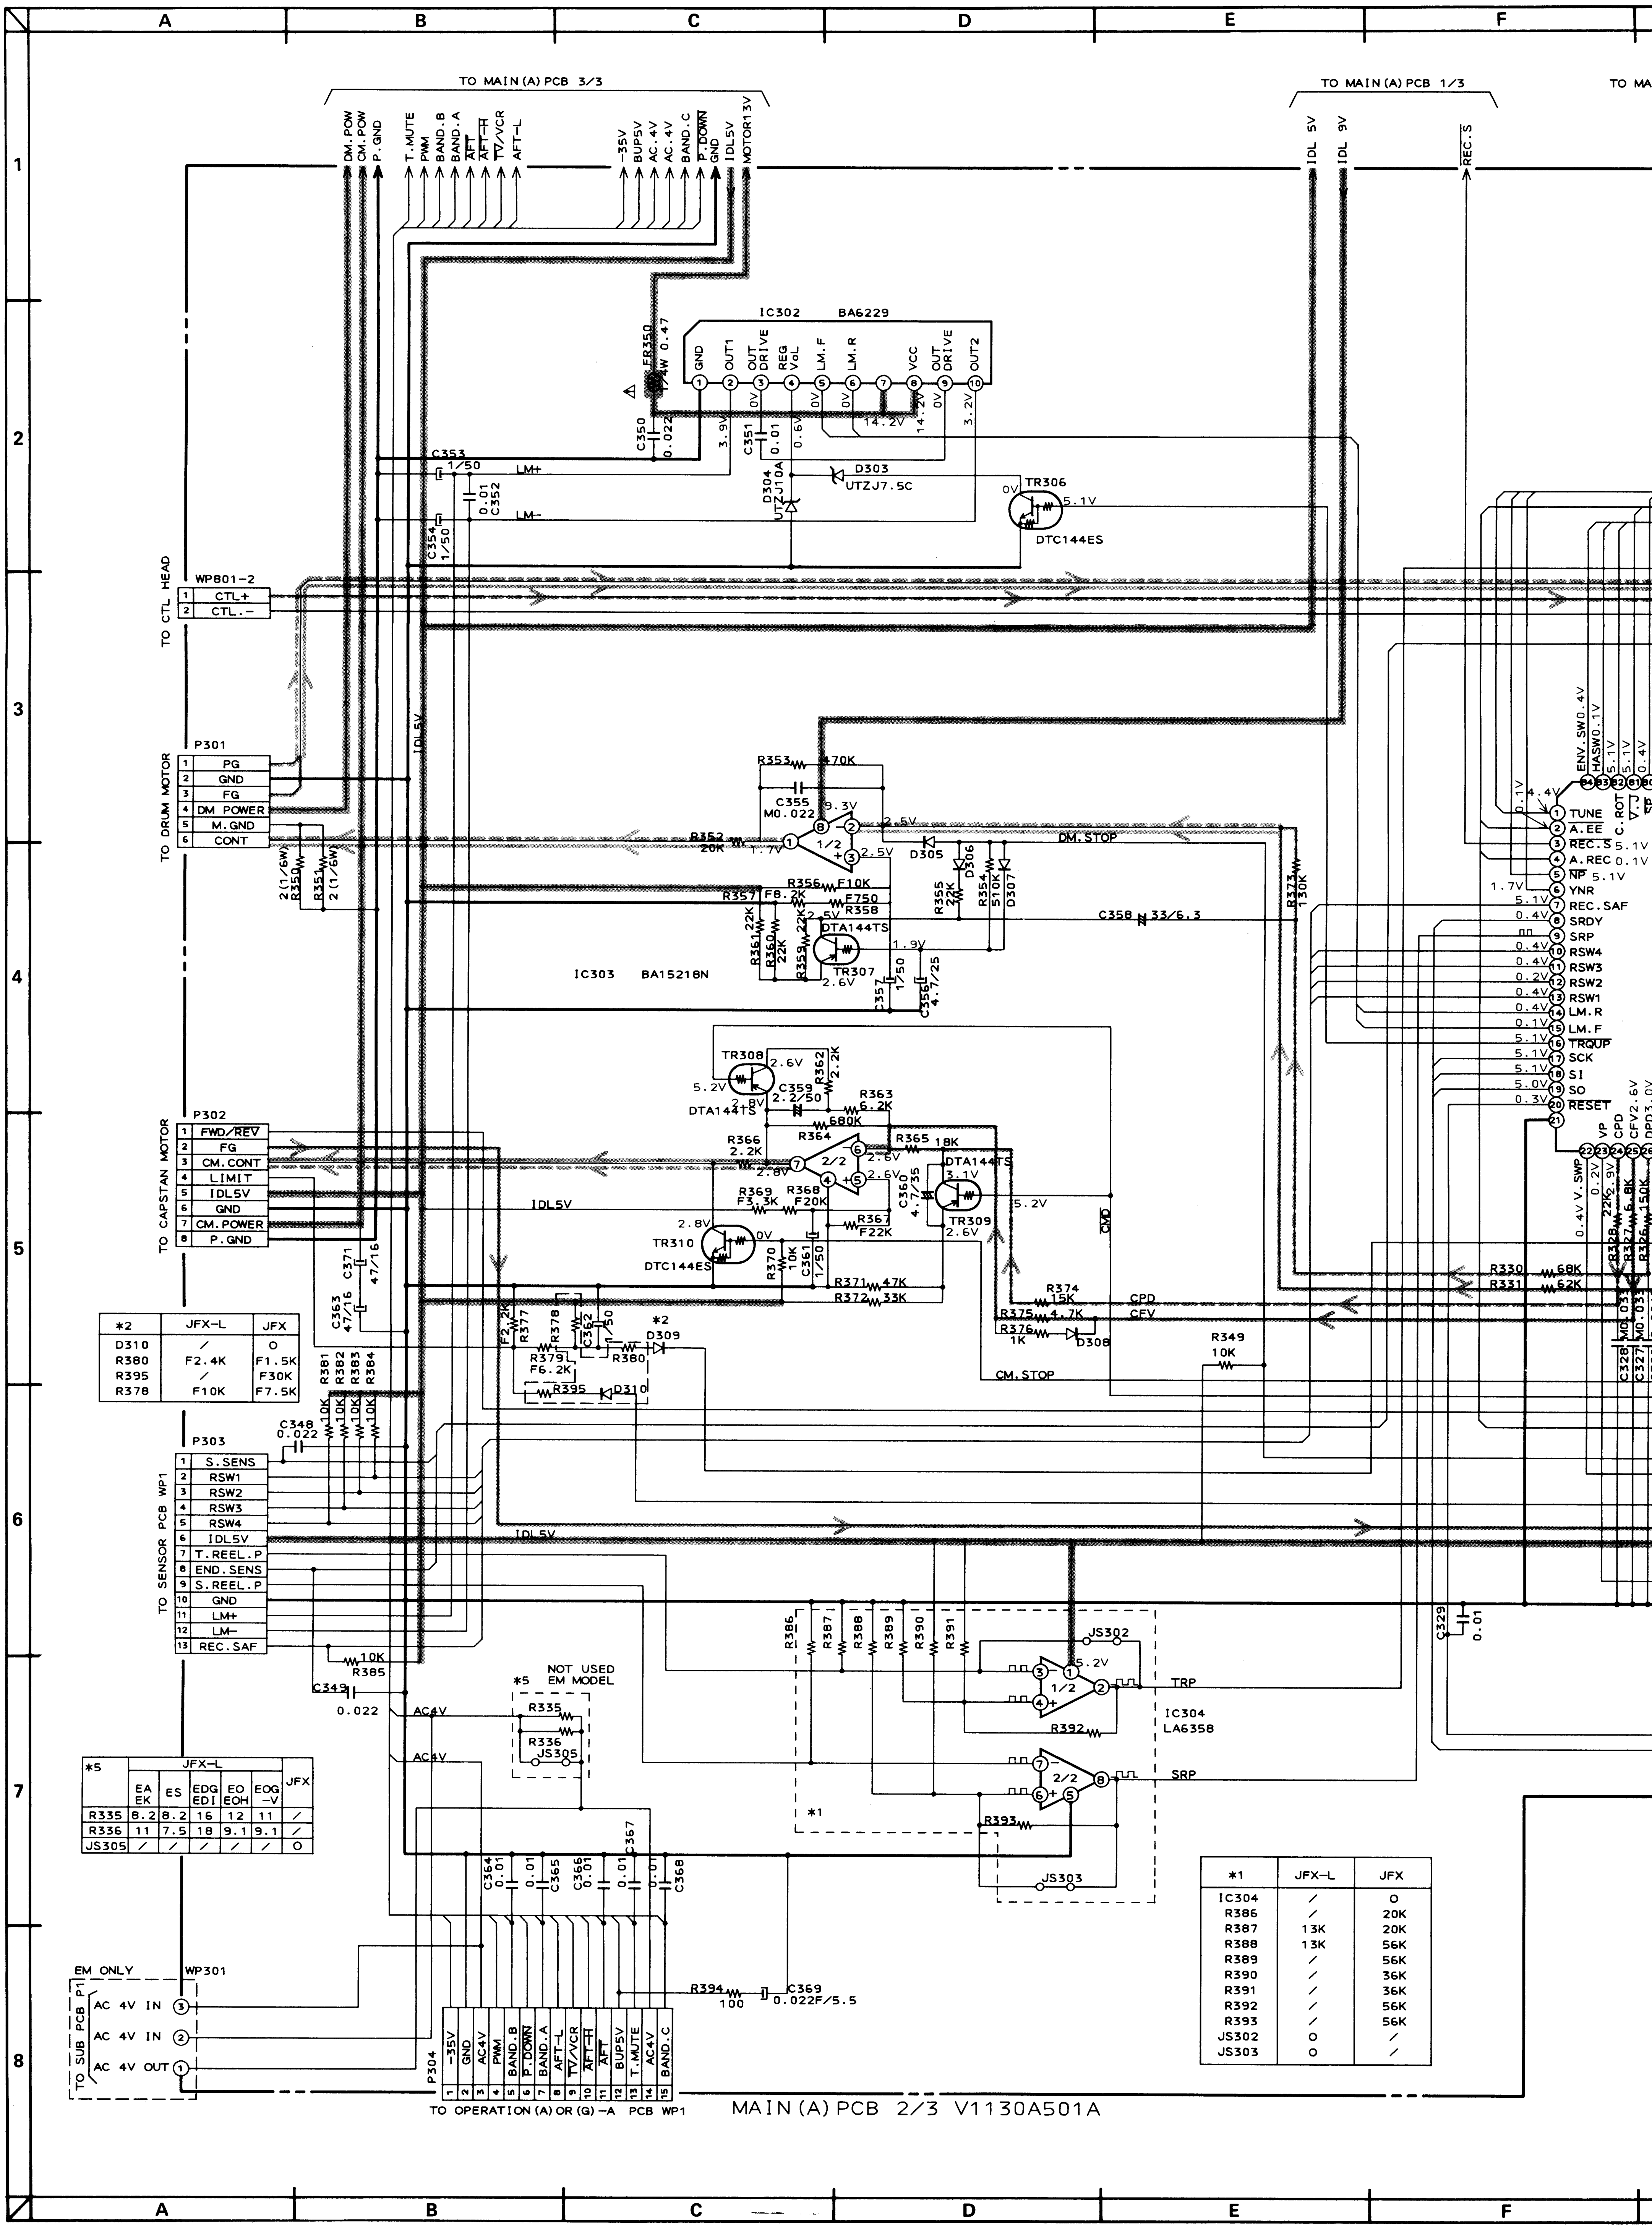
A
B
C
D
E
F
TO MAIN (A) PCB 3/3
DM.POW
CM.POW
P.GND
T.MUTE
PWM
BAND.B
BAND.A
AFT
AFT-H
TV/VCR
AFT-L
-35V
BUP5V
AC.4V
AC.4V
BAND.C
P.DOWN
GND
IDL5V
MOTOR13V
TO MAIN (A) PCB 1/3
IDL 5V
IDL 9V
REC.S
TO MA
IC302 BA6229
FR350 1/4W 0.47
GND
OUT1
OUT DRIVE
REG VoL
LM.F
LM.R
VCC
OUT DRIVE
OUT2
C350 0.022
C351 0.01
C353 1/50
LM+
LM-
C352 0.01
C354 1/50
D303 UTZJ7.5C
D304 UTZJ10A
TR306 DTC144ES
TO CTL HEAD
WP801-2
CTL+
CTL.-
TO DRUM MOTOR
P301
PG
GND
FG
DM POWER
M.GND
CONT
R350 2 (1/6W)
R351 2 (1/6W)
R353 470K
C355 M0.022
R352 20K
DM.STOP
D305
D306
D307
R355 22K
R354 510K
R356 F10K
R357 F8.2K
F750 R358
R361 22K
R360 22K
R359 22K
DTA144TS TR307
C357 1/50
C356 4.7/25
C358 33/6.3
R373 130K
IC303 BA15218N
TR308 DTA144TS
R362 2.2K
C359 2.2/50
R363 6.2K
680K
R364
R366 2.2K
R365 18K
DTA144TS TR309
C360 4.7/35
R369 F3.3K
R368 F20K
R367 F22K
TR310 DTC144ES
R370 10K
C361 1/50
R371 47K
R372 33K
R374 15K
R375 4.7K
R376 1K
D308
CPD
CFV
R349 10K
CM.STOP
CMO
TO CAPSTAN MOTOR
P302
FWD/REV
FG
CM.CONT
LIMIT
IDL5V
GND
CM.POWER
P.GND
C371 47/16
C363 47/16
R377 F2.2K
R378
C362 1/50
D309
R379 F6.2K
R380
R395
D310
R381 10K
R382 10K
R383 10K
R384 10K
C348 0.022
TO SENSOR PCB WP1
P303
S.SENS
RSW1
RSW2
RSW3
RSW4
IDL5V
T.REEL.P
END.SENS
S.REEL.P
GND
LM+
LM-
REC.SAF
R385 10K
C349 0.022
AC4V
*5 NOT USED EM MODEL
R335
R336
JS305
R386
R387
R388
R389
R390
R391
JS302
TRP
IC304 LA6358
R392
SRP
R393
JS303
*1
C329 0.01
C364 0.01
C365 0.01
C366 0.01
C367 0.01
C368
R394 100
C369 0.022F/5.5
EM ONLY
TO SUB PCB P1
AC 4V IN
AC 4V IN
AC 4V OUT
WP301
P304
TO OPERATION (A) OR (G)-A PCB WP1
TUNE
A.EE
REC.S
A.REC
NP
YNR
REC.SAF
SRDY
SRP
RSW4
RSW3
RSW2
RSW1
LM.R
LM.F
TRQUP
SCK
SI
SO
RESET
ENV.SW
HASW
C.ROT
V.SWP
VP
CPD
CFV
R330 68K
R331 62K
C328
C327

*2	JFX-L	JFX
D310	/	O
R380	F2.4K	F1.5K
R395	/	F30K
R378	F10K	F7.5K

*5	JFX-L					JFX
	EA EK	ES	EDG EDI	EO EOH	EOG -V	
R335	8.2	8.2	16	12	11	/
R336	11	7.5	18	9.1	9.1	/
JS305	/	/	/	/	/	O

*1	JFX-L	JFX
IC304	/	O
R386	/	20K
R387	13K	20K
R388	13K	56K
R389	/	56K
R390	/	36K
R391	/	36K
R392	/	56K
R393	/	56K
JS302	O	/
JS303	O	/

MAIN (A) PCB 2/3 V1130A501A

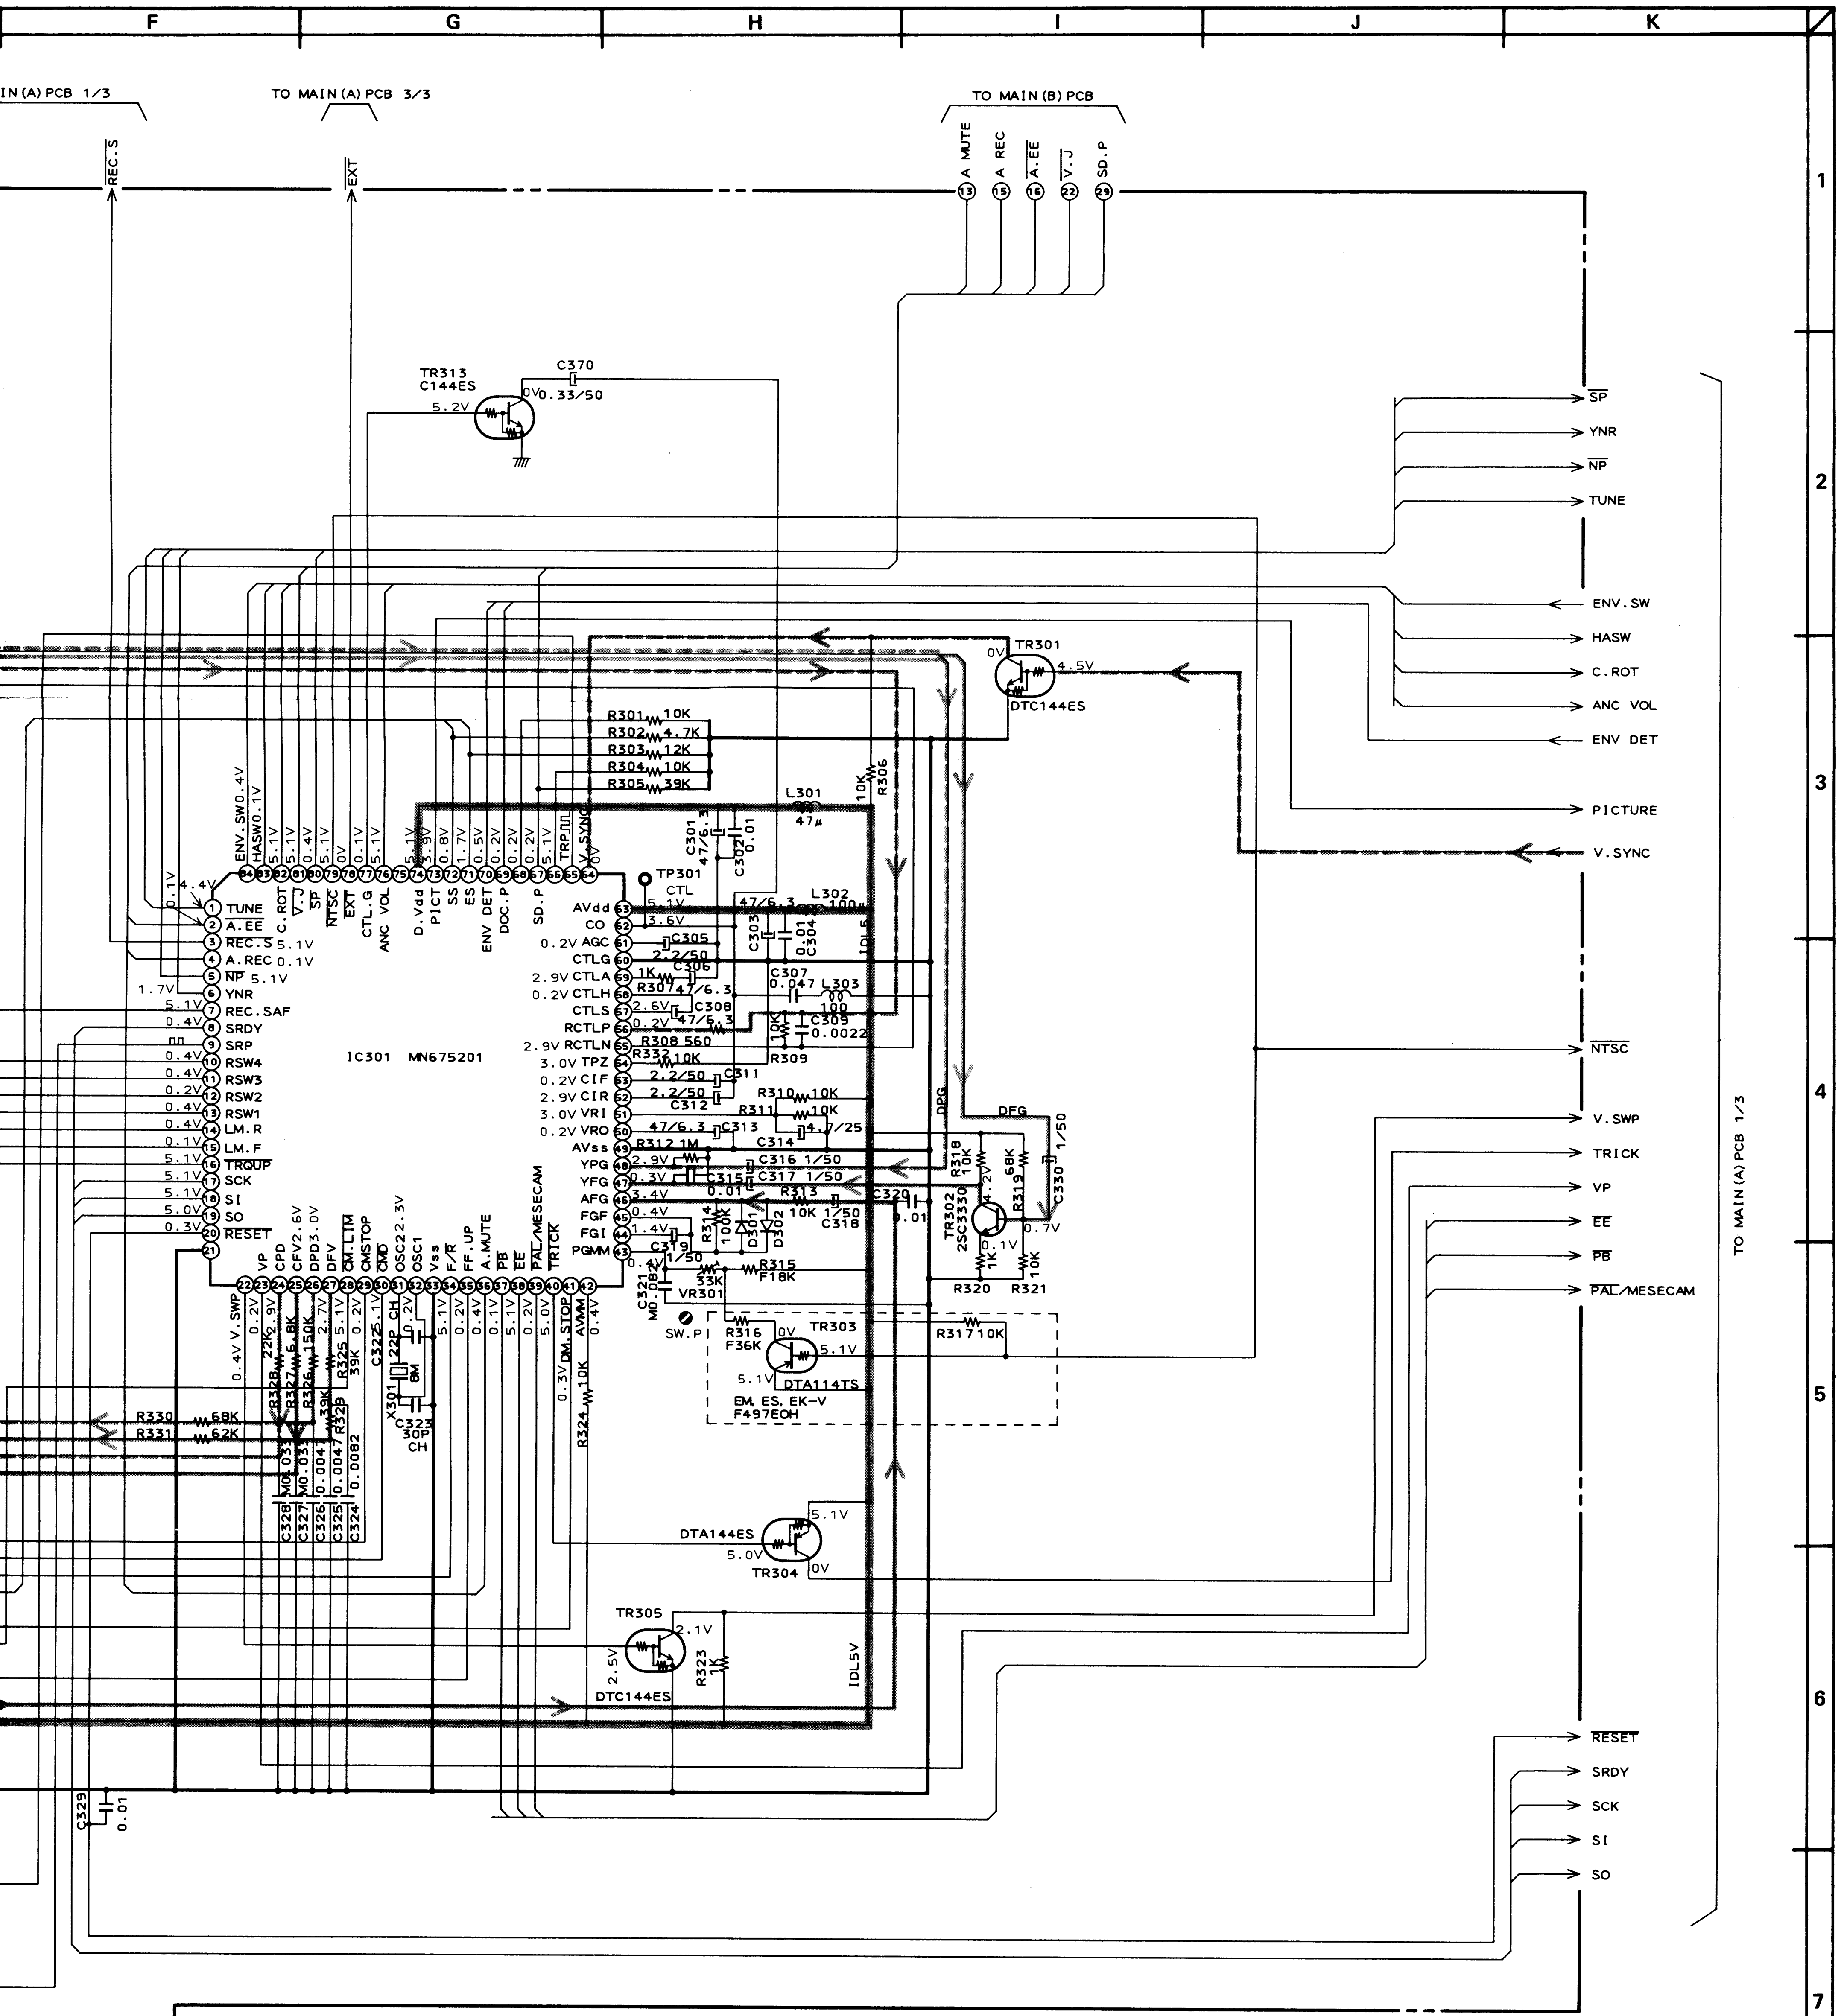
F
G
H
I
J
K
1
2
3
4
5
6
7
TO MAIN (A) PCB 1/3
TO MAIN (A) PCB 3/3
TO MAIN (B) PCB
REC.S
EXT
A MUTE
A REC
A.EE
V.J
SD.P
TR313
C144ES
C370
0.33/50
TR301
DTC144ES
R301 10K
R302 4.7K
R303 12K
R304 10K
R305 39K
R306 10K
L301 47μ
C301 47/6.3
C302 0.01
TP301 CTL
L302 100μ
C303 47/6.3
C304 0.01
C305 2.2/50
C306
R307 1K
C307 0.047
L303 100
C308 47/6.3
R308 560
C309 0.0022
R309
R332 10K
C311 2.2/50
C312 2.2/50
R310 10K
R311 10K
C313 47/6.3
C314 4.7/25
R312 1M
C316 1/50
C317 1/50
C315 0.01
R313 10K
C318 1/50
C320 0.01
R314 10K
D301
D302
C319 1/50
R315 F18K
VR301 33K
C321 M0.068
SW.P1
R316 F36K
TR303
DTA114TS
EM, ES, EK-V
F497EOH
R317 10K
TR302
2SC3330
R318 10K
R319 68K
C330 1/50
R320 1K
R321 10K
DPG
DFG
IC301 MN675201
TUNE
A.EE
REC.S
A.REC
NP
YNR
REC.SAF
SRDY
SRP
RSW4
RSW3
RSW2
RSW1
LM.R
LM.F
TRQUP
SCK
SI
SO
RESET
ENV.SW
HASW
C.ROT
V.J
SP
NTSC
EXT
CTL.G
ANC VOL
D.Vdd
PICT
SS
ES
ENV DET
DOC.P
SD.P
TRP
V.SYNC
AVdd
CO
AGC
CTLG
CTLA
CTLH
CTLS
RCTLP
RCTLN
TPZ
CIF
CIR
VRI
VRO
AVss
YPG
YFG
AFG
FGF
FGI
PGMM
V.SWP
VP
CPD
CFV2
DPD
DFV
CM.LIM
CMSTOP
CMD
OSC2
OSC1
Vss
F/R
FF.UP
A.MUTE
PB
EE
PAL/MESECAM
TRICK
DM.STOP
AVMM
R324 10K
R325 39K
R326 150K
R327 6.8K
R328 22K
R329
R330 68K
R331 62K
X301 8M
C322 22P CH
C323 30P CH
C324 0.0082
C325 0.0047
C326 0.0047
C327 M0.033
C328 M0.033
DTA144ES
TR304
TR305
DTC144ES
R323 1K
IDL5V
C329 0.01
SP
YNR
NP
TUNE
ENV.SW
HASW
C.ROT
ANC VOL
ENV DET
PICTURE
V.SYNC
NTSC
V.SWP
TRICK
VP
EE
PB
PAL/MESECAM
RESET
SRDY
SCK
SI
SO
TO MAIN (A) PCB 1/3

JFX
0
20K
20K
56K
56K
36K
36K
56K
56K
/
/

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W
ALL CAPACITORS IN μF (P=PF)
ALL ELECTROLYTIC CAPACITORS IN μF/WV
ALL DIODES ARE 1SS131T

INDICATED VOLTAGES WERE
MEASURED DURING PB MODE.
(TAPE SPEED:SP)

▬▬ B (POWER SUPPLY) LINE
━━ CAPSTAN MOTOR SPEED CONTROL LINE
– – CAPSTAN MOTOR PHASE CONTROL LINE
━━ DRUM MOTOR SPEED CONTROL LINE
– – DRUM MOTOR PHASE CONTROL LINE

WARNING: ⚠ AND ■ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ■, ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

JFX/JFX-L
MAIN (A) 2/3
SCHEMATIC DIAGRAM
No.21-7 V115207M
A1

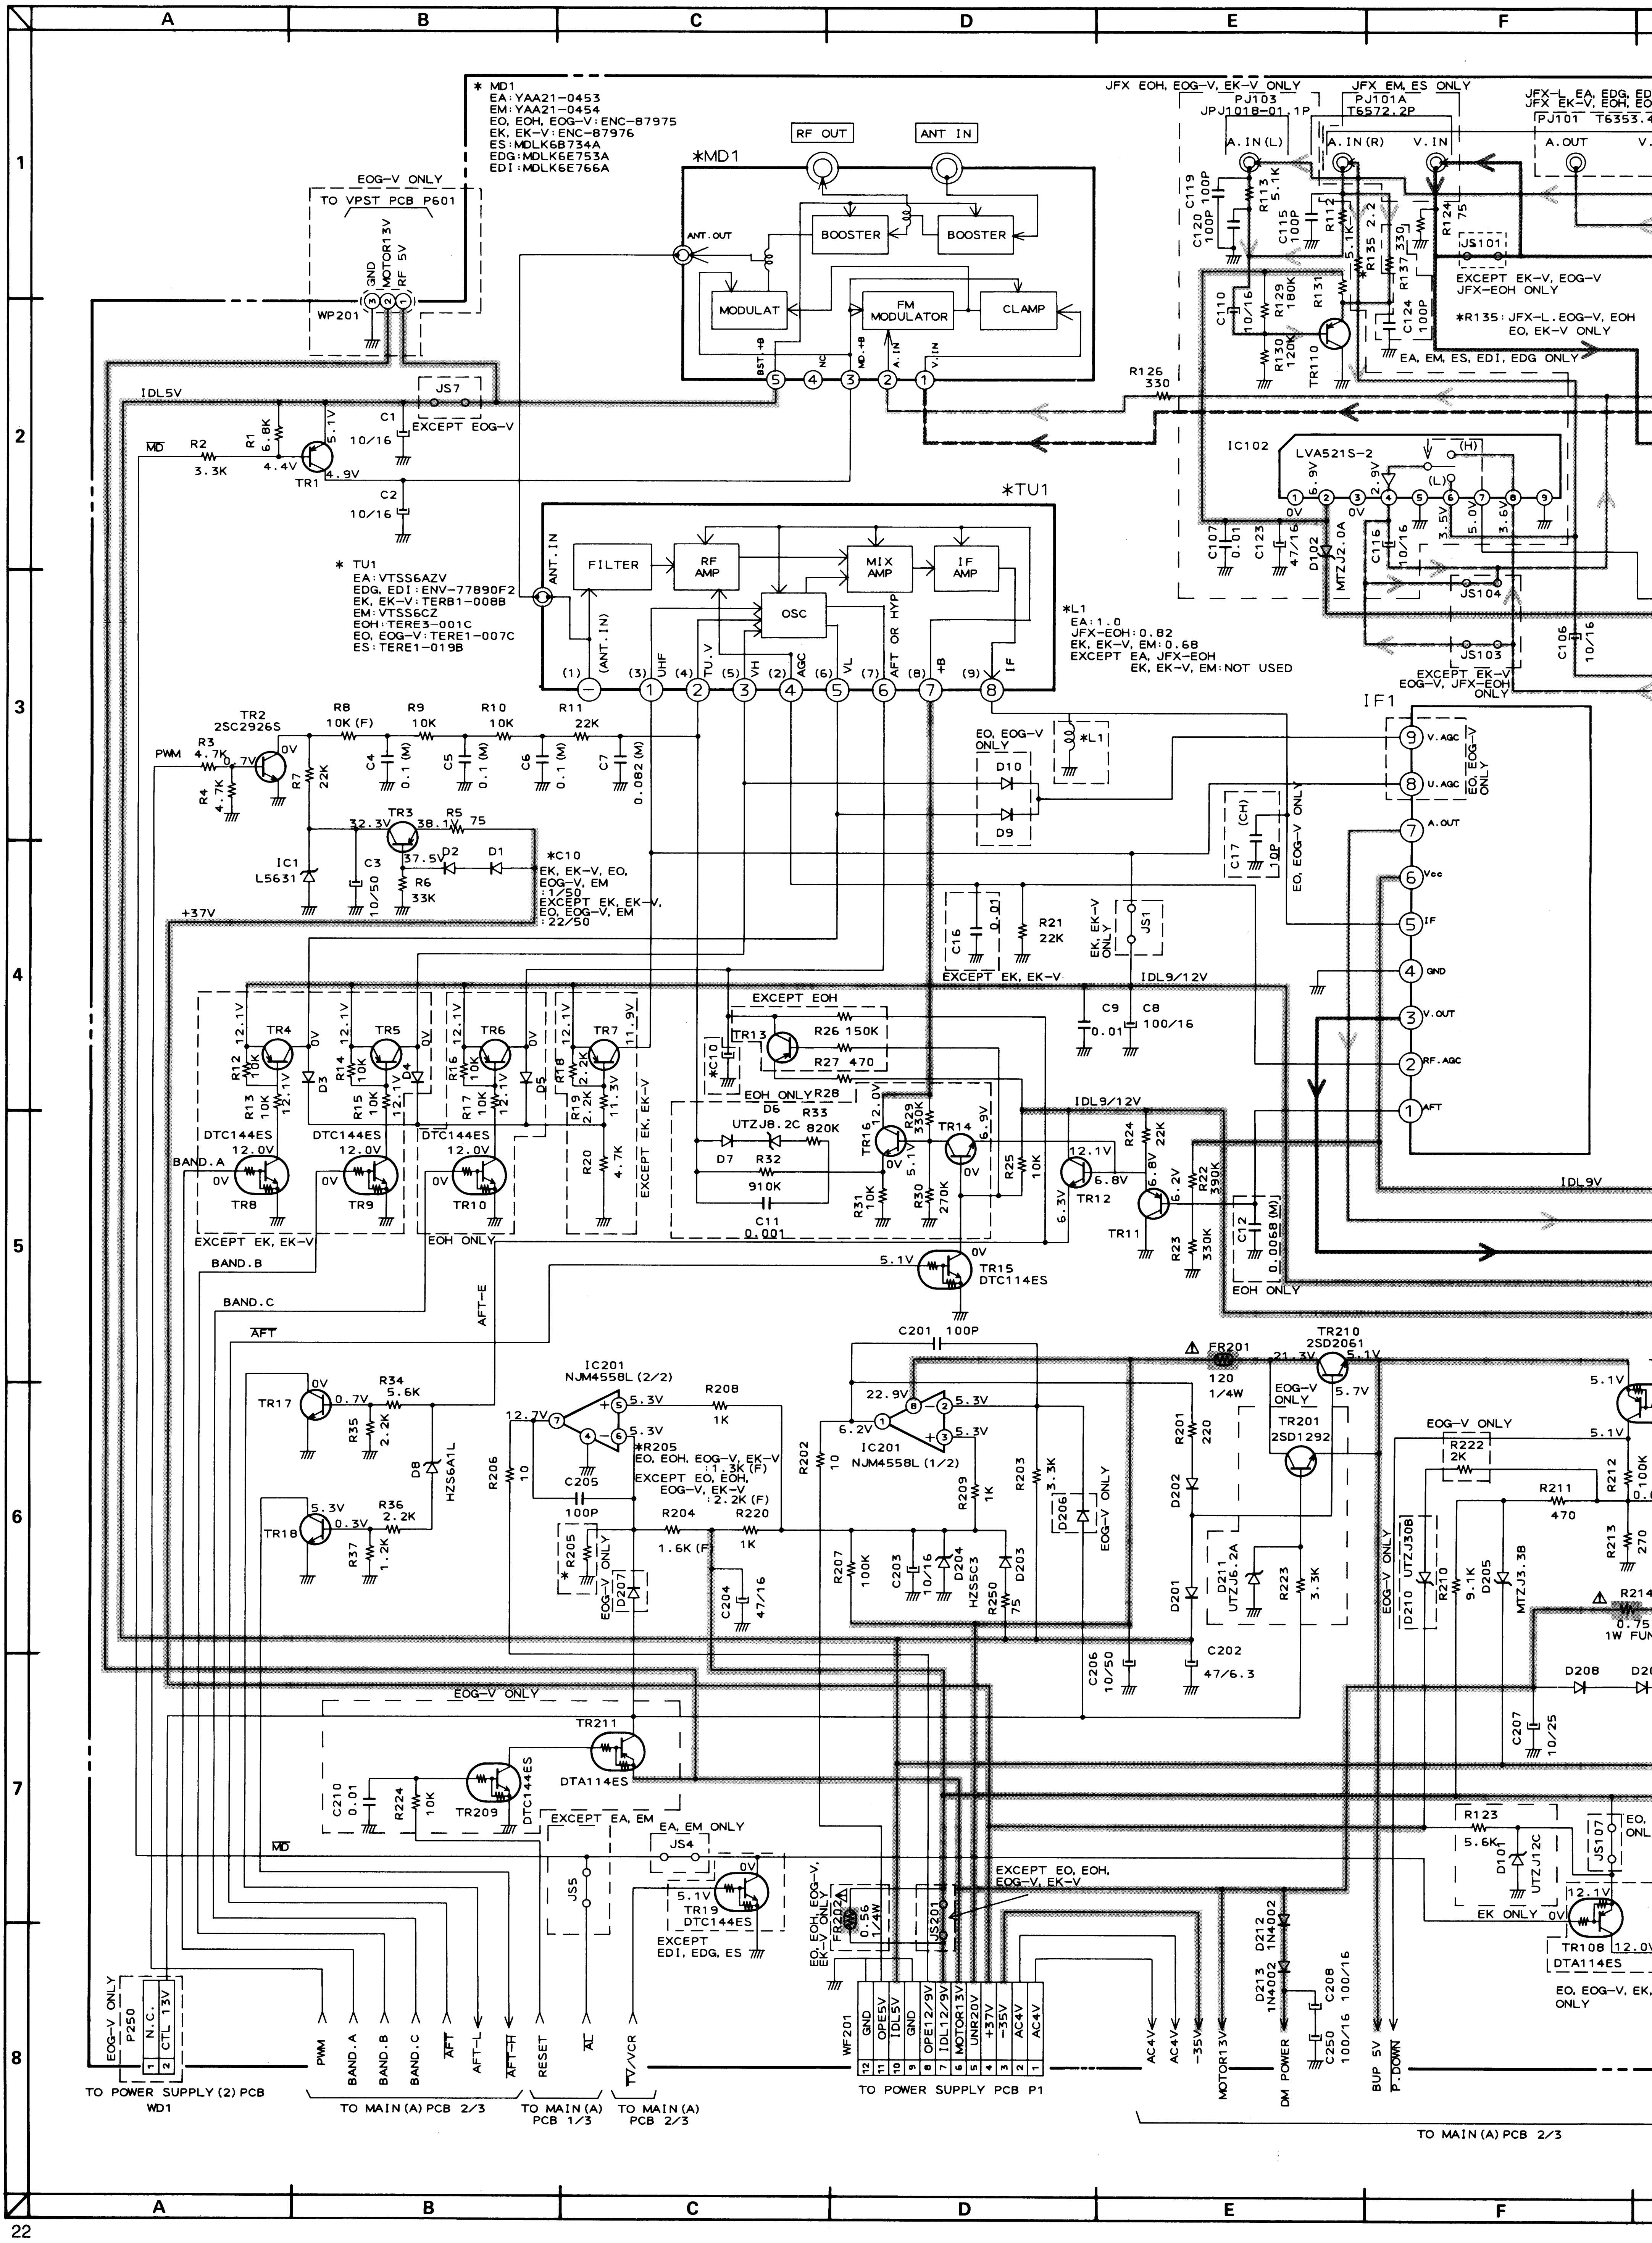
A
B
C
D
E
F
* MD1
EA:YAA21-0453
EM:YAA21-0454
EO, EOH, EOG-V:ENC-87975
EK, EK-V:ENC-87976
ES:MDLK6B734A
EDG:MDLK6E753A
EDI:MDLK6E766A
*MD1
RF OUT
ANT IN
ANT.OUT
BOOSTER
BOOSTER
MODULAT
FM MODULATOR
CLAMP
BST+B
NC
MD.+B
A.IN
V.IN
EOG-V ONLY
TO VPST PCB P601
GND
MOTOR13V
RF 5V
WP201
IDL5V
JS7
EXCEPT EOG-V
MD
R2 3.3K
R1 6.8K
4.4V
5.1V
4.9V
TR1
C1 10/16
C2 10/16
*TU1
* TU1
EA:VTSS6AZV
EDG, EDI:ENV-77890F2
EK, EK-V:TERB1-008B
EM:VTSS6CZ
EOH:TERE3-001C
EO, EOG-V:TERE1-007C
ES:TERE1-019B
ANT.IN
FILTER
RF AMP
MIX AMP
IF AMP
OSC
(ANT.IN)
UHF
TU.V
VH
AGC
VL
AFT OR HYP
+B
IF
*L1
EA:1.0
JFX-EOH:0.82
EK, EK-V, EM:0.68
EXCEPT EA, JFX-EOH
EK, EK-V, EM:NOT USED
TR2 2SC2926S
PWM
R3 4.7K
R4 4.7K
R7 22K
R8 10K (F)
R9 10K
R10 10K
R11 22K
C4 0.1 (M)
C5 0.1 (M)
C6 0.1 (M)
C7 0.082 (M)
TR3
32.3V
38.1V
37.5V
R5 75
R6 33K
D2
D1
IC1 L5631
C3 10/50
*C10
EK, EK-V, EO, EOG-V, EM :1/50
EXCEPT EK, EK-V, EO, EOG-V, EM :22/50
+37V
EO, EOG-V ONLY
D10
D9
*L1
C17 10P
EO, EOG-V ONLY
C16 0.01
R21 22K
EK, EK-V ONLY
JS1
EXCEPT EK, EK-V
IDL9/12V
C9 0.01
C8 100/16
TR4
TR5
TR6
TR7
R12 10K
R13 10K
R14 10K
R15 10K
R16 10K
R17 10K
R18 2.2K
R19 2.2K
R20 4.7K
D3
D4
D5
12.1V
11.9V
11.3V
DTC144ES
BAND.A
TR8
TR9
TR10
12.0V
0V
EXCEPT EK, EK-V
EOH ONLY
EXCEPT EK, EK-V
BAND.B
BAND.C
AFT
AFT-E
EXCEPT EOH
TR13
R26 150K
R27 470
*C10
EOH ONLY
R28
D6 UTZJ8.2C
R33 820K
D7
R32 910K
C11 0.001
TR16
R29 330K
TR14
6.9V
R31 10K
R30 270K
5.1V
R25 10K
IDL9/12V
R24 22K
TR12
6.8V
6.3V
TR11
6.2V
R22 330K
R23 330K
C12 0.0068 (M)
EOH ONLY
TR15 DTC114ES
IF1
V.AGC
U.AGC
EO, EOG-V ONLY
A.OUT
Vcc
IF
GND
V.OUT
RF.AGC
AFT
IDL9V
JFX EOH, EOG-V, EK-V ONLY
PJ103 JPJ1018-01.1P
A.IN(L)
JFX EM, ES ONLY
PJ101A T6572.2P
A.IN(R)
V.IN
JFX-L EA, EDG, ED
JFX EK-V, EOH, EO
PJ101 T6353.4
A.OUT
C119 100P
C120 100P
R113 5.1K
C115 100P
R112
R135 2.2
R136 5.1K
R137 330
R124 75
JS101
EXCEPT EK-V, EOG-V JFX-EOH ONLY
*R135:JFX-L, EOG-V, EOH EO, EK-V ONLY
C110 10/16
R129 180K
R130 120K
R131
TR110
C124 100P
EA, EM, ES, EDI, EDG ONLY
R126 330
IC102 LVA521S-2
(H)
(L)
6.9V
2.9V
3.5V
5.0V
3.6V
C107 0.01
C123 47/16
D102 MTZJ2.0A
C116 10/16
JS104
JS103
EXCEPT EK-V EOG-V, JFX-EOH ONLY
C106 10/16
TR17
0.7V
R34 5.6K
R35 2.2K
D8 HZS6A1L
TR18
5.3V
0.3V
R36 2.2K
R37 1.2K
IC201 NJM4558L (2/2)
12.7V
5.3V
R208 1K
R206 10
C205 100P
*R205
EO, EOH, EOG-V, EK-V :1.3K (F)
EXCEPT EO, EOH, EOG-V, EK-V :2.2K (F)
R204 1.6K (F)
R220 1K
EOG-V ONLY
D207
C204 47/16
C201 100P
22.9V
6.2V
IC201 NJM4558L (1/2)
R202 10
R207 100K
C203 10/16
D204 HZS5C3
R209 1K
R250 75
D203
R203 3.3K
D206
EOG-V ONLY
FR201 120 1/4W
TR210 2SD2061
21.3V
5.1V
5.7V
EOG-V ONLY
TR201 2SD1292
R201 220
D202
D201
D211 UTZJ6.2A
R223 3.3K
C206 10/50
C202 47/6.3
EOG-V ONLY
R222 2K
R211 470
R212 100K
R213 270
D210 UTZJ30B
R210 9.1K
D205 MTZJ3.3B
R214 0.75 1W FUN
D208
C207 10/25
EOG-V ONLY
TR211 DTA114ES
C210 0.01
R224 10K
TR209 DTC144ES
EXCEPT EA, EM
EA, EM ONLY
JS4
JS5
TR19 DTC144ES
EXCEPT EDI, EDG, ES
EO, EOH, EOG-V, EK-V ONLY
FR202 0.56 1/4W
JS201
EXCEPT EO, EOH, EOG-V, EK-V
D212 1N4002
D213 1N4002
C208 100/16
R123 5.6K
D101 UTZJ12C
JS107
EO, ONL
EK ONLY
TR108 DTA114ES
12.1V
EO, EOG-V, EK, ONLY
EOG-V ONLY
P250
N.C.
CTL 13V
TO POWER SUPPLY (2) PCB WD1
PWM
BAND.A
BAND.B
BAND.C
AFT
AFT-L
AFT-H
RESET
AC
TV/VCR
TO MAIN (A) PCB 2/3
TO MAIN (A) PCB 1/3
TO MAIN (A) PCB 2/3
WF201
GND
OPE5V
IDL5V
GND
OPE12/9V
IDL12/9V
MOTOR13V
UNR20V
+37V
-35V
AC4V
AC4V
TO POWER SUPPLY PCB P1
AC4V
AC4V
-35V
MOTOR13V
DM POWER
C250 100/16
BUP 5V
P.DOWN
TO MAIN (A) PCB 2/3

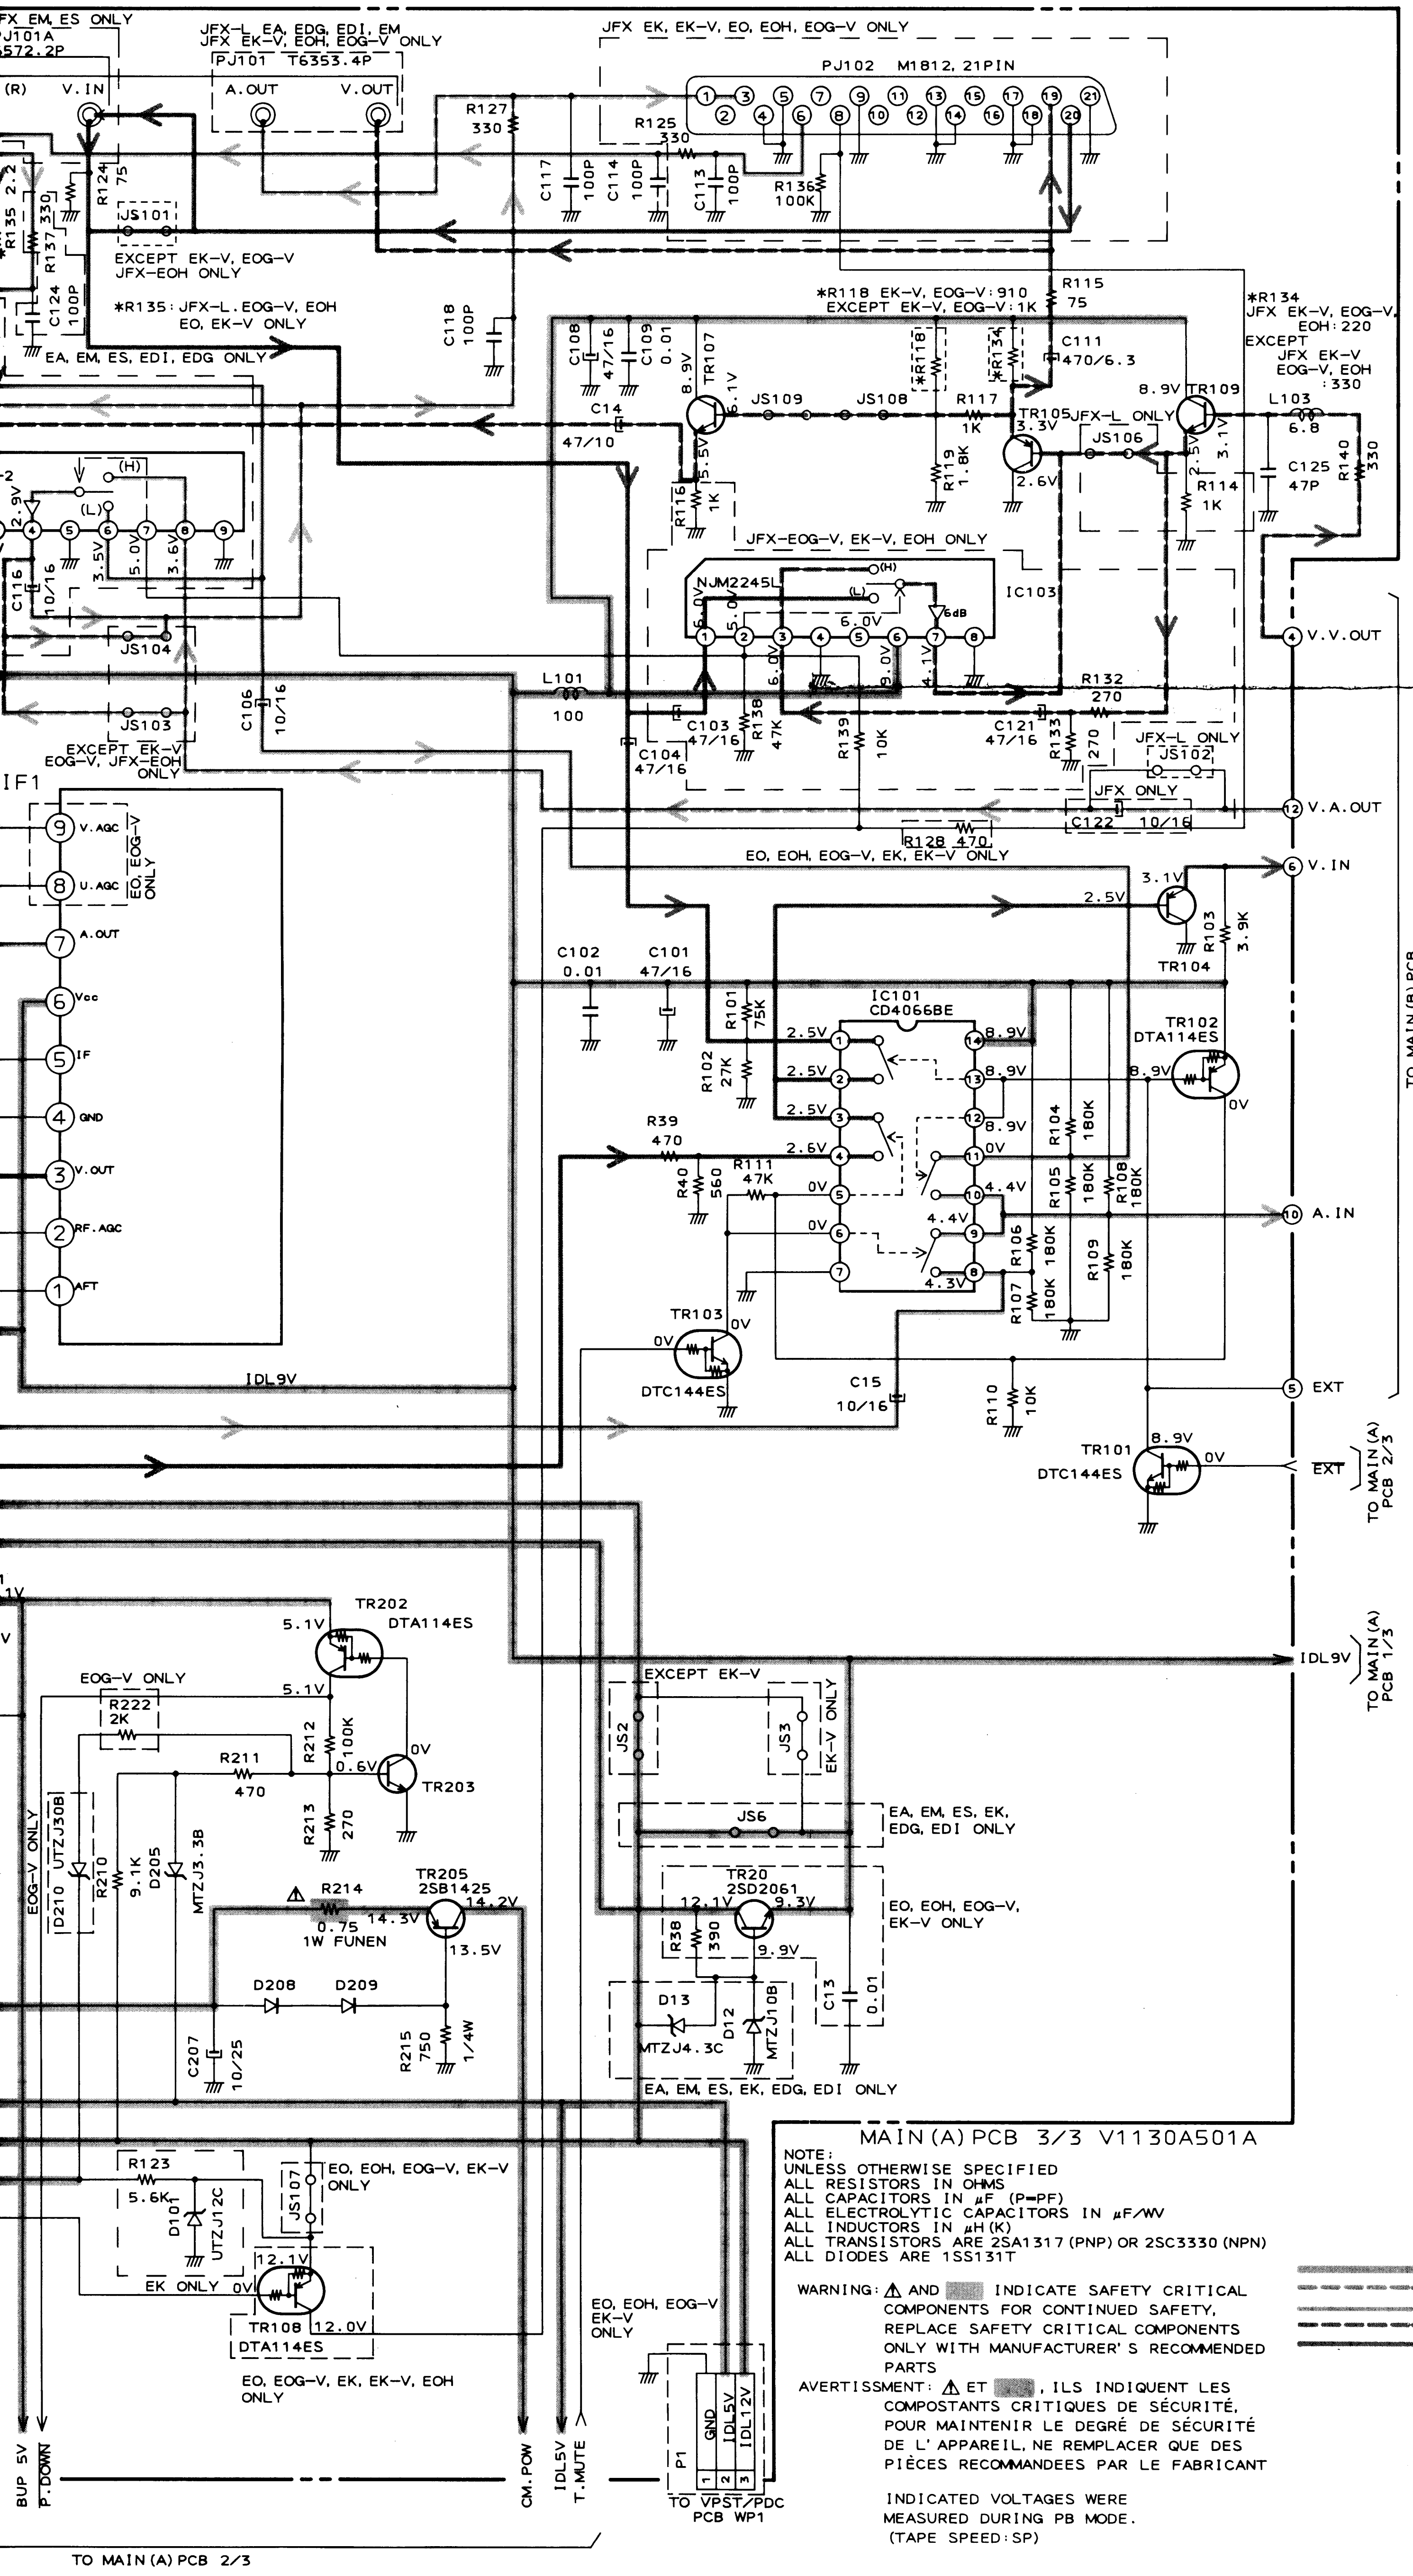
JFX-L, EA, EDG, EDI, EM
JFX EK-V, EOH, EOG-V ONLY
PJ101 T6353.4P
A.OUT
V.OUT
V.IN
JFX EK, EK-V, EO, EOH, EOG-V ONLY
PJ102 M1812, 21PIN
R127 330
R125 330
C117 100P
C114 100P
C113 100P
R136 100K
R124 75
JS101
EXCEPT EK-V, EOG-V
JFX-EOH ONLY
*R135: JFX-L, EOG-V, EOH
EO, EK-V ONLY
C118 100P
EA, EM, ES, EDI, EDG ONLY
*R118 EK-V, EOG-V: 910
EXCEPT EK-V, EOG-V: 1K
R115 75
*R134
JFX EK-V, EOG-V, EOH: 220
EXCEPT
JFX EK-V
EOG-V, EOH
: 330
C108 47/16
C109 0.01
TR107
C111 470/6.3
TR109
L103 6.8
C14 47/10
JS109
JS108
R117 1K
TR105
JFX-L ONLY
JS106
R119 1.8K
R116 1K
R114 1K
C125 47P
R140 330
JFX-EOG-V, EK-V, EOH ONLY
NJM2245L
IC103
6dB
V.V.OUT
L101 100
R132 270
C103 47/16
C104 47/16
R138 47K
R139 10K
C121 47/16
R133 270
JFX-L ONLY
JS102
JFX ONLY
C122 10/16
R128 470
EO, EOH, EOG-V, EK, EK-V ONLY
V.A.OUT
V.IN
JS104
JS103
C106 10/16
EXCEPT EK-V
EOG-V, JFX-EOH
ONLY
IF1
V.AGC
U.AGC
EO, EOG-V ONLY
A.OUT
Vcc
IF
GND
V.OUT
RF.AGC
AFT
TR104
R103 3.9K
C102 0.01
C101 47/16
R101 75K
R102 27K
IC101
CD4066BE
TR102
DTA114ES
R39 470
R40 560
R111 47K
R104 180K
R105 180K
R108 180K
R106 180K
R107 180K
R109 180K
A.IN
TR103
DTC144ES
C15 10/16
R110 10K
EXT
TR101
DTC144ES
TO MAIN (B) PCB
TO MAIN (A) PCB 2/3
IDL9V
TO MAIN (A) PCB 1/3
TR202
DTA114ES
EOG-V ONLY
R222 2K
R211 470
R212 100K
R213 270
TR203
EXCEPT EK-V
JS2
JS3
EK-V ONLY
JS6
EA, EM, ES, EK, EDG, EDI ONLY
D210 UTZJ30B
R210 9.1K
D205 MTZJ3.3B
R214 0.75 1W FUNEN
TR205 2SB1425
TR20 2SD2061
EO, EOH, EOG-V, EK-V ONLY
R38 390
D208
D209
R215 750 1/4W
C207 10/25
D13 MTZJ4.3C
D12 MTZJ10B
C13 0.01
EA, EM, ES, EK, EDG, EDI ONLY
R123 5.6K
D107 UTZJ12C
JS107
EO, EOH, EOG-V, EK-V ONLY
EK ONLY
TR108
DTA114ES
EO, EOG-V, EK, EK-V, EOH ONLY
EO, EOH, EOG-V
EK-V
ONLY
P1
GND
IDL5V
IDL12V
TO VPST/PDC PCB WP1
BUP 5V
P.DOWN
CM.POW
IDL5V
T.MUTE
TO MAIN (A) PCB 2/3

MAIN (A) PCB 3/3 V1130A501A

NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF (P=PF)
ALL ELECTROLYTIC CAPACITORS IN μF/WV
ALL INDUCTORS IN μH (K)
ALL TRANSISTORS ARE 2SA1317 (PNP) OR 2SC3330 (NPN)
ALL DIODES ARE 1SS131T

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ▨, ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

INDICATED VOLTAGES WERE MEASURED DURING PB MODE. (TAPE SPEED: SP)

▬▬ B (POWER SUPPLY) LINE
‒ ‒ ‒ AUDIO OUT (E-E, PB) LINE
── AUDIO IN (E-E, REC) LINE
━ ━ ━ VIDEO OUT (E-E, PB) LINE
━━ VIDEO IN (E-E, REC) LINE

JFX/JFX-L
MAIN (A) 3/3
SCHEMATIC DIAGRAM
No. 21-8 V115208M
A1

PRINCIPAL PARTS LOCATION

ICs

IC101	D5
IC102	D,E5
IC103	D5
IC201	F4,5
IC301	E1,2
IC302	F1,2
IC303	E,F3
IC304	F2
IC400	C3
IC401	C,D4
IC402	C,D1
IC403	C5

WF & WPs

WF201	F4,5
WP301	F3
WP801	E1,2

CONNECTORs

P1	E,F5
P250	F4
P301	E3
P302	F4
P303	E2
P304	F1
P400	B,C1
P401	D5

TRANSISTORS

TR1	F6
TR2	F6
TR3	F5
TR4	F5
TR5	F5
TR6	F5
TR7	E5
TR8	F5
TR9	F5
TR10	E,F5
TR11	E5
TR12	E5
TR13	E,F5
TR14	F5
TR15	F5
TR16	F5
TR17	F4
TR18	F4
TR19	E4
TR20	E5
TR101	D5
TR102	D5
TR103	E5
TR104	E5
TR105	D6
TR107	D6
TR108	D4
TR109	C6
TR110	E6
TR201	F4
TR202	E4
TR203	E4
TR205	E,F4
TR209	F4
TR210	E,F4
TR211	F4
TR301	D1
TR302	E3
TR303	D,E2
TR304	D2
TR305	E2
TR306	F1
TR307	E3
TR308	E,F4
TR309	F3
TR310	E,F3
TR313	D1
TR401	B3
TR402	B4
TR404	C5
TR406	C4
TR407	C4
TR408	C4
TR409	C5
TR410	C5
TR411	C4
TR413	C4
TR414	D4
TR415	C4
TR417	C5
TR419	C2
TR420	C4
TR421	C3
TR423	C2
TR424	B5
TR425	B3
TR470	D4
TR471	C4
TR501	C2
TR502	C1
TR503	C1
TR504	C1
TR505	C2
TR506	C2
TR507	C2
TR508	C,D3
TR509	C3
TR510	C3
TR511	D3
TR512	C,D3
TR513	D4
TR514	C2
TR515	C2
TR570	C1
TR571	C1
TR572	C2
TR573	C2

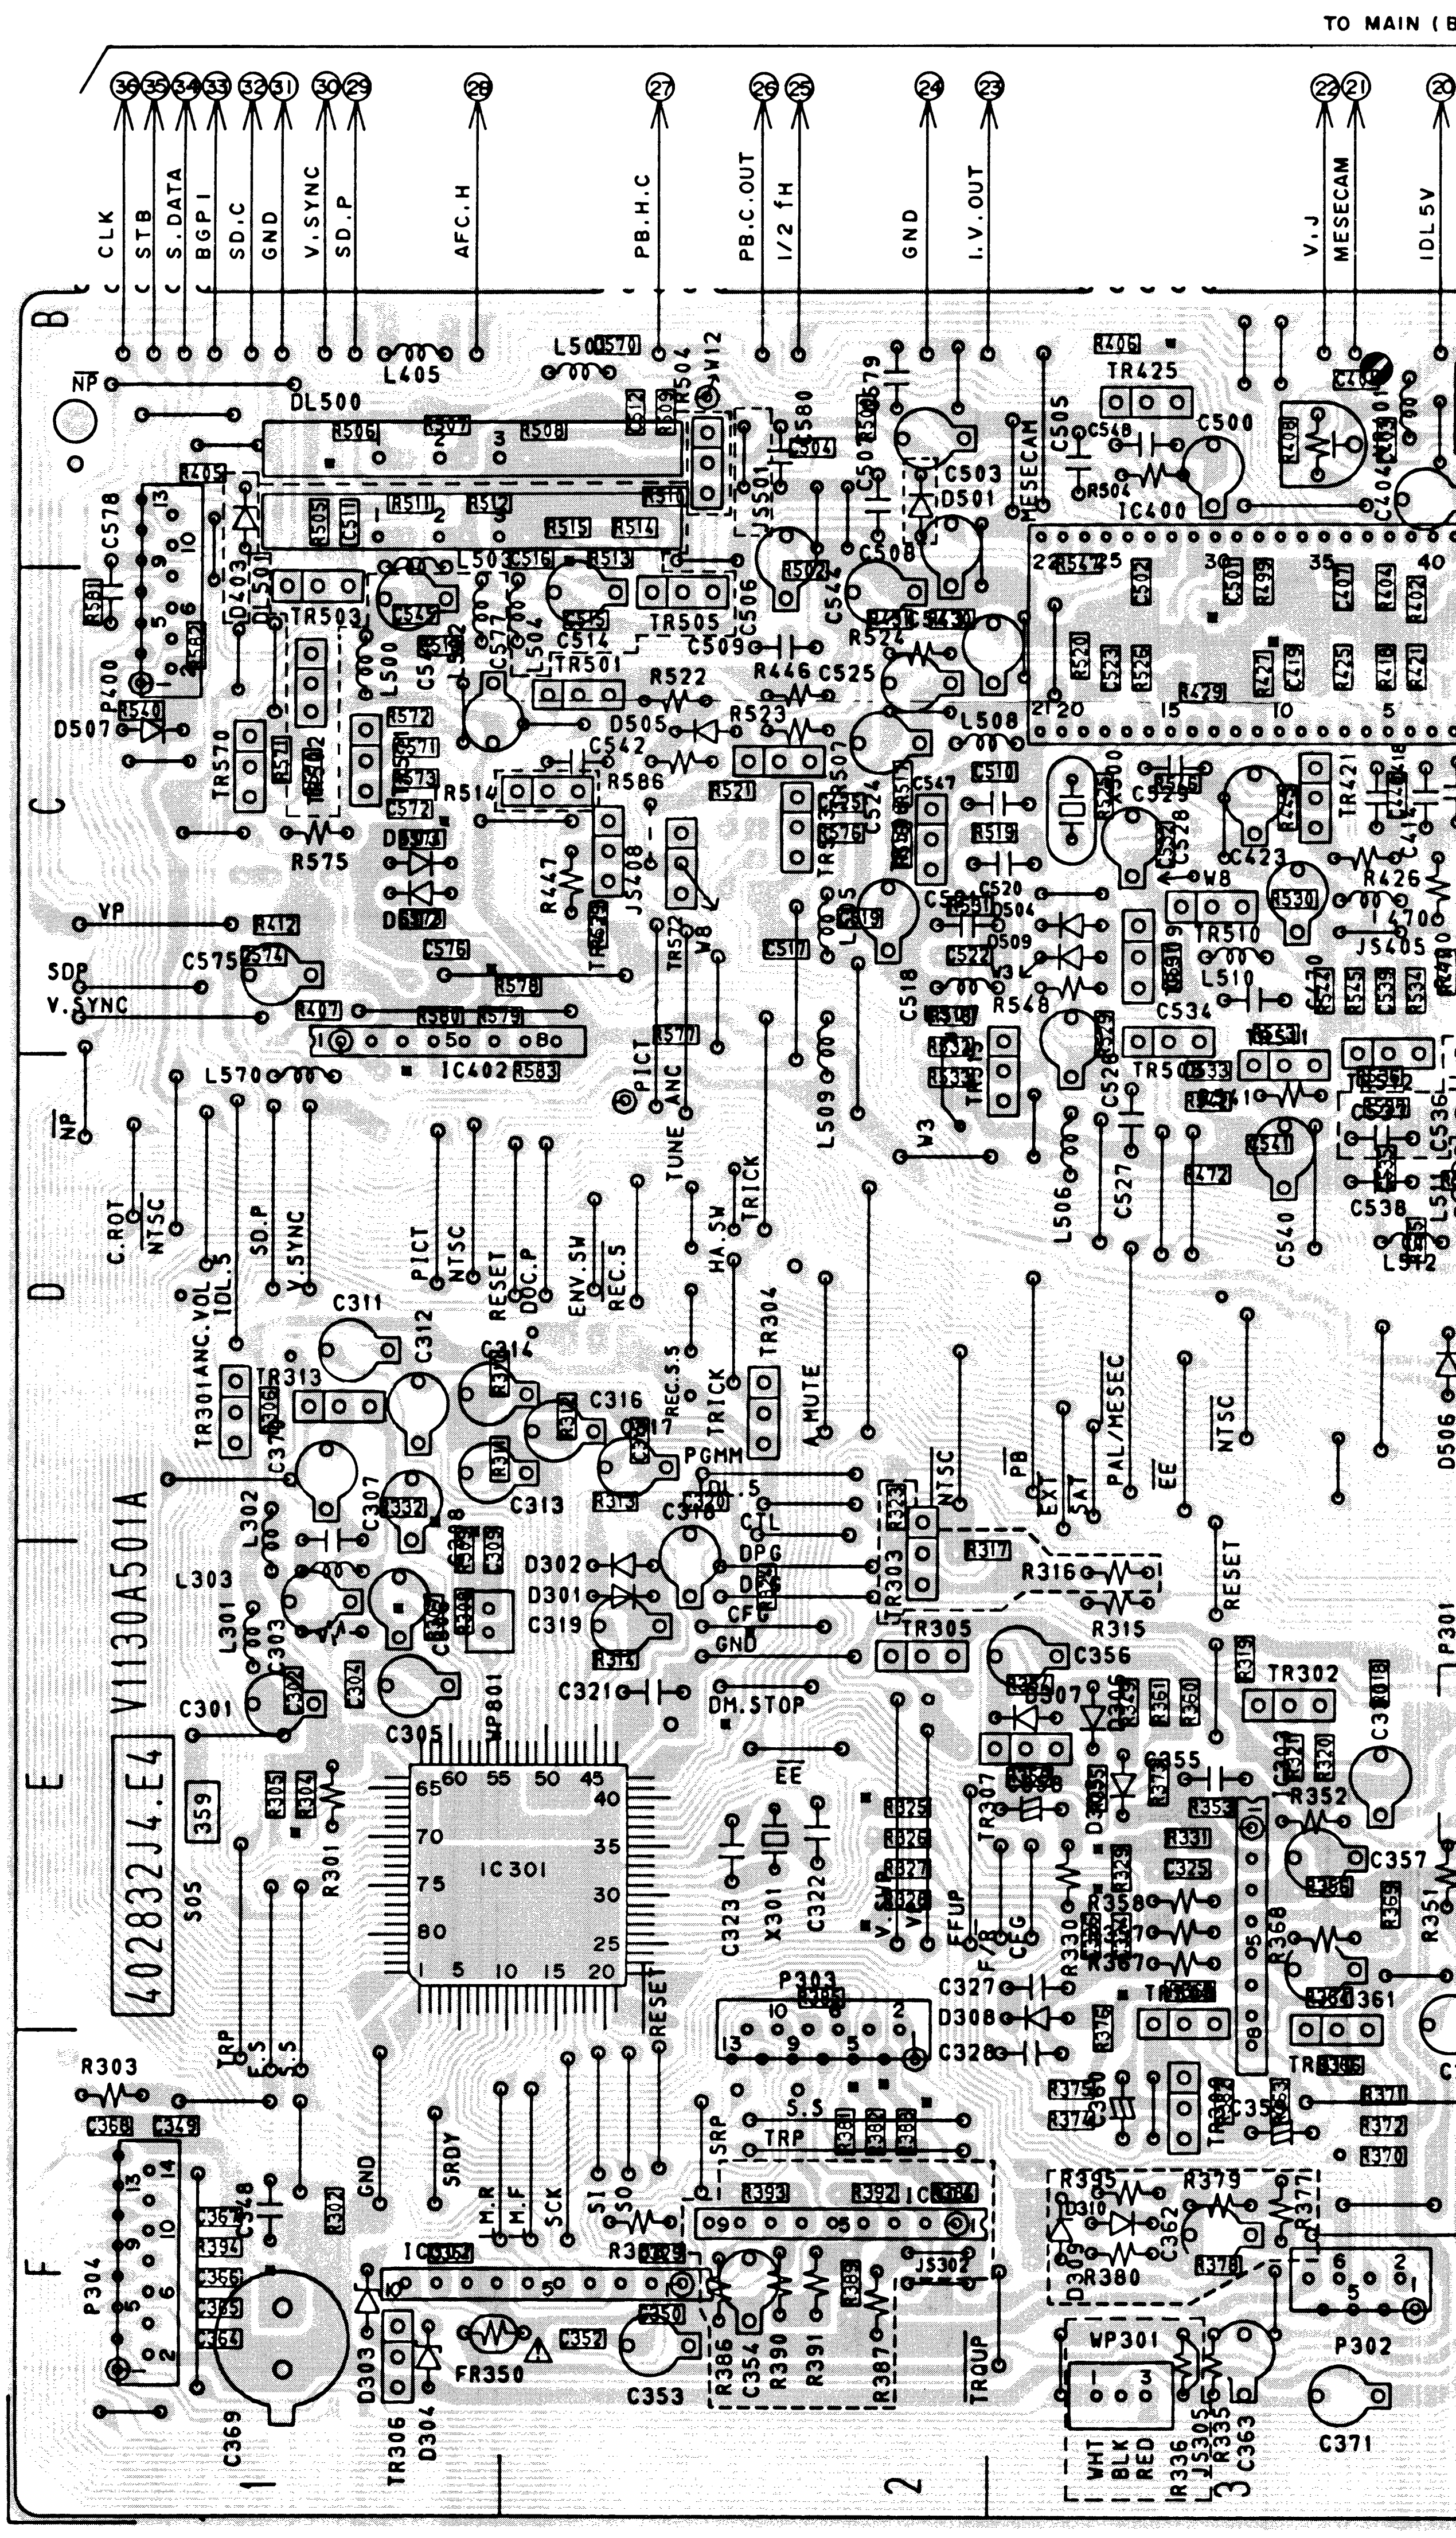
TO MAIN (B
36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20
CLK
STB
S.DATA
BGPI
SD.C
GND
V.SYNC
SD.P
AFC.H
PB.H.C
PB.C.OUT
I/2 fH
GND
I.V.OUT
V.J
MESECAM
IDL5V
B
C
D
E
F
1
2
3
V1130A501A
402832J4.E4
IC301
IC400
IC402
DL500
P400
P304
P303
P302
WP301
WP801
FR350
X301
WHT
BLK
RED

MAIN (A) P

WARNING: ⚠INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: ⚠IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

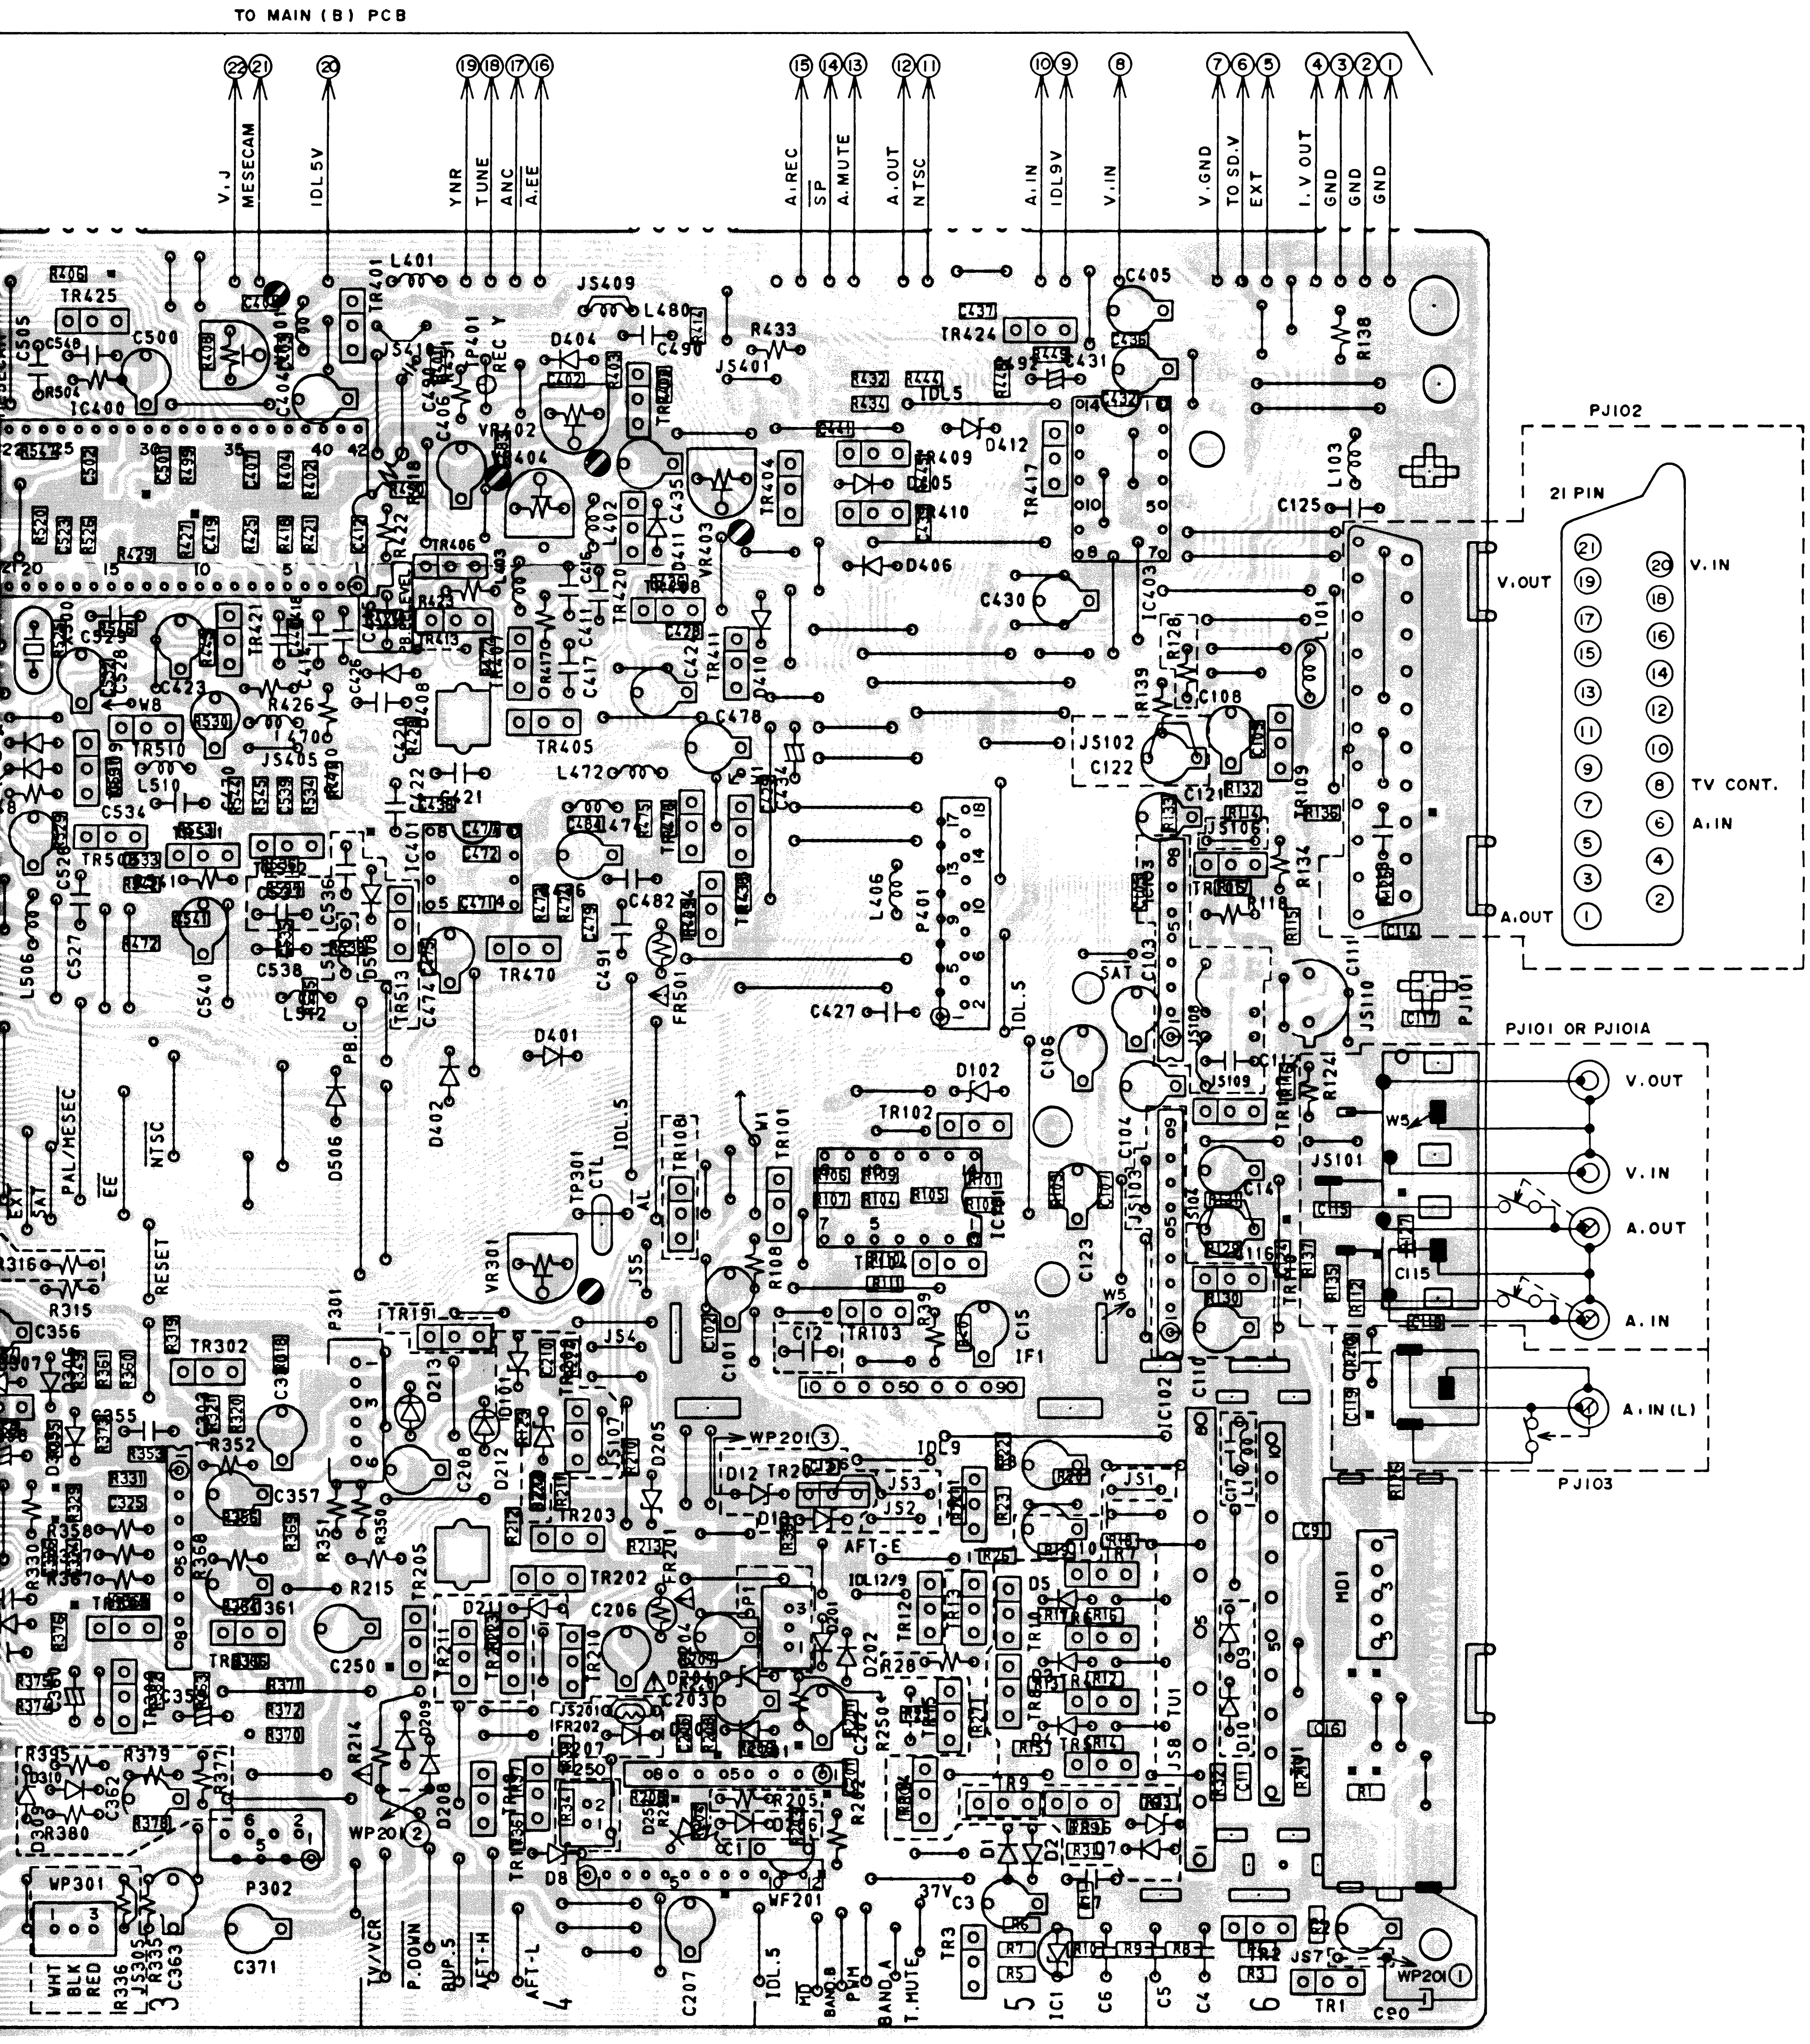
TO MAIN (B) PCB
V.J
MESECAM
IDL5V
YNR
TUNE
ANC
A.EE
A.REC
SP
A.MUTE
A.OUT
NTSC
A.IN
IDL9V
V.IN
V.GND
TO SD.V
EXT
I.V OUT
GND
GND
GND
PJ102
21 PIN
V.OUT
V.IN
TV CONT.
A.IN
A.OUT
PJ101 OR PJ101A
V.OUT
V.IN
A.OUT
A.IN
A.IN (L)
PJ103
WHT
BLK
RED

MAIN (A) PCB V1130A501A (J4)

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING PARTS INFORMATION.

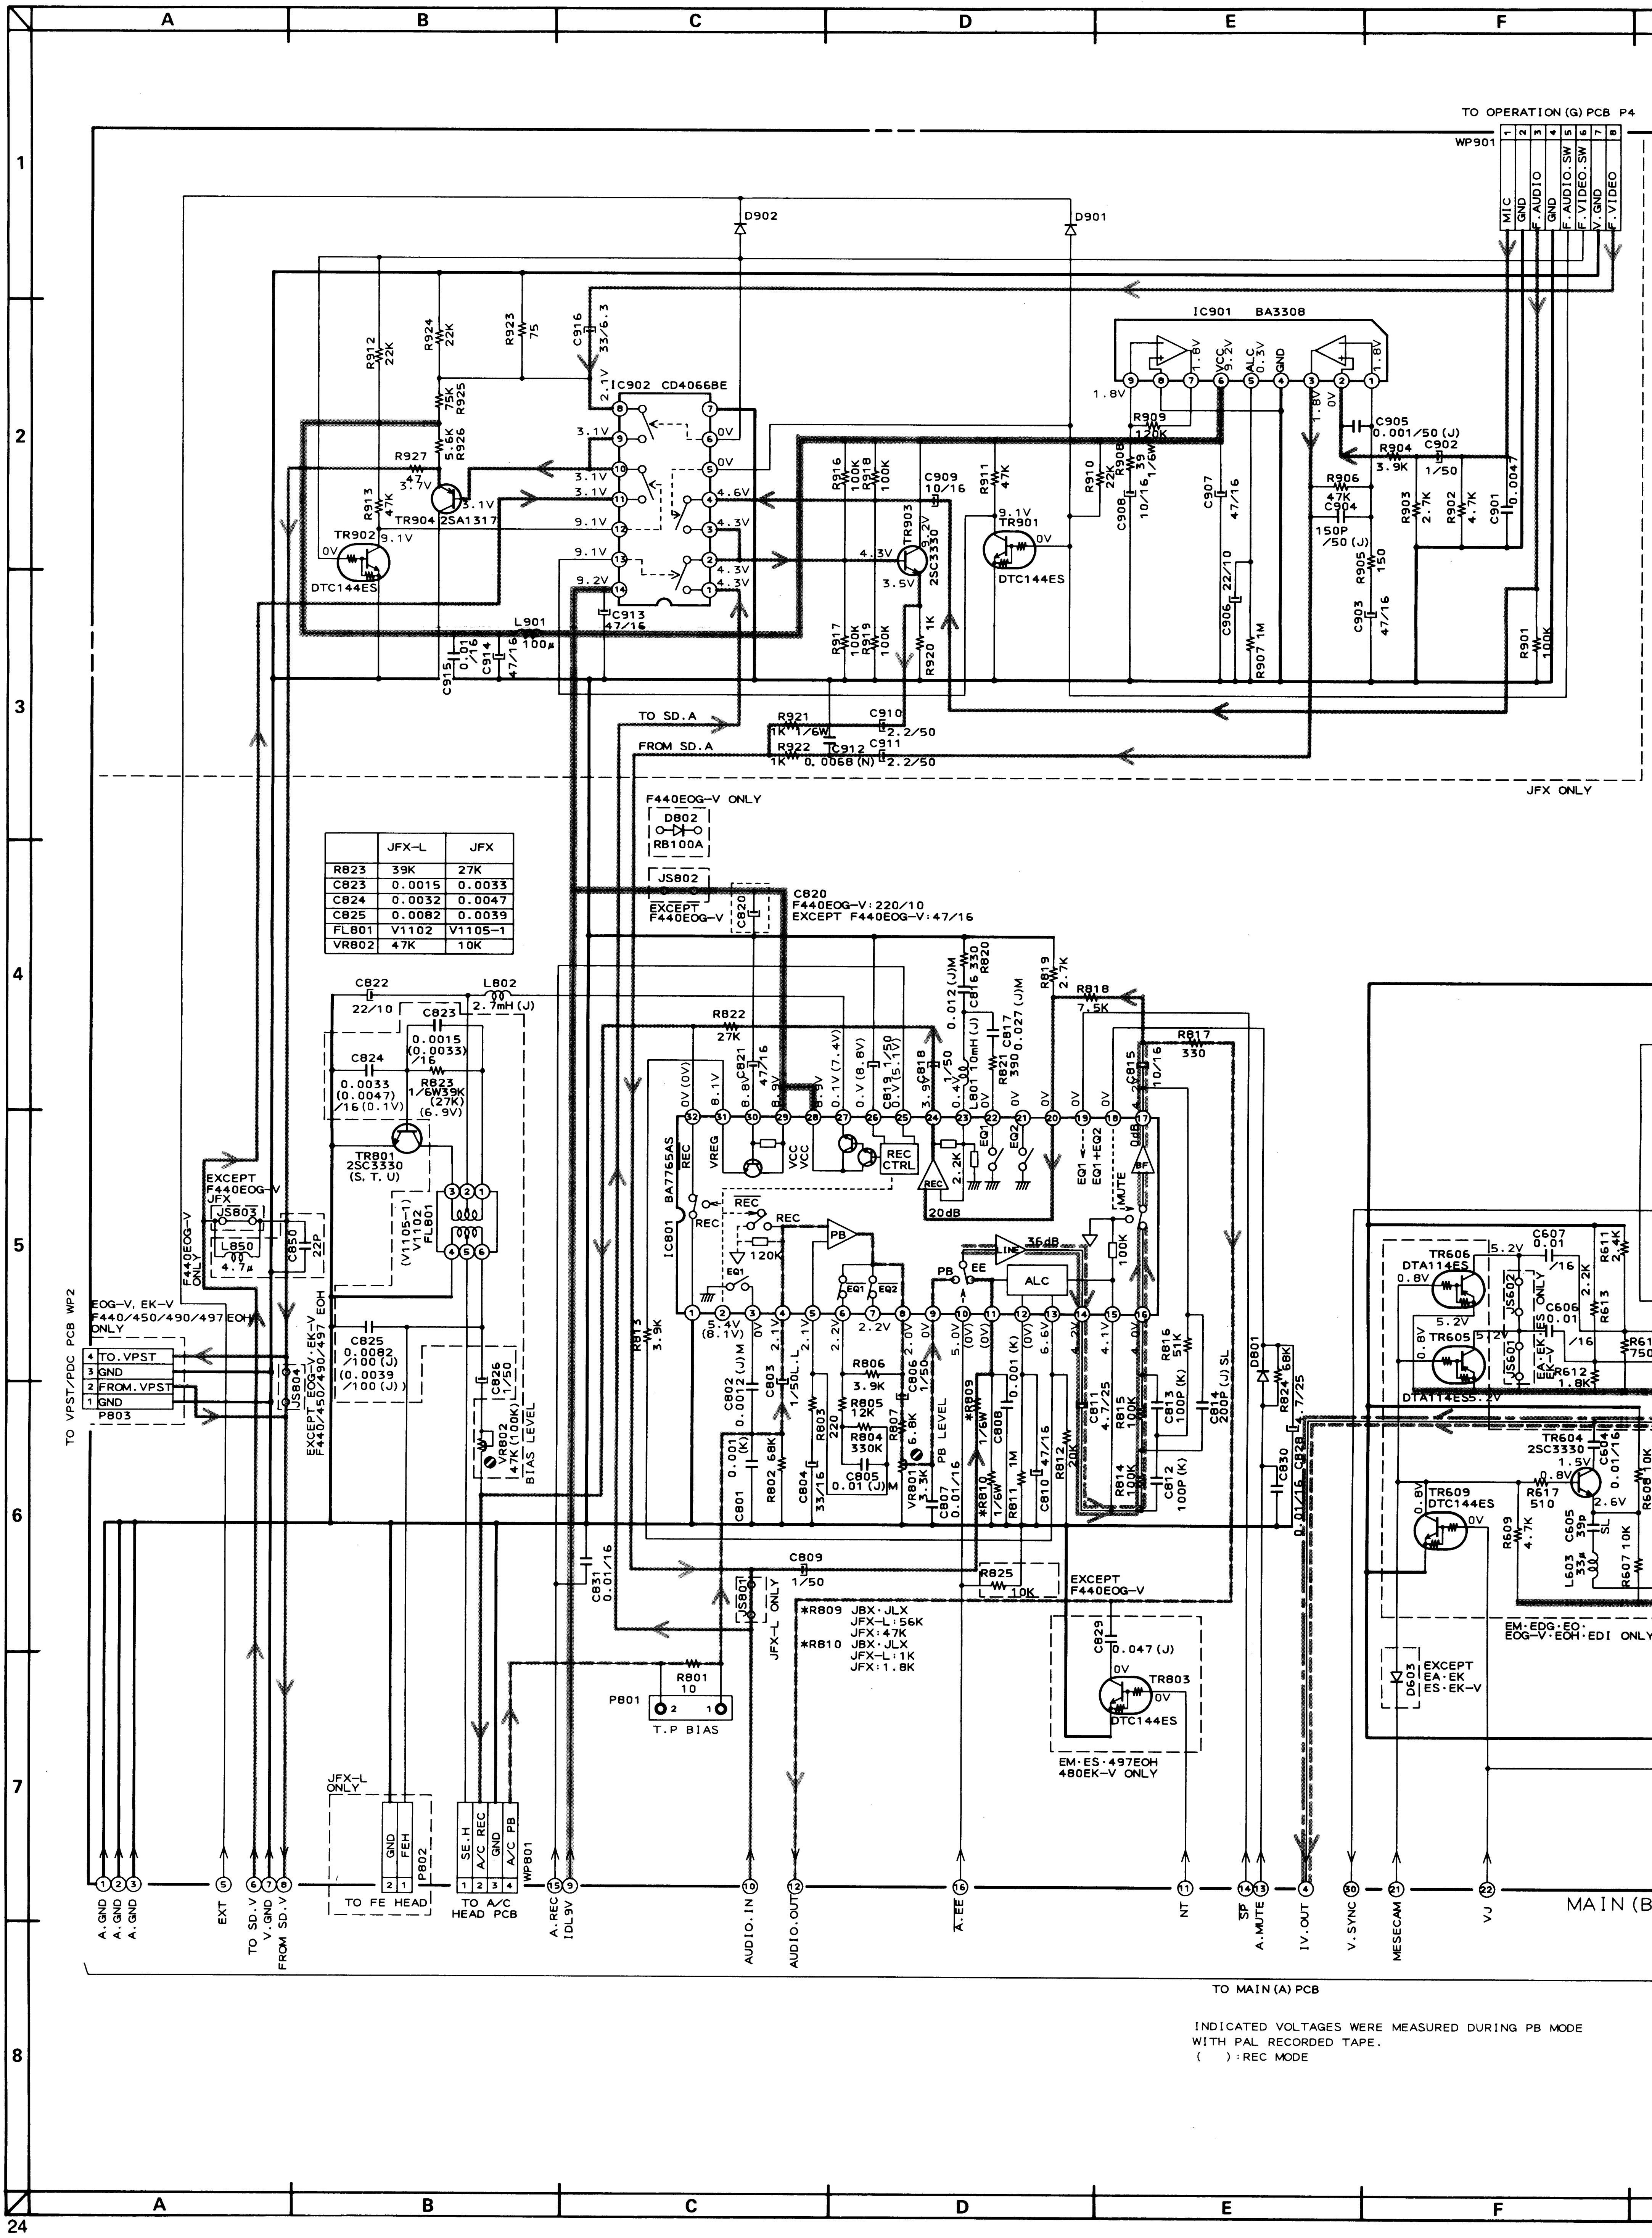
A
B
C
D
E
F
1
2
3
4
5
6
7
8
TO OPERATION (G) PCB P4
WP901
MIC
GND
F.AUDIO
GND
F.AUDIO.SW
F.VIDEO.SW
V.GND
F.VIDEO
D902
D901
IC901 BA3308
IC902 CD4066BE
R912 22K
R924 22K
R923 75
C916 33/6.3
R925 75K
R926 5.6K
R927 47
TR904 2SA1317
R913 47K
TR902
DTC144ES
L901 100μ
C915 0.01/16
C914 47/16
C913 47/16
R916 100K
R918 100K
C909 10/16
TR903 2SC3330
R917 100K
R919 100K
R920 1K
R911 47K
TR901
DTC144ES
R910 22K
R908 39
C908 10/16
R909 120K 1/6W
C907 47/16
C906 22/10
R907 1M
C905 0.001/50 (J)
R904 3.9K
C902 1/50
R906 47K
C904 150P/50 (J)
R903 2.7K
R902 4.7K
C901 0.0047
R905 150
C903 47/16
R901 100K
TO SD.A
FROM SD.A
R921 1K 1/6W
R922 1K
C912 0.0068 (N)
C910 2.2/50
C911 2.2/50
JFX ONLY
F440EOG-V ONLY
D802
RB100A
JS802
EXCEPT F440EOG-V
C820
F440EOG-V:220/10
EXCEPT F440EOG-V:47/16
C822 22/10
L802 2.7mH (J)
C823 0.0015 (0.0033) /16
C824 0.0033 (0.0047) /16 (0.1V)
R823 1/6W 39K (27K) (6.9V)
TR801 2SC3330 (S, T, U)
FL801 V1102 (V1105-1)
EXCEPT F440EOG-V JFX
JS803
L850 4.7μ
C850 22P
F440EOG-V ONLY
EOG-V, EK-V F440/450/490/497 EOH ONLY
TO VPST/PDC PCB WP2
TO.VPST
GND
FROM.VPST
GND
P803
JS804
EXCEPT EOG-V·EK-V F440/450/490/497 EOH
C825 0.0082 /100 (J) (0.0039 /100 (J))
C826 1/50
VR802 47K (100K) BIAS LEVEL
IC801 BA7765AS
R822 27K
C821 47/16
VREG
VCC
REC CTRL
C818 1/50
C819 1/50
C816 330 R820
L801 10mH (J)
C817 0.027 (J)M
R821 390
R819 2.7K
R818 7.5K
R817 330
C815 10/16
EQ1←
EQ1+EQ2
MUTE
BF
0dB
20dB
REC
PB
EE
EQ1
EQ2
LINE
36dB
ALC
PB LEVEL
R813 3.9K
C802 0.0012 (J)M
C803 1/50
C801 0.001 (K)
R802 68K
R803 220
C804 33/16
R806 3.9K
R805 12K
R804 330K
C805 0.01 (J)M
C806 1/50
R807 6.8K
VR801 3.3K
C807 0.01/16
*R809 1/6W
*R810 1/6W
R811 1M
C808 0.001 (K)
C810 47/16
R812 20K
C811 4.7/25
R815 100K
R814 100K
C813 100P (K)
C812 100P (K)
R816 51K
C814 200P (J) SL
D801
R824 68K
C828 4.7/25
C830 0.01/16
C831 0.01/16
C809 1/50
JS801
JFX-L ONLY
R825 10K
EXCEPT F440EOG-V
*R809 JBX·JLX
JFX-L:56K
JFX:47K
*R810 JBX·JLX
JFX-L:1K
JFX:1.8K
C829 0.047 (J)
TR803
DTC144ES
EM·ES·497EOH
480EK-V ONLY
R801 10
P801
T.P BIAS
JFX-L ONLY
GND
FEH
P802
TO FE HEAD
SE.H
A/C REC
GND
A/C PB
WP801
TO A/C HEAD PCB
A.GND
A.GND
A.GND
EXT
TO SD.V
V.GND
FROM SD.V
A.REC
IDL9V
AUDIO.IN
AUDIO.OUT
A.EE
NT
SP
A.MUTE
IV.OUT
V.SYNC
MESECAM
VJ
MAIN (B
TO MAIN (A) PCB
TR606
DTA114ES
C607 0.01
R611 2.4K
R613
JS602
EA·EK·ES ONLY
C606 0.01
TR605
JS601
R612 1.8K
DTA114ES
TR604 2SC3330
C604 0.01/16
R608 10K
TR609
DTC144ES
R617 510
R609 4.7K
C605 39P SL
L603 33μ
R607 10K
EM·EDG·EO·
EOG-V·EOH·EDI ONLY
D603
EXCEPT
EA·EK
ES·EK-V

	JFX-L	JFX
R823	39K	27K
C823	0.0015	0.0033
C824	0.0032	0.0047
C825	0.0082	0.0039
FL801	V1102	V1105-1
VR802	47K	10K

INDICATED VOLTAGES WERE MEASURED DURING PB MODE
WITH PAL RECORDED TAPE.
( ) : REC MODE

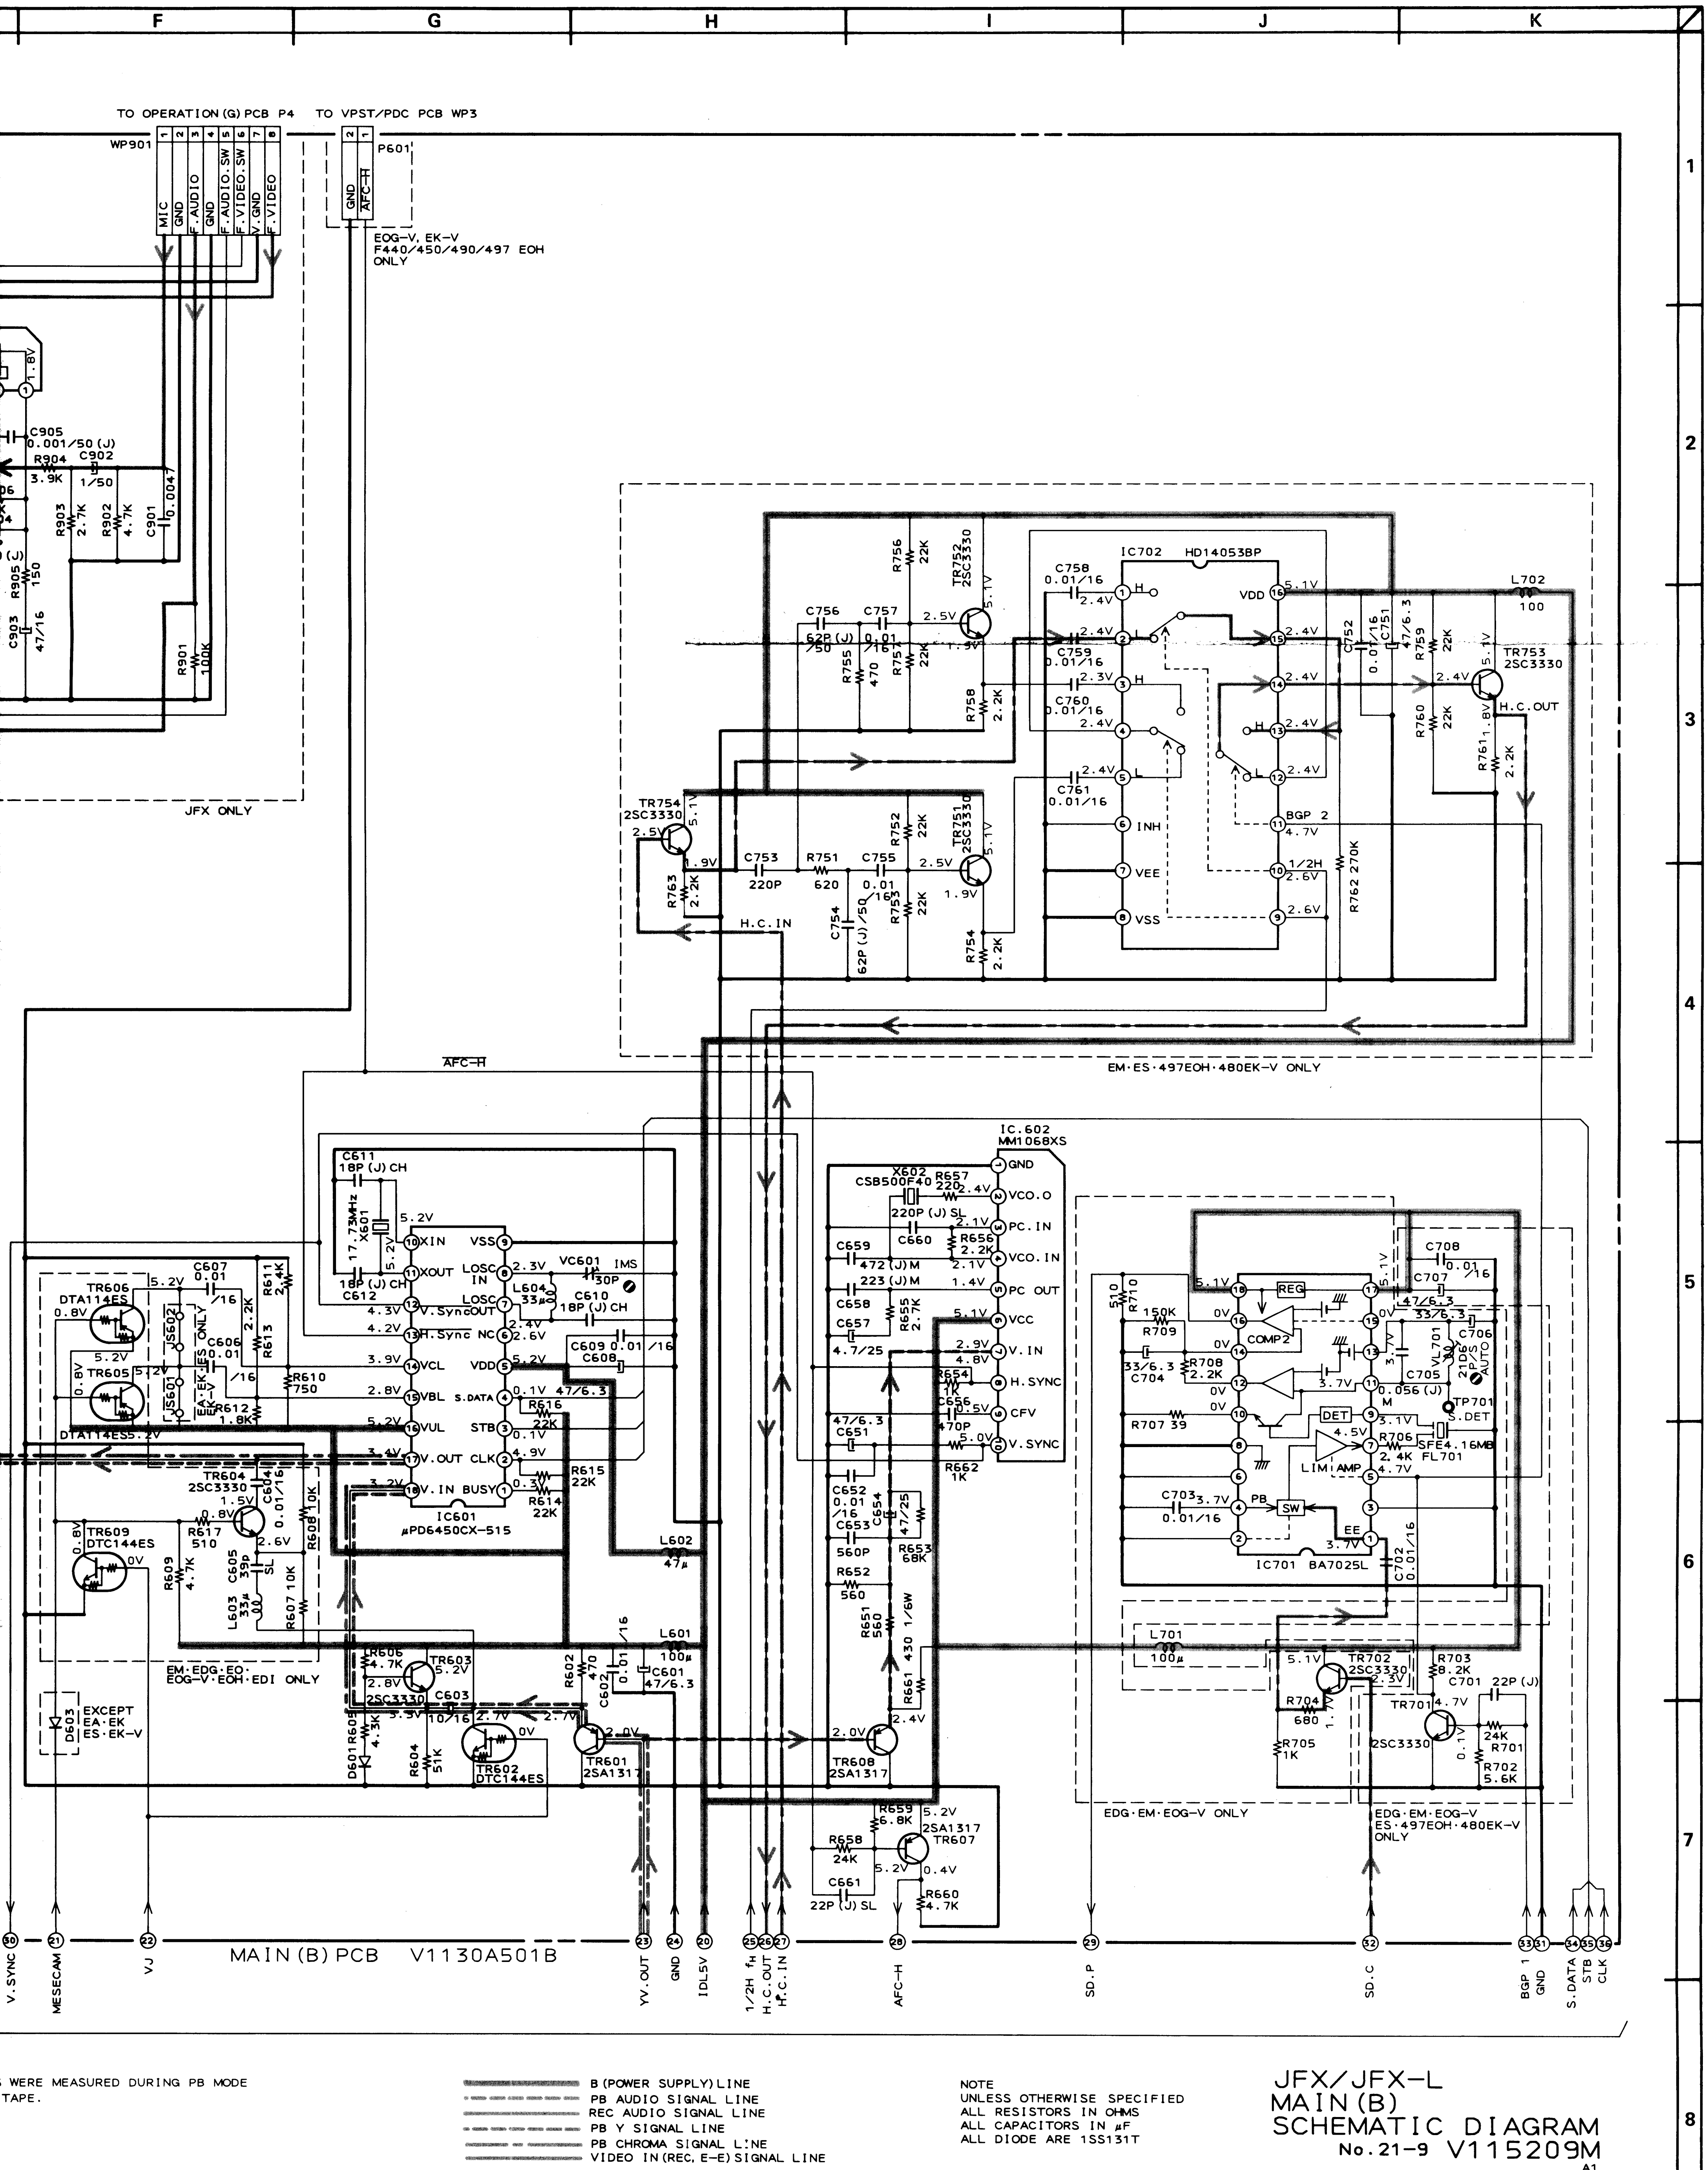
TO OPERATION (G) PCB P4
TO VPST/PDC PCB WP3
WP901
P601
EOG-V, EK-V F440/450/490/497 EOH ONLY
JFX ONLY
IC702 HD14053BP
TR752 2SC3330
TR751 2SC3330
TR753 2SC3330
TR754 2SC3330
H.C.OUT
H.C.IN
L702 100
EM·ES·497EOH·480EK-V ONLY
AFC-H
IC.602 MM1068XS
IC601 μPD6450CX-515
IC701 BA7025L
EM·EDG·EQ· EOG-V·EOH·EDI ONLY
EXCEPT EA·EK ES·EK-V
EDG·EM·EOG-V ONLY
EDG·EM·EOG-V ES·497EOH·480EK-V ONLY
TR601 2SA1317
TR602 DTC144ES
TR603 2SC3330
TR604 2SC3330
TR605 DTA114ES
TR606 DTA114ES
TR607 2SA1317
TR608 2SA1317
TR609 DTC144ES
TR701 2SC3330
TR702 2SC3330
MAIN (B) PCB V1130A501B
V.SYNC
MESECAM
VJ
YV.OUT
GND
IDL5V
1/2H fH
H.C.OUT
H.C.IN
AFC-H
SD.P
SD.C
BGP 1
GND
S.DATA
STB
CLK

S WERE MEASURED DURING PB MODE
TAPE.

B (POWER SUPPLY) LINE
PB AUDIO SIGNAL LINE
REC AUDIO SIGNAL LINE
PB Y SIGNAL LINE
PB CHROMA SIGNAL LINE
VIDEO IN (REC, E-E) SIGNAL LINE

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF
ALL DIODE ARE 1SS131T

JFX/JFX-L
MAIN (B)
SCHEMATIC DIAGRAM
No.21-9 V115209M
A1

PRINCIPAL PARTS LOCATION

ICs

IC601	A3
IC602	A1
IC701	A1
IC702	A2
IC801	A4
IC901	A5
IC902	A6

WPs

WP801	A4
WP901	A6

CONNECTORs

P601	A3
P801	A4
P802	A4
P803	A5,6

TRANSISTORs

TR601	A3
TR602	A3
TR603	A3
TR604	A3
TR605	A3
TR606	A3
TR607	A1
TR608	A3
TR609	A3
TR701	A1
TR702	A1
TR751	A2
TR752	A2
TR753	A2
TR754	A2
TR801	A4
TR803	B5
TR901	A6
TR902	A6
TR903	A6
TR904	B6

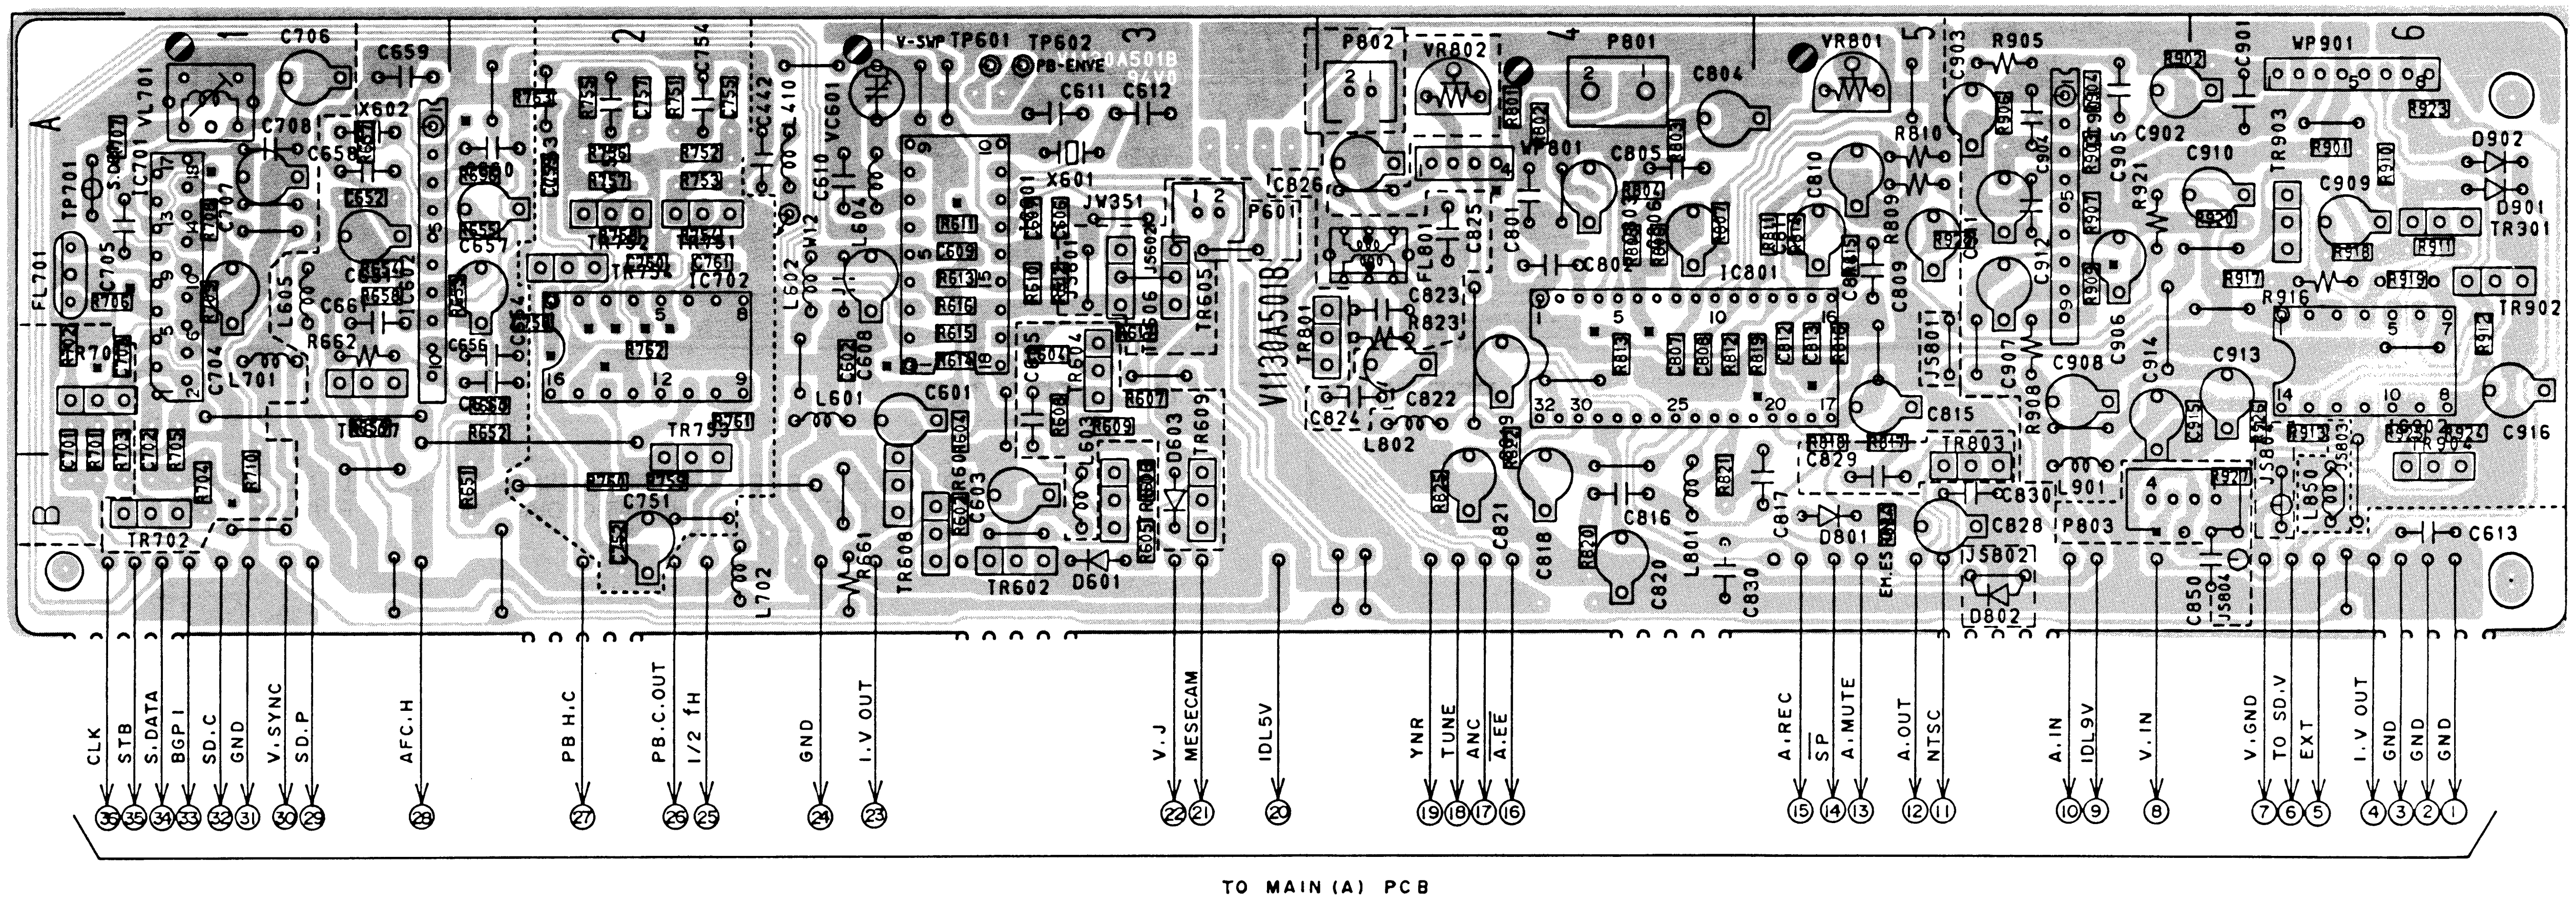
VII30A501B
CLK
STB
S.DATA
BGP.I
SD.C
GND
V.SYNC
SD.P
AFC.H
PB H.C
PB.C.OUT
1/2 fH
GND
I.V OUT
V.J
MESECAM
IDL5V
YNR
TUNE
ANC
A.EE
A.REC
SP
A.MUTE
A.OUT
NTSC
A.IN
IDL9V
V.IN
V.GND
TO SD.V
EXT
I.V OUT
GND
GND
GND
TO MAIN (A) PCB

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING PARTS INFORMATION.

MAIN(B) PCB VII30A501B(J4)

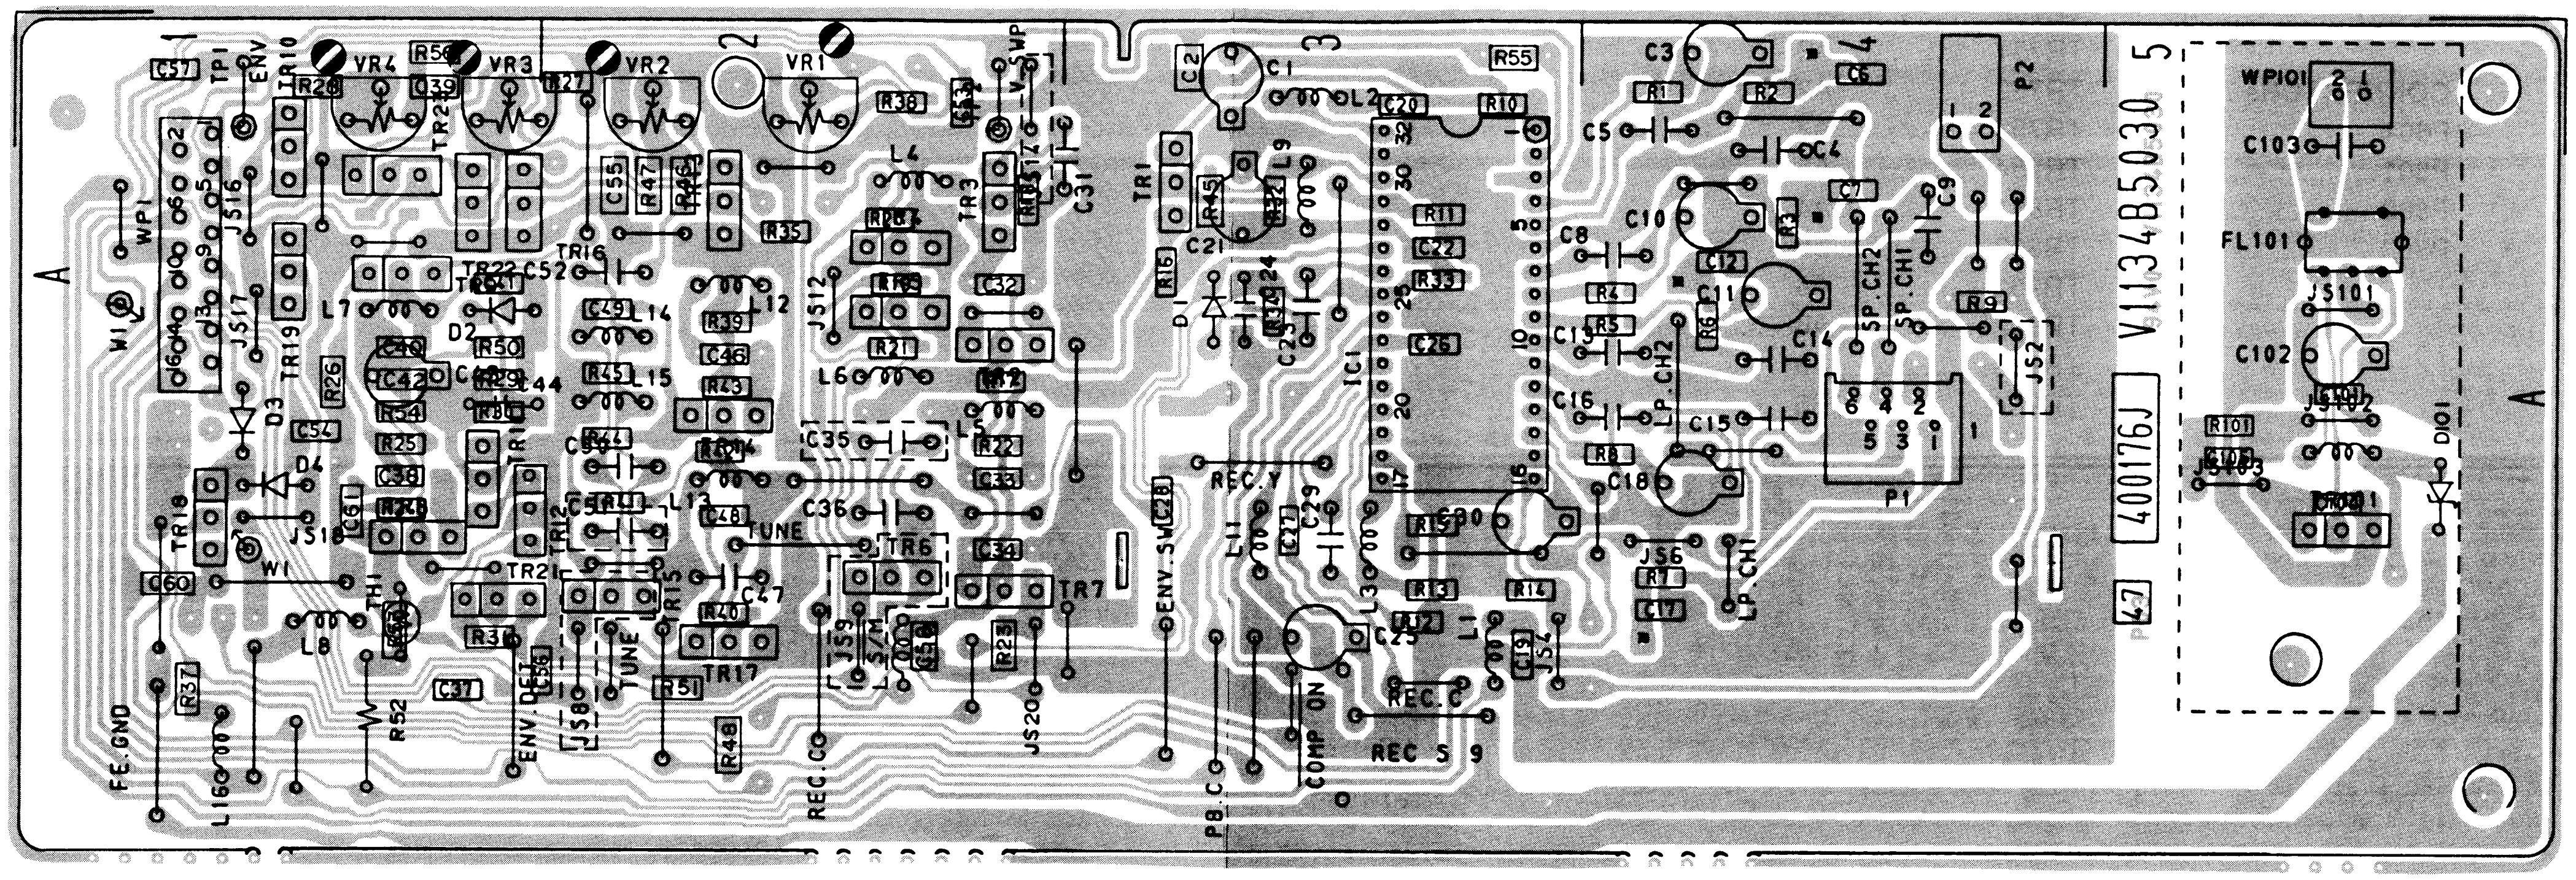
VR4
VR3
VR2
VR1
IC1
TR1
TR3
TR6
TR7
TR17
TR18
TR19
FL101
WP101
WP1
P1
P2
V1134B5030
400176J
REC.Y
REC.C
REC 5 9
COMP ON
PB.C
REC.C0
ENV.5V
ENV.DET
TUNE
FE.GND
SP.CH1
SP.CH2
LP.CH1
LP.CH2
A

PRE AMP PCB V1134B5030(J2)

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER.
REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING
PARTS INFORMATION.

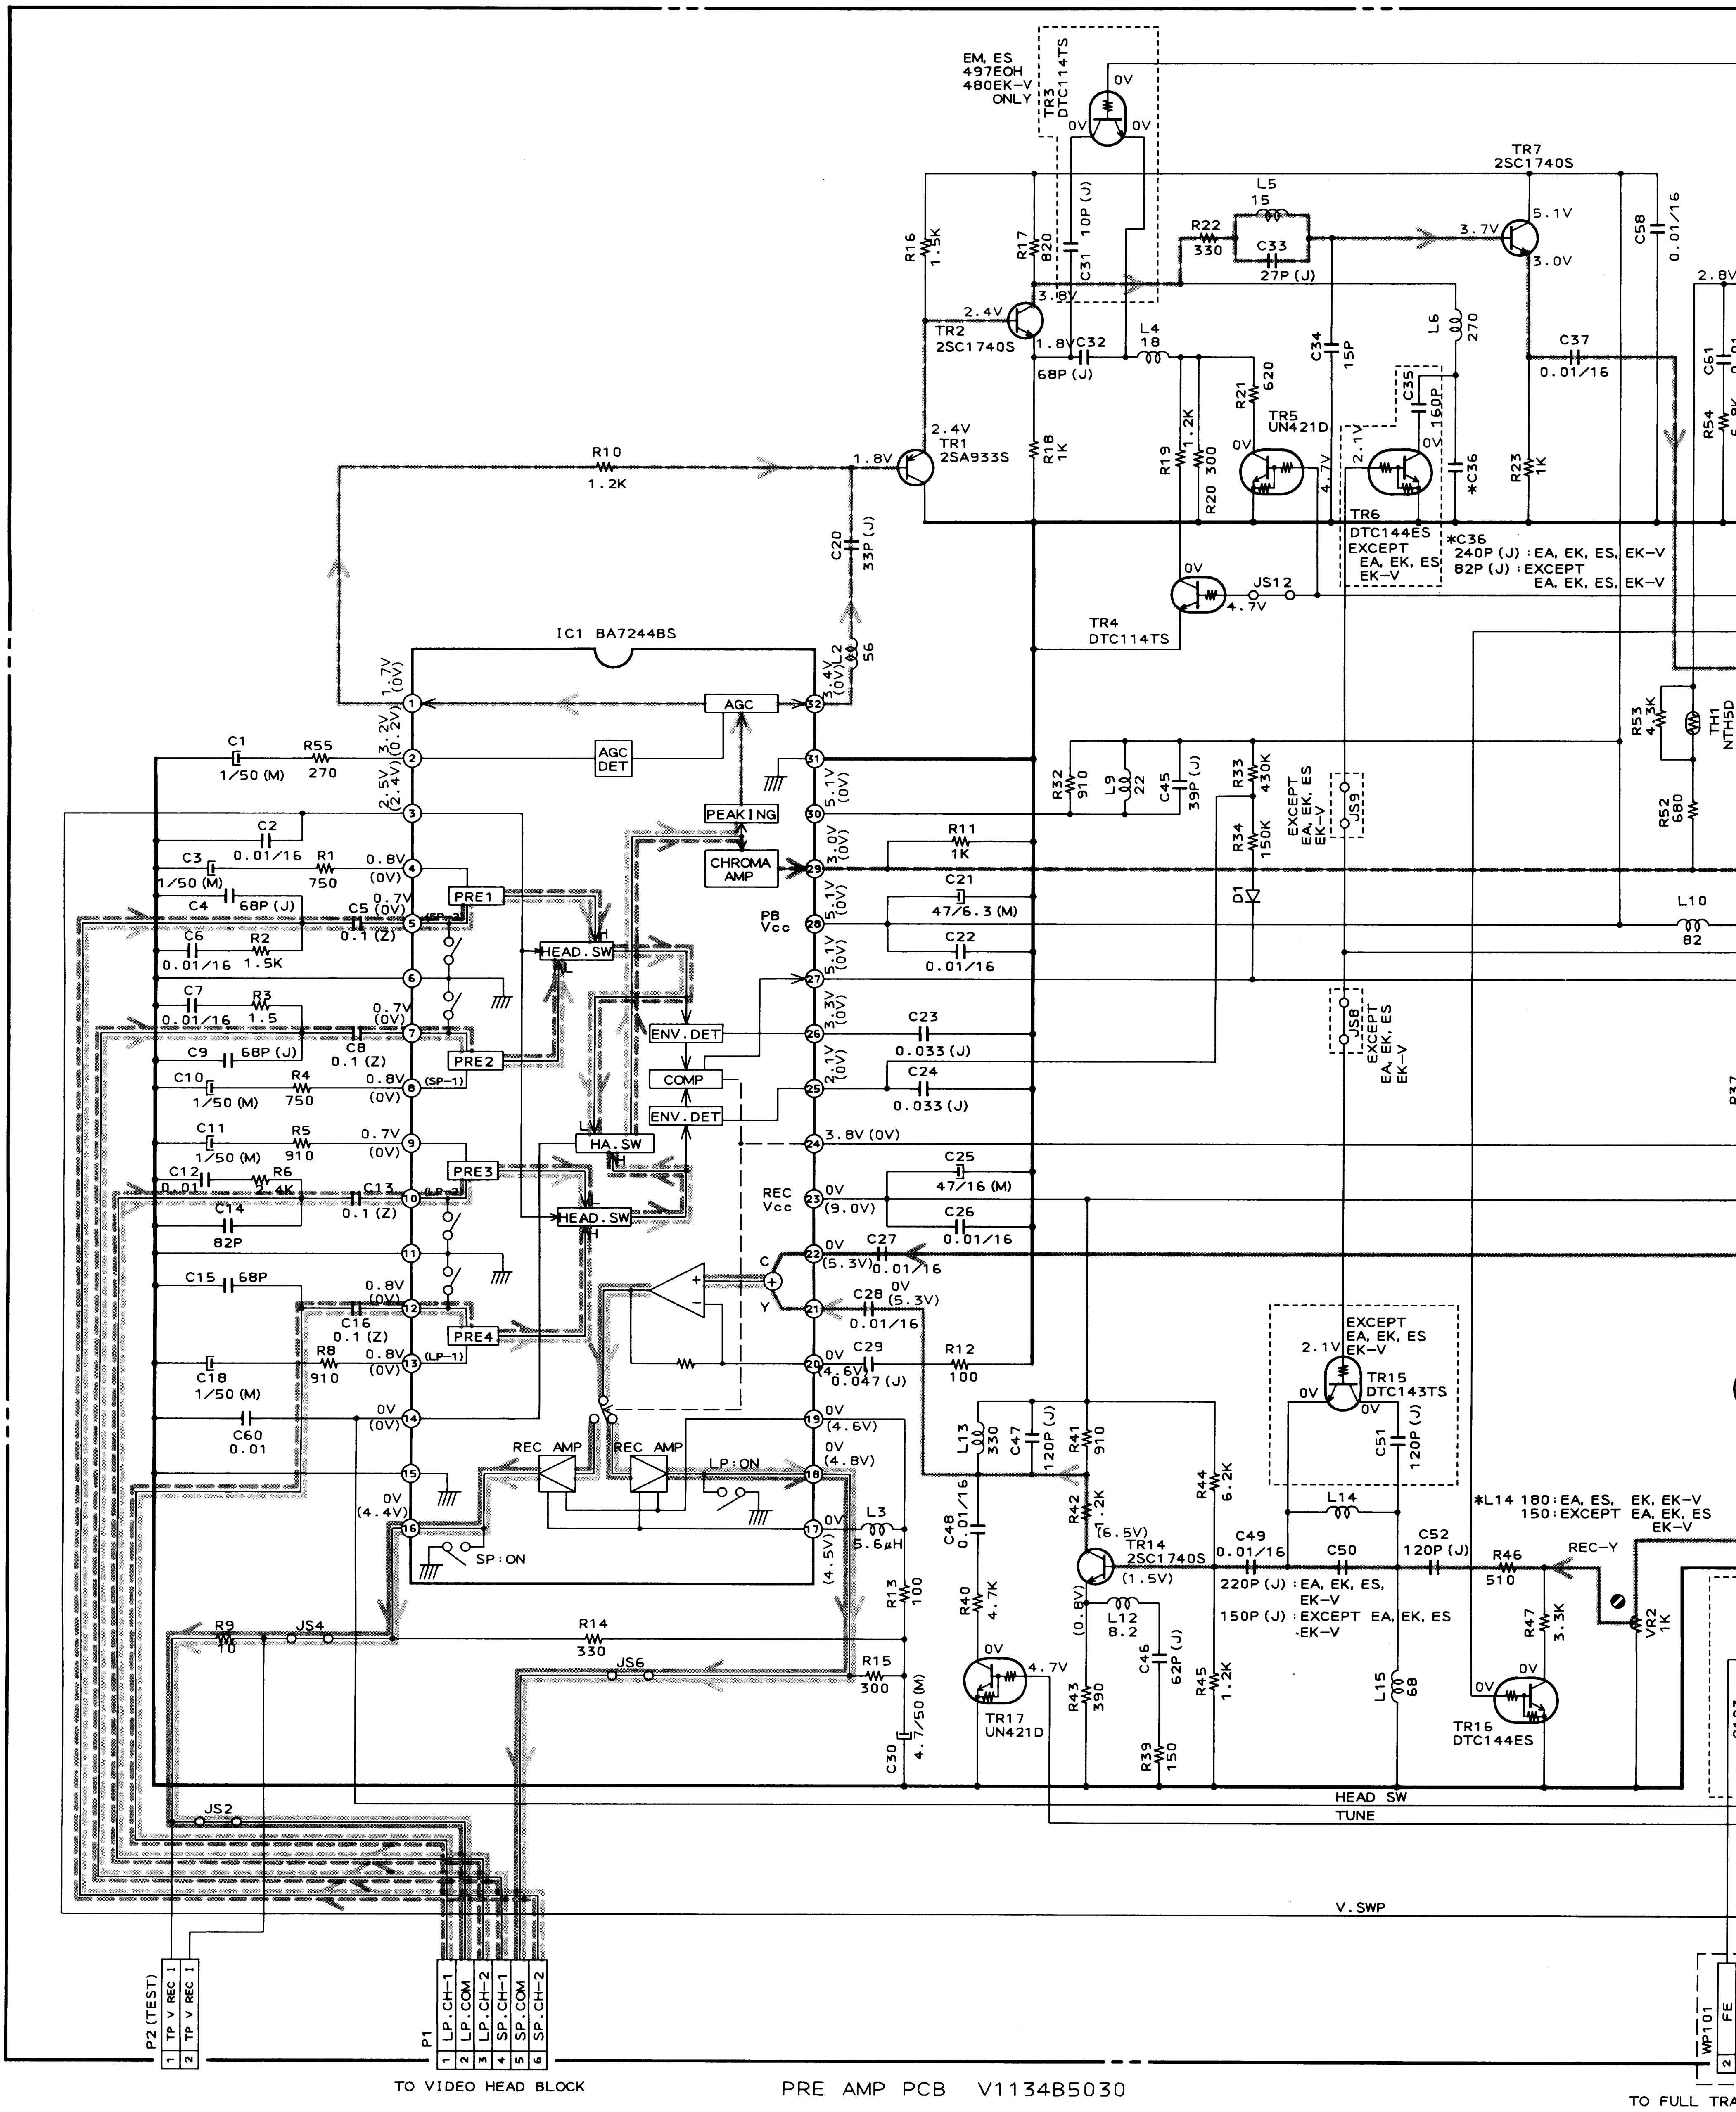
IC1 BA7244BS
AGC
AGC DET
PEAKING
CHROMA AMP
PRE1
PRE2
PRE3
PRE4
HEAD.SW
HA.SW
ENV.DET
COMP
REC AMP
LP:ON
SP:ON
PB Vcc
REC Vcc
TR1 2SA933S
TR2 2SC1740S
TR3 DTC114TS
EM, ES 497EOH 480EK-V ONLY
TR4 DTC114TS
TR5 UN421D
TR6 DTC144ES
TR7 2SC1740S
TR14 2SC1740S
TR15 DTC143TS
TR16 DTC144ES
TR17 UN421D
TH1 NTH5D
*C36 240P (J) : EA, EK, ES, EK-V
82P (J) : EXCEPT EA, EK, ES, EK-V
*L14 180 : EA, ES, EK, EK-V
150 : EXCEPT EA, EK, ES EK-V
220P (J) : EA, EK, ES, EK-V
150P (J) : EXCEPT EA, EK, ES -EK-V
EXCEPT EA, EK, ES EK-V
REC-Y
HEAD SW
TUNE
V.SWP
P2 (TEST)
TP V REC 1
TP V REC 1
P1
LP.CH-1
LP.COM
LP.CH-2
SP.CH-1
SP.COM
SP.CH-2
TO VIDEO HEAD BLOCK
WP101
TO FULL TRA

PRE AMP PCB V1134B5030

▨ B (POWER SUPPLY) LINE
▨ PB Y SIGNAL LINE
▨ REC Y SIGNAL LINE
▨ PB CHROMA SIGNAL LINE
▨ REC CHROMA SIGNAL LINE

INDICATED VOLTAG
MEASURED DURING
( ) : REC MODE

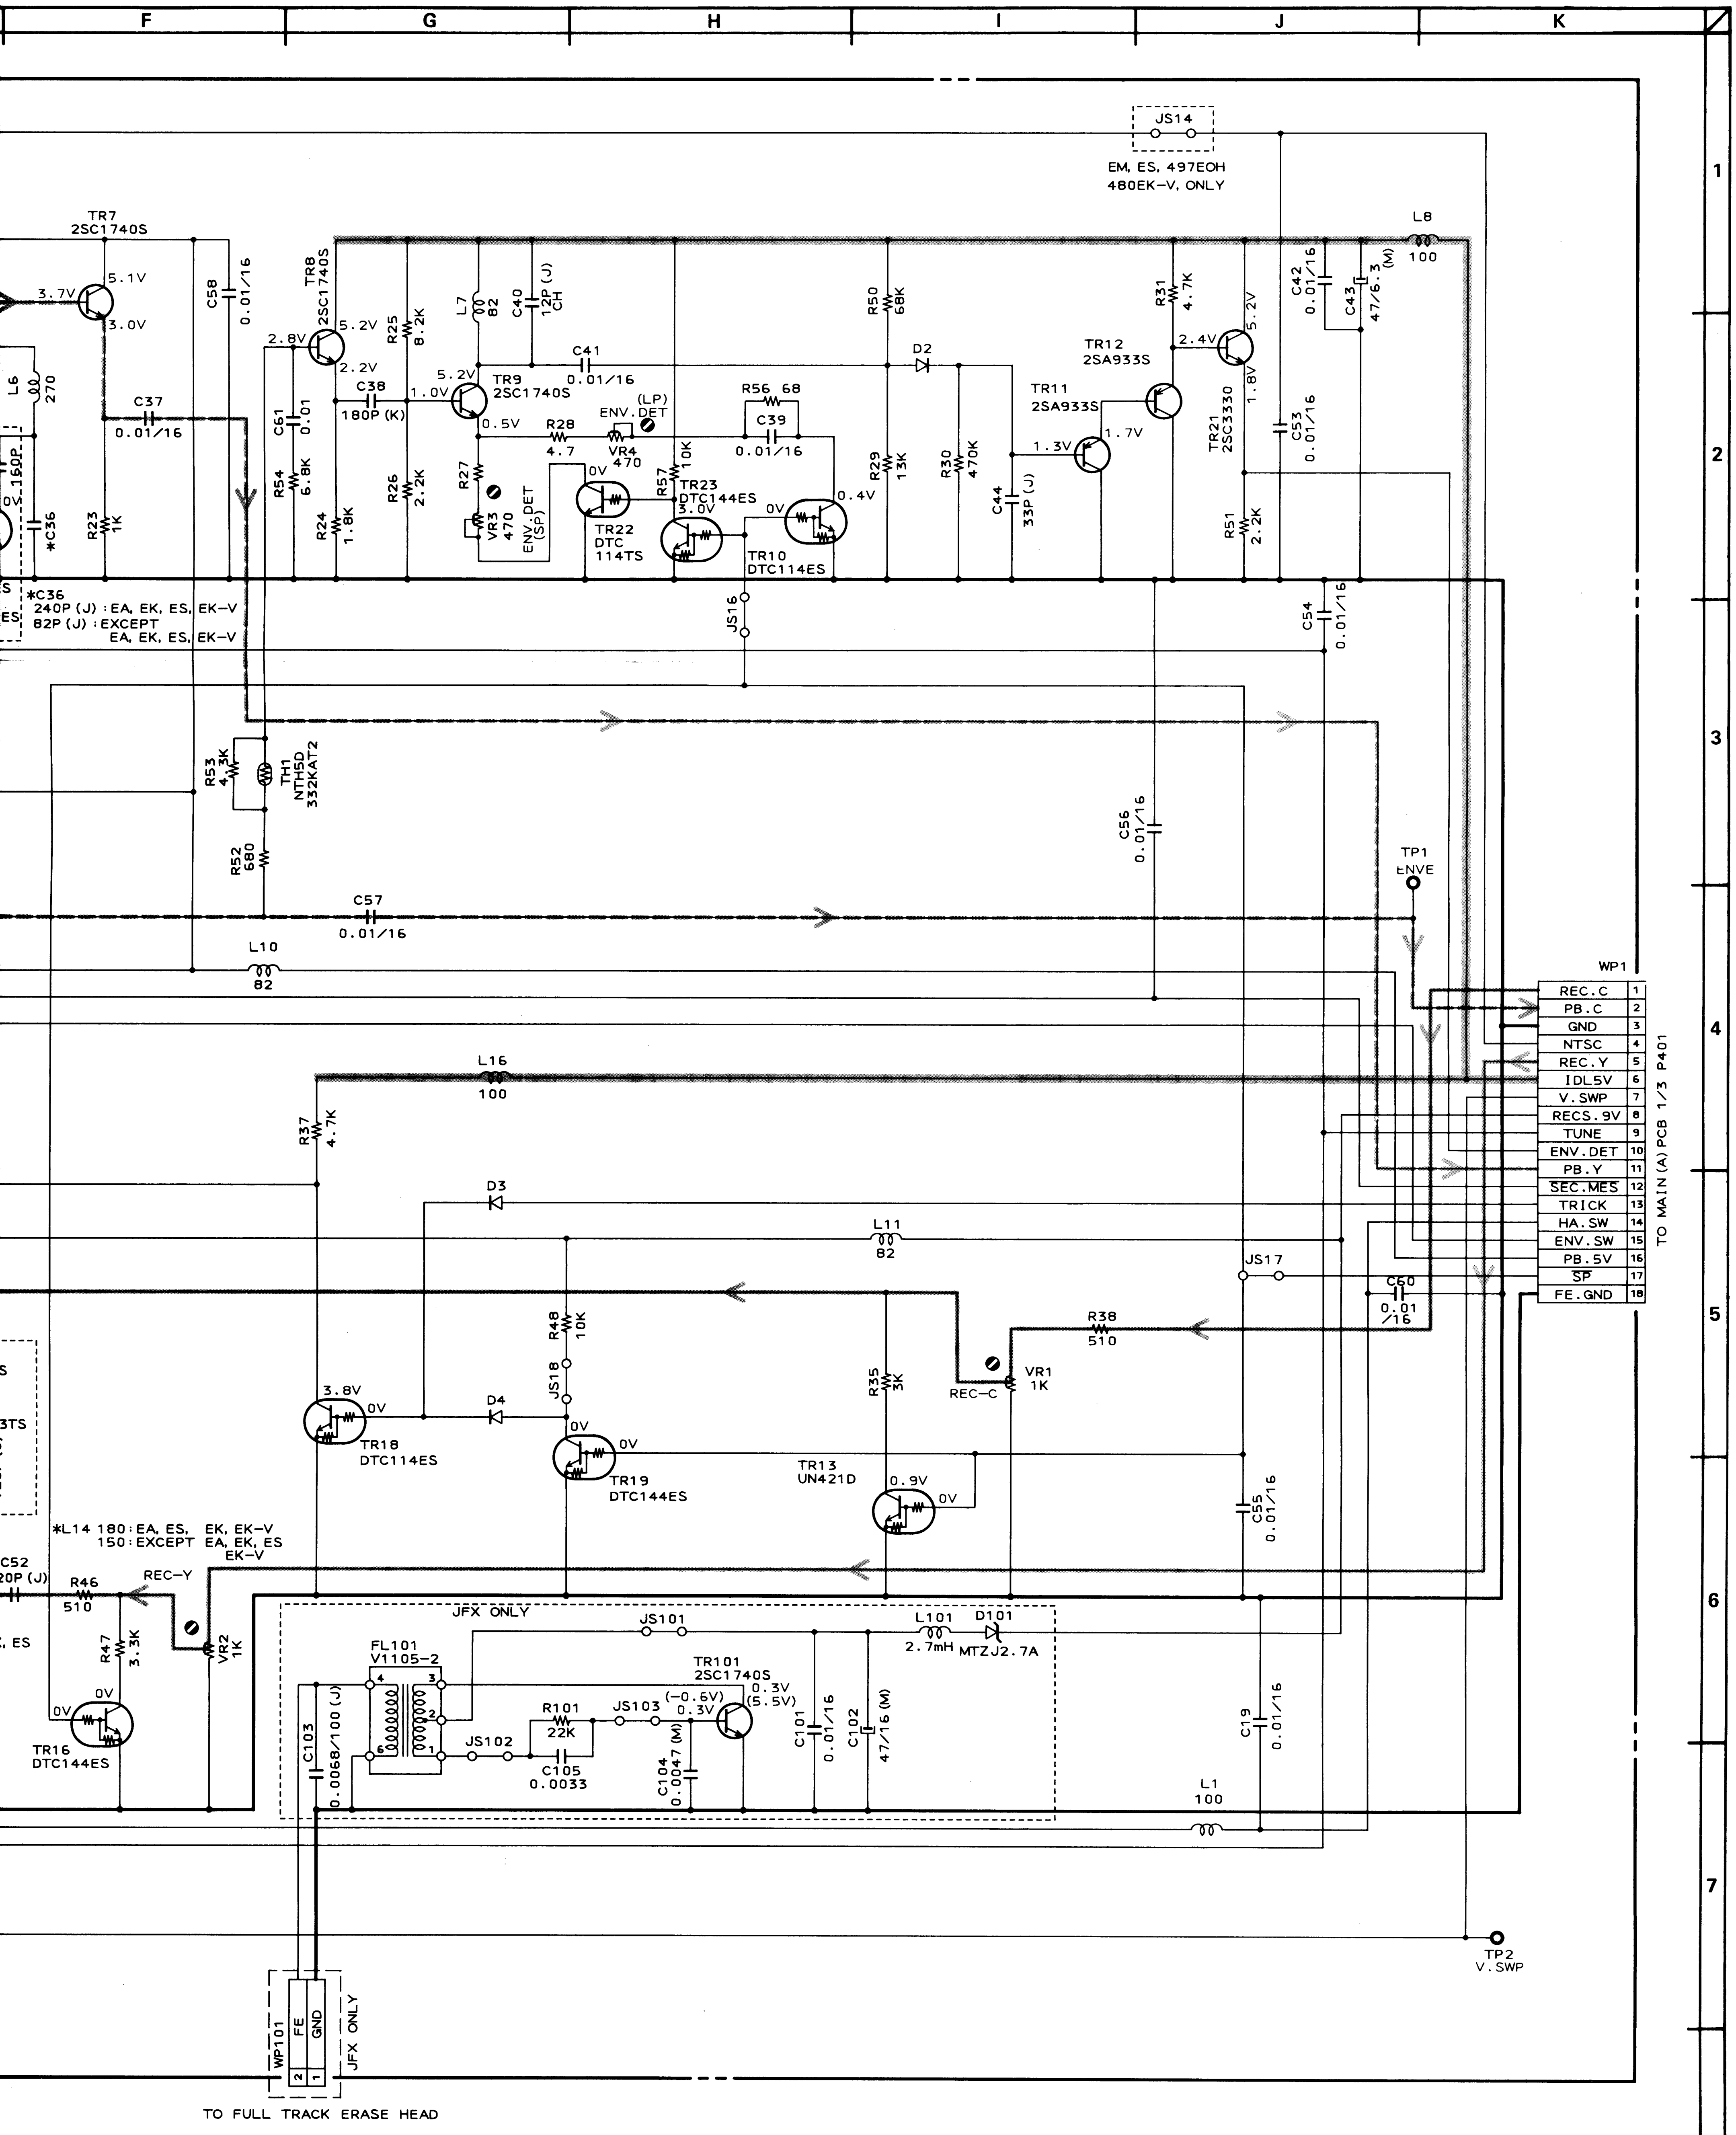
F
G
H
I
J
K
1
2
3
4
5
6
7
8
JS14
EM, ES, 497EOH
480EK-V, ONLY
TR7
2SC1740S
3.7V
5.1V
3.0V
L6
270
C37
0.01/16
R23
1K
*C36
C58
0.01/16
*C36
240P (J) : EA, EK, ES, EK-V
82P (J) : EXCEPT
EA, EK, ES, EK-V
TR8
2SC1740S
2.8V
5.2V
2.2V
C61
0.01
R54
6.8K
R24
1.8K
R25
8.2K
R26
2.2K
C38
180P (K)
1.0V
5.2V
TR9
2SC1740S
0.5V
L7
82
C40
12P (J)
CH
C41
0.01/16
R27
VR3
470
ENV.DET
(SP)
R28
4.7
(LP)
ENV.DET
VR4
470
0V
TR22
DTC
114TS
R57
10K
TR23
DTC144ES
3.0V
R56 68
C39
0.01/16
0V
TR10
DTC114ES
0.4V
JS16
R50
68K
R29
13K
D2
R30
470K
C44
33P (J)
TR11
2SA933S
1.3V
1.7V
TR12
2SA933S
R31
4.7K
2.4V
5.2V
1.8V
TR21
2SC3330
R51
2.2K
C53
0.01/16
C42
0.01/16
C43
47/6.3
(M)
L8
100
C54
0.01/16
R53
4.3K
TH1
NTH5D
332KAT2
R52
680
C56
0.01/16
C57
0.01/16
L10
82
TP1
ENVE
WP1
REC.C 1
PB.C 2
GND 3
NTSC 4
REC.Y 5
IDL5V 6
V.SWP 7
RECS.9V 8
TUNE 9
ENV.DET 10
PB.Y 11
SEC.MES 12
TRICK 13
HA.SW 14
ENV.SW 15
PB.5V 16
SP 17
FE.GND 18
TO MAIN (A) PCB 1/3 P401
L16
100
R37
4.7K
D3
L11
82
JS17
C60
0.01
/16
R48
10K
JS18
R38
510
VR1
1K
REC-C
R35
3K
3.8V
0V
D4
TR18
DTC114ES
0V
0V
TR19
DTC144ES
TR13
UN421D
0.9V
0V
C55
0.01/16
*L14 180: EA, ES, EK, EK-V
150: EXCEPT EA, EK, ES
EK-V
C52
20P (J)
R46
510
REC-Y
R47
3.3K
VR2
1K
0V
0V
TR16
DTC144ES
JFX ONLY
JS101
L101
2.7mH
D101
MTZJ2.7A
FL101
V1105-2
TR101
2SC1740S
0.3V
(5.5V)
(-0.6V)
0.3V
R101
22K
JS103
JS102
C105
0.0033
C1047
0.0047 (M)
C103
0.0068/100 (J)
C101
0.01/16
C102
47/16 (M)
C19
0.01/16
L1
100
TP2
V.SWP
WP101
FE
GND
2
1
JFX ONLY
TO FULL TRACK ERASE HEAD

INDICATED VOLTAGES WERE
MEASURED DURING PB MODE.
( ) : REC MODE

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF
ALL INDUCTORS IN μH (K)
ALL DIODES ARE 1SS131

TRANSISTORS 2SA933S AND 2SC1740 CAN BE
SUBSTITUTED FOR 2SA1317 AND 2SC3330 RESPECTIVELY.

JFX/JFX-L
PRE AMP
SCHEMATIC DIAGRAM
No. 21-10 V115210M
A1

F G H I J K

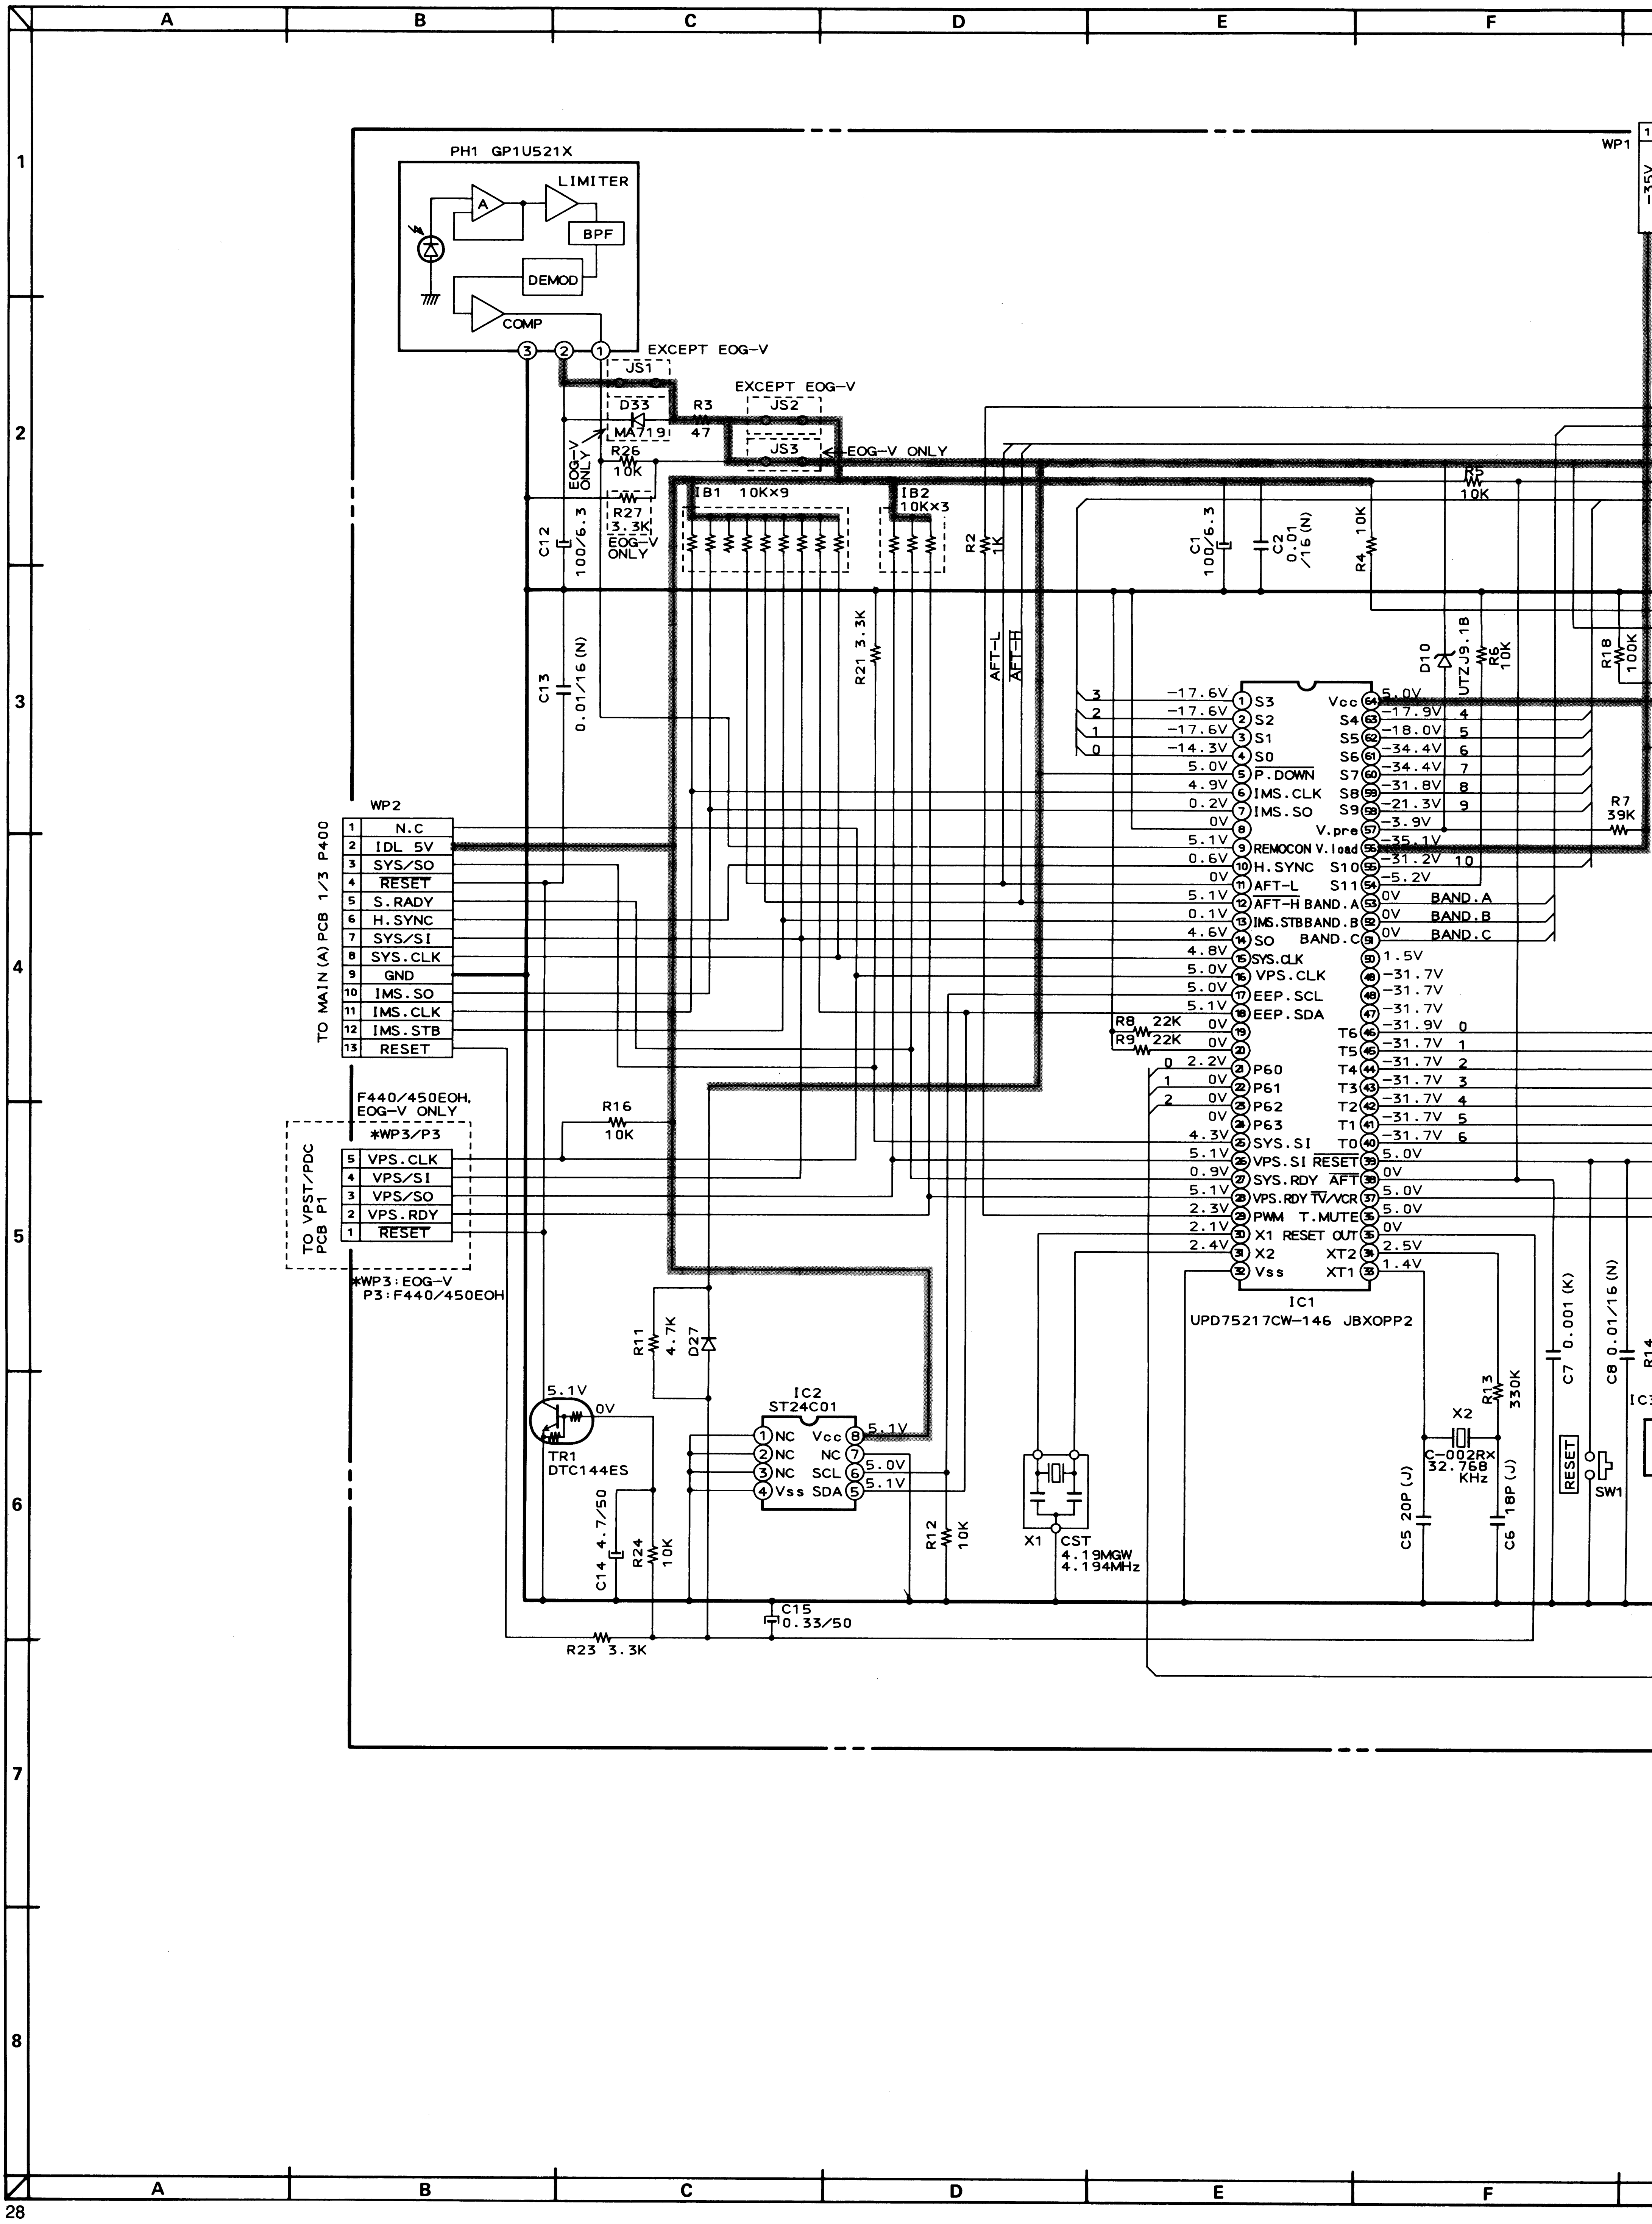
PH1 GP1U521X
LIMITER
BPF
DEMOD
COMP
EXCEPT EOG-V
JS1
D33
MA719
R3 47
EXCEPT EOG-V
JS2
JS3
EOG-V ONLY
R26 10K
R27 3.3K
EOG-V ONLY
IB1 10K×9
IB2 10K×3
C12 100/6.3
C13 0.01/16 (N)
R21 3.3K
R2 1K
AFT-L
AFT-H
C1 100/6.3
C2 0.01 /16 (N)
R4 10K
R5 10K
D10 UTZJ9.1B
R6 10K
R18 100K
R7 39K
WP1
WP2
TO MAIN (A) PCB 1/3 P400
1 N.C
2 IDL 5V
3 SYS/SO
4 RESET
5 S.RADY
6 H.SYNC
7 SYS/SI
8 SYS.CLK
9 GND
10 IMS.SO
11 IMS.CLK
12 IMS.STB
13 RESET
F440/450EOH, EOG-V ONLY
*WP3/P3
TO VPST/PDC PCB P1
5 VPS.CLK
4 VPS/SI
3 VPS/SO
2 VPS.RDY
1 RESET
*WP3: EOG-V
P3: F440/450EOH
R16 10K
R8 22K
R9 22K
IC1
UPD75217CW-146 JBXOPP2
S3 S2 S1 S0 P.DOWN IMS.CLK IMS.SO REMOCON H.SYNC AFT-L AFT-H IMS.STB SO SYS.CLK VPS.CLK EEP.SCL EEP.SDA P60 P61 P62 P63 SYS.SI VPS.SI SYS.RDY VPS.RDY PWM X1 X2 Vss
Vcc S4 S5 S6 S7 S8 S9 V.pre V.load S10 S11 BAND.A BAND.B BAND.C T6 T5 T4 T3 T2 T1 T0 RESET AFT TV/VCR T.MUTE RESET OUT XT2 XT1
-17.6V -17.6V -17.6V -14.3V 5.0V 4.9V 0.2V 0V 5.1V 0.6V 0V 5.1V 0.1V 4.6V 4.8V 5.0V 5.0V 5.1V 0V 0V 2.2V 0V 0V 0V 4.3V 5.1V 0.9V 5.1V 2.3V 2.1V 2.4V
5.0V -17.9V -18.0V -34.4V -34.4V -31.8V -21.3V -3.9V -35.1V -31.2V -5.2V 0V 0V 0V 1.5V -31.7V -31.7V -31.7V -31.9V -31.7V -31.7V -31.7V -31.7V -31.7V 5.0V 0V 5.0V 5.0V 0V 2.5V 1.4V
BAND.A BAND.B BAND.C
R11 4.7K
D27
TR1 DTC144ES
5.1V 0V
IC2 ST24C01
NC NC NC Vss Vcc NC SCL SDA
5.1V 5.0V 5.1V
C14 4.7/50
R24 10K
R12 10K
C15 0.33/50
R23 3.3K
X1 CST 4.19MGW 4.194MHz
X2 C-002RX 32.768 KHz
R13 330K
C5 20P (J)
C6 18P (J)
C7 0.001 (K)
C8 0.01/16 (N)
RESET
SW1
A B C D E F
1 2 3 4 5 6 7 8

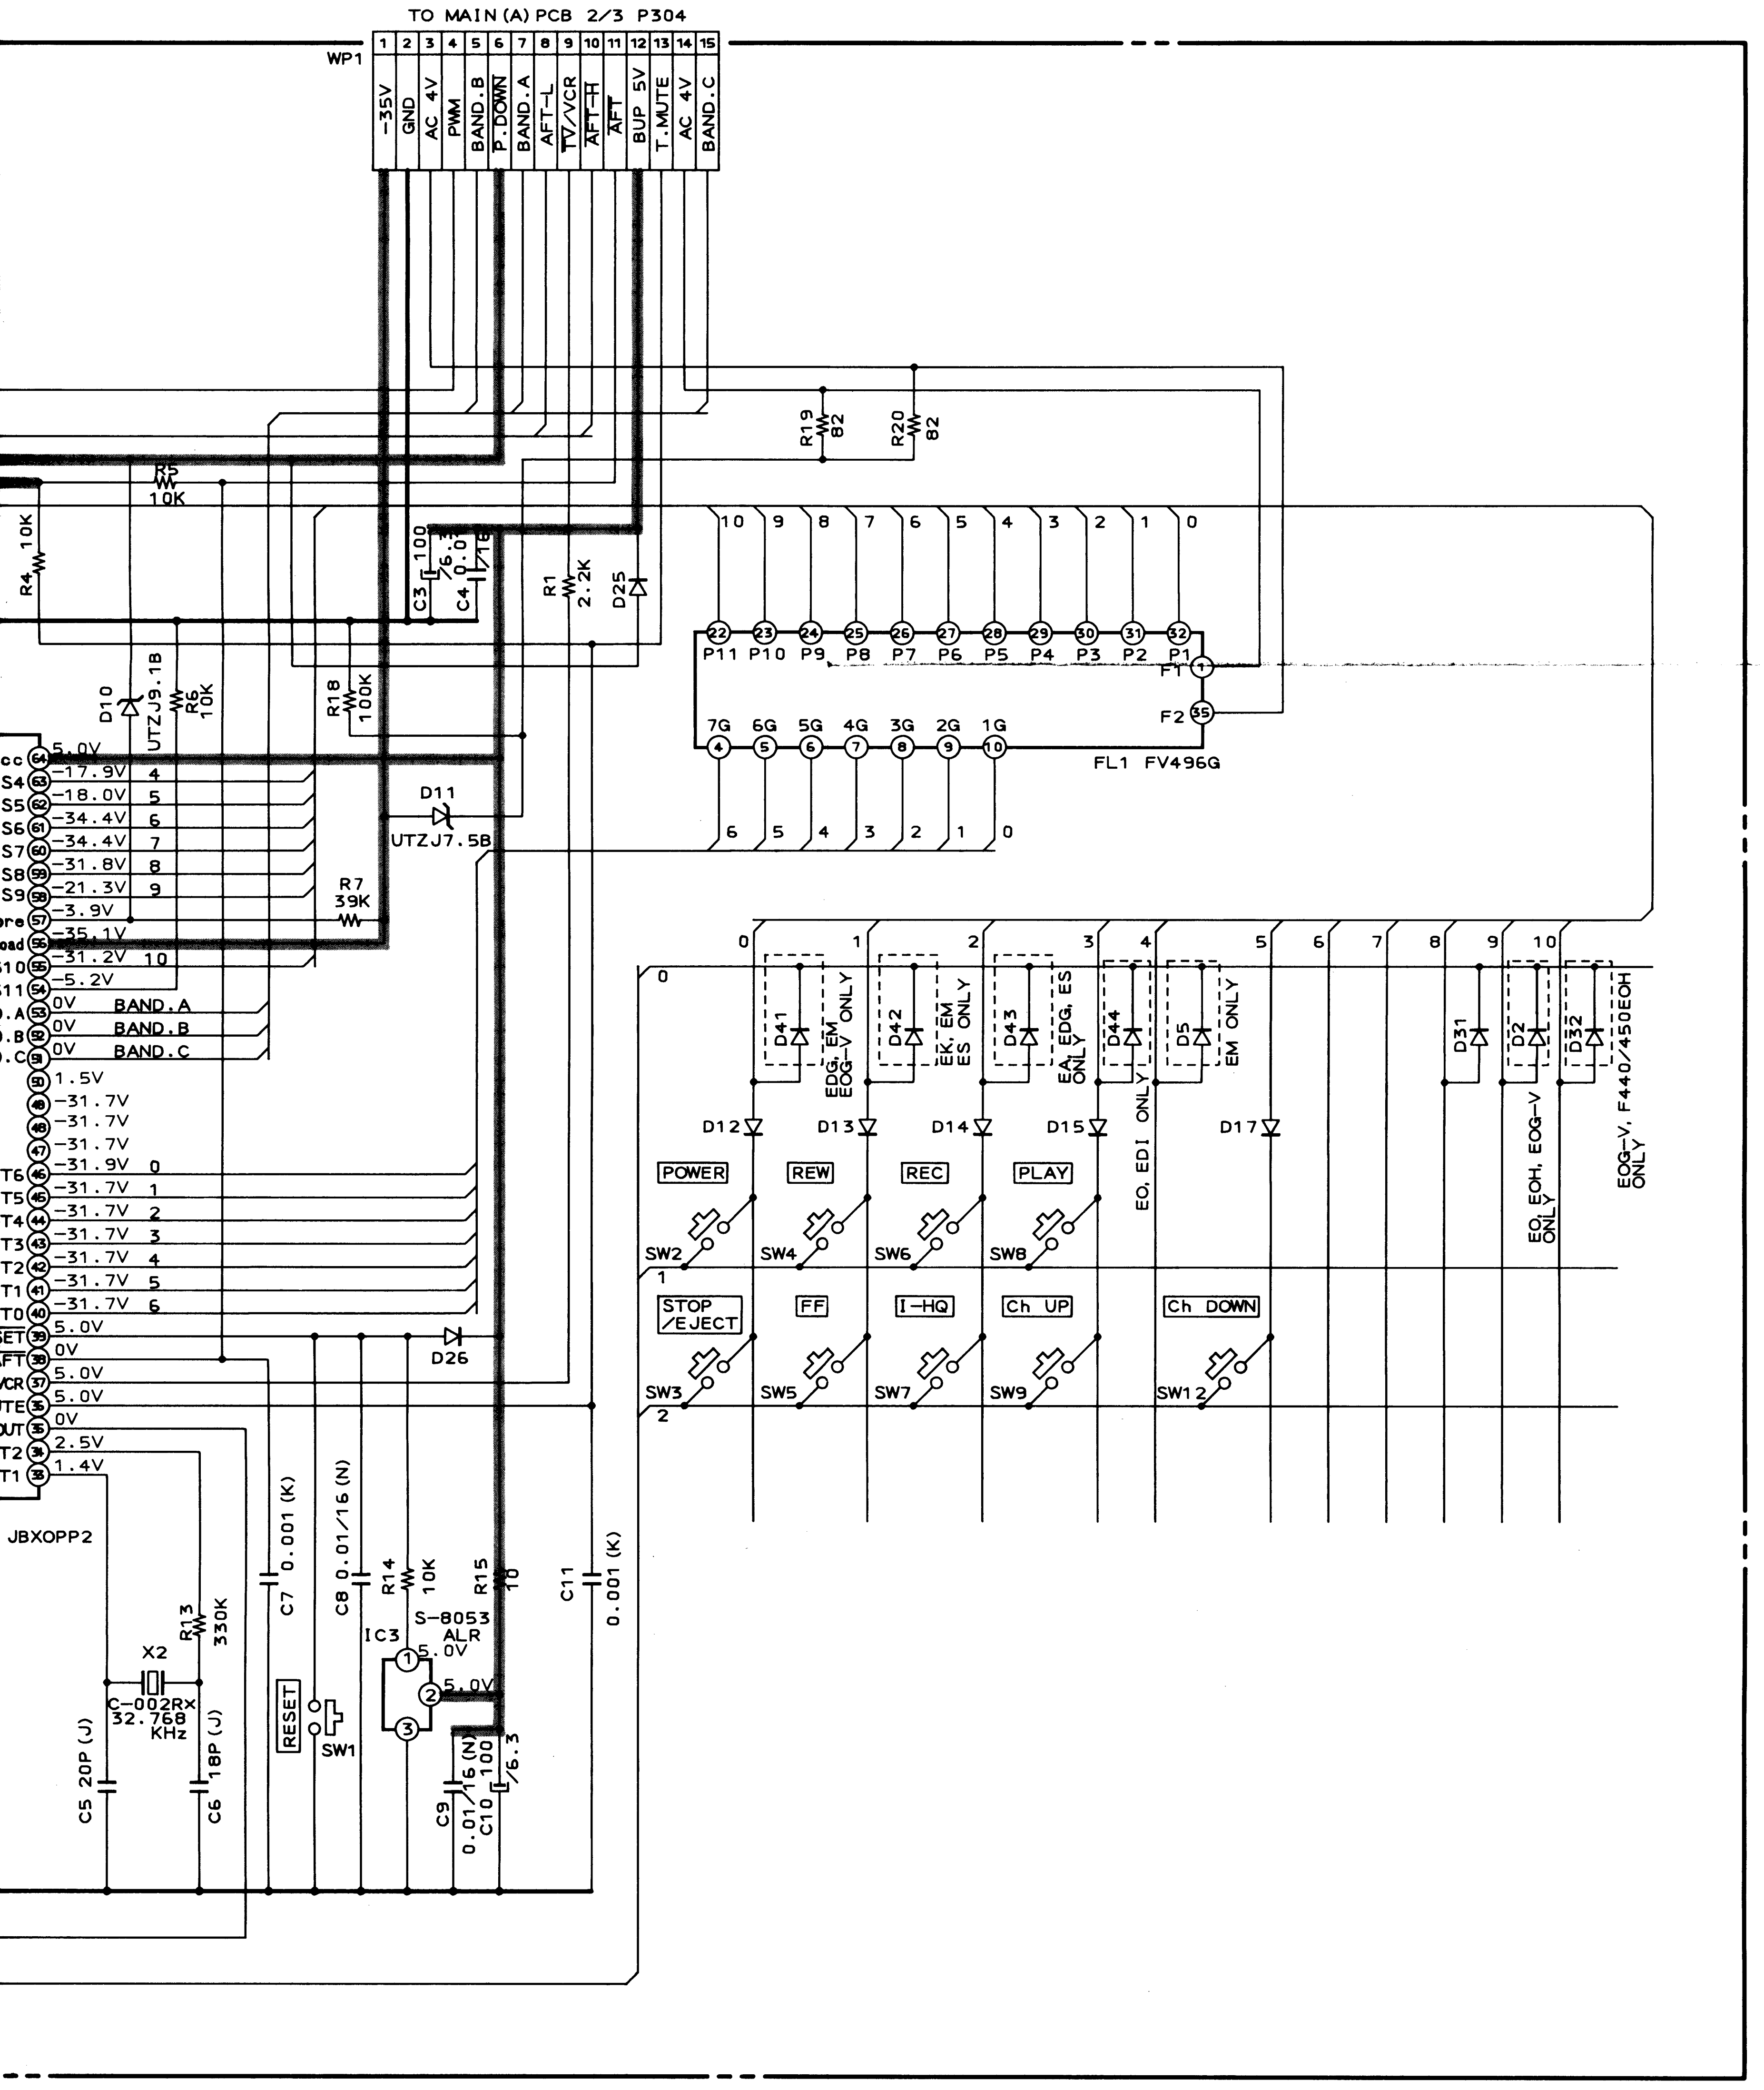
TO MAIN (A) PCB 2/3 P304
WP1
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
-35V
GND
AC 4V
PWM
BAND.B
P.DOWN
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
AC 4V
BAND.C
R19 82
R20 82
R5 10K
R4 10K
C3 100 /6.3
C4 0.01 /16
R1 2.2K
D25
P11 P10 P9 P8 P7 P6 P5 P4 P3 P2 P1
F1
F2
7G 6G 5G 4G 3G 2G 1G
FL1 FV496G
D10 UTZJ9.1B
R6 10K
R18 100K
D11 UTZJ7.5B
R7 39K
5.0V
-17.9V
-18.0V
-34.4V
-34.4V
-31.8V
-21.3V
-3.9V
-35.1V
-31.2V
-5.2V
0V BAND.A
0V BAND.B
0V BAND.C
1.5V
-31.7V
-31.7V
-31.7V
-31.9V
-31.7V
-31.7V
-31.7V
-31.7V
-31.7V
-31.7V
5.0V
0V
5.0V
5.0V
0V
2.5V
1.4V
JBXOPP2
D41 EDG, EM EOG-V ONLY
D42 EK, EM ES ONLY
D43 EA, EDG, ES ONLY
D44 EO, EDI ONLY
D5 EM ONLY
D31
D2 EO, EOH, EOG-V ONLY
D32 EOG-V, F440/450EOH ONLY
D12 D13 D14 D15 D17
POWER
REW
REC
PLAY
SW2 SW4 SW6 SW8
STOP /EJECT
FF
I-HQ
Ch UP
Ch DOWN
SW3 SW5 SW7 SW9 SW12
D26
C7 0.001 (K)
C8 0.01/16 (N)
R14 10K
R15 10
C11 0.001 (K)
IC3 S-8053 ALR
5.0V
5.0V
R13 330K
X2 C-002RX 32.768 KHz
C5 20P (J)
C6 18P (J)
RESET
SW1
C9 0.01/16 (N)
C10 100 /6.3

OPREATION (A) PCB V1146B5100

B (POWER SUPPLY) LINE

INDICATED VOLTAGES WERE
MEASURED DURING PB MODE.

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF 50WV (M)
ALL DIODES ARE 1SS131T

JFX-L
OPERATION (A)
SCHEMATIC DIAGRAM
No. 21-11 V115211M
A1

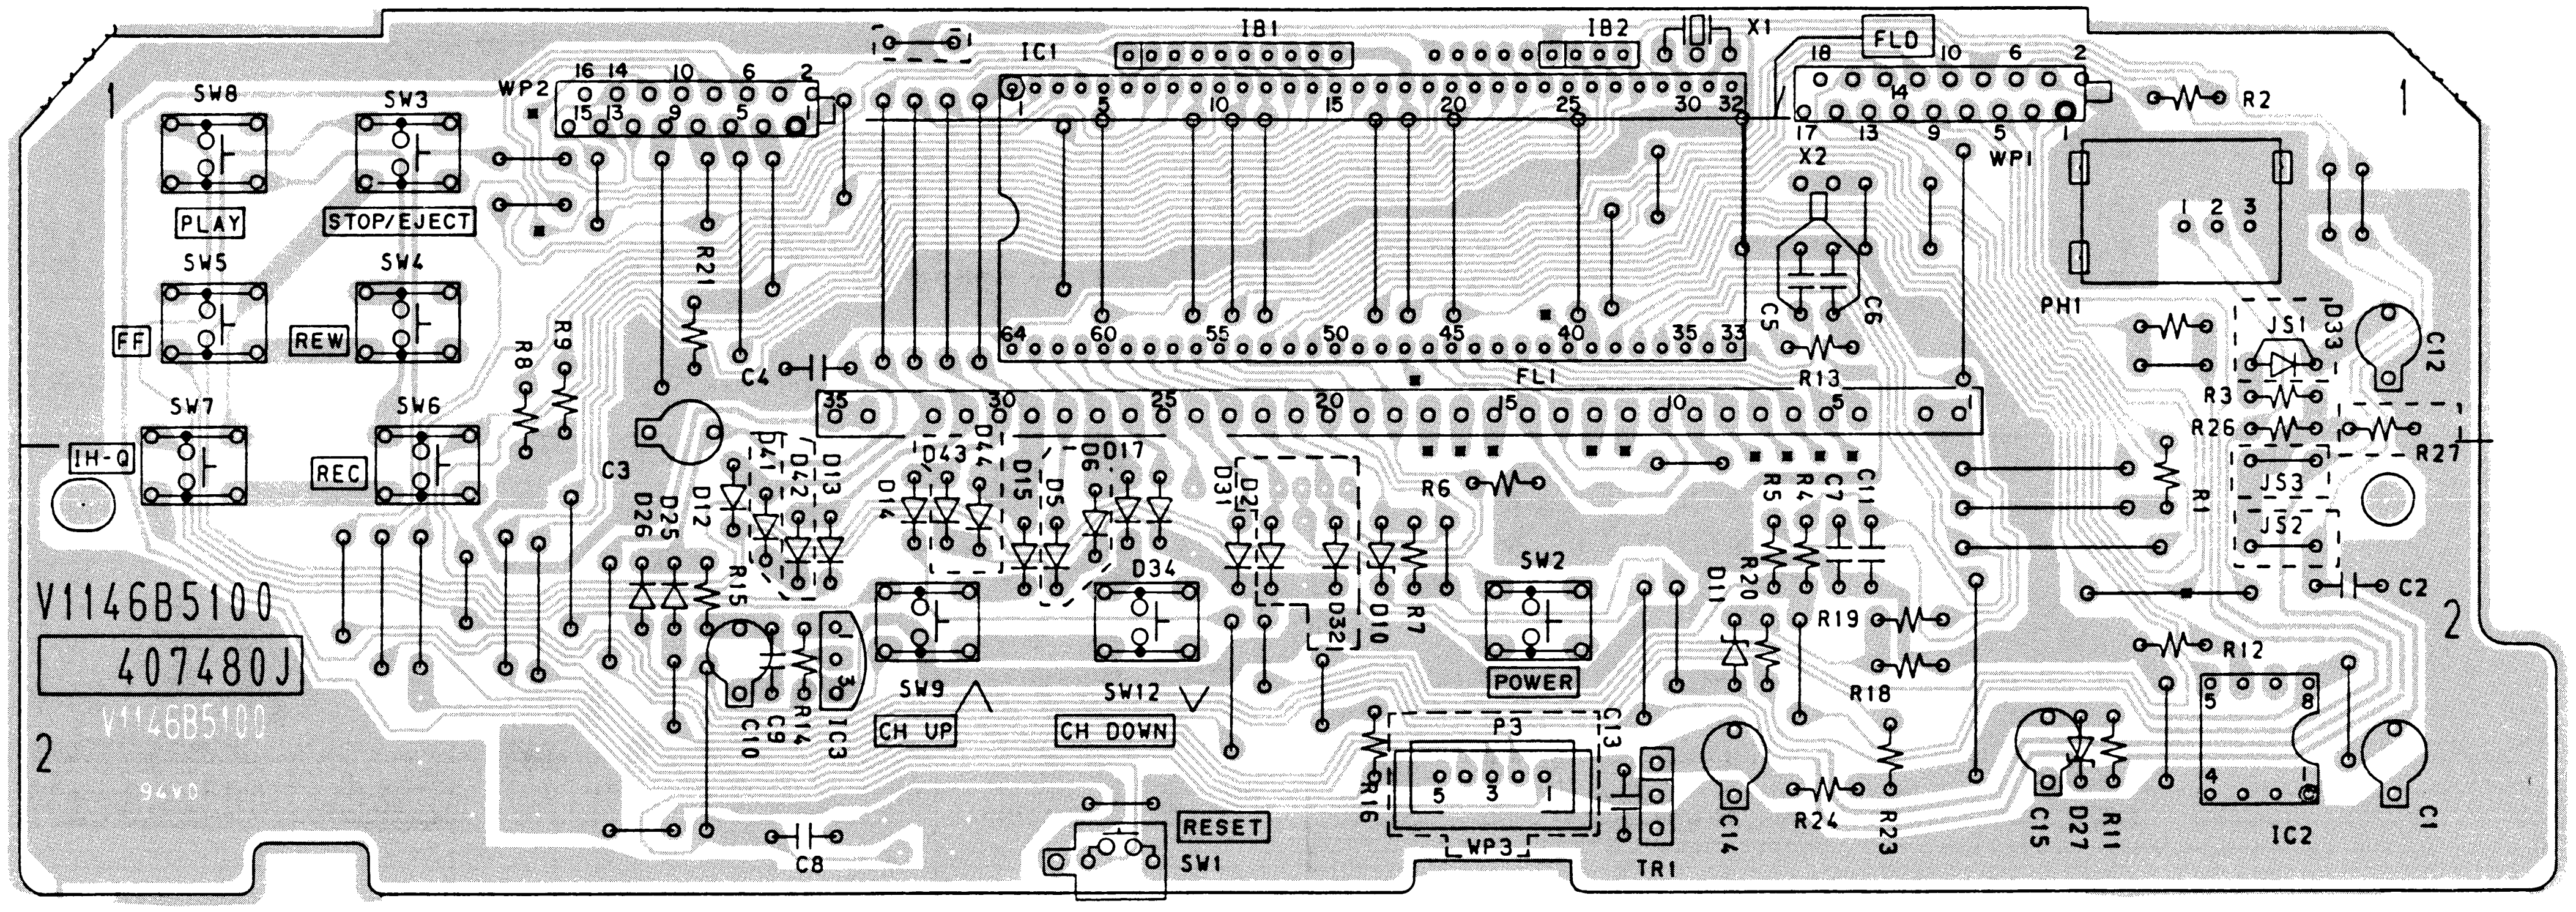
SW8
SW3
WP2
IC1
IB1
IB2
X1
FLD
WP1
X2
R2
PLAY
STOP/EJECT
SW5
SW4
FF
REW
SW7
SW6
IH-Q
REC
R21
R9
R8
C4
C3
C5
C6
R13
FL1
PH1
JS1
JS2
JS3
D33
C12
R3
R26
R27
R1
R6
SW2
POWER
C2
R12
R19
R18
V1146B5100
407480J
SW9
CH UP
SW12
CH DOWN
D34
IC3
C8
RESET
SW1
P3
WP3
TR1
C13
C14
R16
R24
R23
C15
D27
R11
IC2
C1

OPERATION(A) PCB V1146B5100(J1)

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER.
REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING
PARTS INFORMATION.

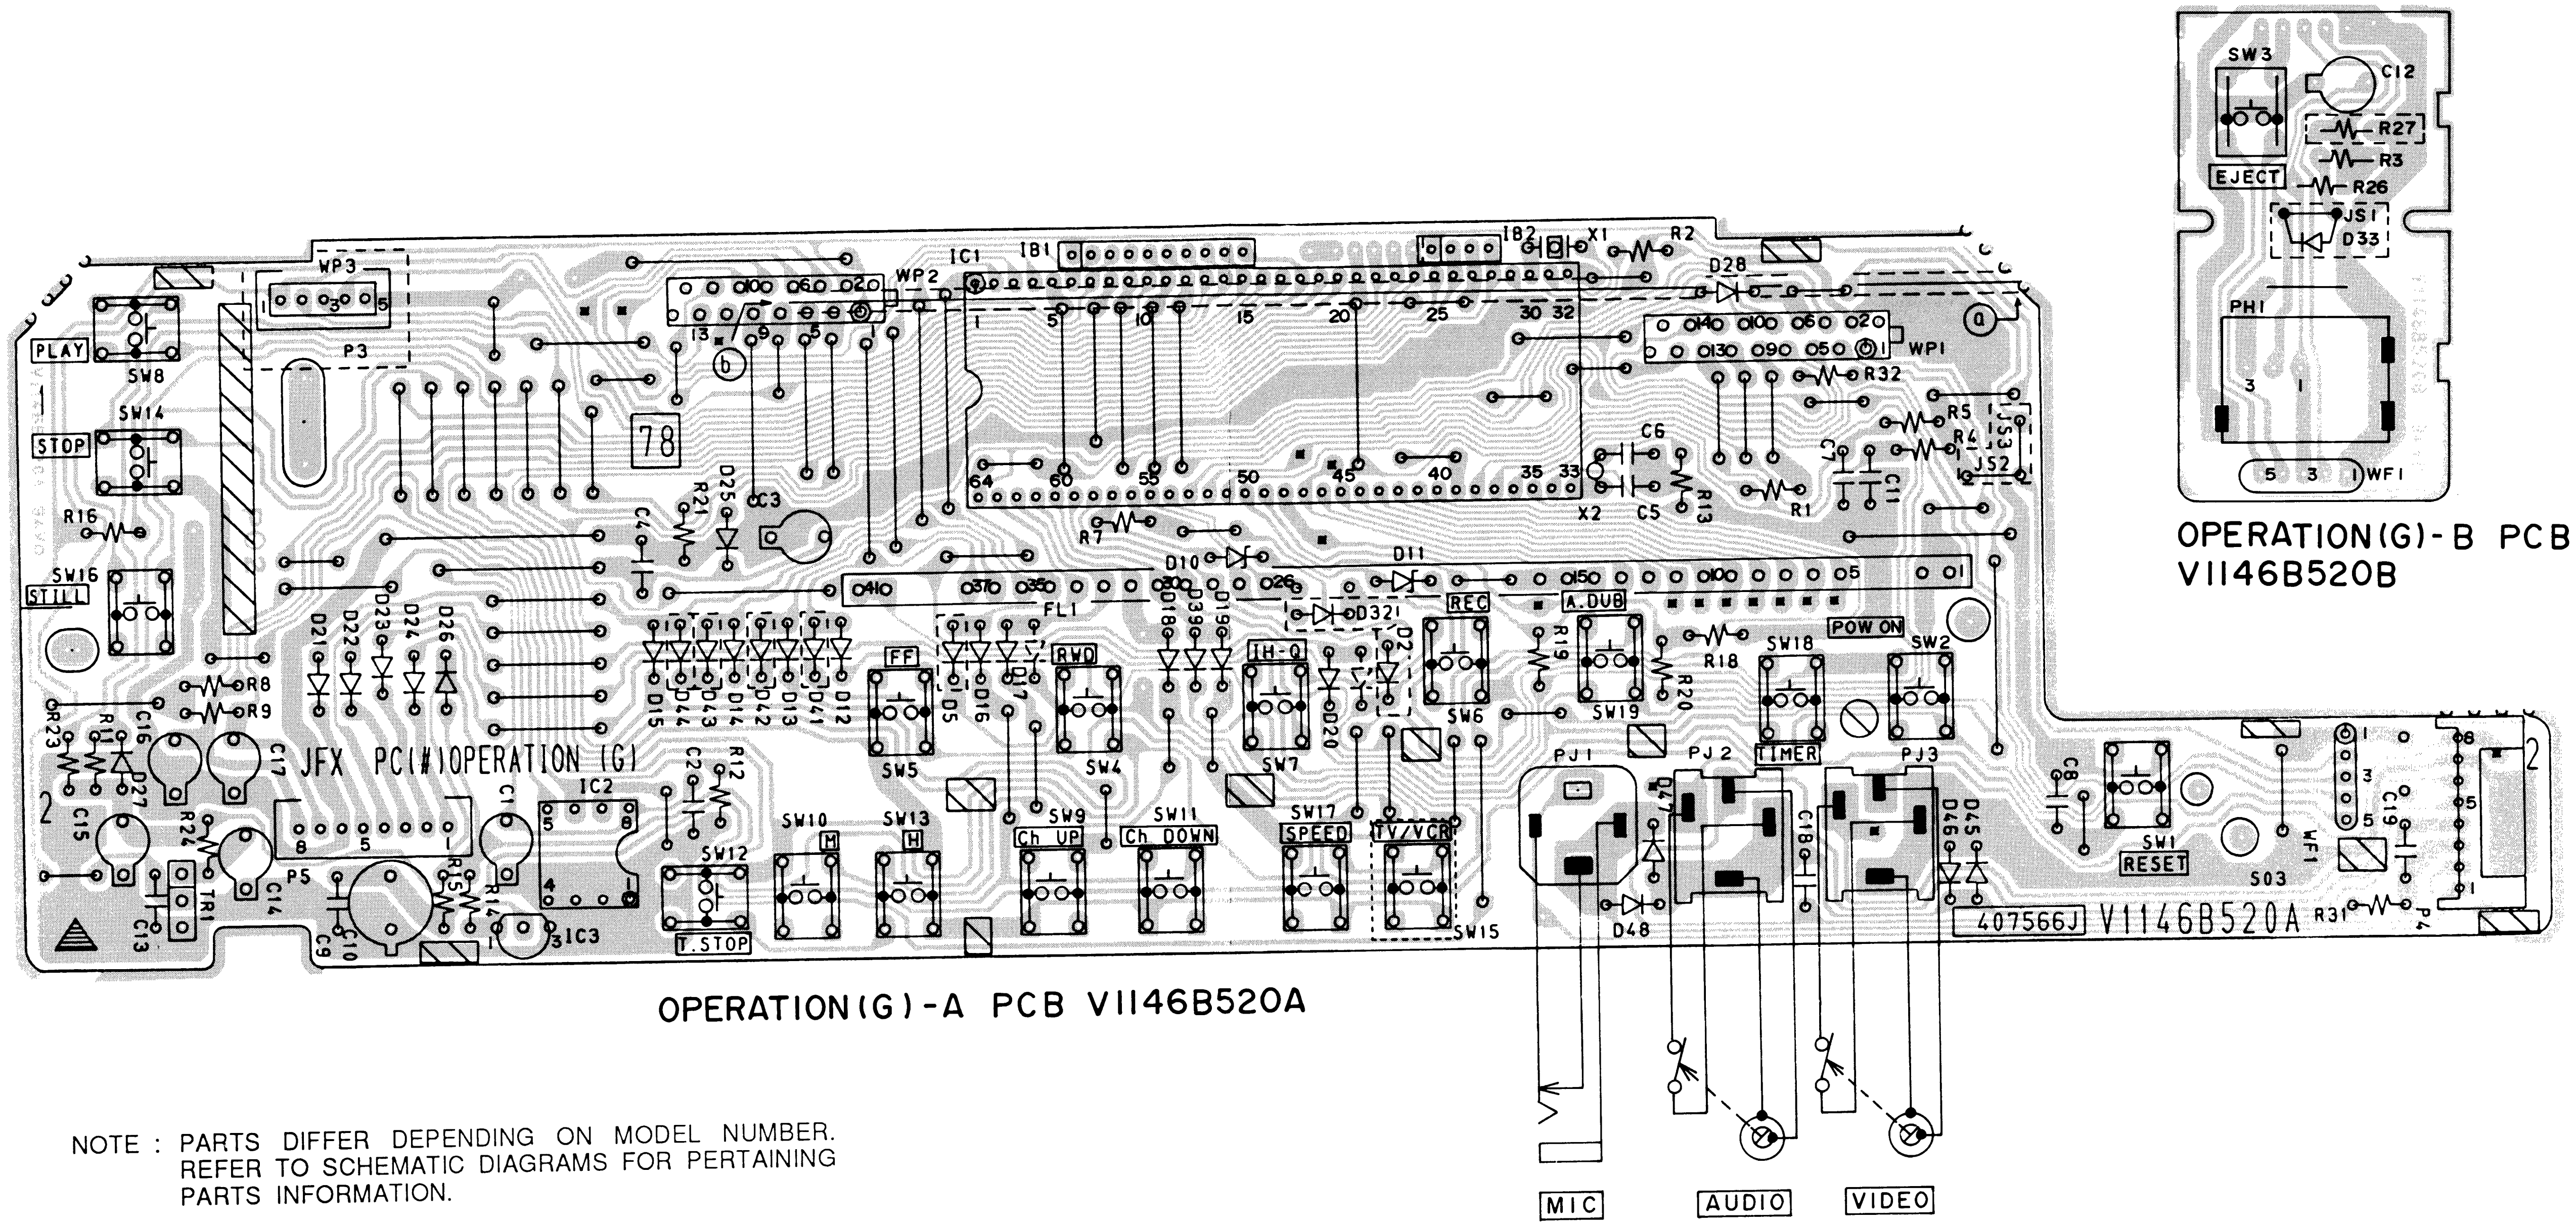
PLAY
SW8
SW14
STOP
R16
SW16
STILL
WP3
P3
13
b
78
IC1
IB1
WP2
IB2
X1
R2
D28
WP1
a
R32
R5
R4
JS3
JS2
C6
C5
R13
X2
R1
C7
C11
R21
D25
C3
C4
R7
D10
D11
D321
FL1
D21
D22
D23
D24
D26
D15
D44
D43
D14
D42
D13
D41
D12
FF
D5
D16
D17
RWD
D18
D39
D19
IH-Q
D20
D2
REC
A.DUB
R19
R20
R18
SW18
POW ON
SW2
SW5
SW4
SW7
SW6
SW19
R8
R9
R23
R11
C16
D27
C17
JFX PC(#1)OPERATION (G)
C15
R24
TR1
C14
P5
C13
C9
C10
R15
R14
C1
IC2
IC3
C2
R12
SW12
T.STOP
SW10
SW13
SW9
Ch UP
SW11
Ch DOWN
SW17
SPEED
TV/VCR
SW15
PJ1
PJ2
TIMER
PJ3
D47
C18
D46
D45
D48
C8
SW1
RESET
S03
WF1
C19
407566J
V1146B520A
R31
P4
MIC
AUDIO
VIDEO

OPERATION(G)-A PCB V1146B520A

SW3
C12
R27
R3
EJECT
R26
JS1
D33
PH1
3
1
5
3
1
WF1

OPERATION(G)-B PCB
V1146B520B

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER.
REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING
PARTS INFORMATION.

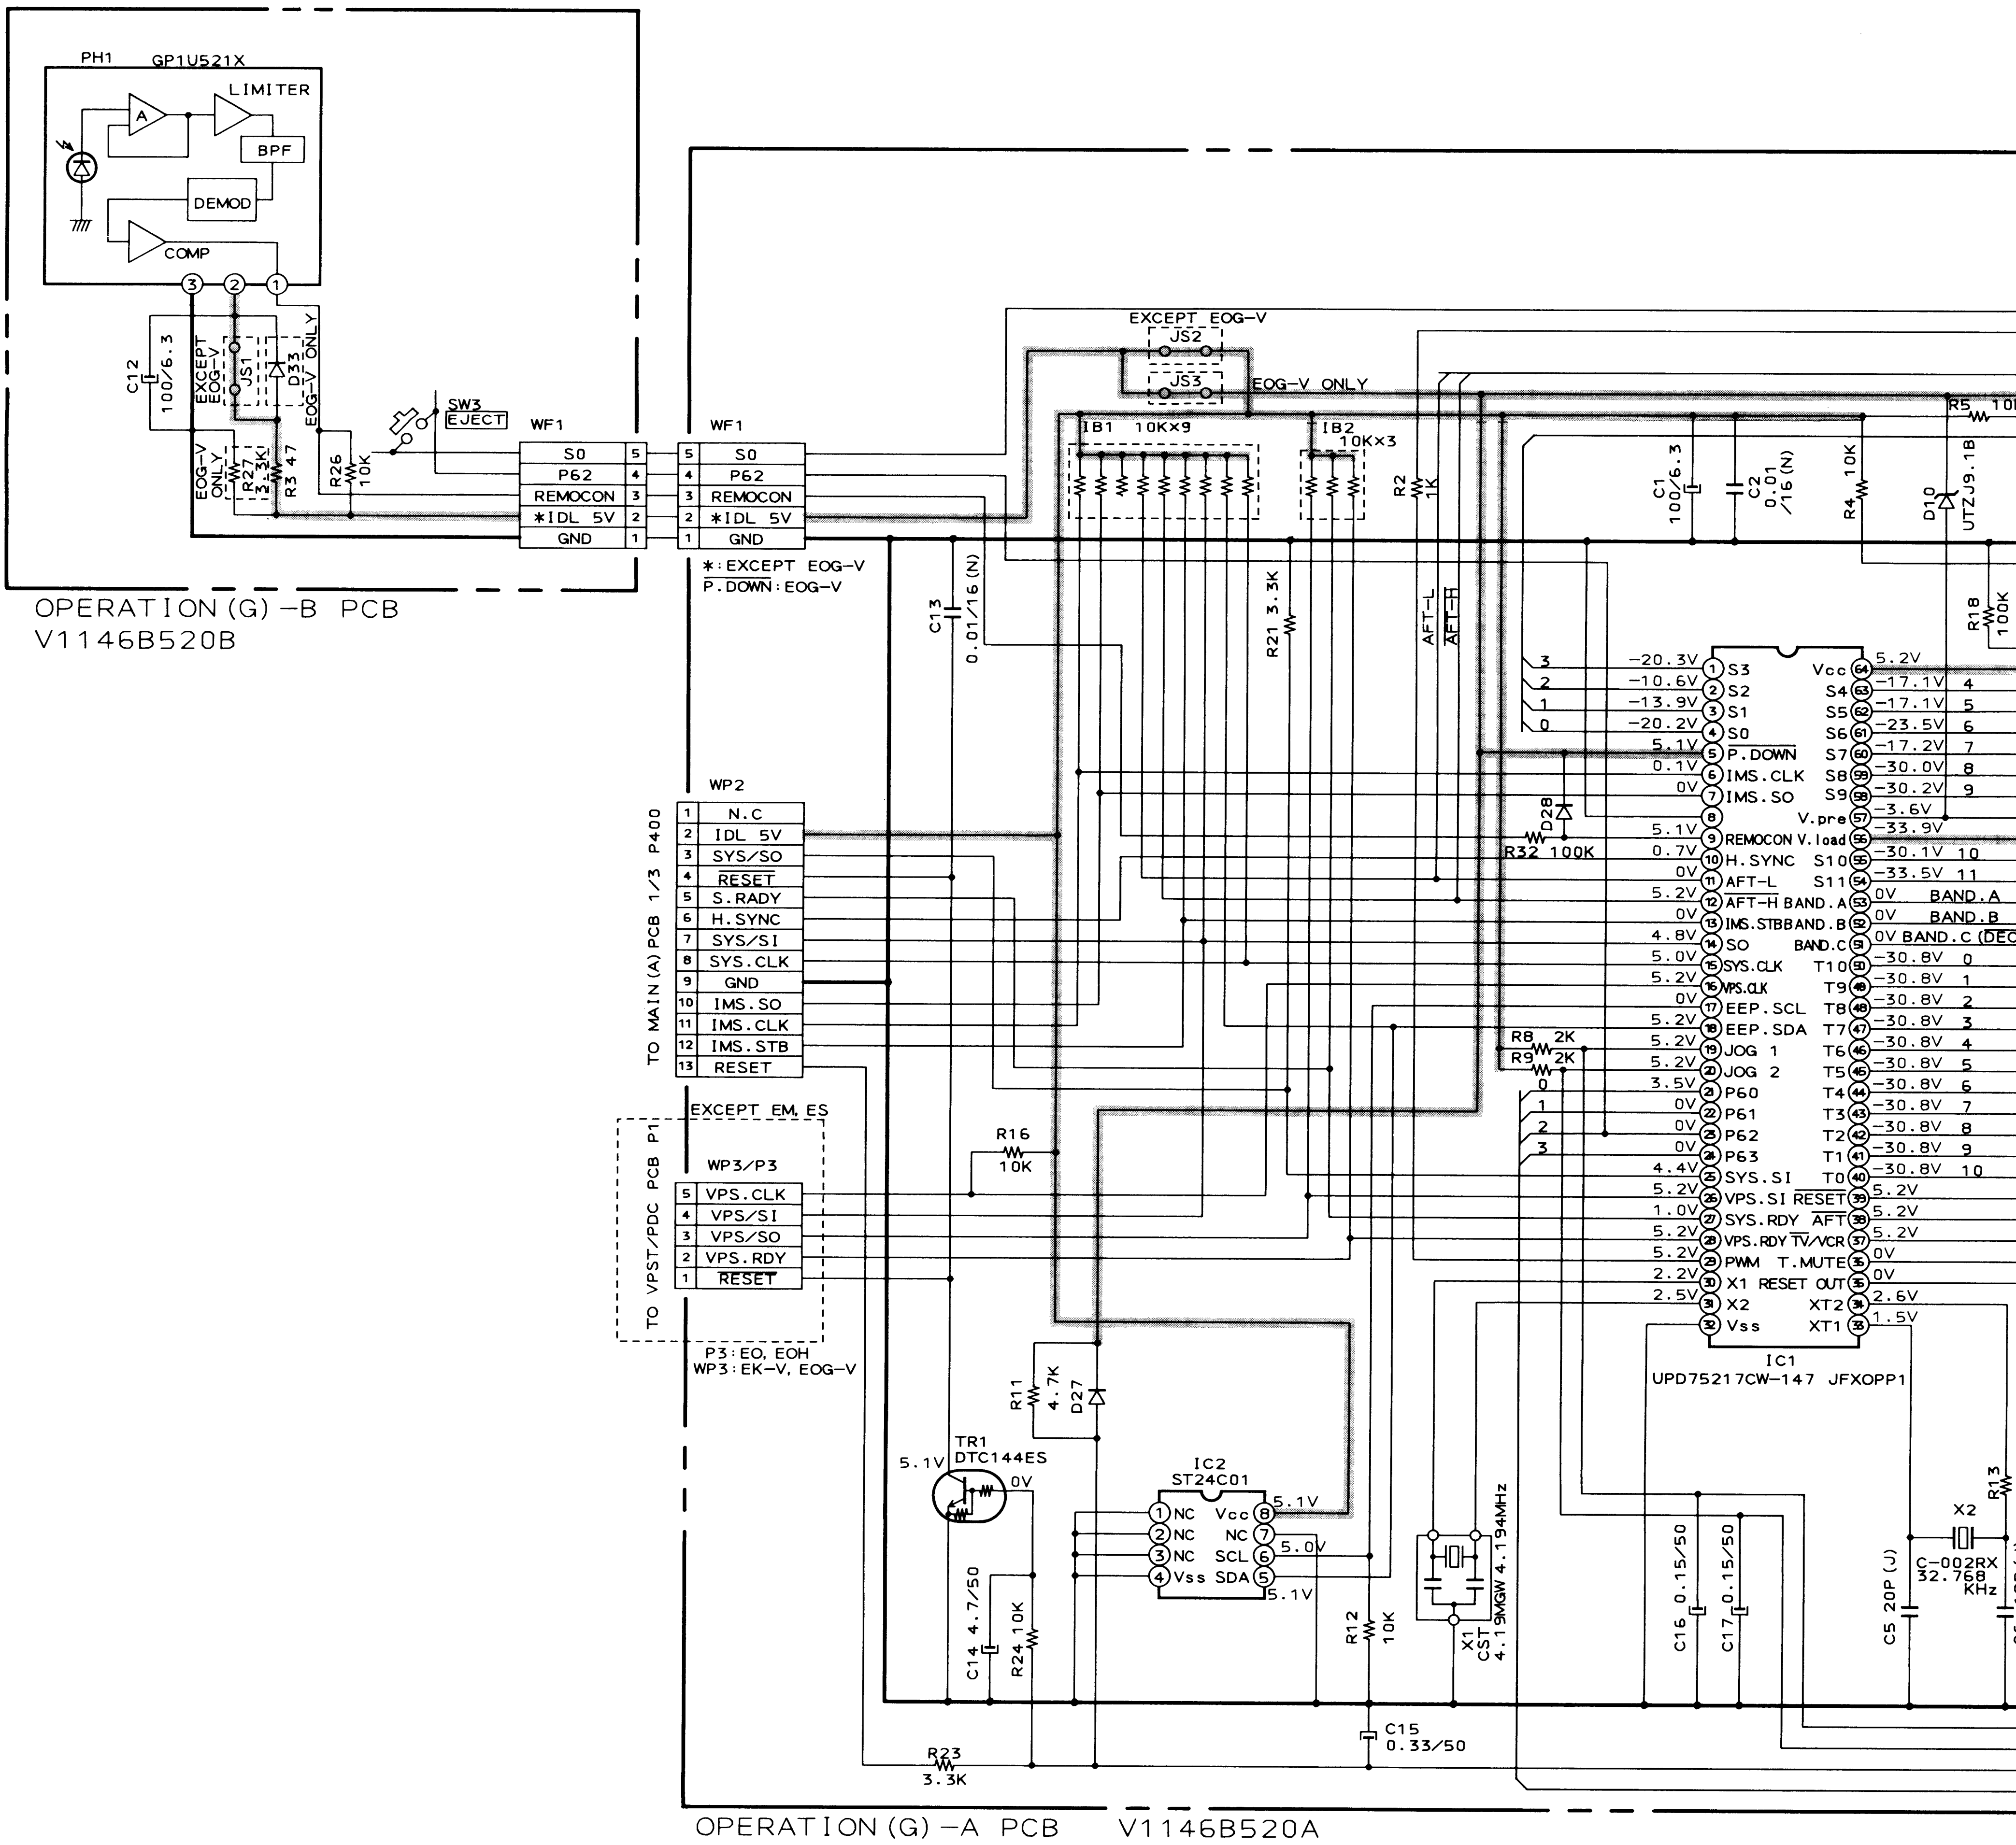

PH1 GP1U521X
LIMITER
A
BPF
DEMOD
COMP
C12 100/6.3
EXCEPT EOG-V
JS1
D33 EOG-V ONLY
EOG-V ONLY
R27 3.3K
R3 47
R26 10K
SW3 EJECT
WF1
S0
P62
REMOCON
*IDL 5V
GND
OPERATION (G) -B PCB
V1146B520B
*: EXCEPT EOG-V
P.DOWN: EOG-V
EXCEPT EOG-V
JS2
JS3
EOG-V ONLY
IB1 10K×9
IB2 10K×3
R2 1K
C1 100/6.3
C2 0.01 /16 (N)
R4 10K
R5 10K
D10 UTZJ9.1B
R18 100K
C13 0.01/16 (N)
R21 3.3K
AFT-L
AFT-H
WP2
TO MAIN (A) PCB 1/3 P400
N.C
IDL 5V
SYS/SO
RESET
S.RADY
H.SYNC
SYS/SI
SYS.CLK
GND
IMS.SO
IMS.CLK
IMS.STB
RESET
EXCEPT EM, ES
TO VPST/PDC PCB P1
WP3/P3
VPS.CLK
VPS/SI
VPS/SO
VPS.RDY
RESET
P3: EO, EOH
WP3: EK-V, EOG-V
R16 10K
D28
R32 100K
R8 2K
R9 2K
IC1
UPD75217CW-147 JFXOPP1
S3 S2 S1 S0 P.DOWN IMS.CLK IMS.SO REMOCON H.SYNC AFT-L AFT-H IMS.STB SO SYS.CLK VPS.CLK EEP.SCL EEP.SDA JOG 1 JOG 2 P60 P61 P62 P63 SYS.SI VPS.SI SYS.RDY VPS.RDY PWM X1 X2 Vss
Vcc S4 S5 S6 S7 S8 S9 V.pre V.load S10 S11 BAND.A BAND.B BAND.C T10 T9 T8 T7 T6 T5 T4 T3 T2 T1 T0 RESET AFT TV/VCR T.MUTE RESET OUT XT2 XT1
-20.3V -10.6V -13.9V -20.2V 5.1V 0.1V 0V 5.1V 0.7V 0V 5.2V 0V 4.8V 5.0V 5.2V 0V 5.2V 5.2V 5.2V 3.5V 0V 0V 0V 4.4V 5.2V 1.0V 5.2V 5.2V 2.2V 2.5V
5.2V -17.1V -17.1V -23.5V -17.2V -30.0V -30.2V -3.6V -33.9V -30.1V -33.5V 0V 0V 0V -30.8V 5.2V 5.2V 5.2V 0V 0V 2.6V 1.5V
BAND.A BAND.B BAND.C (DEC
R11 4.7K
D27
TR1 DTC144ES
5.1V 0V
IC2 ST24C01
NC NC NC Vss Vcc NC SCL SDA
5.1V 5.0V 5.1V
C14 4.7/50
R24 10K
R12 10K
X1 CST 4.19MGW 4.194MHz
C16 0.15/50
C17 0.15/50
C5 20P (J)
X2 C-002RX 32.768 KHz
R13
C15 0.33/50
R23 3.3K
OPERATION (G) -A PCB V1146B520A

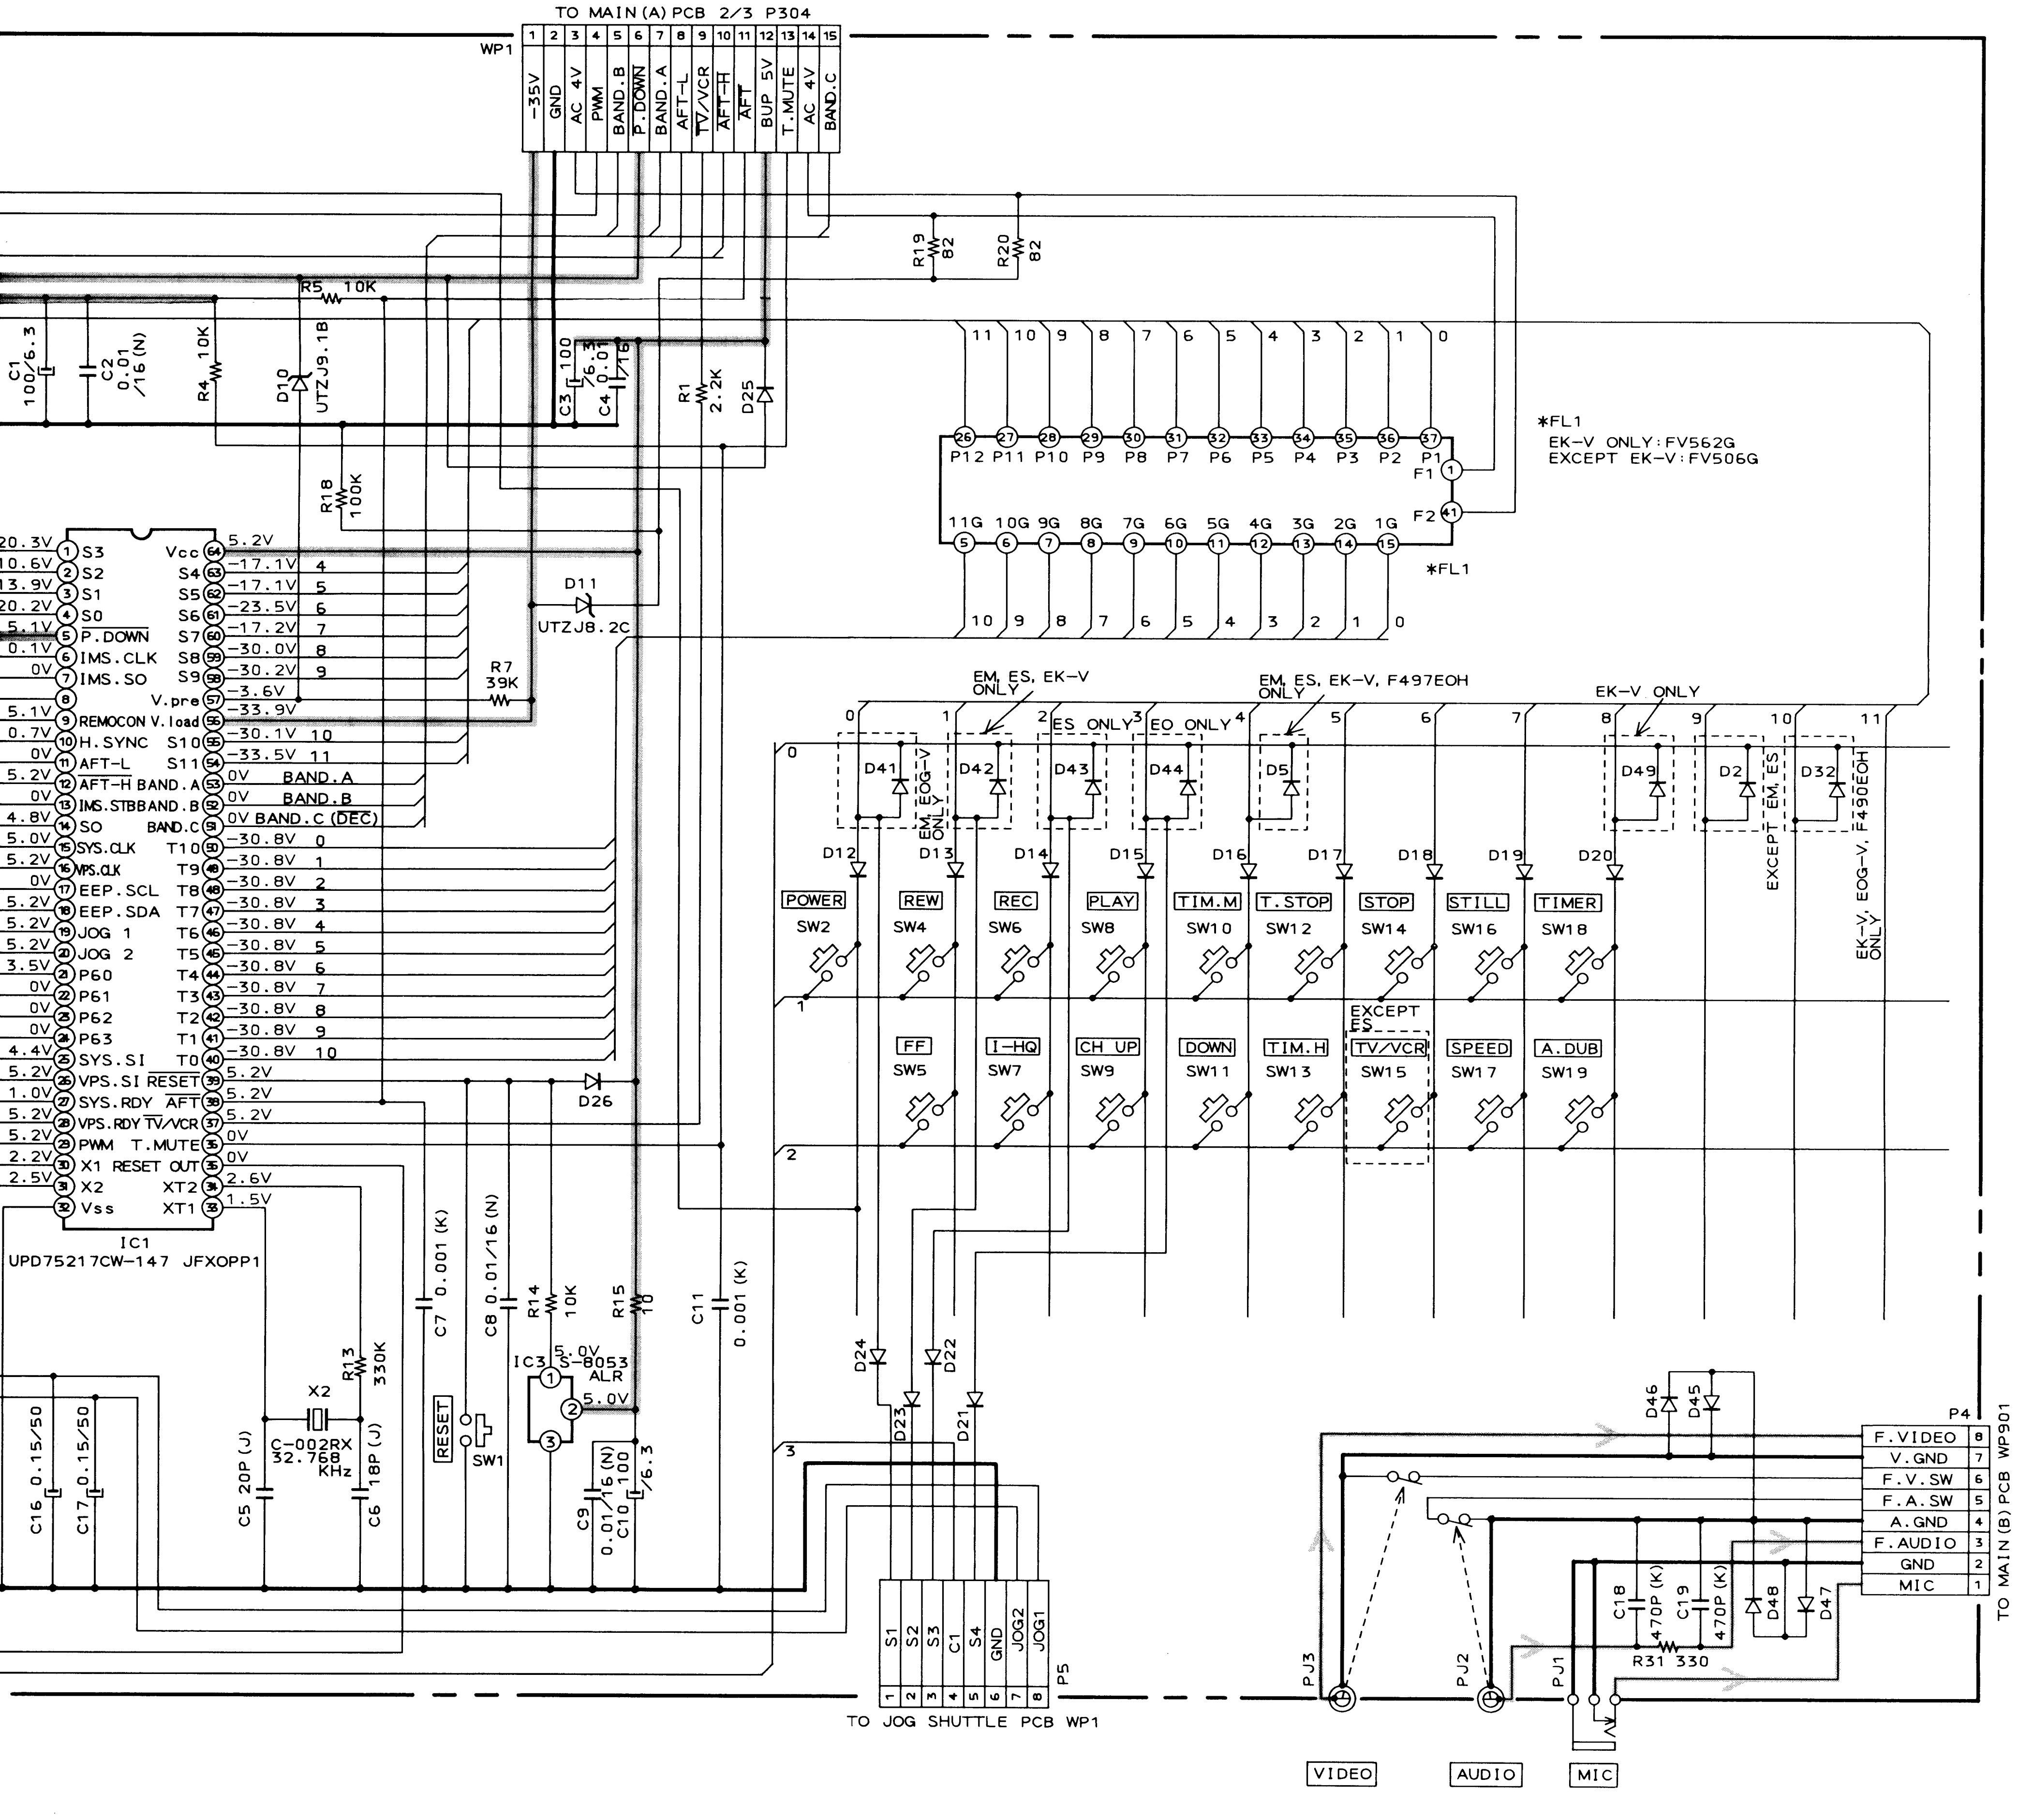
TO MAIN (A) PCB 2/3 P304
WP1
-35V
GND
AC 4V
PWM
BAND.B
P.DOWN
BAND.A
AFT-L
TV/VCR
AFT-H
AFT
BUP 5V
T.MUTE
AC 4V
BAND.C
R19 82
R20 82
R5 10K
C1 100/6.3
C2 0.01 /16 (N)
R4 10K
D10 UTZJ9.1B
C3 100 /6.3
C4 0.01 /16
R1 2.2K
D25
R18 100K
*FL1
EK-V ONLY:FV562G
EXCEPT EK-V:FV506G
P12 P11 P10 P9 P8 P7 P6 P5 P4 P3 P2 P1
F1
F2
11G 10G 9G 8G 7G 6G 5G 4G 3G 2G 1G
D11
UTZJ8.2C
R7 39K
EM, ES, EK-V ONLY
EM, ES, EK-V, F497EOH ONLY
EK-V ONLY
ES ONLY
EO ONLY
D41
D42
D43
D44
D5
D49
D2
D32
EM, EOG-V ONLY
EXCEPT EM, ES
EK-V, EOG-V, F490EOH ONLY
D12 D13 D14 D15 D16 D17 D18 D19 D20
POWER SW2
REW SW4
REC SW6
PLAY SW8
TIM.M SW10
T.STOP SW12
STOP SW14
STILL SW16
TIMER SW18
FF SW5
I-HQ SW7
CH UP SW9
DOWN SW11
TIM.H SW13
EXCEPT ES
TV/VCR SW15
SPEED SW17
A.DUB SW19
S3 S2 S1 S0
P.DOWN
IMS.CLK
IMS.SO
REMOCON
H.SYNC
AFT-L
AFT-H
IMS.STB
SO
SYS.CLK
VPS.CLK
EEP.SCL
EEP.SDA
JOG 1
JOG 2
P60 P61 P62 P63
SYS.SI
VPS.SI
SYS.RDY
VPS.RDY
PWM
X1
X2
Vss
Vcc
V.pre
V.load
BAND.A
BAND.B
BAND.C (DEC)
RESET
TV/VCR
T.MUTE
RESET OUT
XT2
XT1
IC1
UPD75217CW-147 JFXOPP1
D26
C7 0.001 (K)
C8 0.01/16 (N)
R14 10K
R15 10
C11 0.001 (K)
IC3 S-8053 ALR
5.0V
RESET SW1
X2 C-002RX 32.768 KHz
R13 330K
C5 20P (J)
C6 18P (J)
C16 0.15/50
C17 0.15/50
C9 0.01/16 (N)
C10 100 /6.3
D24 D23 D22 D21
S1 S2 S3 C1 S4 GND JOG2 JOG1
P5
TO JOG SHUTTLE PCB WP1
D46 D45
P4
F.VIDEO
V.GND
F.V.SW
F.A.SW
A.GND
F.AUDIO
GND
MIC
TO MAIN (B) PCB WP901
C18 470P (K)
C19 470P (K)
D48 D47
R31 330
PJ3 PJ2 PJ1
VIDEO
AUDIO
MIC

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W (J)
ALL CAPACITORS IN μF 50WV (M)
ALL DIODES ARE 1SS131T

INDICATED VOLTAGES WERE
MEASURED DURING PB MODE.
(TAPE SPEED: SP)

▬ B (POWER SUPPLY) LINE
▬ AUDIO SIGNAL LINE
▬ VIDEO IN (REC) SIGNAL LINE

JFX
OPERATION (G) -A, B
SCHEMATIC DIAGRAM
No.21-12 V115212M
A1

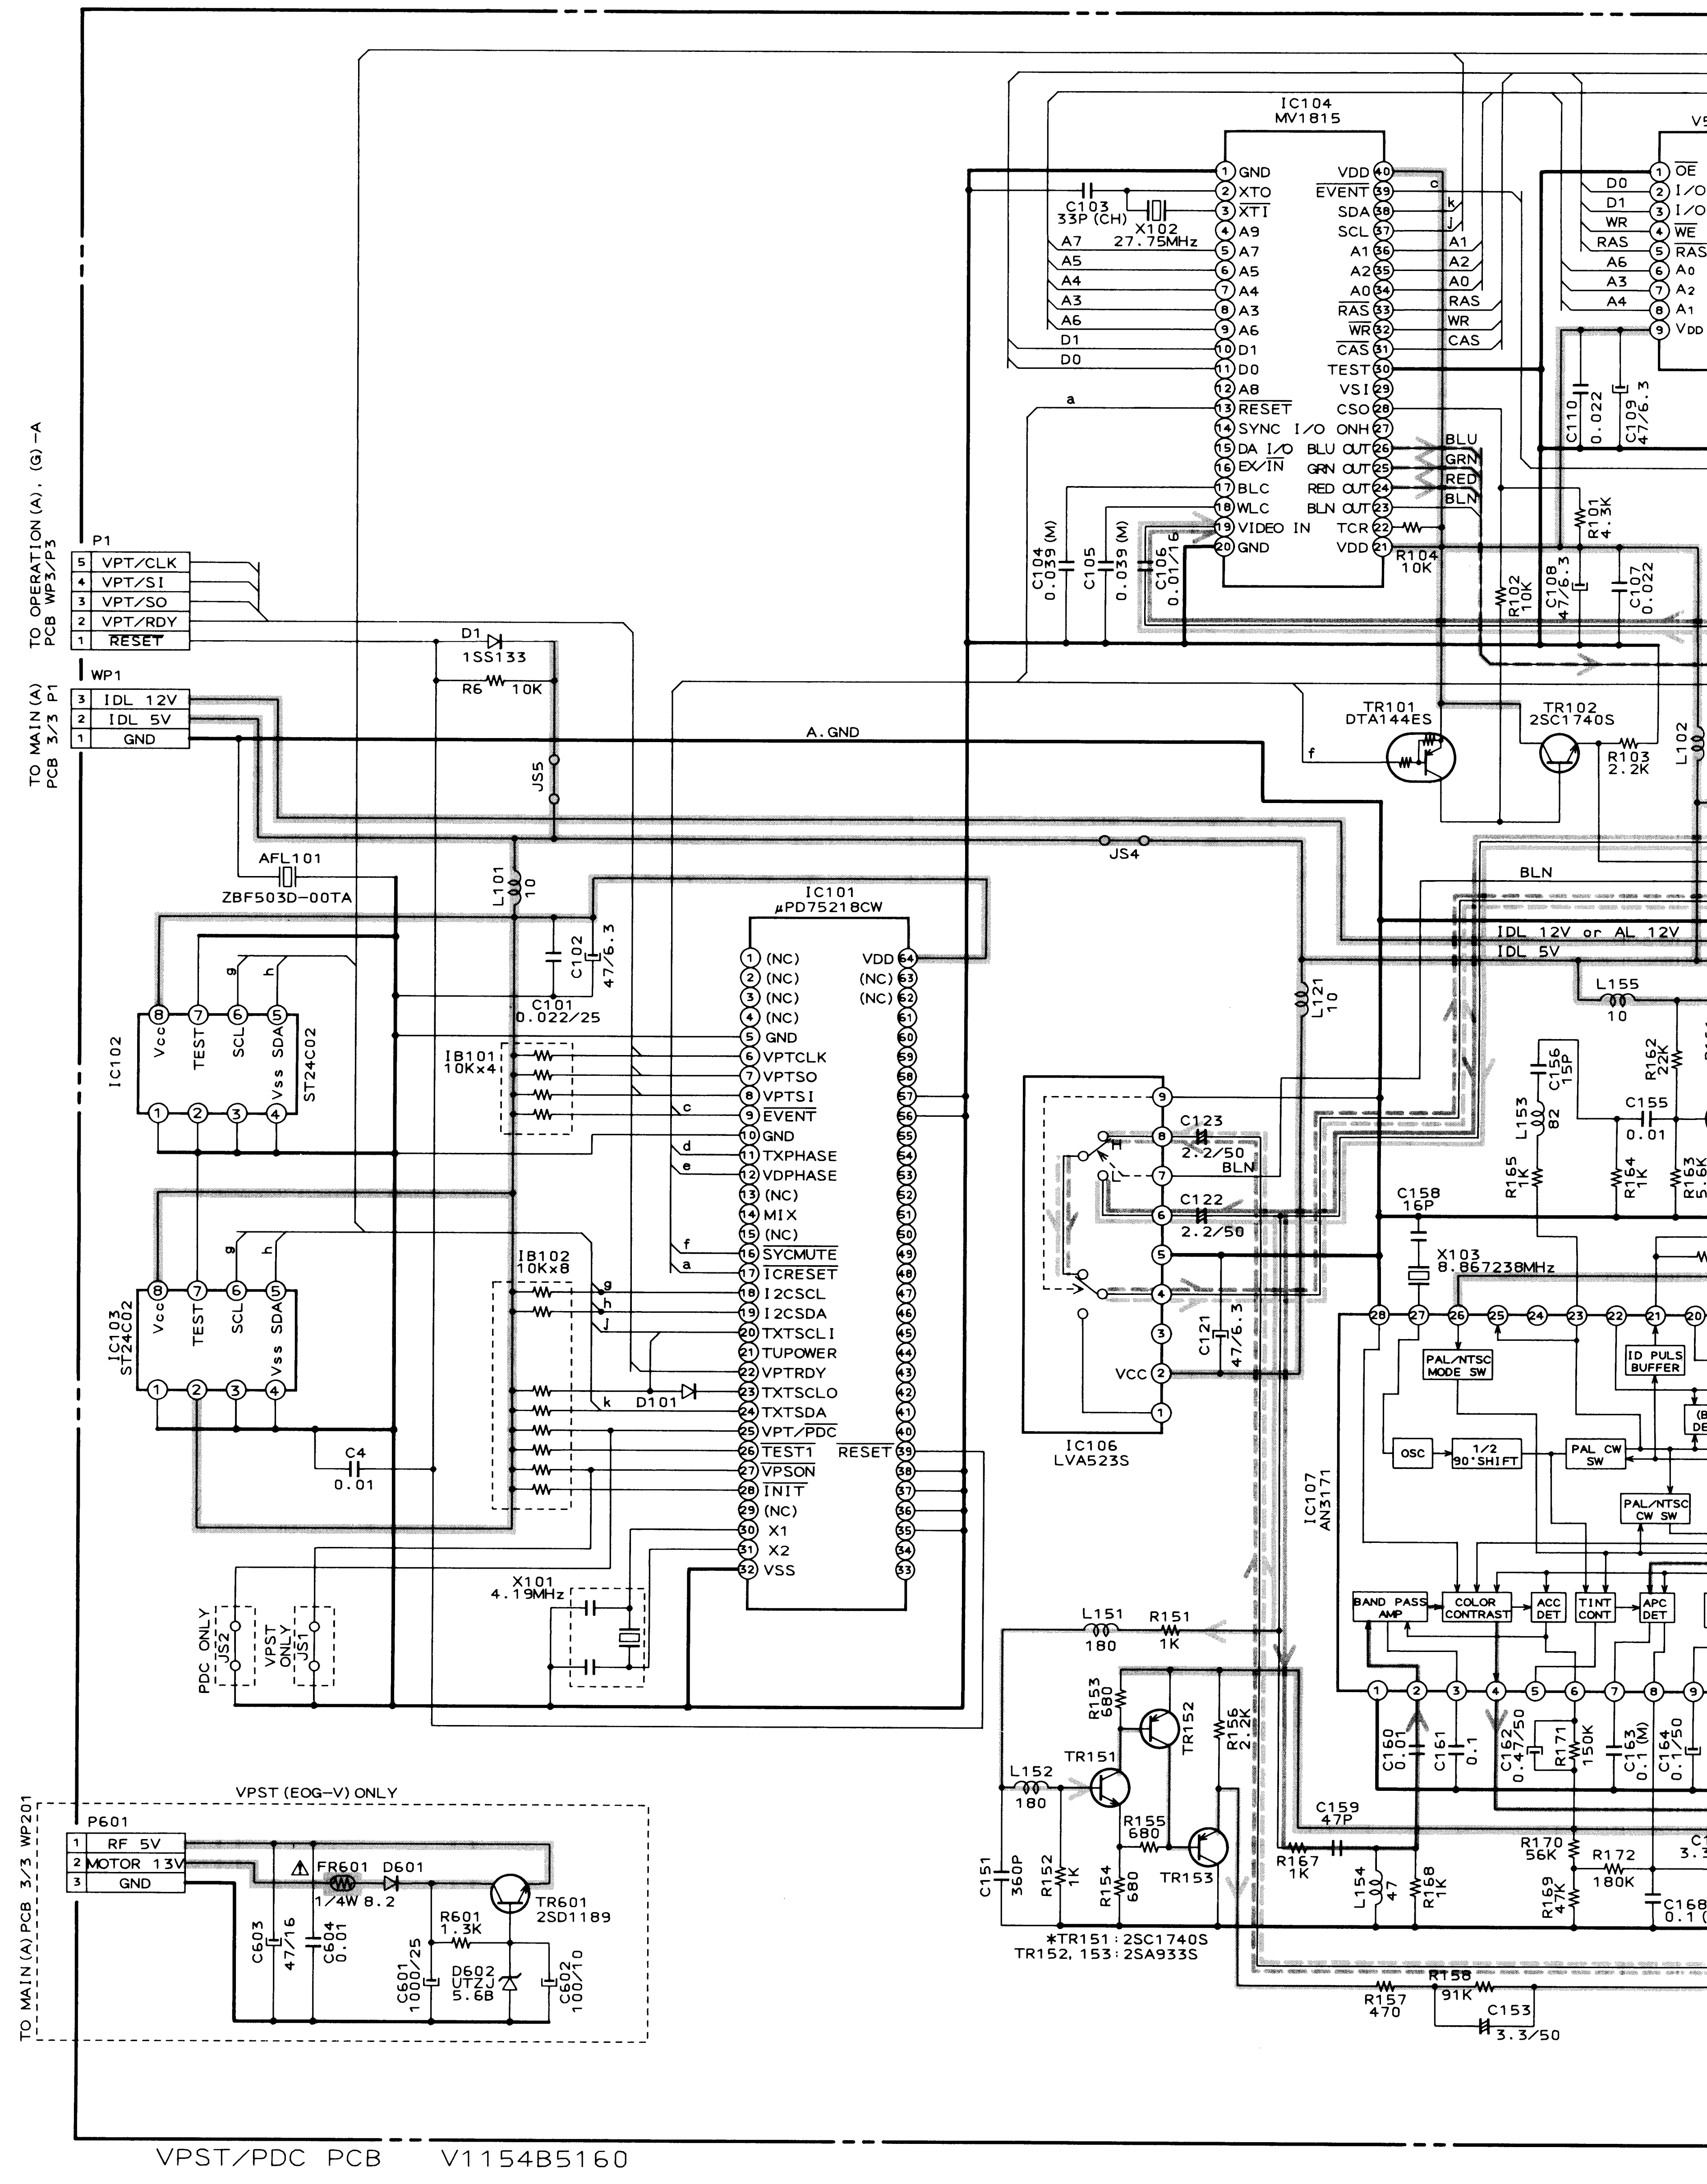
IC104
MV1815
GND
XTO
XTI
A9
A7
A5
A4
A3
A6
D1
D0
A8
RESET
SYNC I/O
DA I/O
EX/IN
BLC
WLC
VIDEO IN
GND
VDD
EVENT
SDA
SCL
A1
A2
A0
RAS
WR
CAS
TEST
VSI
CSO
ONH
BLU OUT
GRN OUT
RED OUT
BLN OUT
TCR
VDD
C103
33P (CH)
X102
27.75MHz
C104
0.039 (M)
C105
0.039 (M)
C106
0.01/16
R104
10K
BLU
GRN
RED
BLN
C110
0.022
C109
47/6.3
R91
4.3K
R102
10K
C108
47/6.3
C107
0.022
OE
I/O
WE
RAS
VDD
TO OPERATION (A). (G)-A PCB WP3/P3
P1
VPT/CLK
VPT/SI
VPT/SO
VPT/RDY
RESET
D1
1SS133
R6 10K
TO MAIN (A) PCB 3/3 P1
WP1
IDL 12V
IDL 5V
GND
A.GND
JS5
JS4
TR101
DTA144ES
TR102
2SC1740S
R103
2.2K
L102
AFL101
ZBF503D-00TA
L101
10
IC101
μPD75218CW
(NC)
VPTCLK
VPTSO
VPTSI
EVENT
TXPHASE
VDPHASE
MIX
SYCMUTE
ICRESET
I2CSCL
I2CSDA
TXTSCLI
TUPOWER
VPTRDY
TXTSCLO
TXTSDA
VPT/PDC
TEST1
VPSON
INIT
X1
X2
VSS
RESET
C102
47/6.3
C101
0.022/25
IC102
ST24C02
IC103
ST24C02
Vcc
TEST
SCL
Vss
SDA
IB101
10K×4
IB102
10K×8
D101
C4
0.01
PDC ONLY JS2
VPST ONLY JS1
X101
4.19MHz
BLN
IDL 12V or AL 12V
IDL 5V
L155
10
L121
10
C123
2.2/50
C122
2.2/50
C121
47/6.3
IC106
LVA523S
VCC
C156
15P
L153
82
R162
22K
C155
0.01
R165
1K
R164
1K
R163
5.6K
C158
16P
X103
8.867238MHz
IC107
AN3171
PAL/NTSC MODE SW
ID PULS BUFFER
OSC
1/2 90° SHIFT
PAL CW SW
PAL/NTSC CW SW
BAND PASS AMP
COLOR CONTRAST
ACC DET
TINT CONT
APC DET
L151
180
R151
1K
R153
680
TR152
R156
2.2K
TR151
L152
180
R155
680
TR153
C151
360P
R152
1K
R154
680
C159
47P
R167
1K
L154
47
R168
1K
C160
0.01
C161
0.1
C162
0.47/50
R171
150K
C163
0.1 (M)
C164
0.1/50
R170
56K
R172
180K
R169
47K
C168
0.1
R157
470
R158
91K
C153
3.3/50
*TR151: 2SC1740S
TR152, 153: 2SA933S
VPST (EOG-V) ONLY
TO MAIN (A) PCB 3/3 WP201
P601
RF 5V
MOTOR 13V
GND
FR601
1/4W 8.2
D601
TR601
2SD1189
R601
1.3K
C603
47/16
C604
0.01
C601
1000/25
D602
UTZJ
5.6B
C602
100/10

VPST/PDC PCB V1154B5160

▬ B (POWER SUPPLY) LINE

▬ Y IN (TUNER) SIGNAL

- - Y VPT SIGNAL

▬ CHROMA IN (TUNER) SIGNAL

- - CHROMA VPT SIGNAL

NOTE
UNLES
ALL R
ALL C

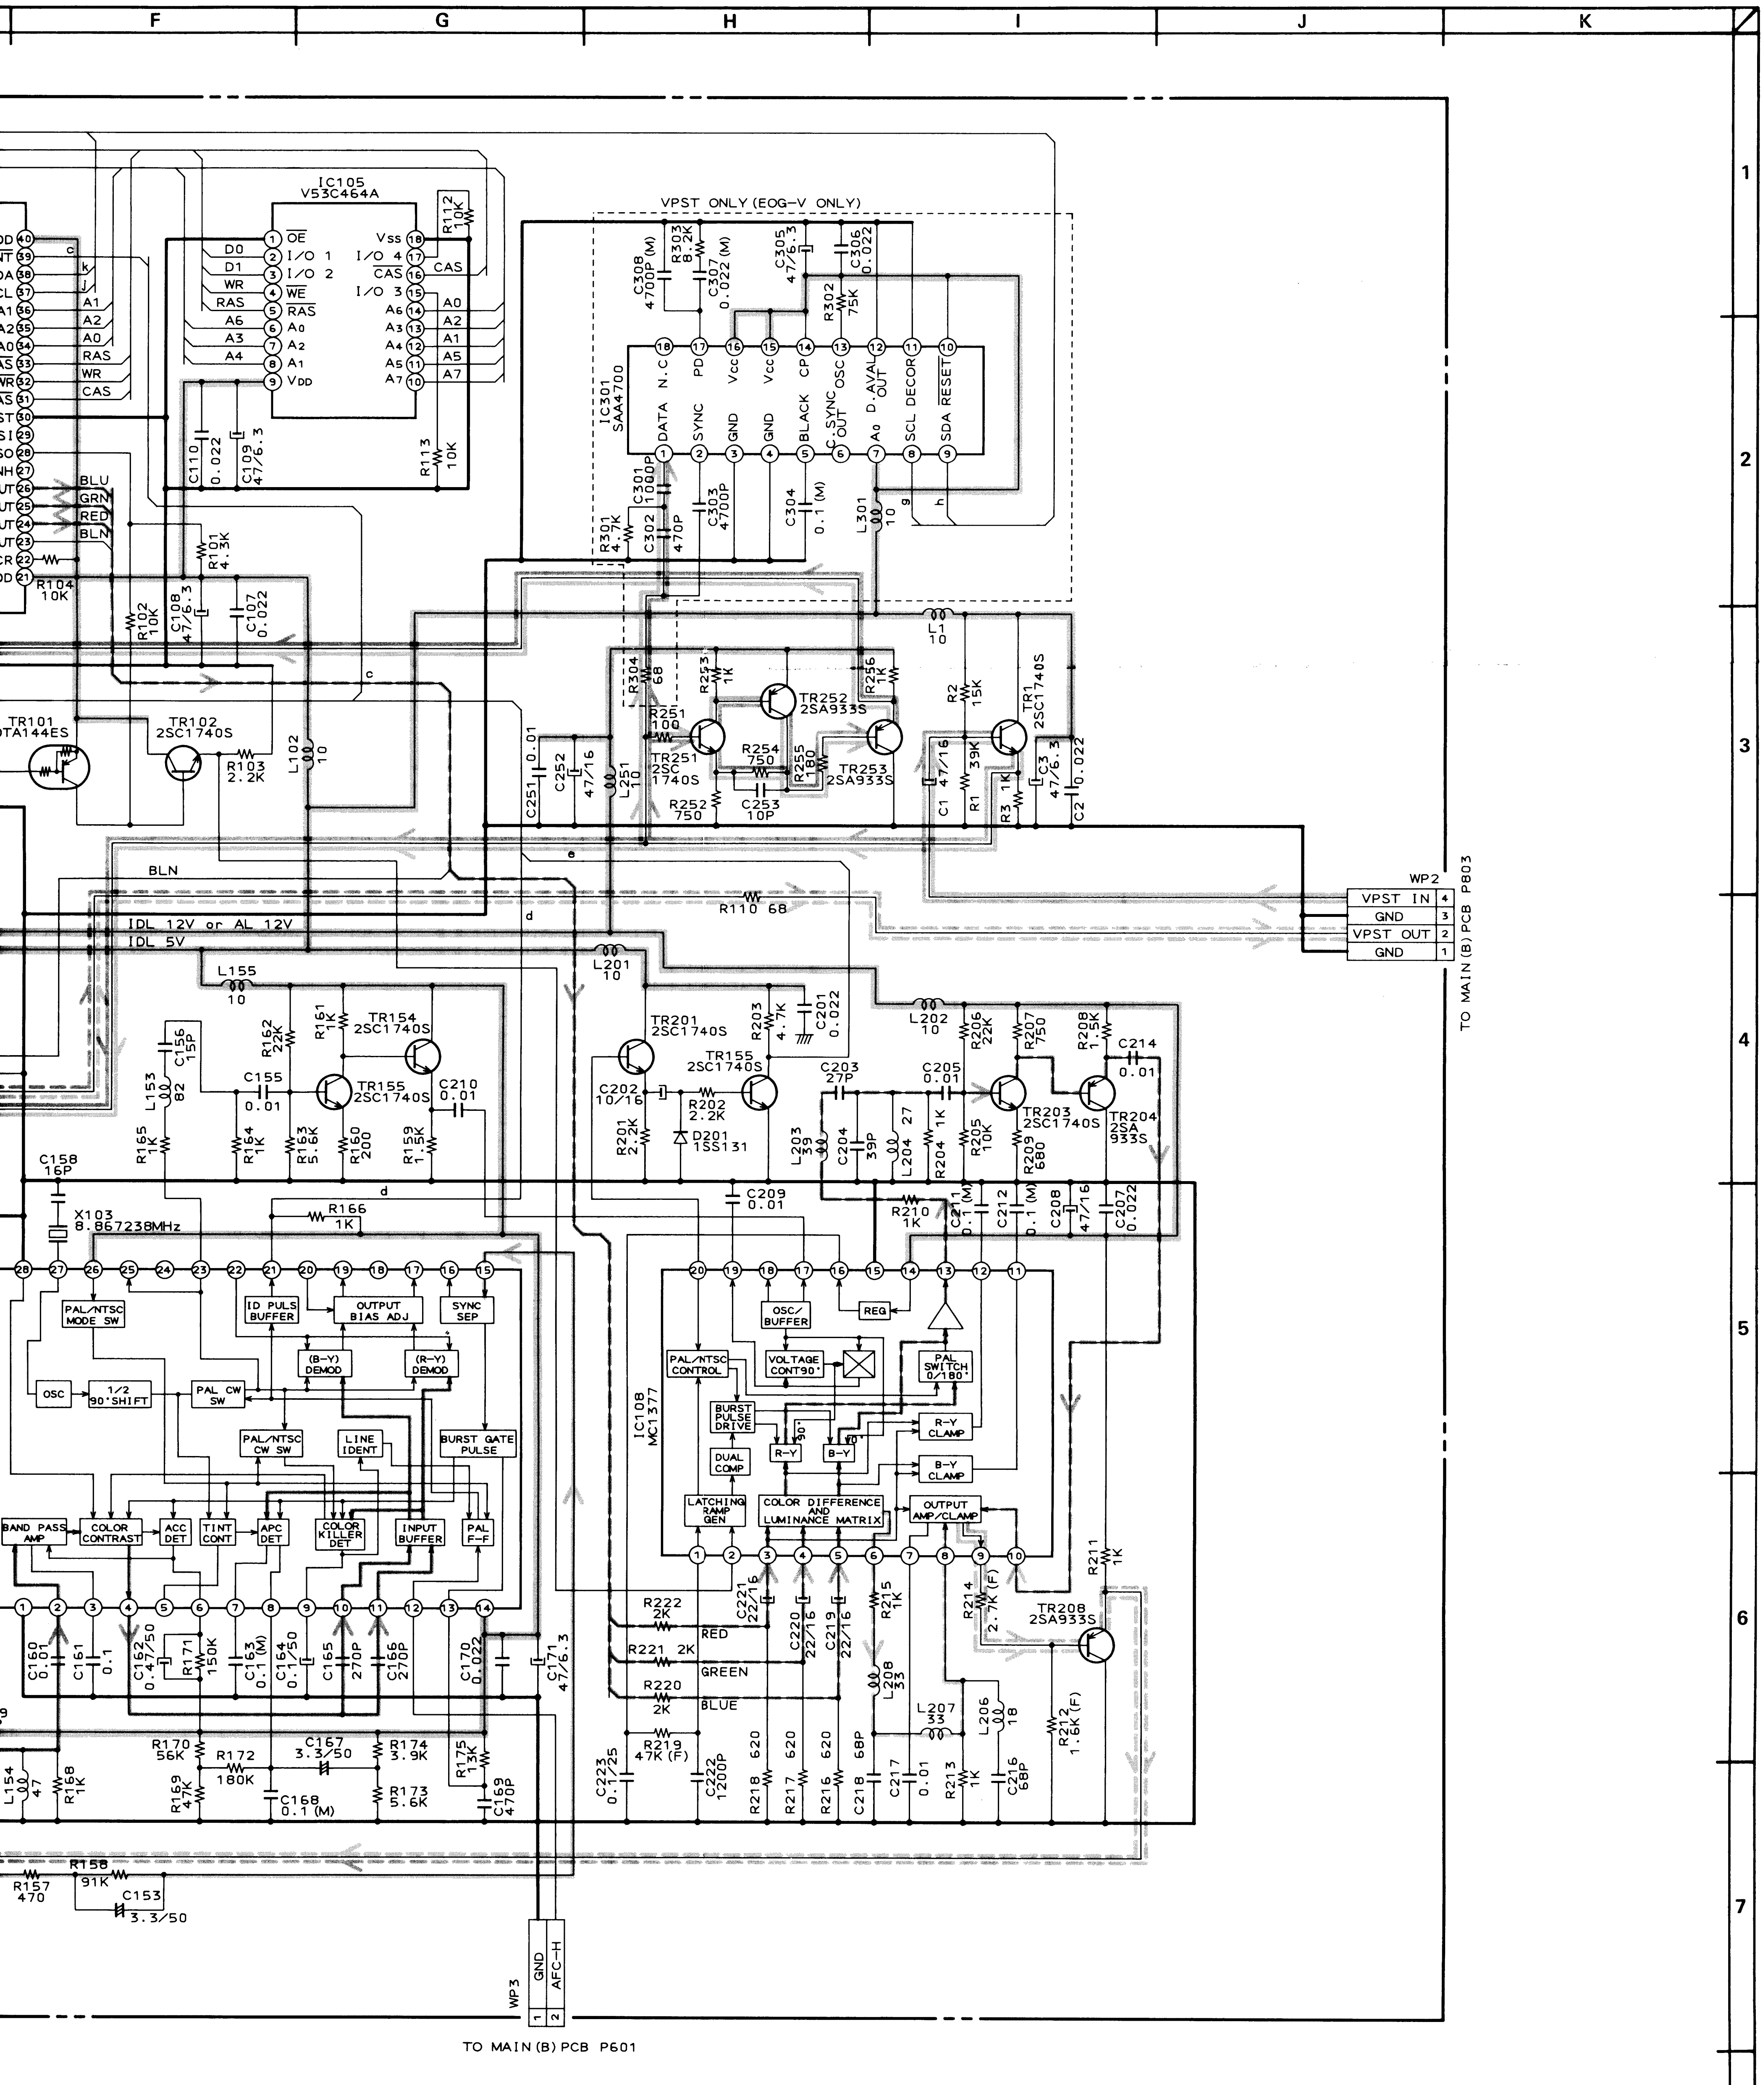
F
G
H
I
J
K
1
2
3
4
5
6
7
8
IC105
V53C464A
OE
I/O 1
I/O 2
WE
RAS
A0
A2
A1
VDD
Vss
I/O 4
CAS
I/O 3
A6
A3
A4
A5
A7
R112 10K
R113 10K
C110 0.022
C109 47/6.3
VPST ONLY (EOG-V ONLY)
IC301
SAA4700
DATA
N.C
PD
Vcc
BLACK
CP
OSC
C.SYNC OUT
D.AVAL OUT
A0
SCL DECOR
SDA RESET
SYNC
GND
C308 4700P (M)
R303 8.2K
C307 0.022 (M)
C305 47/6.3
C306 0.022
R302 75K
C301 1000P
R301 4.7K
C302 470P
C303 4700P
C304 0.1 (M)
L301 10
R304 68
R251 100
R253 1K
TR252 2SA933S
R256 1K
TR251 2SC1740S
R254 750
R255 180
TR253 2SA933S
R252 750
C253 10P
L1 10
R2 15K
TR1 2SC1740S
C1 47/16
R1 39K
R3 1K
C3 47/6.3
C2 0.022
C251 0.01
C252 47/16
L251 10
TR101 DTA144ES
TR102 2SC1740S
R103 2.2K
L102 10
R101 4.3K
R102 10K
C108 47/6.3
C107 0.022
R104 10K
BLU
GRN
RED
BLN
IDL 12V or AL 12V
IDL 5V
R110 68
WP2
VPST IN
GND
VPST OUT
GND
TO MAIN (B) PCB P803
L155 10
R162 22K
R161 1K
TR154 2SC1740S
C156 15P
L153 82
C155 0.01
TR155 2SC1740S
C210 0.01
R165 1K
R164 1K
R163 5.6K
R160 200
R159 1.5K
C158 16P
X103 8.867238MHz
R166 1K
L201 10
TR201 2SC1740S
R203 4.7K
C201 0.022
TR155 2SC1740S
C202 10/16
R202 2.2K
R201 2.2K
D201 1SS131
C203 27P
L203 39
C204 39P
L204 27
R204 1K
C205 0.01
R205 10K
L202 10
R206 22K
R207 750
R208 1.5K
C214 0.01
TR203 2SC1740S
TR204 2SA933S
R209 680
R210 1K
C211 0.1 (M)
C212 0.1 (M)
C208 47/16
C207 0.022
C209 0.01
PAL/NTSC MODE SW
ID PULS BUFFER
OUTPUT BIAS ADJ
SYNC SEP
(B-Y) DEMOD
(R-Y) DEMOD
OSC
1/2 90°SHIFT
PAL CW SW
PAL/NTSC CW SW
LINE IDENT
BURST GATE PULSE
BAND PASS AMP
COLOR CONTRAST
ACC DET
TINT CONT
APC DET
COLOR KILLER DET
INPUT BUFFER
PAL F-F
IC108
MC1377
OSC/BUFFER
REG
PAL/NTSC CONTROL
VOLTAGE CONT90°
PAL SWITCH 0/180°
BURST PULSE DRIVE
R-Y
B-Y
R-Y CLAMP
B-Y CLAMP
DUAL COMP
LATCHING RAMP GEN
COLOR DIFFERENCE AND LUMINANCE MATRIX
OUTPUT AMP/CLAMP
C160 0.1
C161 0.1
C162 0.47/50
R171 150K
C163 0.1 (M)
C164 0.1/50
C165 270P
C166 270P
C170 0.022
C171 47/6.3
R170 56K
R172 180K
C167 3.3/50
R174 3.9K
R169 4.7K
C168 0.1 (M)
R173 5.6K
R175 13K
C169 470P
L154 47
R158 1K
R156 91K
R157 470
C153 3.3/50
R222 2K
RED
R221 2K
GREEN
R220 2K
BLUE
C221 22/16
C220 22/16
C219 22/16
R215 1K
R214 2.7K (F)
TR208 2SA933S
R211 1K
L208 33
L207 33
L206 18
R212 1.6K (F)
R219 47K (F)
C223 0.1/25
C222 1200P
R218 620
R217 620
R216 620
C218 68P
C217 0.01
R213 1K
C216 68P
WP3
GND
AFC-H
TO MAIN (B) PCB P601

LINE

IAL

2) SIGNAL

IAL

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN µF

WARNING: ⚠ AND ▨ INDICATE SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSMENT: ⚠ ET ▨ , ILS INDIQUENT LES COMPOSTANTS CRITIQUES DE SÉCURITÉ, POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

VS–F440EOG–V
VS–F480EK–V/EOG–V
VPST/PDC
SCHEMATIC DIAGRAM
No.21–13 V115213M
A1

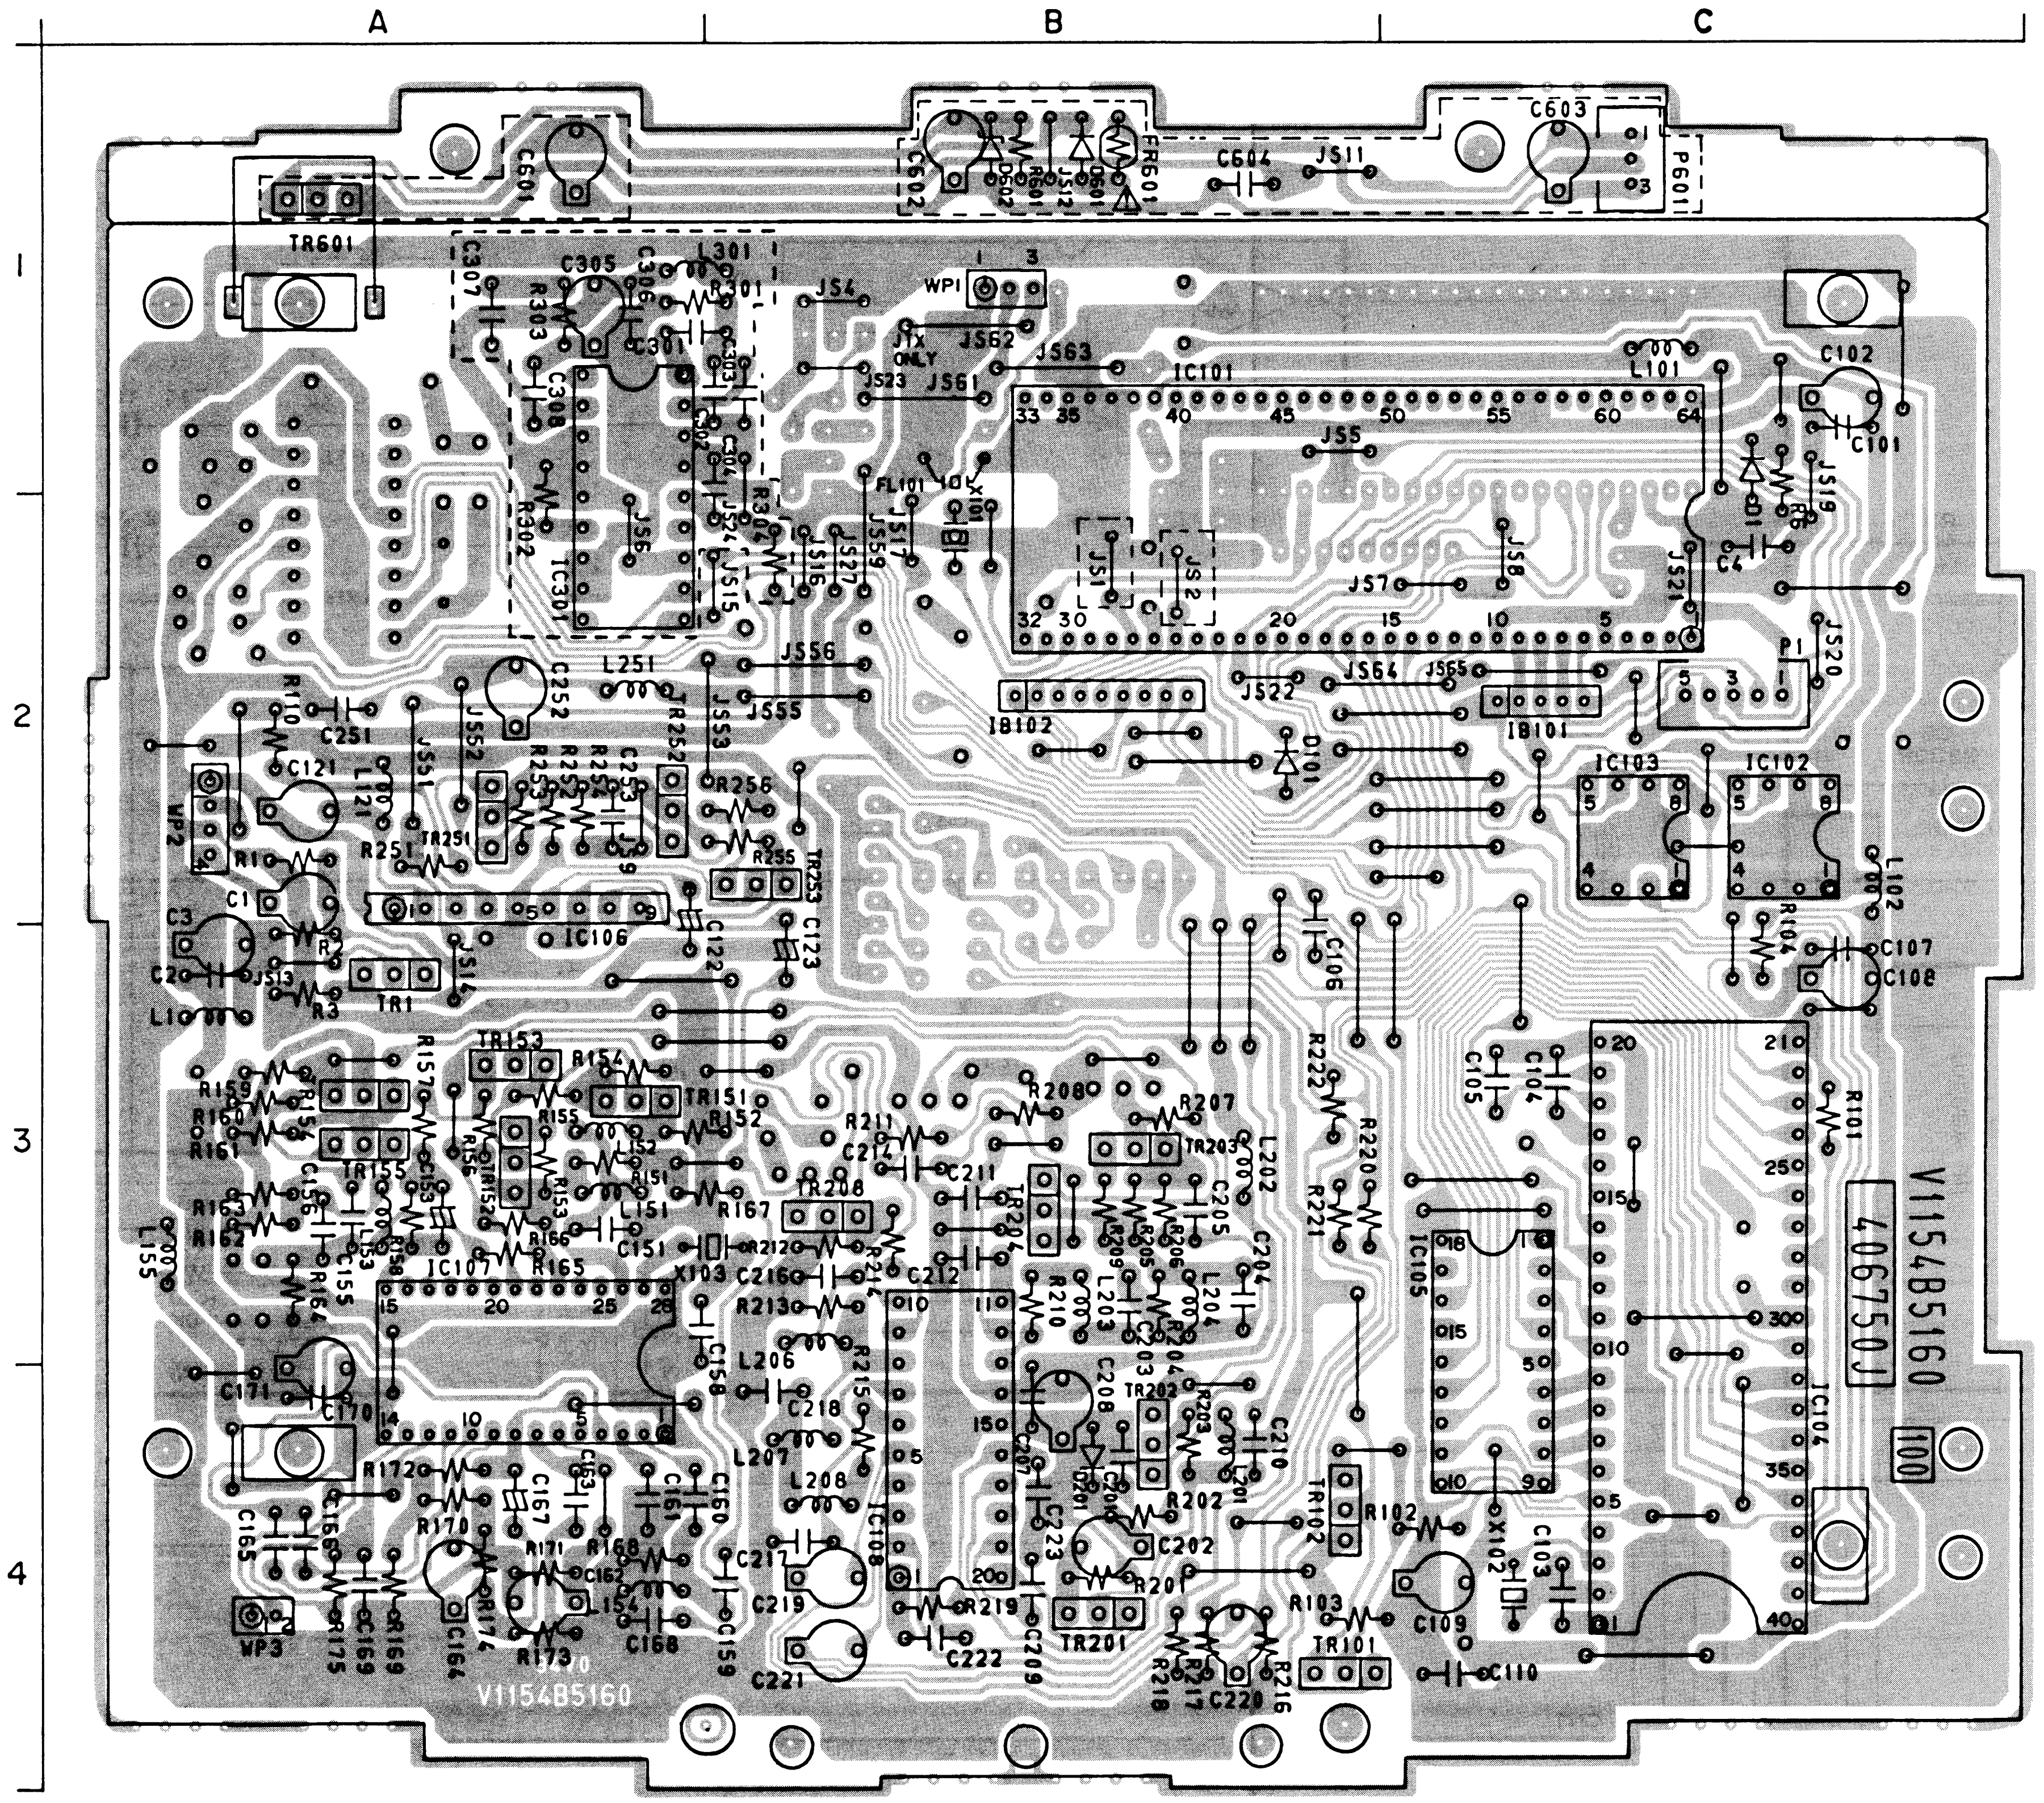
A
B
C
1
2
3
4
IC101
IC102
IC103
IC104
IC105
IC106
IC107
IC108
IC301
WP1
WP2
WP3
P1
P601
TR1
TR601
V1154B5160
4067150J

VPST / PDC PCB V1154B5160

PRINCIPAL PARTS LOCATION

ICs

IC101	B,C1,2
IC102	C2
IC103	C2
IC104	C3,4
IC105	C3,4
IC106	A2
IC107	A3,4
IC108	B3,4
IC301	A1,2

CONNECTORs & WIREs

WP1	B1
WP2	A2
WP3	A4
P1	C2
P601	C1

TRANSISTORs

TR1	A1
TR101	B4
TR102	B4
TR151	A3
TR152	A3
TR153	A3
TR154	A3
TR155	A3
TR201	B4
TR202	B4
TR203	B3
TR204	B3
TR208	B3
TR251	A2
TR252	A2
TR253	B2
TR601	A1

WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDEES PAR LE FABRICANT

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING PARTS INFORMATION.

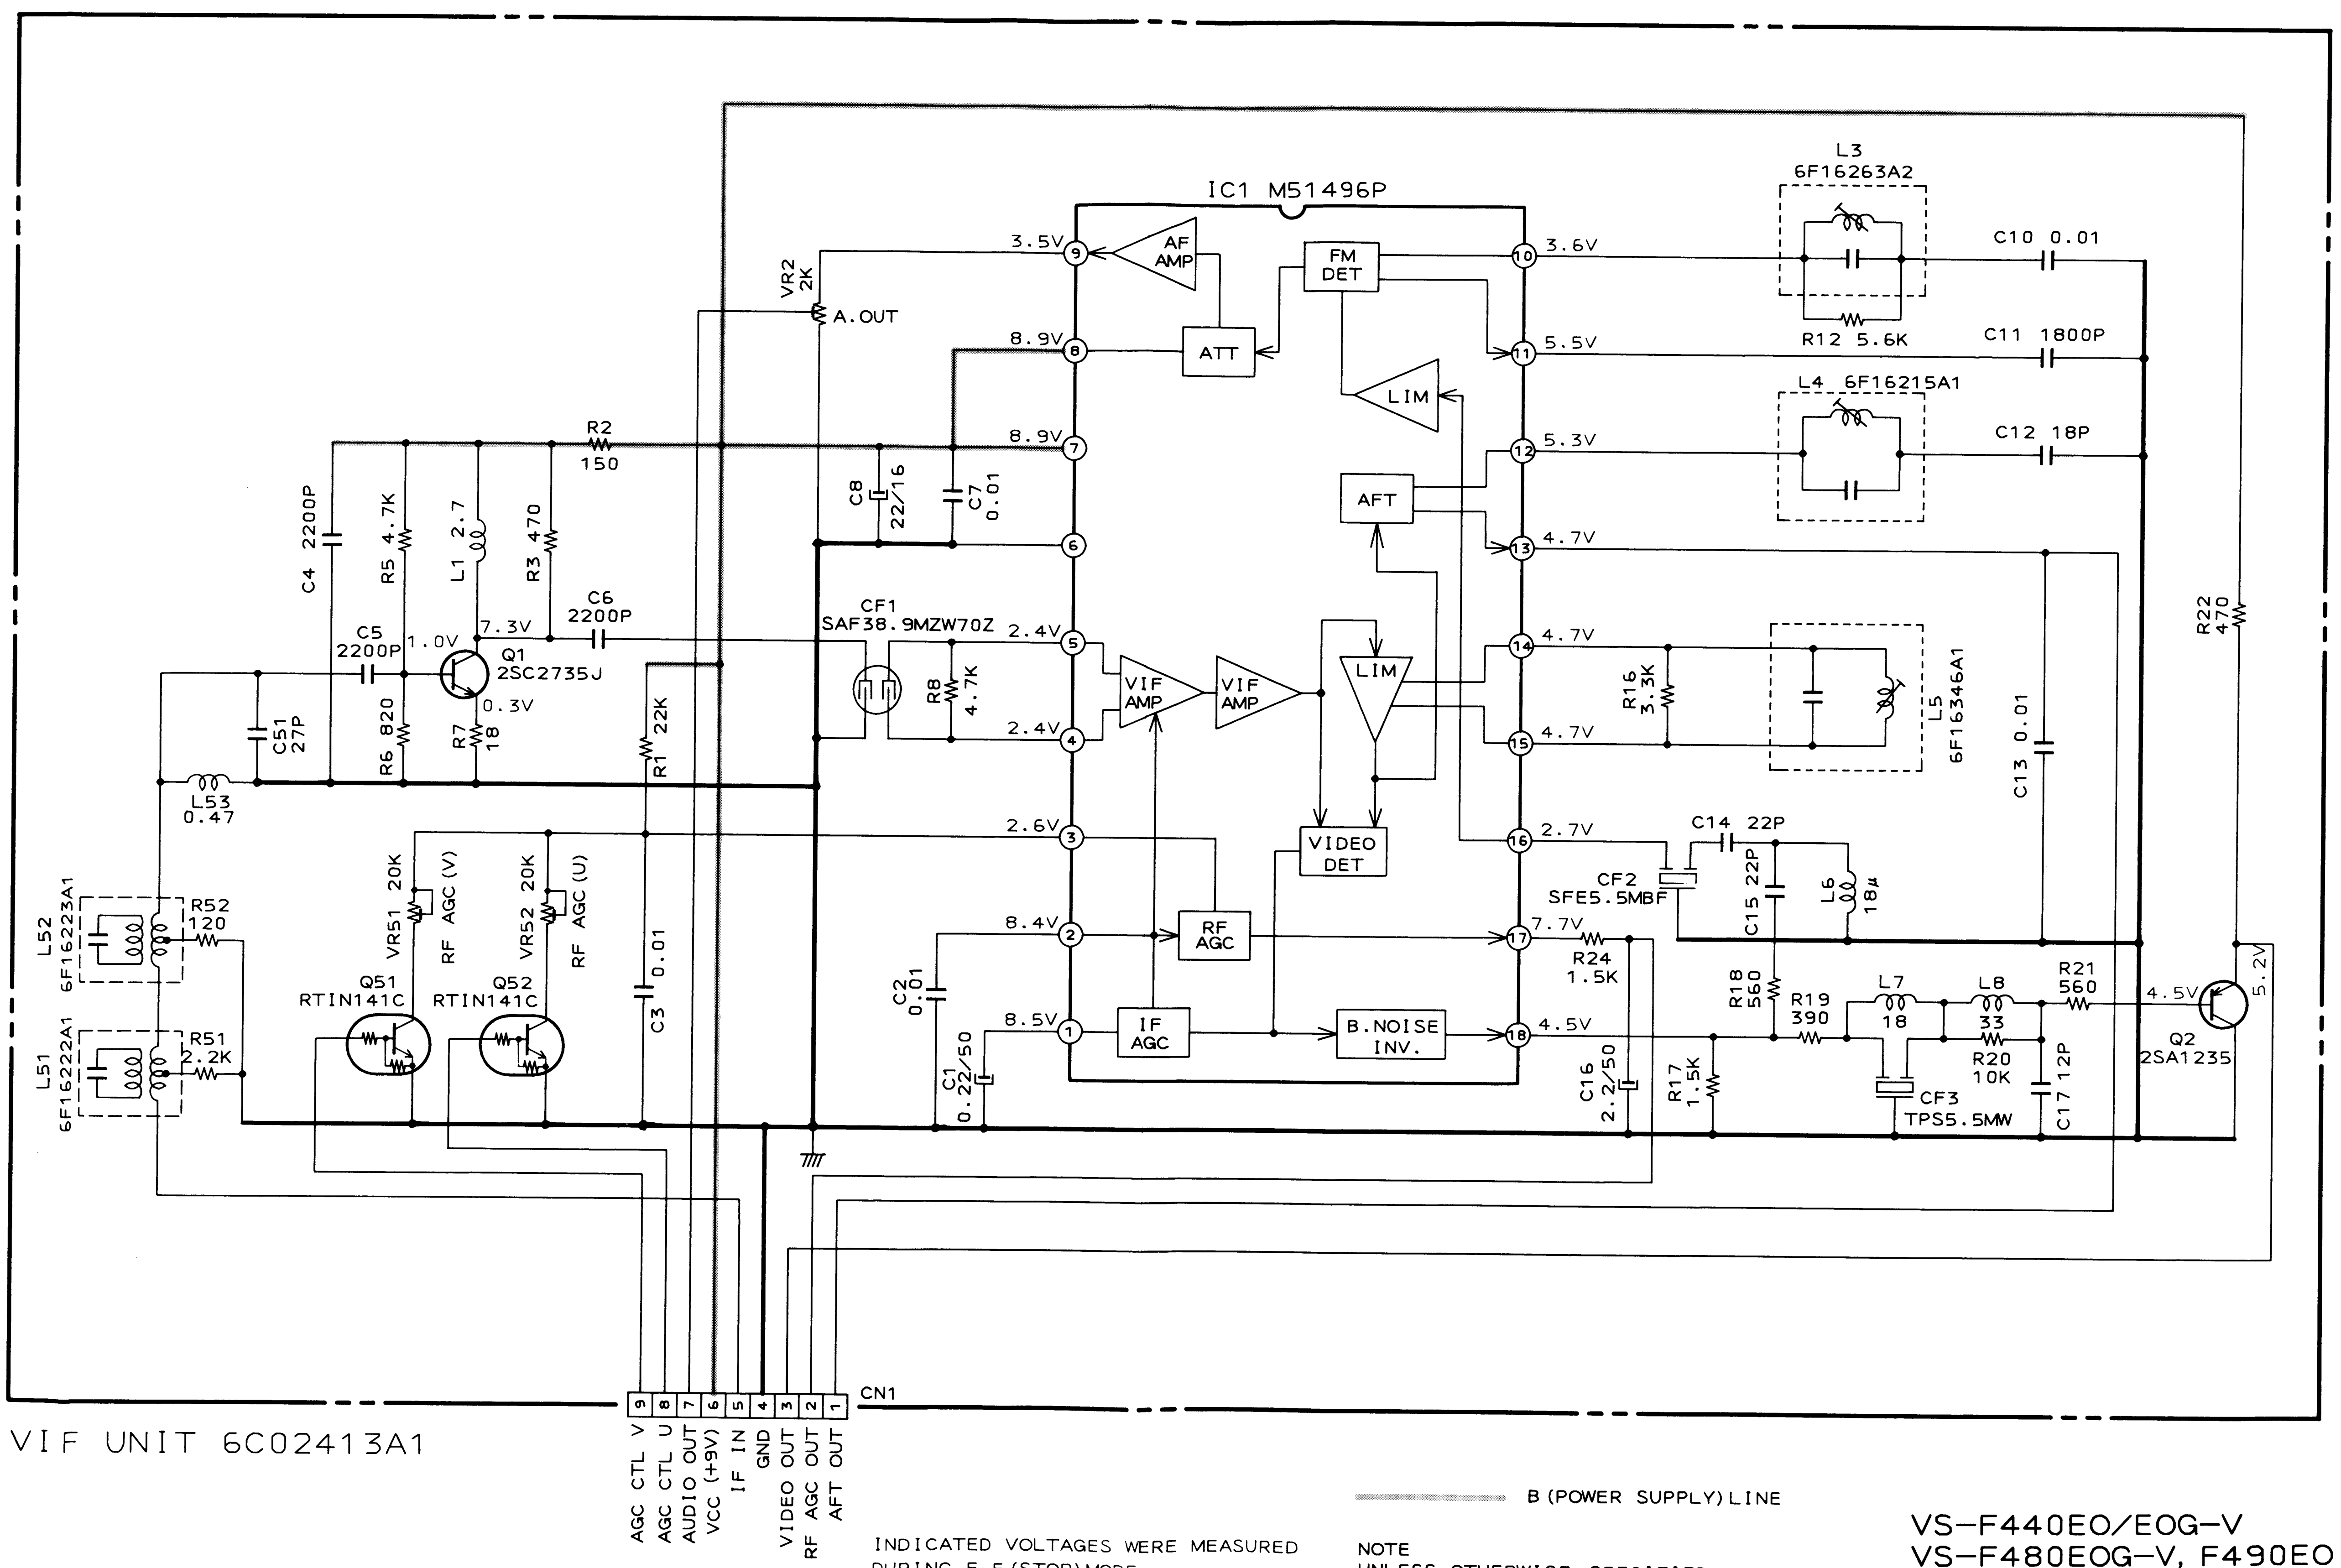
VIF UNIT 6C02413A1
IC1 M51496P
AF AMP
FM DET
ATT
LIM
AFT
VIF AMP
VIF AMP
LIM
VIDEO DET
RF AGC
IF AGC
B.NOISE INV.
3.5V
8.9V
8.9V
2.4V
2.4V
2.6V
8.4V
8.5V
3.6V
5.5V
5.3V
4.7V
4.7V
4.7V
2.7V
7.7V
4.5V
VR2 2K
A.OUT
R2 150
C8 22/16
C7 0.01
C4 2200P
R5 4.7K
L1 2.7
R3 470
C6 2200P
CF1 SAF38.9MZW70Z
R8 4.7K
C5 2200P
1.0V
7.3V
Q1 2SC2735J
0.3V
R1 22K
C51 27P
R6 820
R7 18
L53 0.47
VR51 20K
RF AGC (V)
VR52 20K
RF AGC (U)
C3 0.01
L52 6F16223A1
R52 120
L51 6F16222A1
R51 2.2K
Q51 RTIN141C
Q52 RTIN141C
C2 0.01
C1 0.22/50
L3 6F16263A2
C10 0.01
R12 5.6K
C11 1800P
L4 6F16215A1
C12 18P
R16 3.3K
L5 6F16346A1
C13 0.01
R22 470
C14 22P
CF2 SFE5.5MBF
C15 22P
L6 18μ
R24 1.5K
R18 560
R19 390
L7 18
L8 33
R21 560
4.5V
5.2V
Q2 2SA1235
C16 2.2/50
R17 1.5K
R20 10K
CF3 TPS5.5MW
C17 12P
CN1
9 8 7 6 5 4 3 2 1
AGC CTL V
AGC CTL U
AUDIO OUT
VCC (+9V)
IF IN
GND
VIDEO OUT
RF AGC OUT
AFT OUT
A B C D E F G H I J K
1 2 3 4 5 6 7 8

▬ B (POWER SUPPLY) LINE

INDICATED VOLTAGES WERE MEASURED
DURING E-E (STOP) MODE.

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF
ALL INDUCTORS IN μH (K)

VS-F440EO/EOG-V
VS-F480EOG-V, F490EO
VIF UNIT
SCHEMATIC DIAGRAM

No.21-14 V115214M
A3


COLLECTOR
BASE
EMITTER

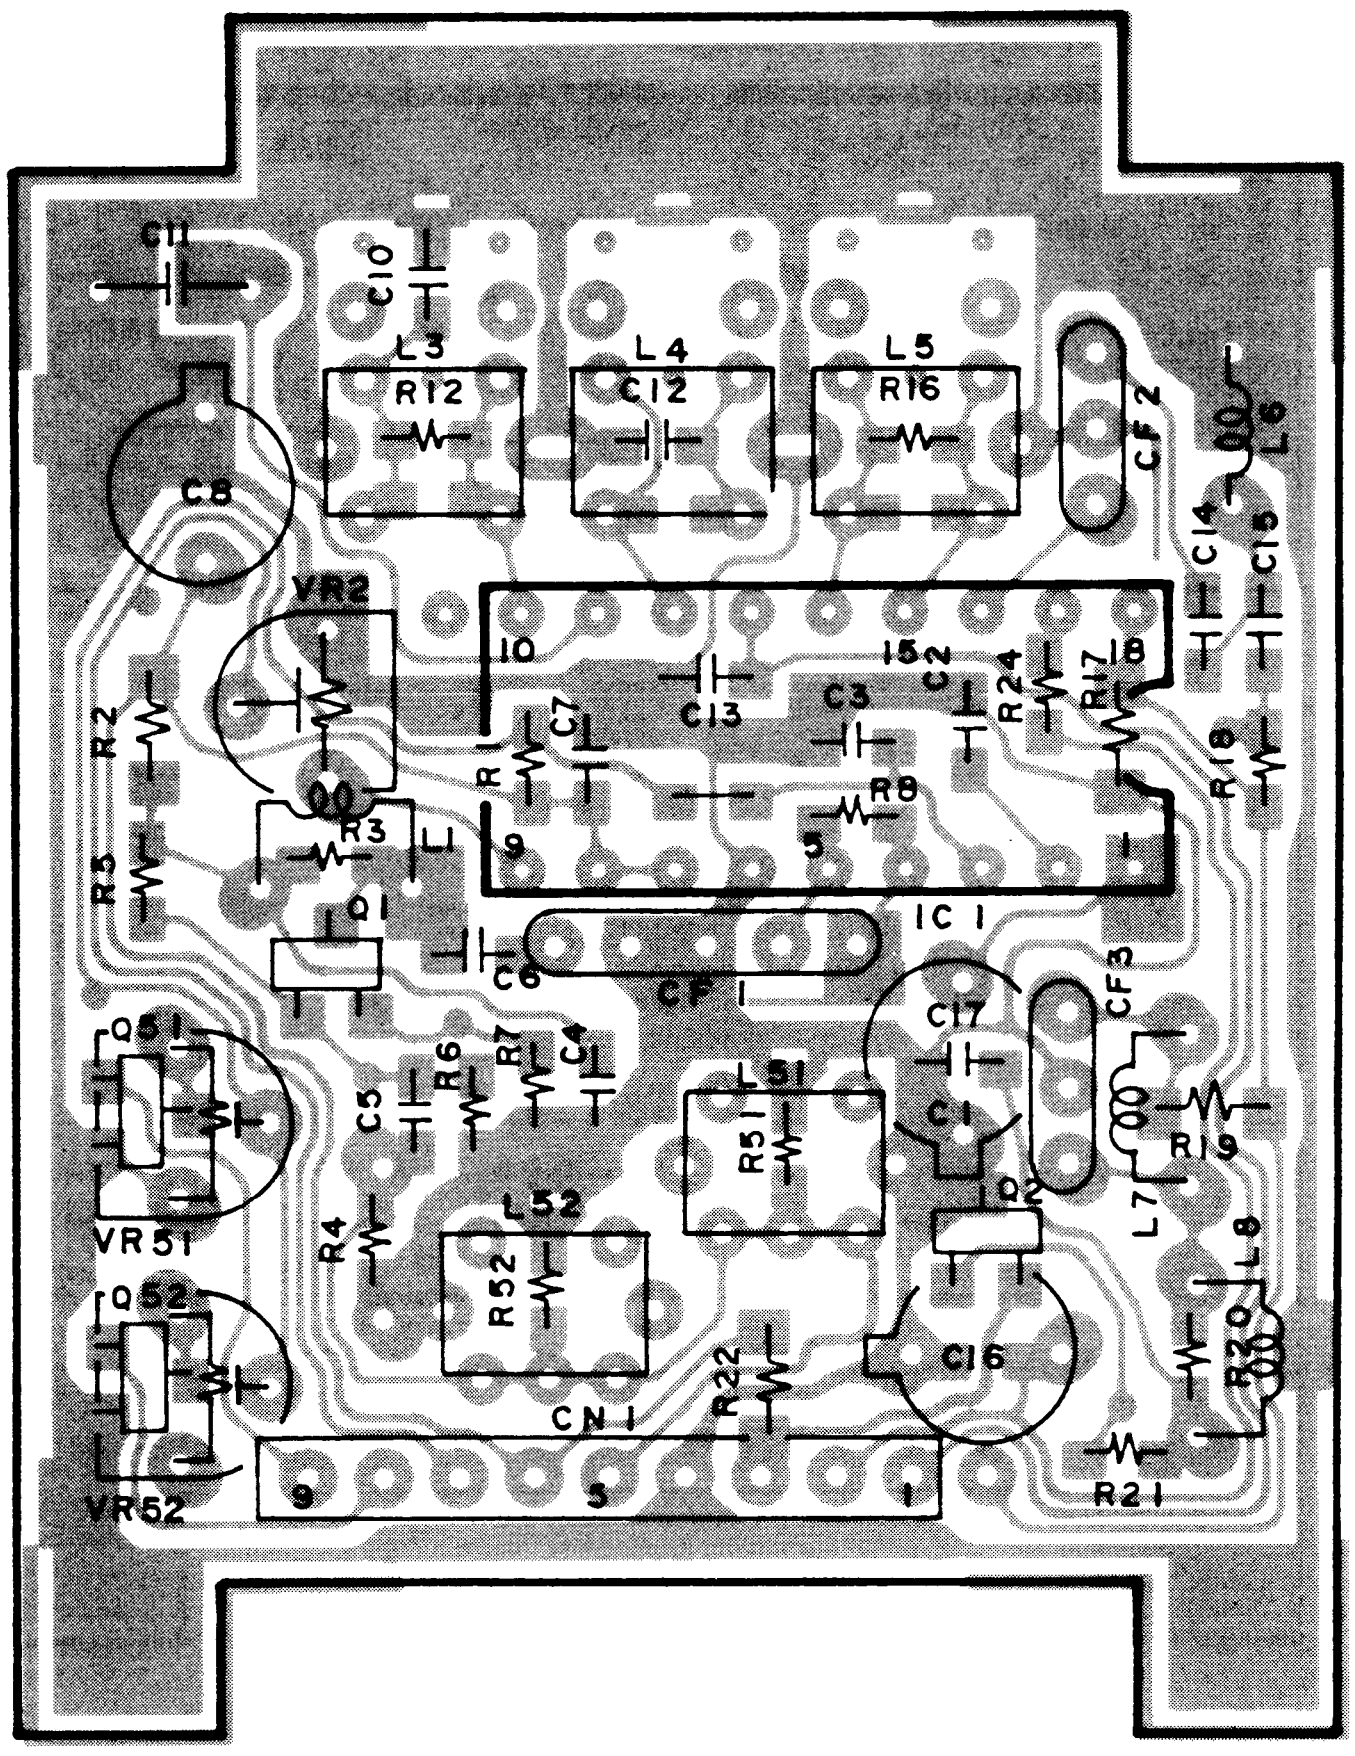
C11
C10
L3
R12
L4
C12
L5
R16
CF2
L6
C8
C14
C15
VR2
10
C13
15
C2
C3
R24
R17
18
R18
R2
R1
C7
R8
R3
9
5
R5
Q1
IC1
C6
CF1
CF3
Q51
C17
R6
R7
C4
L51
C1
R19
C5
R51
VR51
Q2
L7
L52
L8
R4
Q52
R52
R22
C16
R20
CN1
R21
VR52
9
5
1

VIF UNIT 6C02413A1
(EO.EOG-V ONLY)

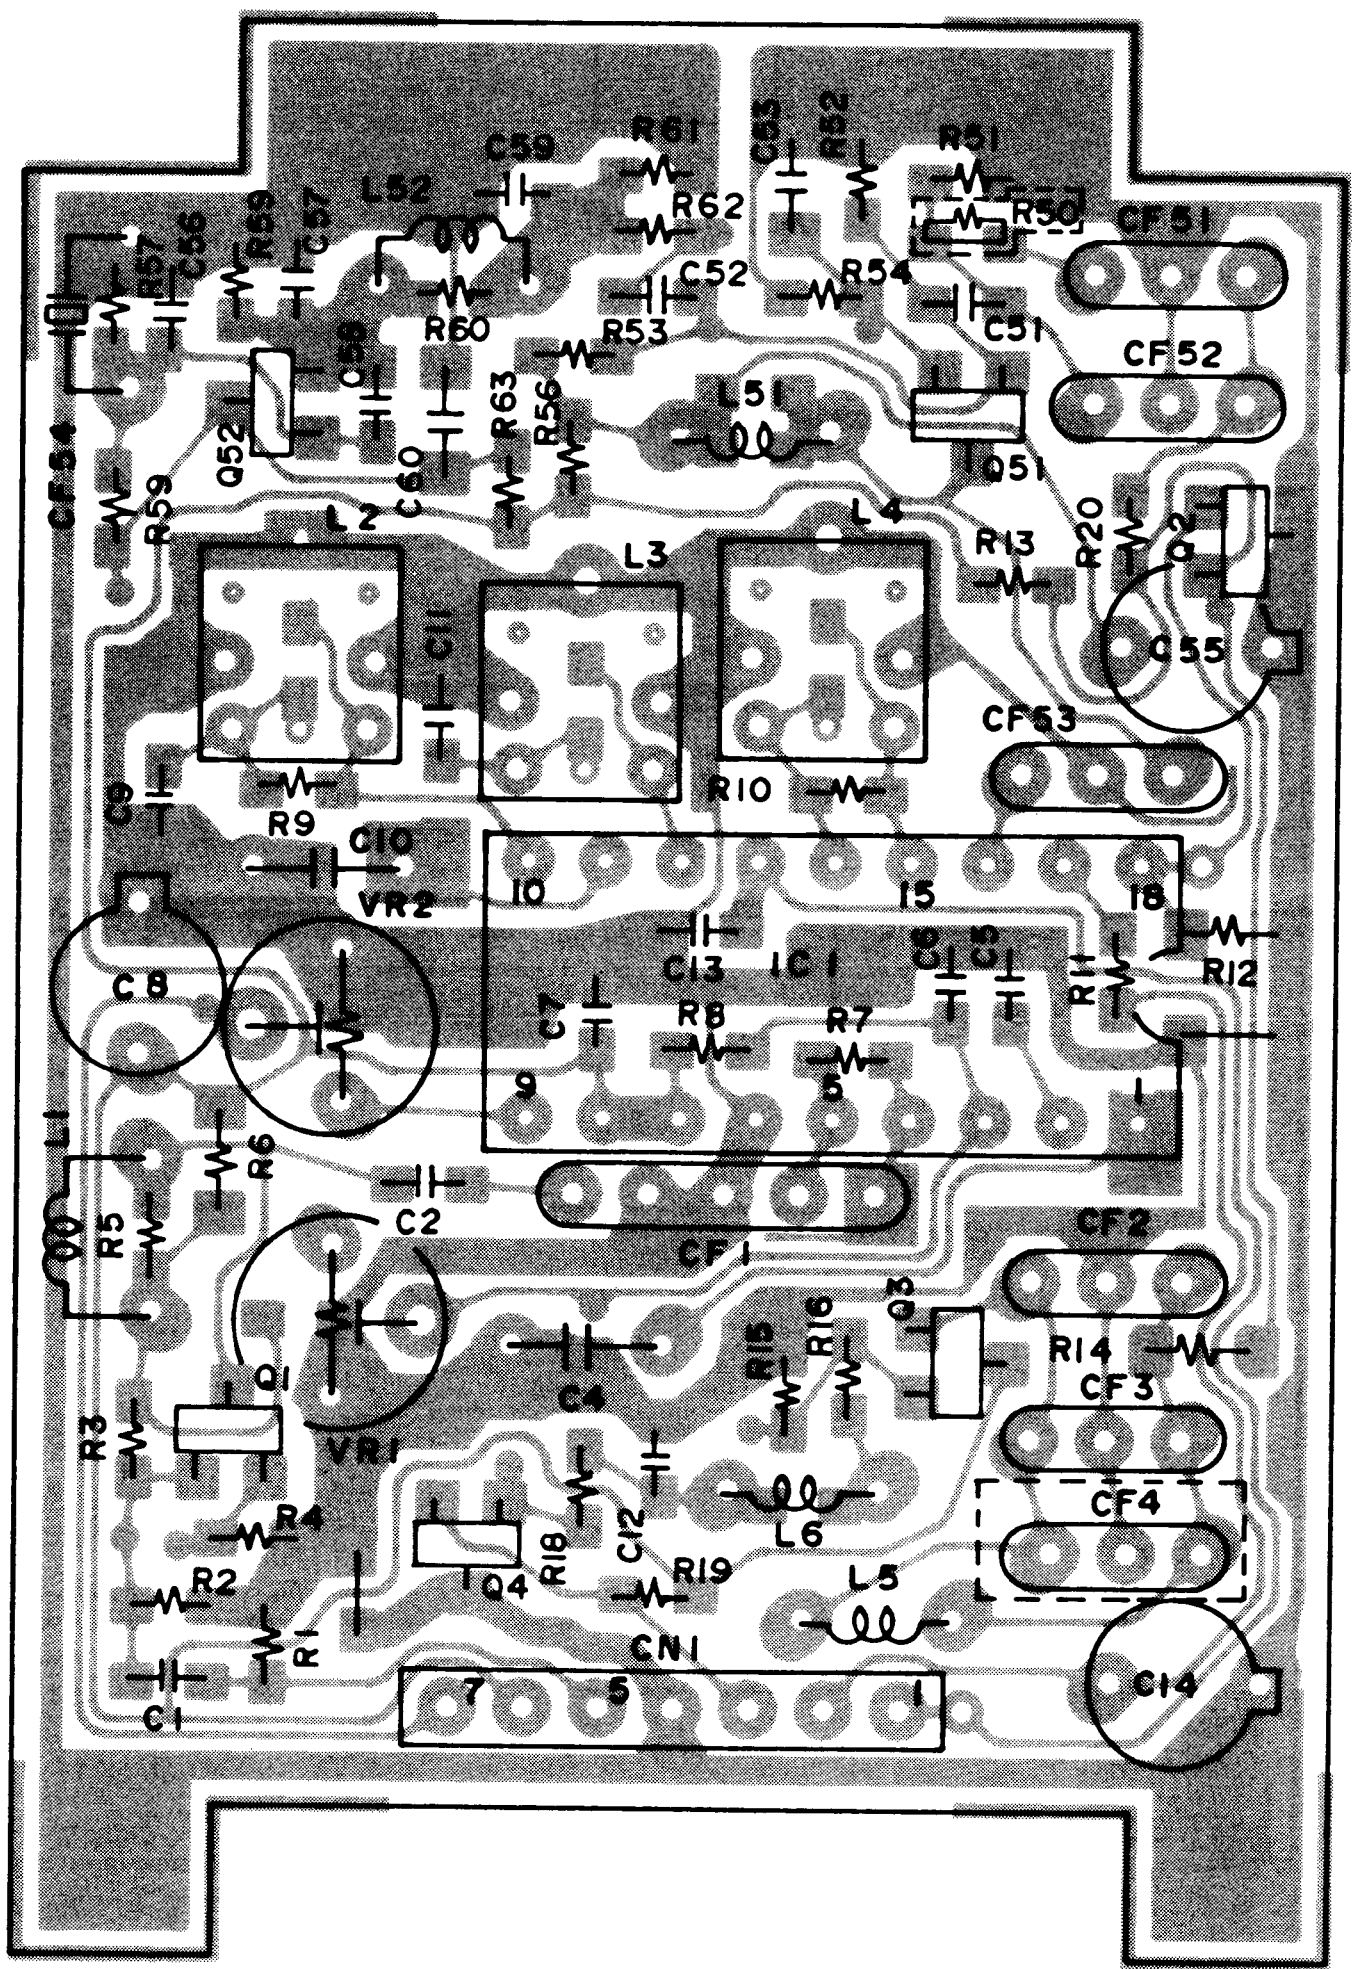
C59
R61
C53
R52
R51
R50
CF51
L52
R62
C56
R57
R58
C57
C52
R54
C51
CF52
C58
R60
R53
L51
CF54
Q52
R63
R56
Q51
R59
C60
L2
L3
L4
R13
R20
Q2
C55
C11
CF53
C9
R9
R10
C10
VR2
10
15
18
R12
C8
C13
IC1
C6
C5
R11
C7
R8
R7
9
5
1
L1
R6
R5
C2
CF1
CF2
Q3
R15
R16
R14
CF3
Q1
C4
R3
VR1
CF4
R4
L6
Q4
R18
C12
R19
L5
R2
R1
CN1
7
5
1
C14
C1


COLLECTOR
BASE
EMITTER

VIF UNIT 6B00870A1
(ED1.EDG ONLY)

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING PARTS INFORMATION.

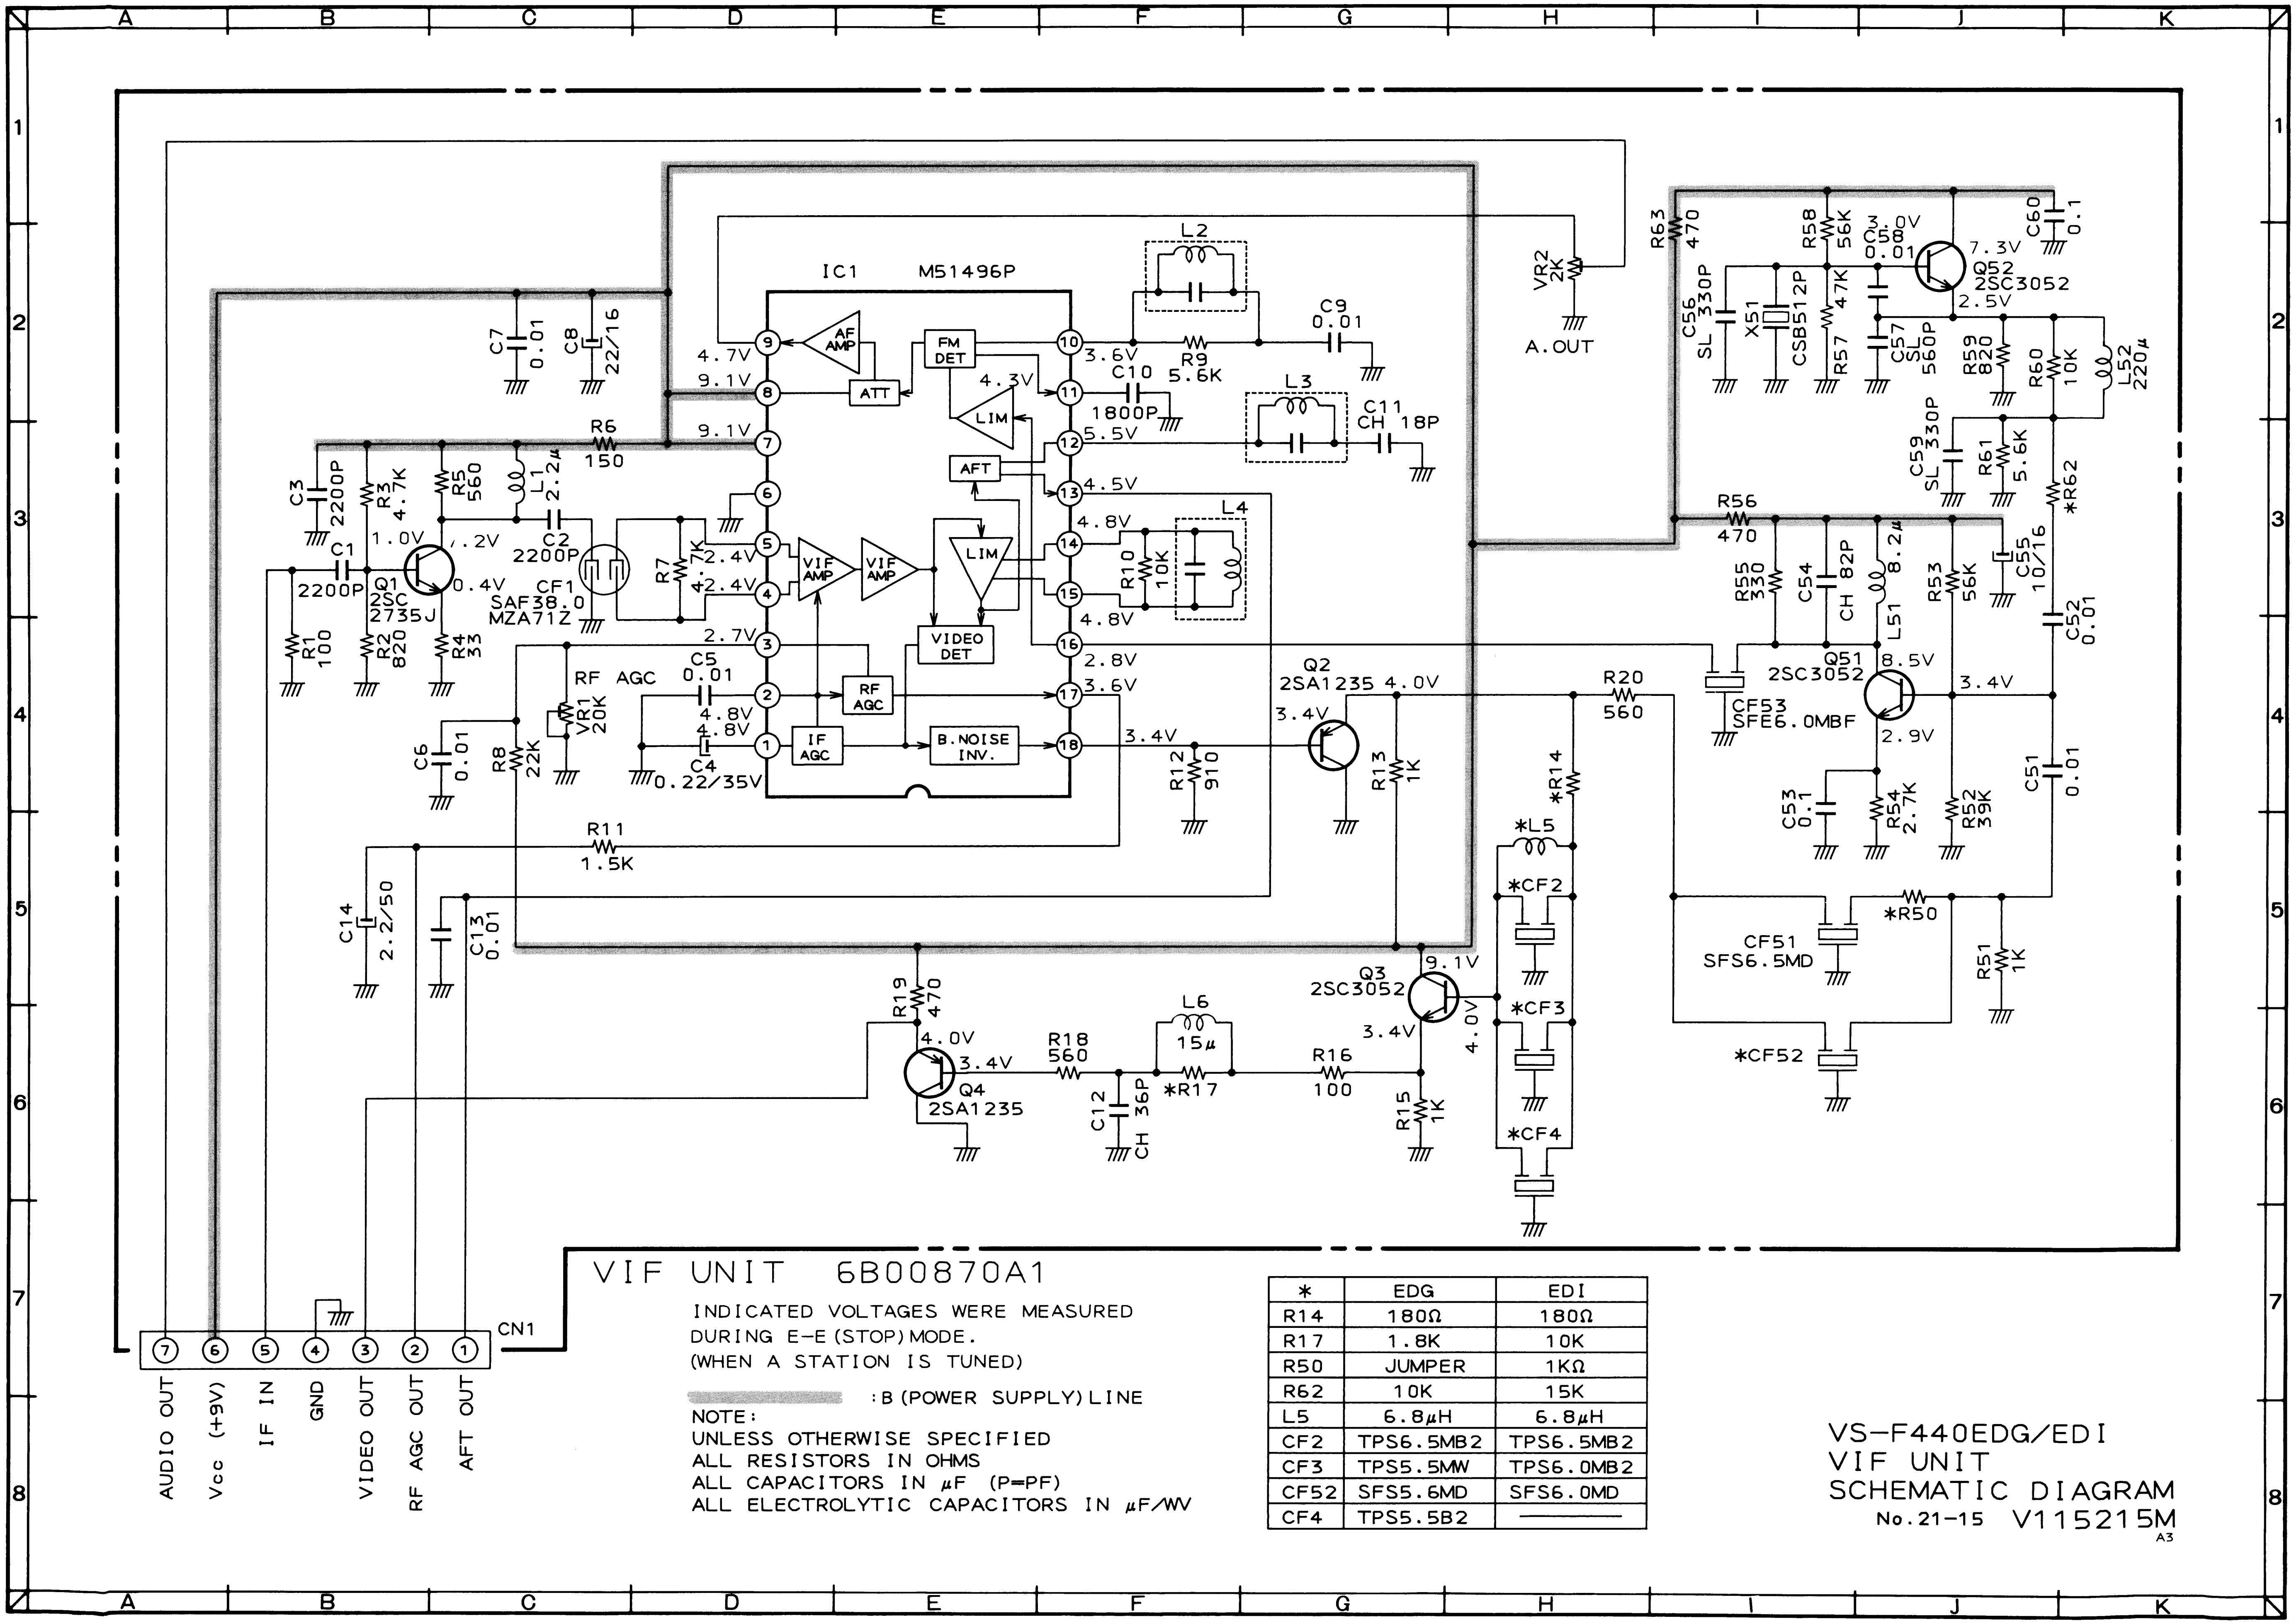
A
B
C
D
E
F
G
H
I
J
K
1
2
3
4
5
6
7
8
IC1 M51496P
AF AMP
FM DET
ATT
LIM
AFT
VIF AMP
VIF AMP
LIM
VIDEO DET
RF AGC
IF AGC
B.NOISE INV.
4.7V
9.1V
9.1V
3.6V
4.3V
5.5V
4.5V
2.4V
2.4V
4.8V
4.8V
2.7V
2.8V
4.8V
4.8V
3.6V
3.4V
L2
C9 0.01
R9 5.6K
C10 1800P
L3
C11 CH 18P
L4
R10 10K
C7 0.01
C8 22/16
R6 150
C3 2200P
R3 4.7K
R5 560
L1 2.2μ
C2 2200P
C1 2200P
Q1 2SC2735J
1.0V
1.2V
0.4V
R1 100
R2 820
R4 33
CF1 SAF38.0 MZA71Z
R7 4.7K
RF AGC
VR1 20K
C5 0.01
C4 0.22/35V
C6 0.01
R8 22K
R11 1.5K
C14 2.2/50
C13 0.01
VR2 2K
A.OUT
Q2 2SA1235
4.0V
3.4V
R12 910
R13 1K
R20 560
*R14
*L5
*CF2
*CF3
*CF4
Q3 2SC3052
9.1V
3.4V
4.0V
R16 100
R15 1K
L6 15μ
*R17
R18 560
C12 CH 36P
R19 470
Q4 2SA1235
4.0V
3.4V
R63 470
R58 56K
C58 0.01
3.0V
Q52 2SC3052
7.3V
2.5V
C60 0.1
C56 SL 330P
X51 CSB512P
R57 47K
C57 SL 560P
R59 820
R60 10K
L52 220μ
C59 SL 330P
R61 5.6K
*R62
R56 470
R55 330
C54 CH 82P
L51 8.2μ
R53 56K
C55 10/16
C52 0.01
CF53 SFE6.0MBF
Q51 2SC3052
8.5V
3.4V
2.9V
C53 0.1
R54 2.7K
R52 39K
C51 0.01
CF51 SFS6.5MD
*R50
R51 1K
*CF52
CN1
⑦ AUDIO OUT
⑥ Vcc (+9V)
⑤ IF IN
④ GND
③ VIDEO OUT
② RF AGC OUT
① AFT OUT

VIF UNIT 6B00870A1

INDICATED VOLTAGES WERE MEASURED
DURING E-E (STOP) MODE.
(WHEN A STATION IS TUNED)

▨ : B (POWER SUPPLY) LINE

NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μF (P=PF)
ALL ELECTROLYTIC CAPACITORS IN μF/WV

*	EDG	EDI
R14	180Ω	180Ω
R17	1.8K	10K
R50	JUMPER	1KΩ
R62	10K	15K
L5	6.8μH	6.8μH
CF2	TPS6.5MB2	TPS6.5MB2
CF3	TPS5.5MW	TPS6.0MB2
CF52	SFS5.6MD	SFS6.0MD
CF4	TPS5.5B2	——

VS-F440EDG/EDI
VIF UNIT
SCHEMATIC DIAGRAM

No.21-15 V115215M
A3

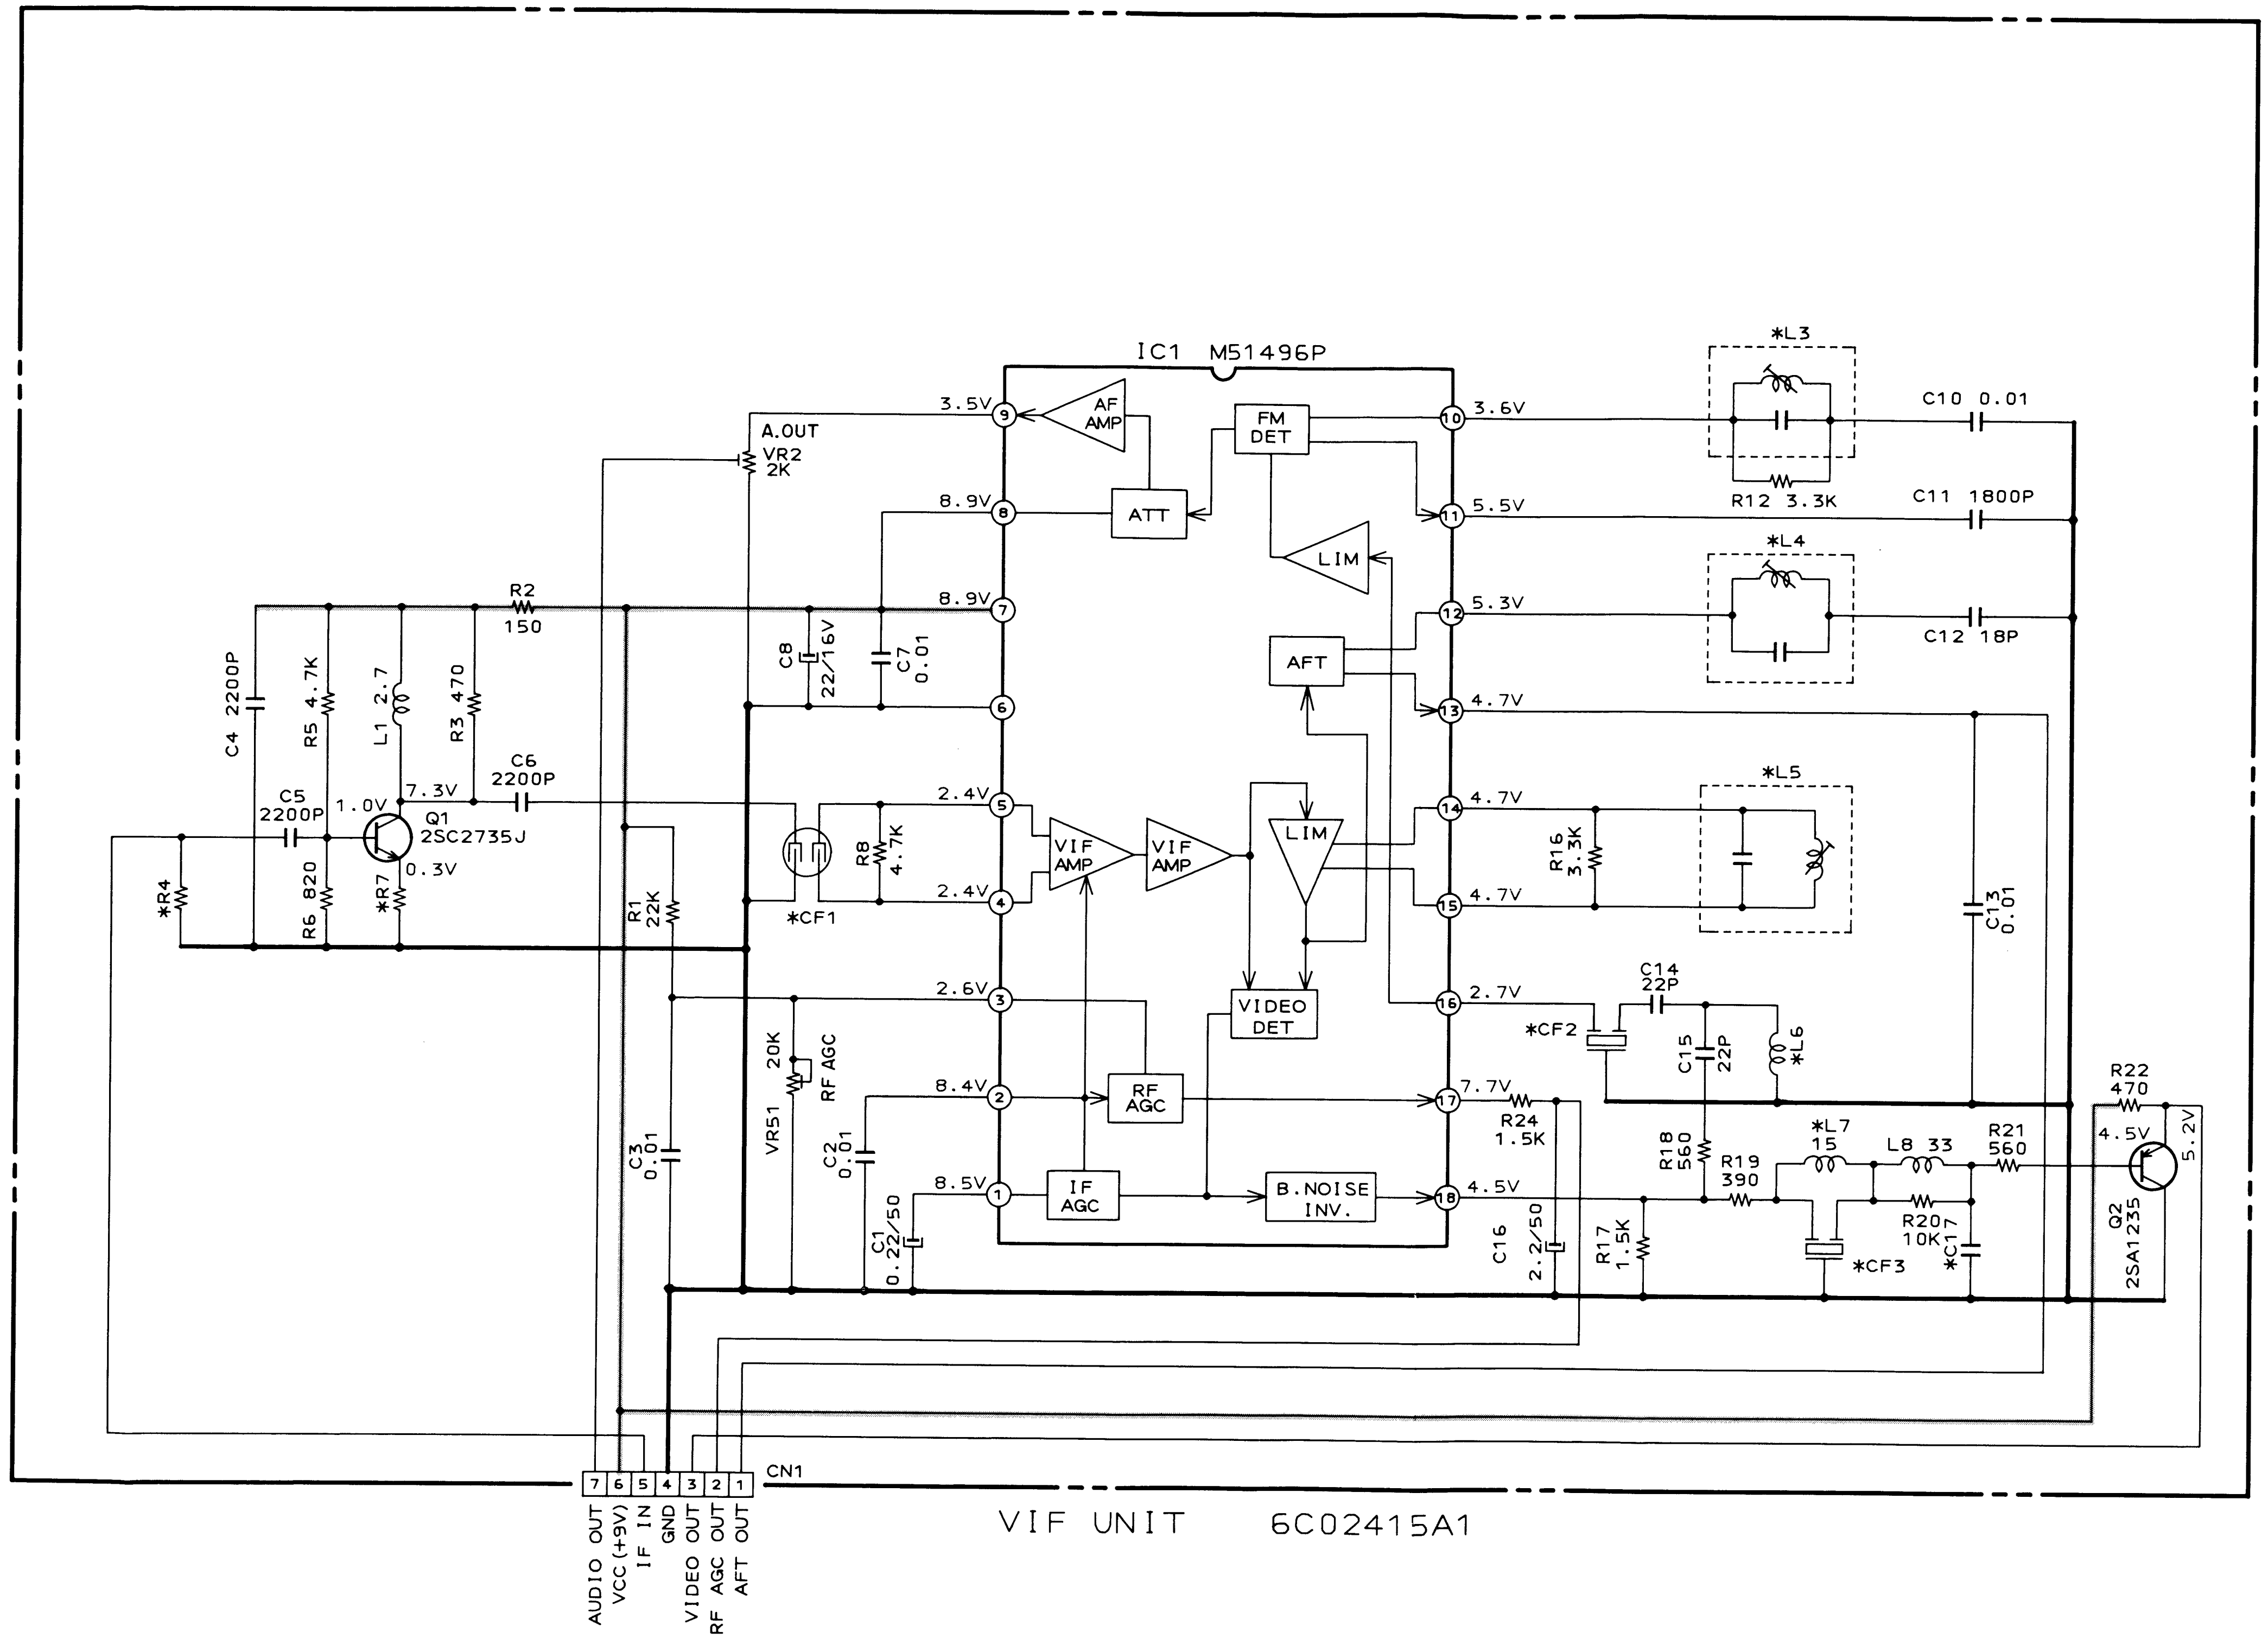
IC1 M51496P
AF AMP
ATT
FM DET
LIM
AFT
VIF AMP
VIF AMP
LIM
VIDEO DET
RF AGC
IF AGC
B.NOISE INV.
3.5V
8.9V
8.9V
2.4V
2.4V
2.6V
8.4V
8.5V
3.6V
5.5V
5.3V
4.7V
4.7V
4.7V
2.7V
7.7V
4.5V
A.OUT
VR2 2K
R2 150
C4 2200P
R5 4.7K
L1 2.7
R3 470
C5 2200P
C6 2200P
1.0V
7.3V
0.3V
Q1 2SC2735J
R6 820
*R7
*R4
C8 22/16V
C7 0.01
R8 4.7K
*CF1
R1 22K
C3 0.01
VR51 20K
RF AGC
C2 0.01
C1 0.22/50
*L3
R12 3.3K
C10 0.01
C11 1800P
*L4
C12 18P
*L5
R16 3.3K
C13 0.01
C14 22P
*CF2
C15 22P
*L6
R24 1.5K
R18 560
R19 390
*L7 15
L8 33
R20 10K
*C17
*CF3
R21 560
R22 470
4.5V
5.2V
Q2 2SA1235
C16 2.2/50
R17 1.5K
CN1
7 6 5 4 3 2 1
AUDIO OUT
VCC(+9V)
IF IN
GND
VIDEO OUT
RF AGC OUT
AFT OUT
VIF UNIT 6C02415A1

※	EM	EOH	EA	ES
CF1	SAF38.9 MZ70Z	SAF38.9 MZW70Z	SAF36.9 MZ70Z	SAF38.5 MZ70Z
CF2	SFE 5.5MBF	←	←	SFE 6.0MBF
CF3	TPS 5.5MB2	TPS 5.5MW	←	TPS 6.0MB2
L 3	6F16263 A2	←	←	6F16263 A3
L 4	6F16215 MZ70Z	←	6F16115 B3	6F16215 A1
L 5	6F16346 A1	←	6F16113 A1	6F16346 A1
L 6	18µ	←	←	15µ
L 7	18µ	15µ	18µ	15µ
R 4	100	100	150	100
R 7	22	←	←	15
R16	10K	—	10K	10K
C17	CH12P	←	←	CH15P

*	EK, EK-V
CF1	SAF39.5MZ70Z
CF2	SFE6.0MBF
CF3	TPS6.0MB2
L3	6F16263A3
L4	6F16215A1
L5	6F16346A1
L6	15µ
L7	15µ
R4	180
R7	22µ
R16	10K
C17	CH15P

▬ B (POWER SUPPLY) LINE

INDICATED VOLTAGES WERE MEASURED
DURING E-E (STOP) MODE.

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN µF
ALL INDUCTORS IN µH (K)

VS-F440EA/EM/EK/EOH
VS-F441EA, F450EOH
VS-F455EOH, F480EK-V
VS-F490EM/ES/EOH
VS-F497EOH
VIF UNIT
SCHEMATIC DIAGRAM
No.21-16 V115216M
A3

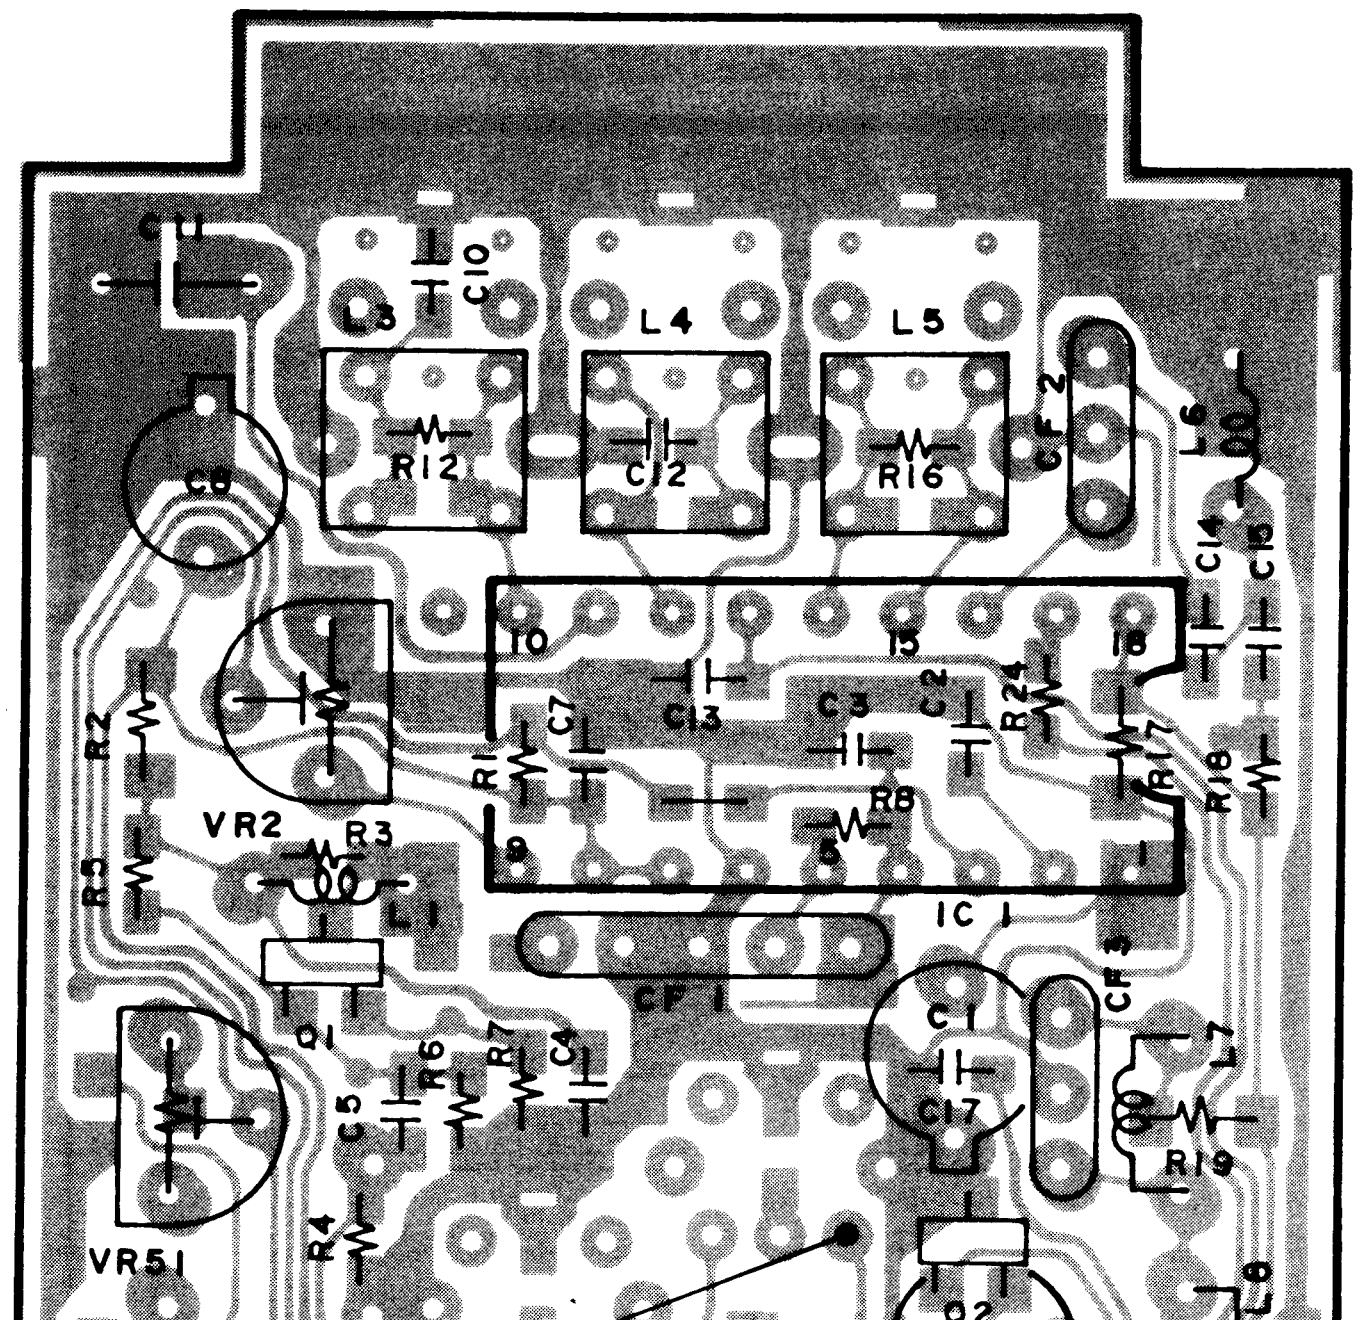
C11
C10
L3
L4
L5
R12
C12
R16
CF2
L6
C8
C14
C15
10
15
18
C13
C3
C2
R24
R17
R18
R2
VR2
R3
R1
C7
R8
9
5
1
R5
L1
IC1
CF1
CF3
Q1
R6
R7
C4
C1
C5
C17
L7
R19
VR51
R4
Q2
C16
R22
R20
L8
CN1
7
5
1
R21

VIF UNIT 6C02415A1
(EA.EK.EM.EOH.ES ONLY)


COLLECTOR
BASE
EMITTER

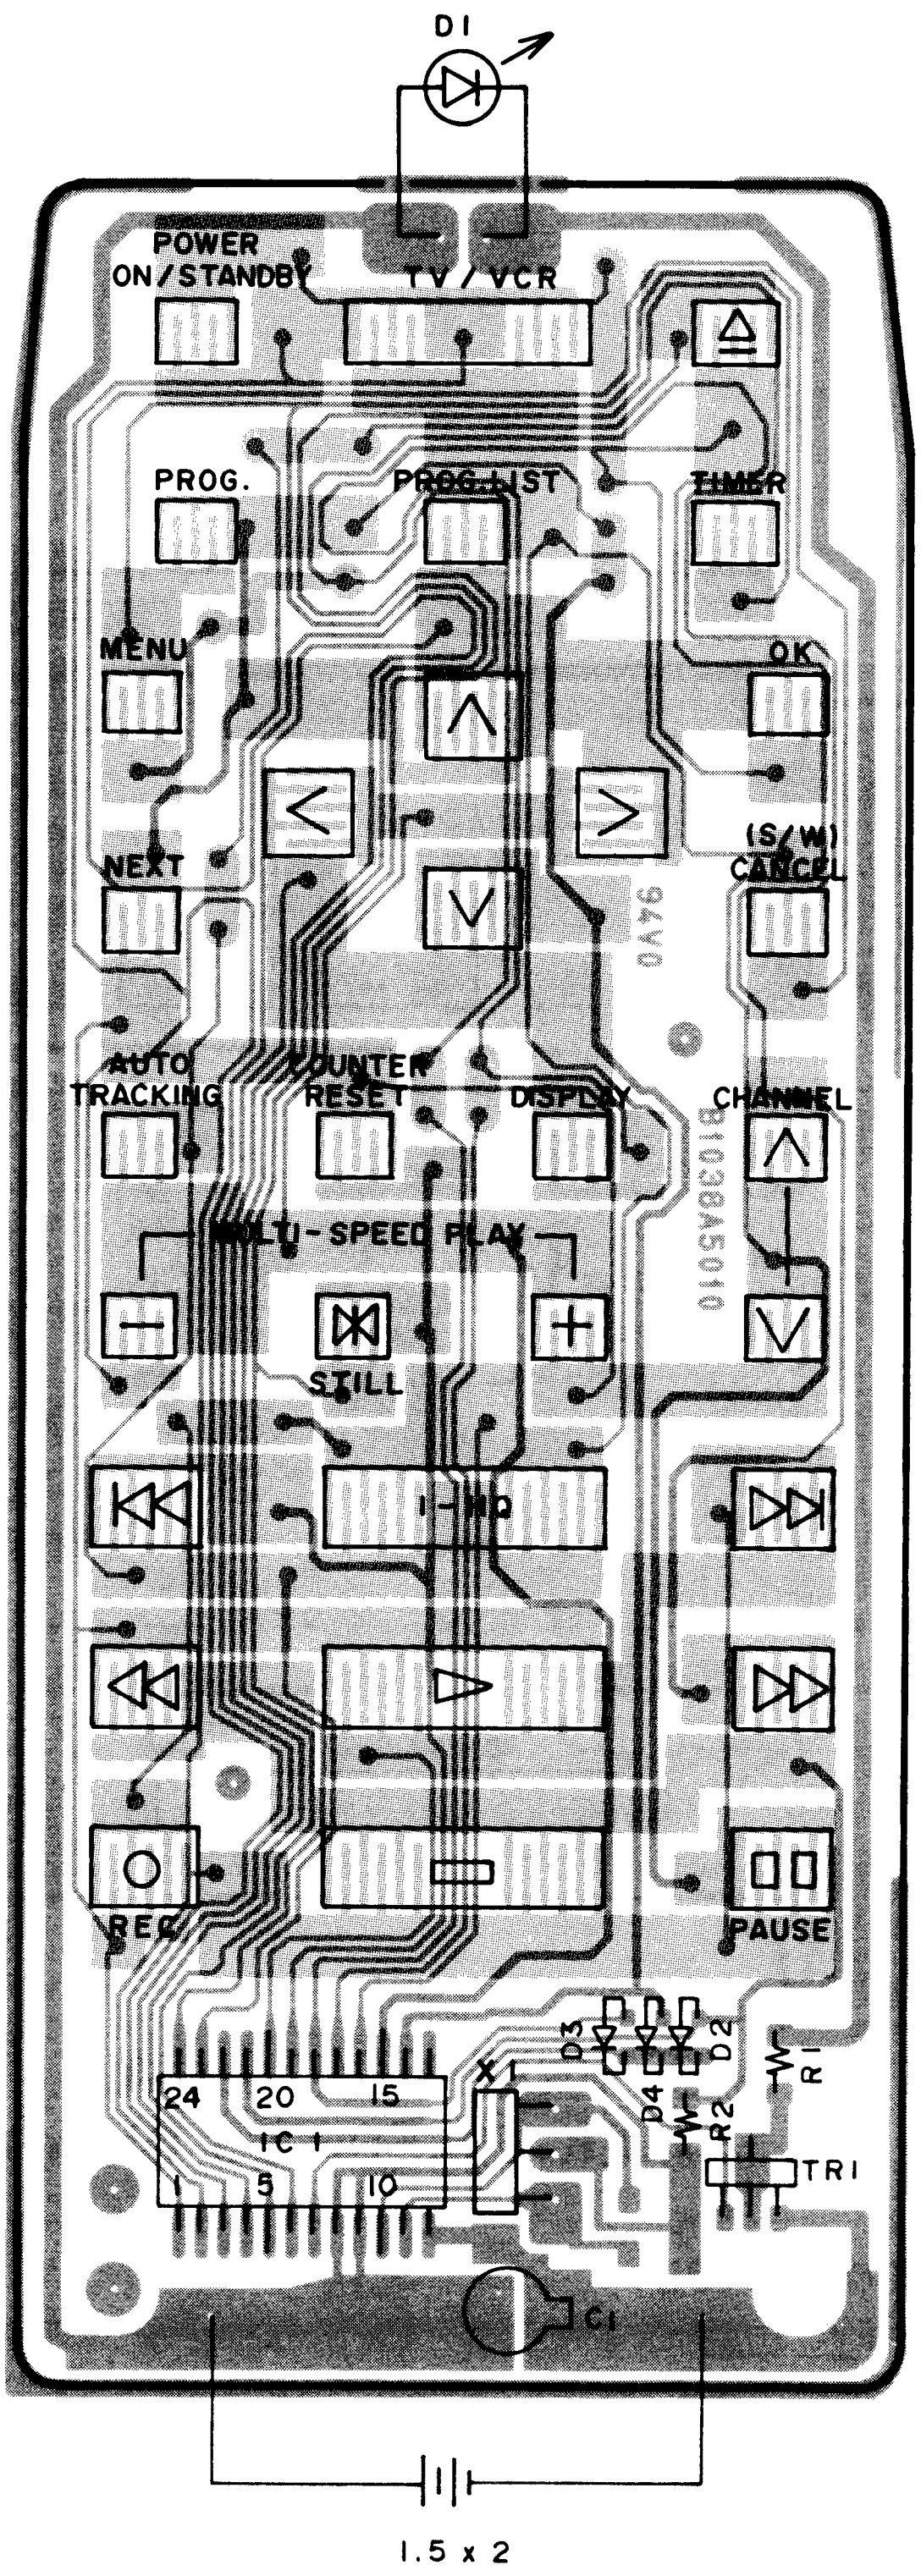
D1
POWER
ON/STANDBY
TV/VCR
PROG.
PROG.LIST
TIMER
MENU
OK
NEXT
(S/W)
CANCEL
94V0
AUTO
TRACKING
COUNTER
RESET
DISPLAY
CHANNEL
B1038A5010
MULTI-SPEED PLAY
STILL
REC
PAUSE
D3
D4
D2
R2
R1
X1
24
20
15
IC 1
1
5
10
TR1
C1
1.5 x 2

REMO-CON PCB B1038A5010

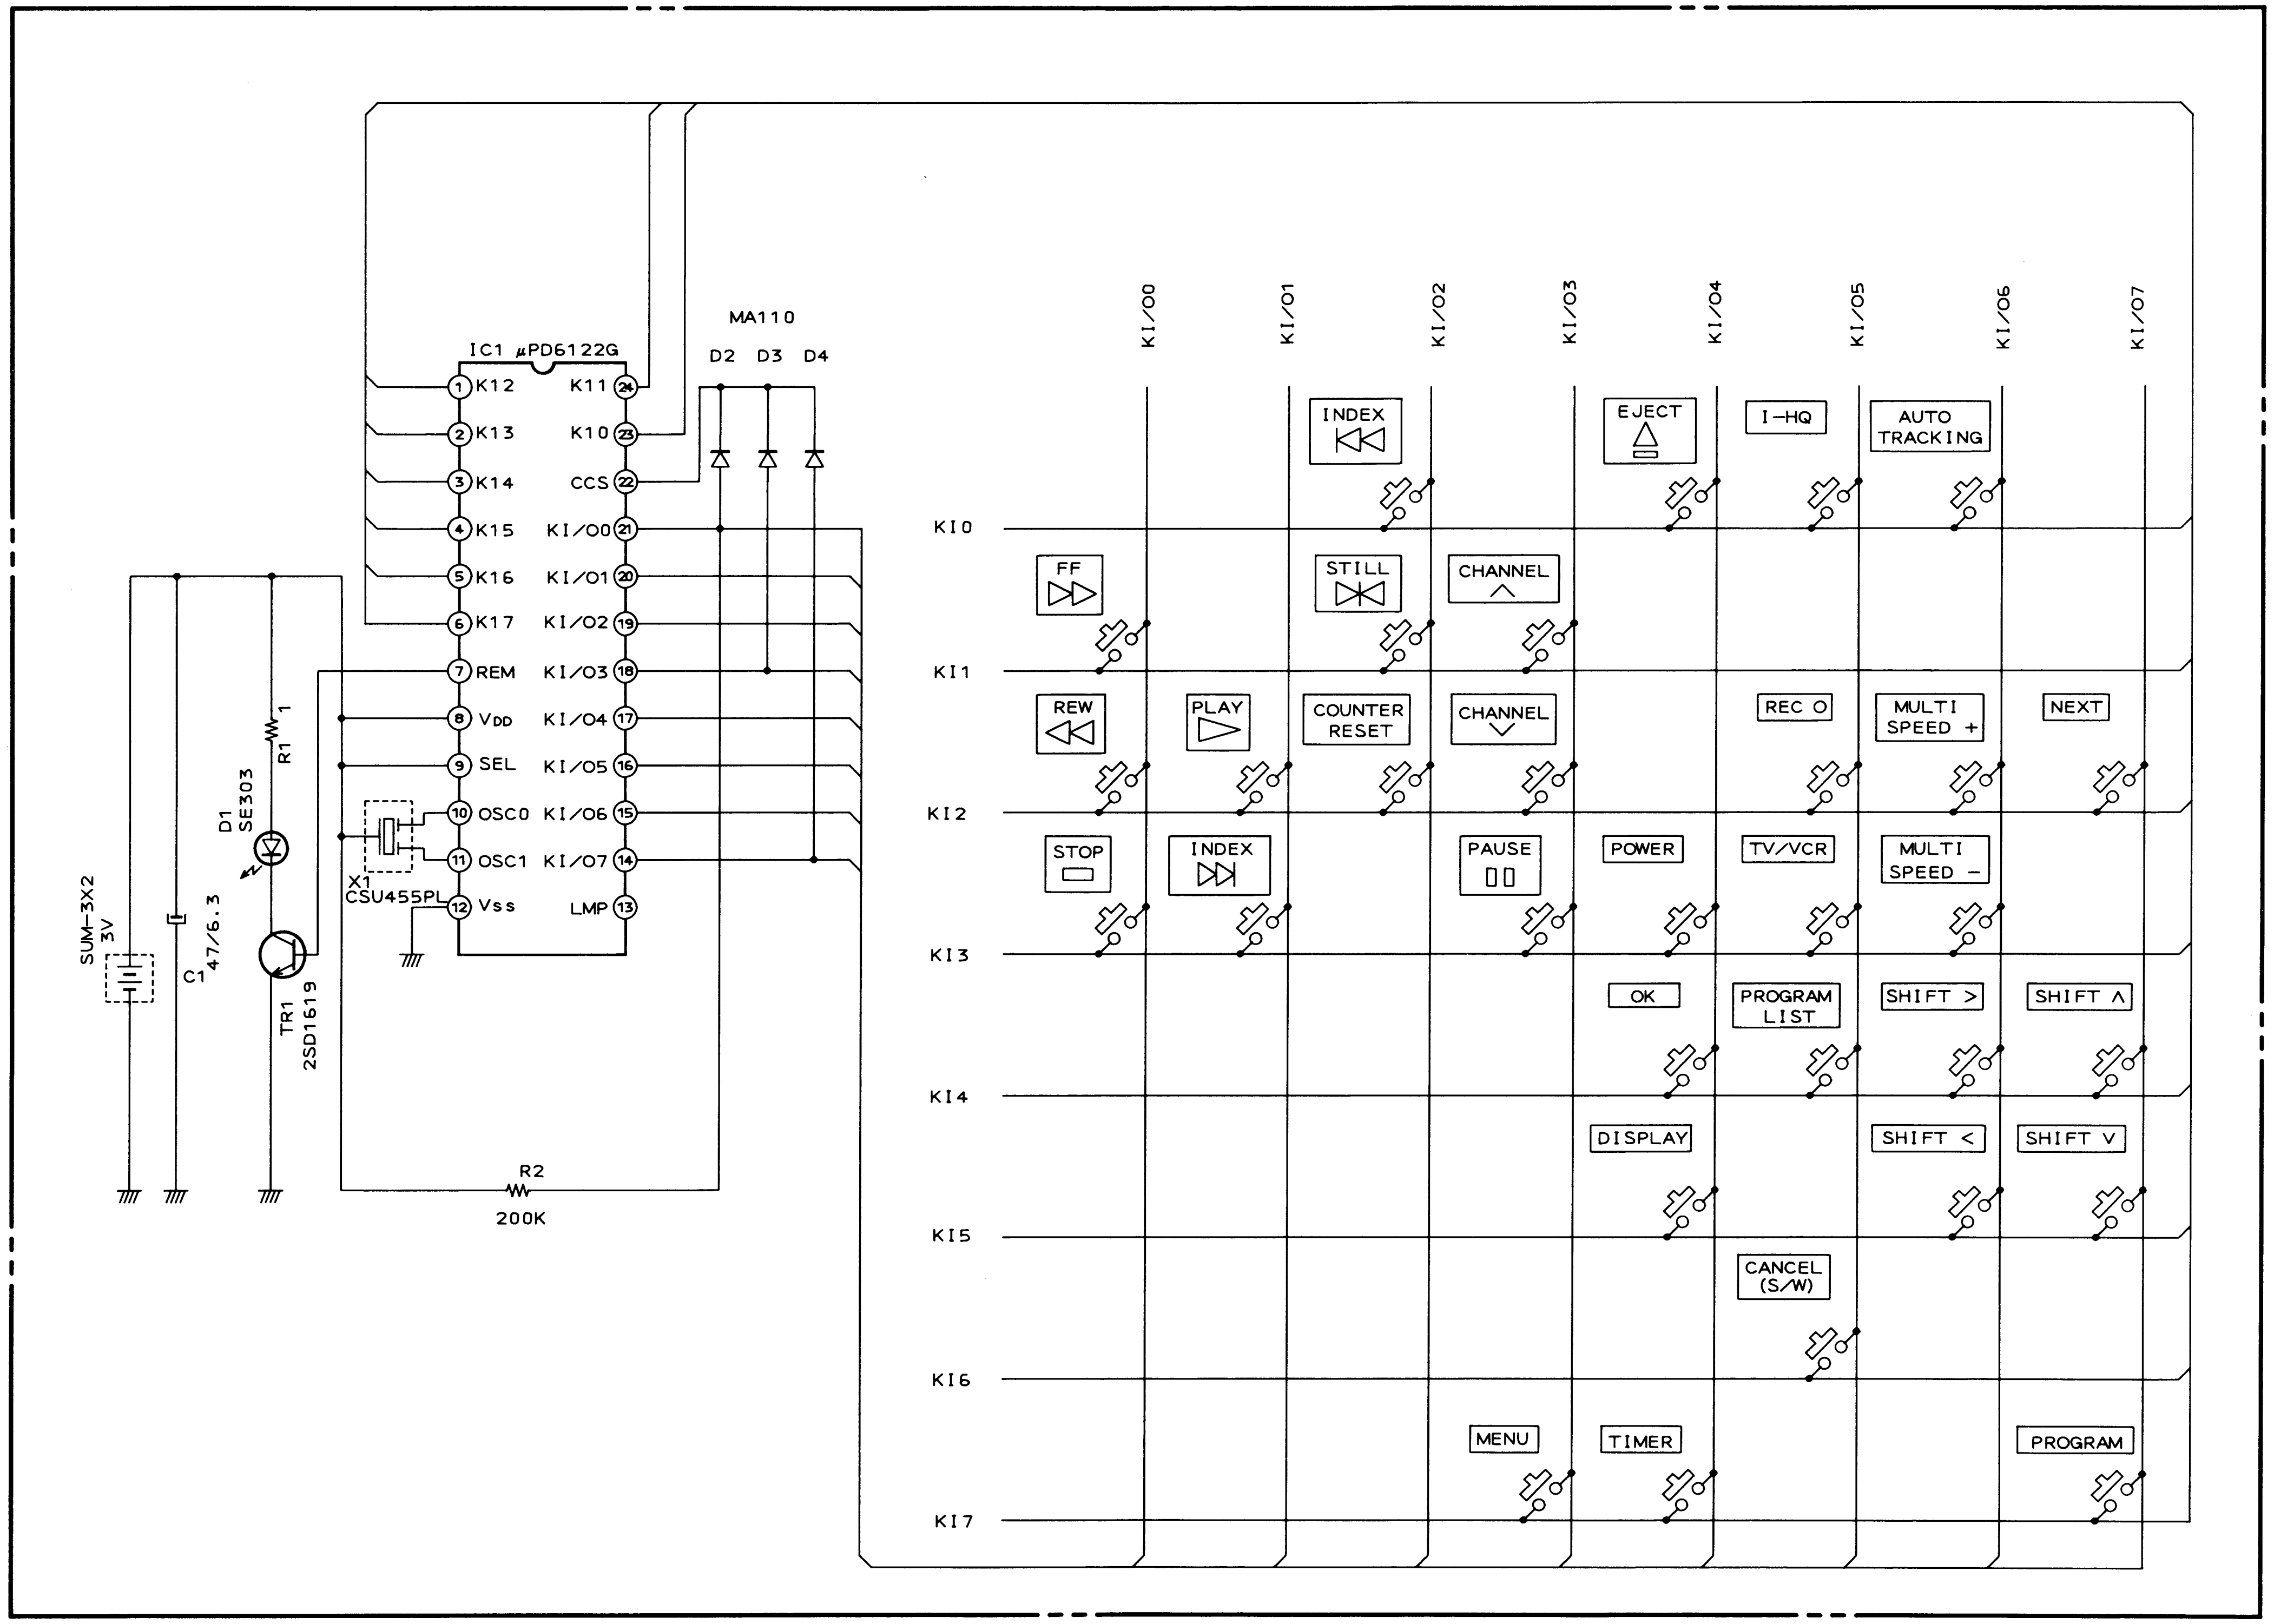
IC1 μPD6122G
K12
K13
K14
K15
K16
K17
REM
VDD
SEL
OSC0
OSC1
Vss
K11
K10
CCS
KI/O0
KI/O1
KI/O2
KI/O3
KI/O4
KI/O5
KI/O6
KI/O7
LMP
MA110
D2 D3 D4
R1 1
D1 SE303
TR1 2SD1619
SUM-3X2 3V
C1 47/6.3
X1 CSU455PL
R2 200K
KI0
KI1
KI2
KI3
KI4
KI5
KI6
KI7
KI/O0
KI/O1
KI/O2
KI/O3
KI/O4
KI/O5
KI/O6
KI/O7
INDEX
EJECT
I-HQ
AUTO TRACKING
FF
STILL
CHANNEL ∧
REW
PLAY
COUNTER RESET
CHANNEL ∨
REC O
MULTI SPEED +
NEXT
STOP
INDEX
PAUSE
POWER
TV/VCR
MULTI SPEED −
OK
PROGRAM LIST
SHIFT >
SHIFT ∧
DISPLAY
SHIFT <
SHIFT V
CANCEL (S/W)
MENU
TIMER
PROGRAM

REMO-CON PCB B1038A5010

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/8W(J)
ALL CAPACITORS IN μF

RC-V250E
REMOTE CONTROL UNIT
SCHEMATIC DIAGRAM

No.21-17 B103802M
A2

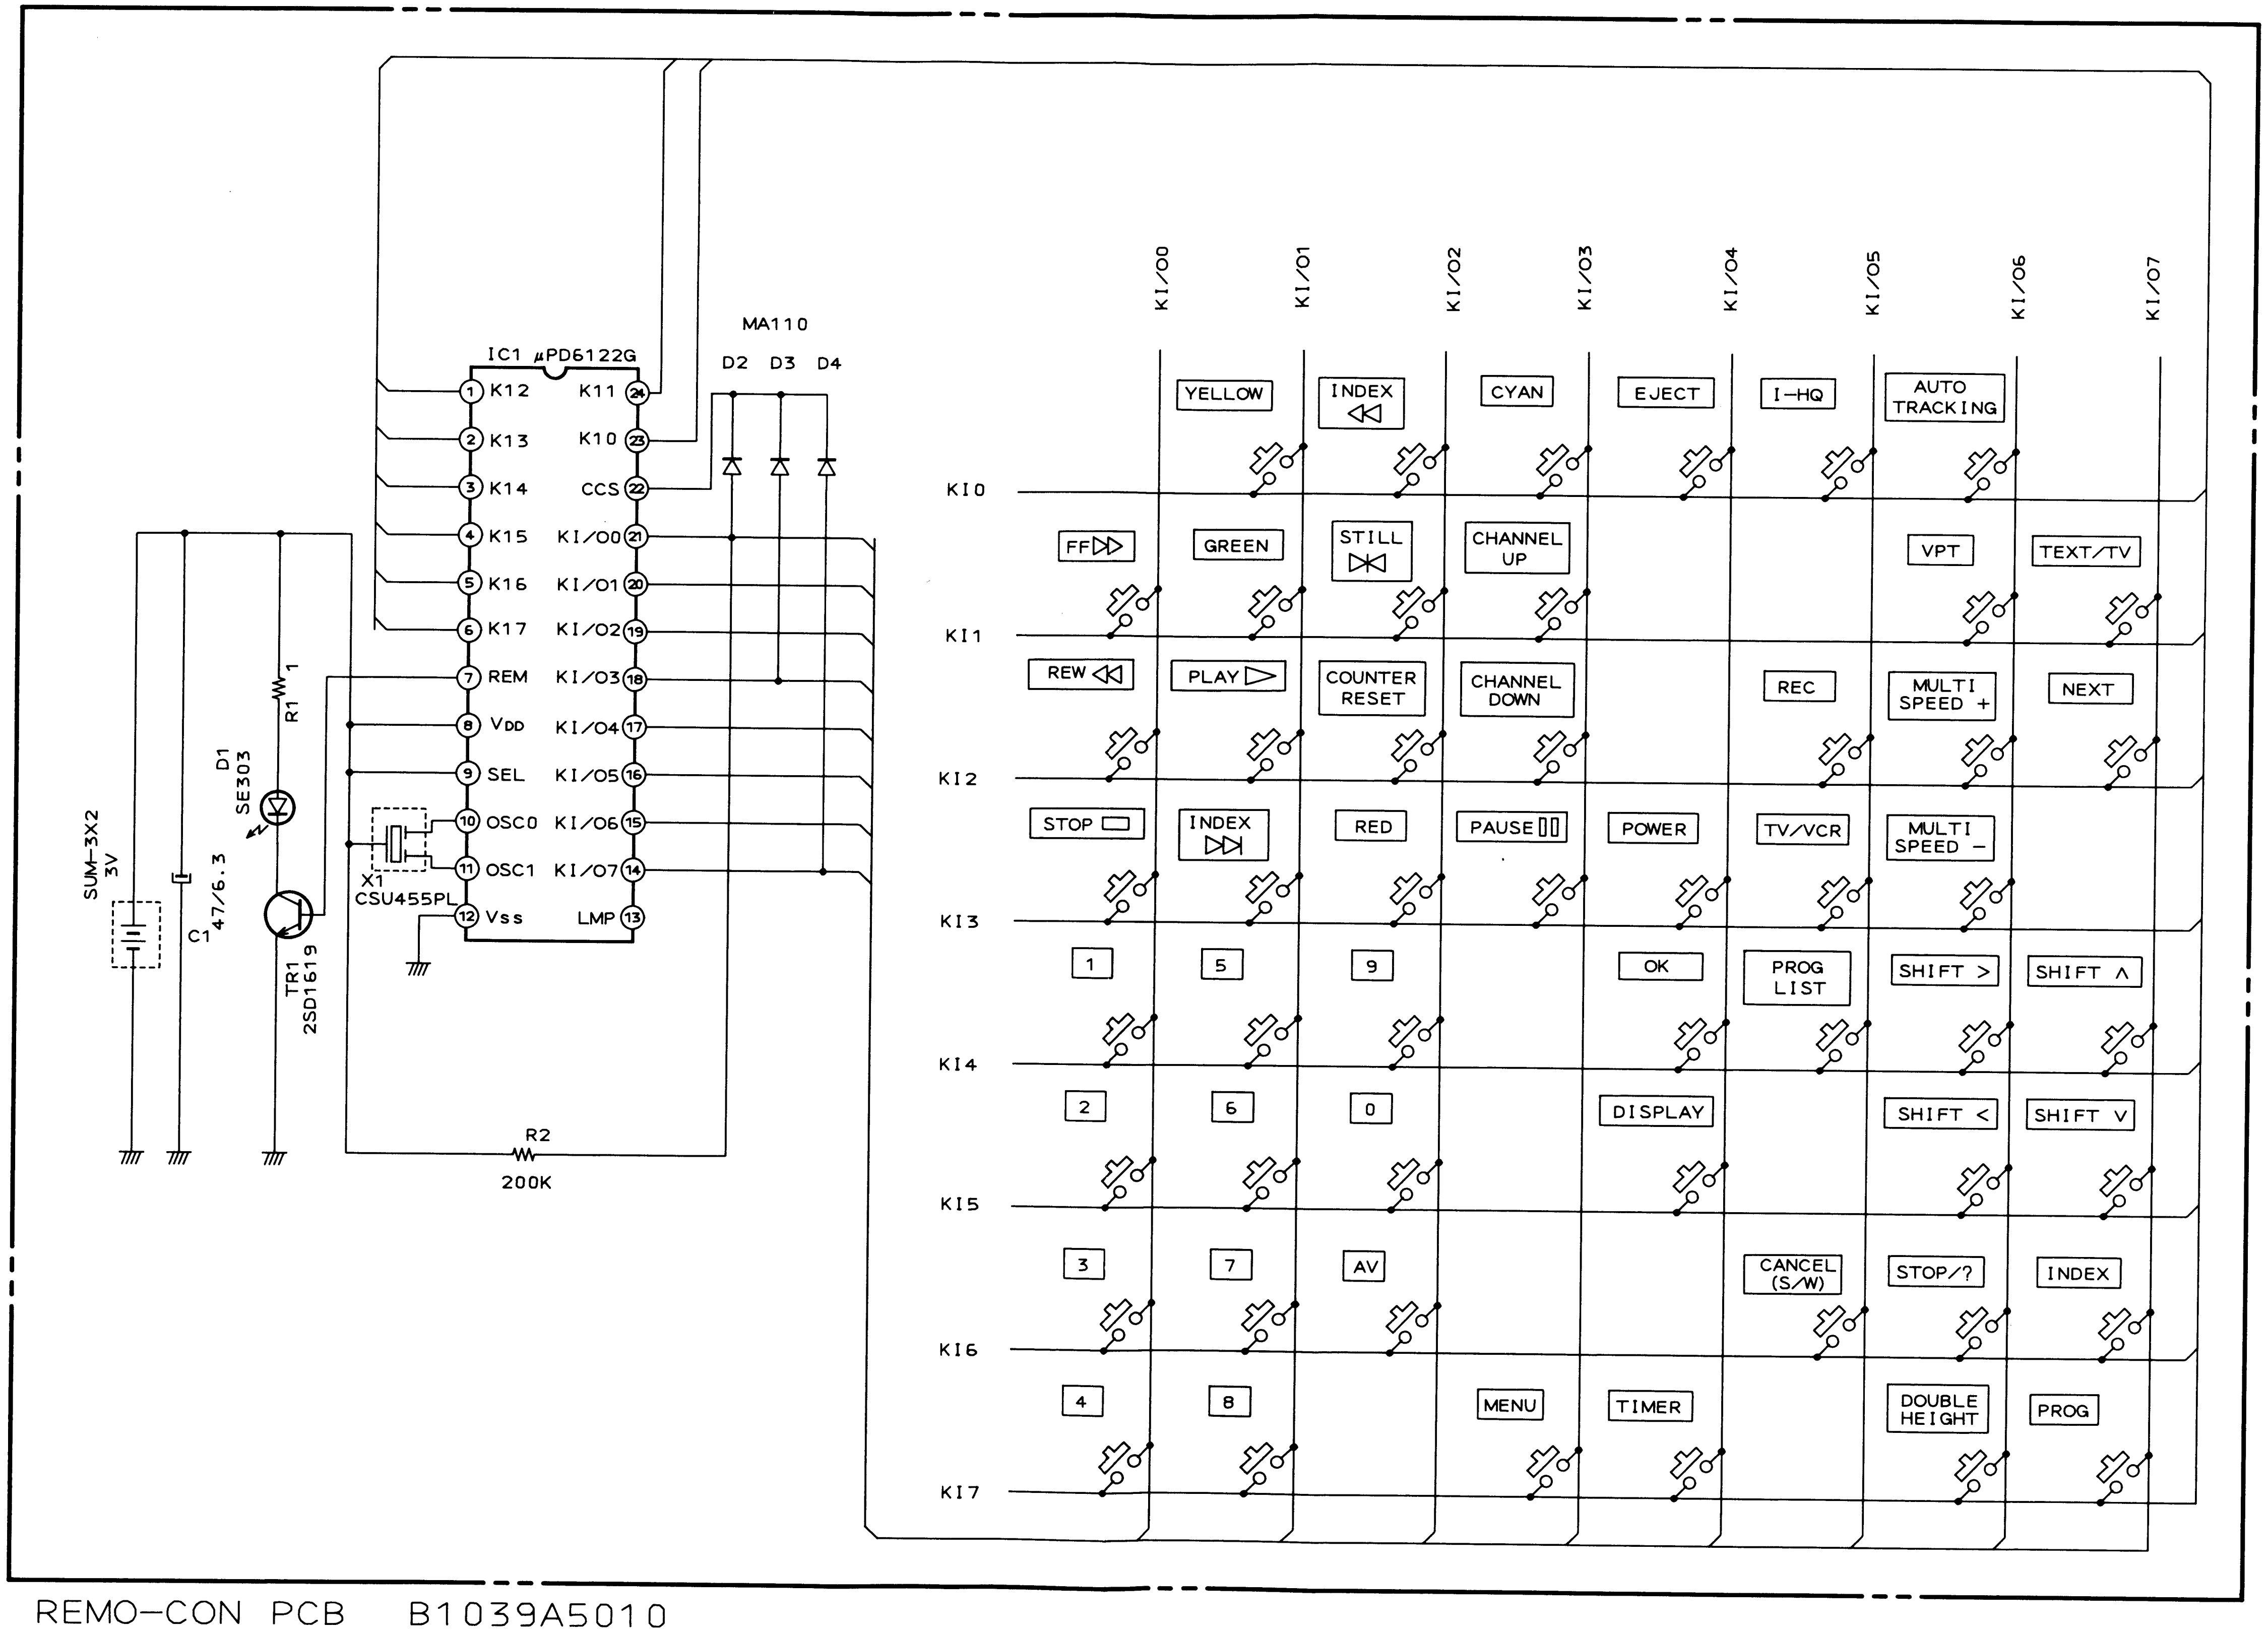
IC1 μPD6122G
K12
K13
K14
K15
K16
K17
REM
VDD
SEL
OSC0
OSC1
Vss
K11
K10
CCS
KI/O0
KI/O1
KI/O2
KI/O3
KI/O4
KI/O5
KI/O6
KI/O7
LMP
MA110
D2 D3 D4
R1 1
D1 SE303
TR1 2SD1619
C1 47/6.3
SUM-3X2 3V
X1 CSU455PL
R2
200K
KI0
KI1
KI2
KI3
KI4
KI5
KI6
KI7
YELLOW
INDEX ◁◁
CYAN
EJECT
I-HQ
AUTO TRACKING
FF▷▷
GREEN
STILL ▷◁
CHANNEL UP
VPT
TEXT/TV
REW ◁◁
PLAY ▷
COUNTER RESET
CHANNEL DOWN
REC
MULTI SPEED +
NEXT
STOP ▭
INDEX ▷▷
RED
PAUSE ▯▯
POWER
TV/VCR
MULTI SPEED −
1
5
9
OK
PROG LIST
SHIFT >
SHIFT ∧
2
6
0
DISPLAY
SHIFT <
SHIFT ∨
3
7
AV
CANCEL (S/W)
STOP/?
INDEX
4
8
MENU
TIMER
DOUBLE HEIGHT
PROG

REMO-CON PCB B1039A5010

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/8W (J)

RC-V251G
REMOTE CONTROL UNIT
SCHEMATIC DIAGRAM
No.21-18 B103902M
A2

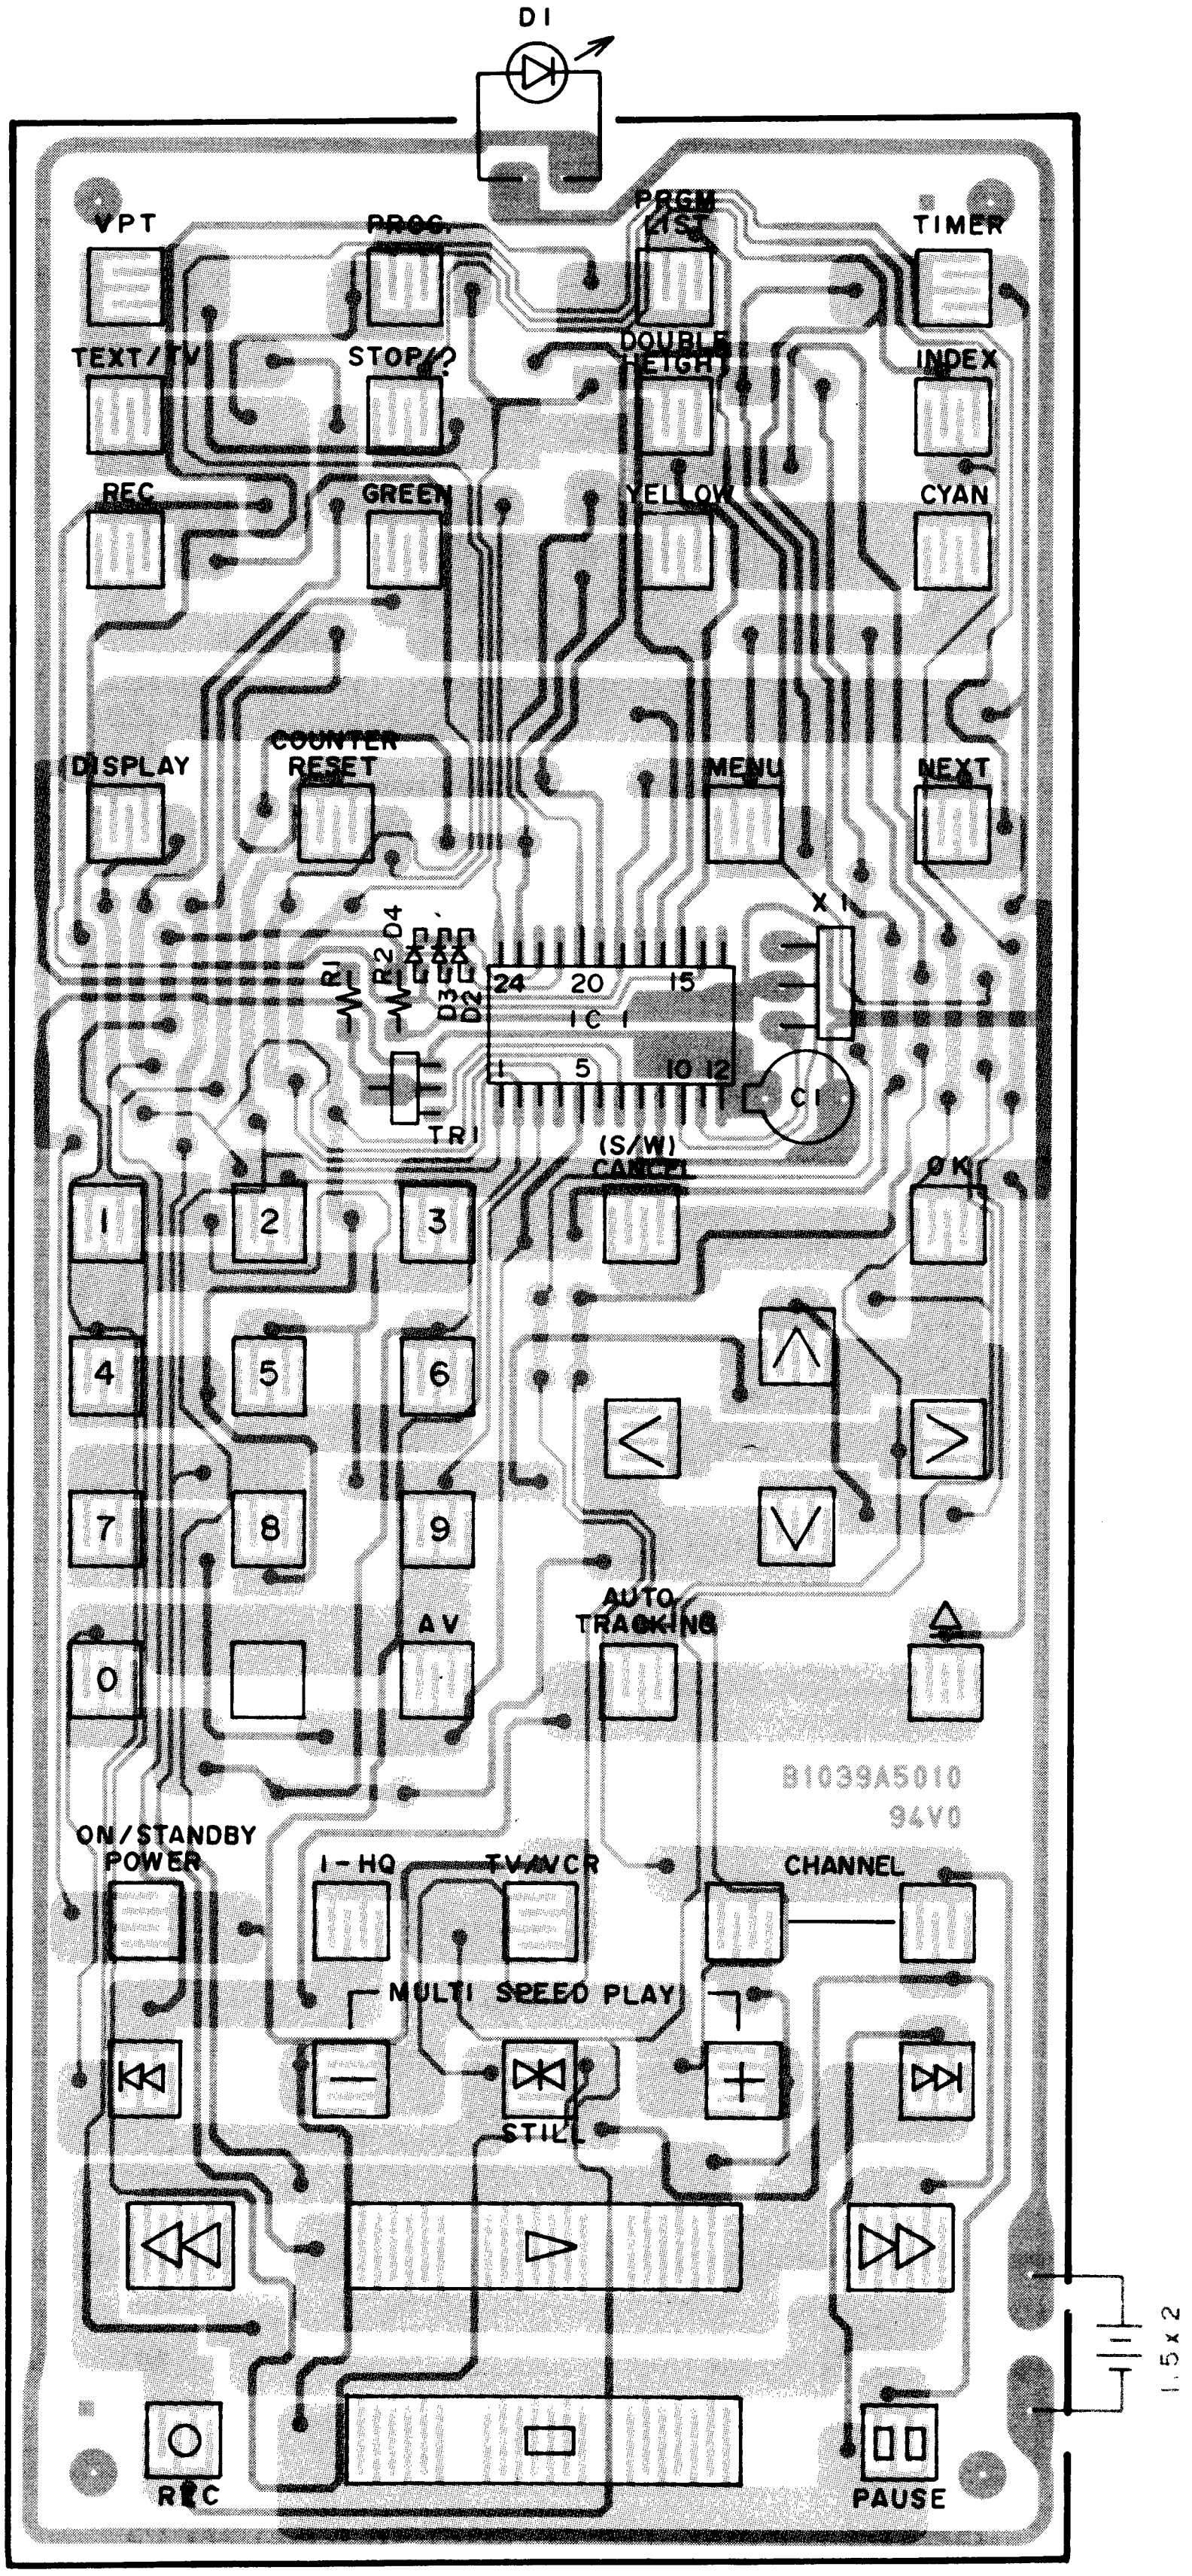
D1
VPT
PROG.
PRGM LIST
TIMER
TEXT/TV
STOP/?
DOUBLE HEIGHT
INDEX
REC
GREEN
YELLOW
CYAN
DISPLAY
COUNTER RESET
MENU
NEXT
X1
R1
R2
D4
D3
D2
24
20
15
IC1
1
5
10
12
C1
TR1
(S/W) CANCEL
OK
1
2
3
4
5
6
7
8
9
0
AV
AUTO TRACKING
B1039A5010
94V0
ON/STANDBY POWER
I-HQ
TV/VCR
CHANNEL
MULTI SPEED PLAY
STILL
REC
PAUSE
1.5×2

REMO-CON PCB B1039A5010

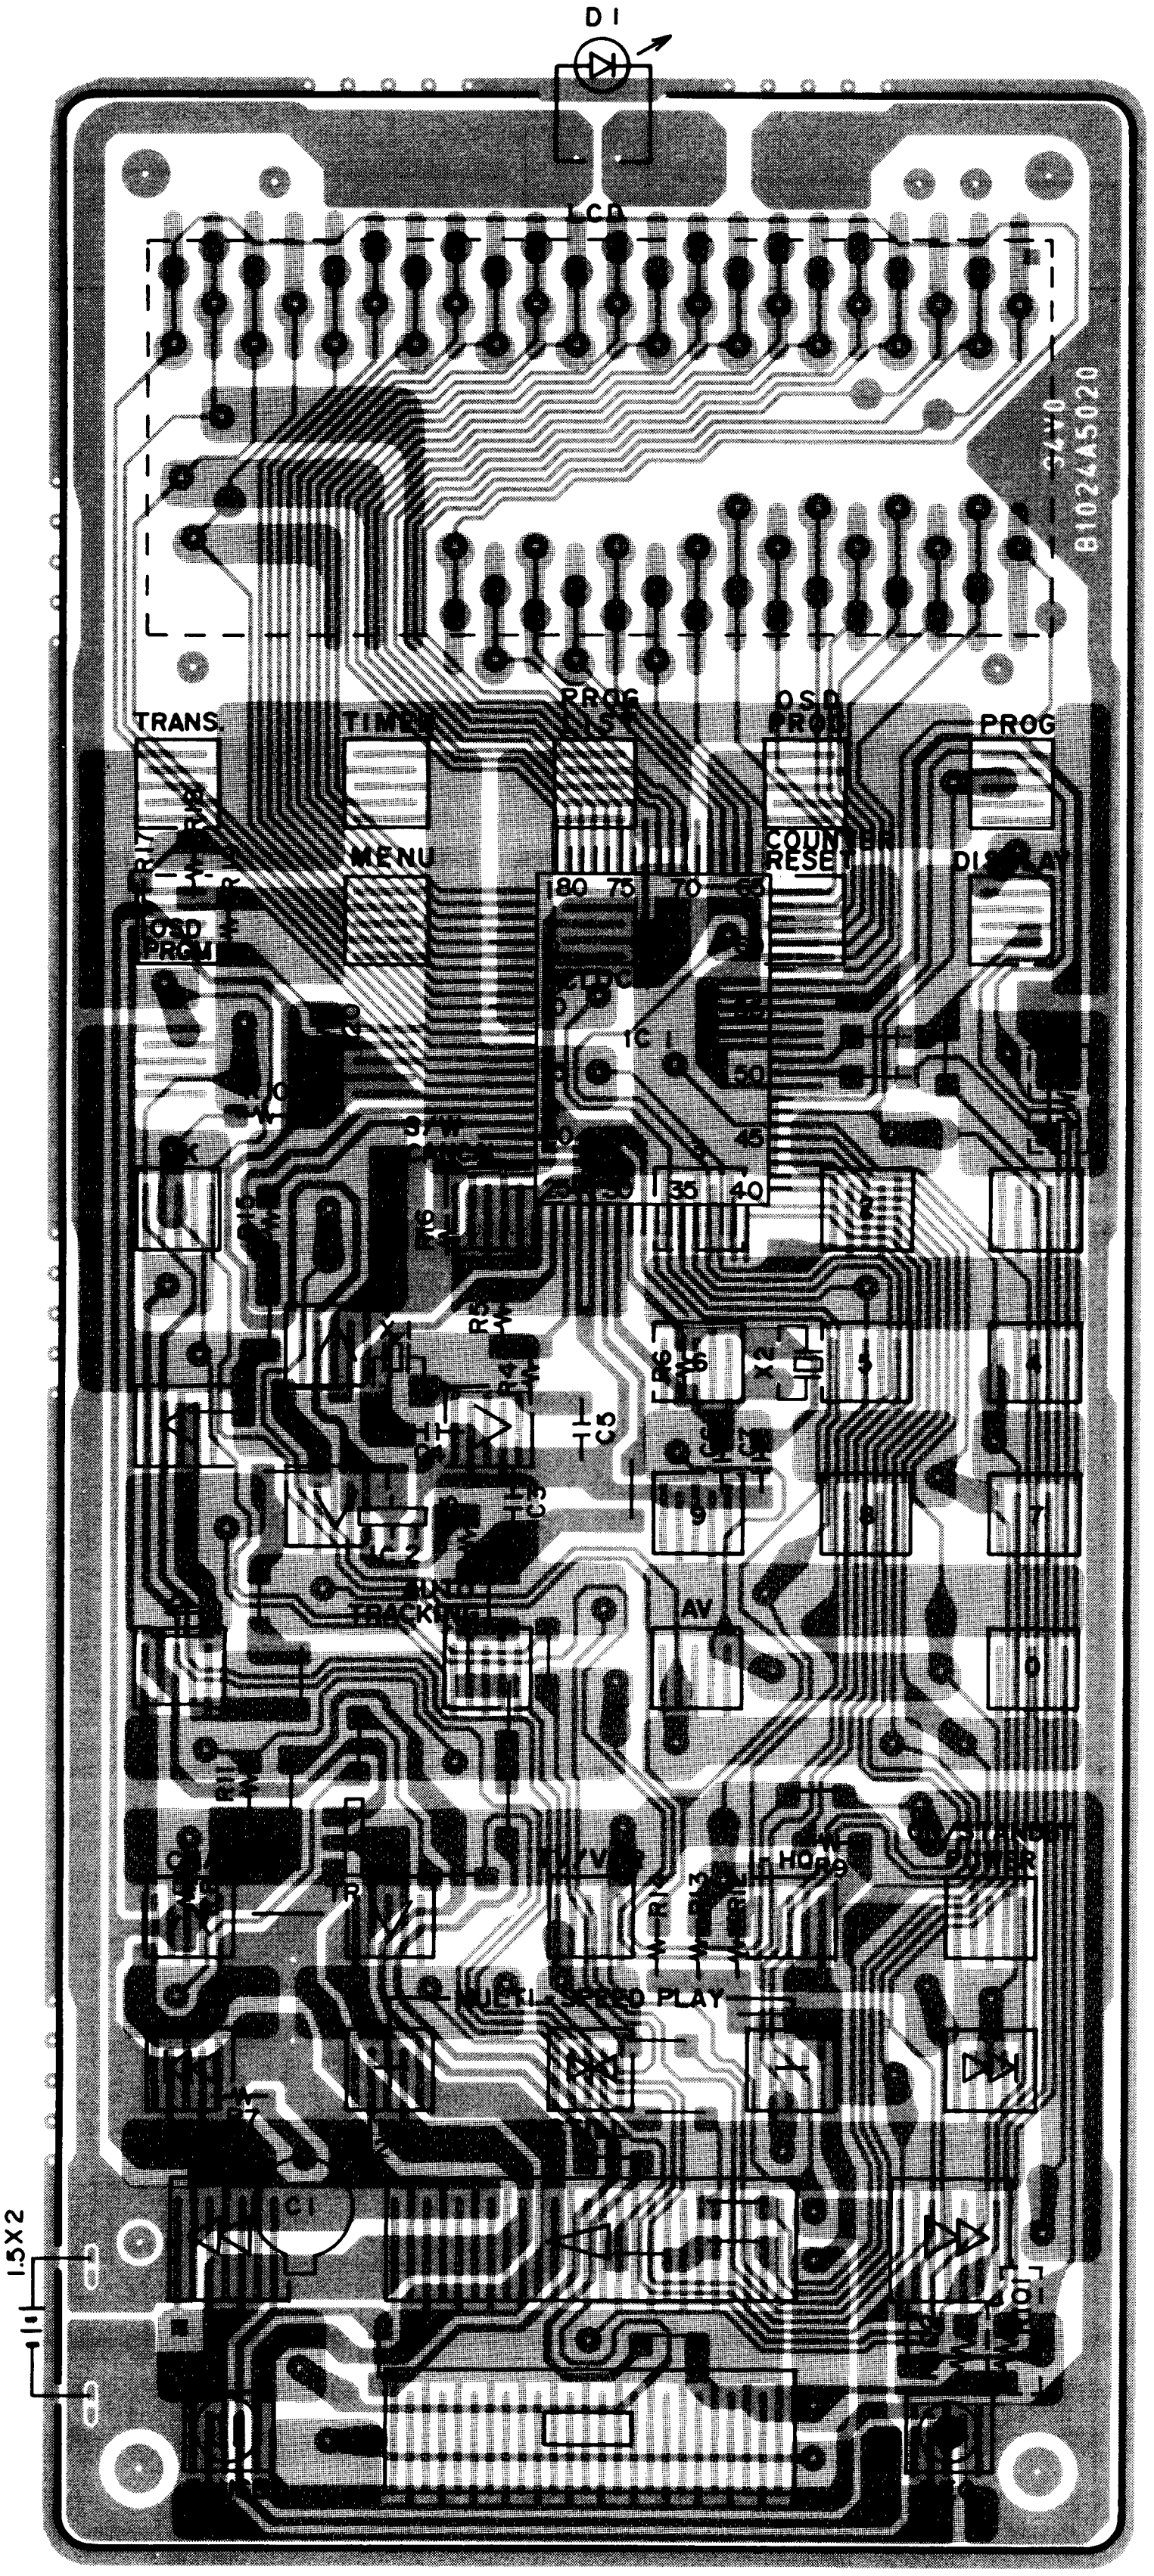
D1
LCD
B1024A5020
TRANS.
TIMER
PROG LIST
OSD PROG
PROG
MENU
COUNTER RESET
DISPLAY
OSD PROG
IC1
80
75
70
65
60
55
50
45
40
35
30
25
AV
AUTO TRACKING
TV/VCR
MULTI SPEED PLAY
C5
C3
1.5X2

REMO - CON PCB B1024A5020J2

NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER.
REFER TO SCHEMATIC DIAGRAMS FOR PERTAINING
PARTS INFORMATION.

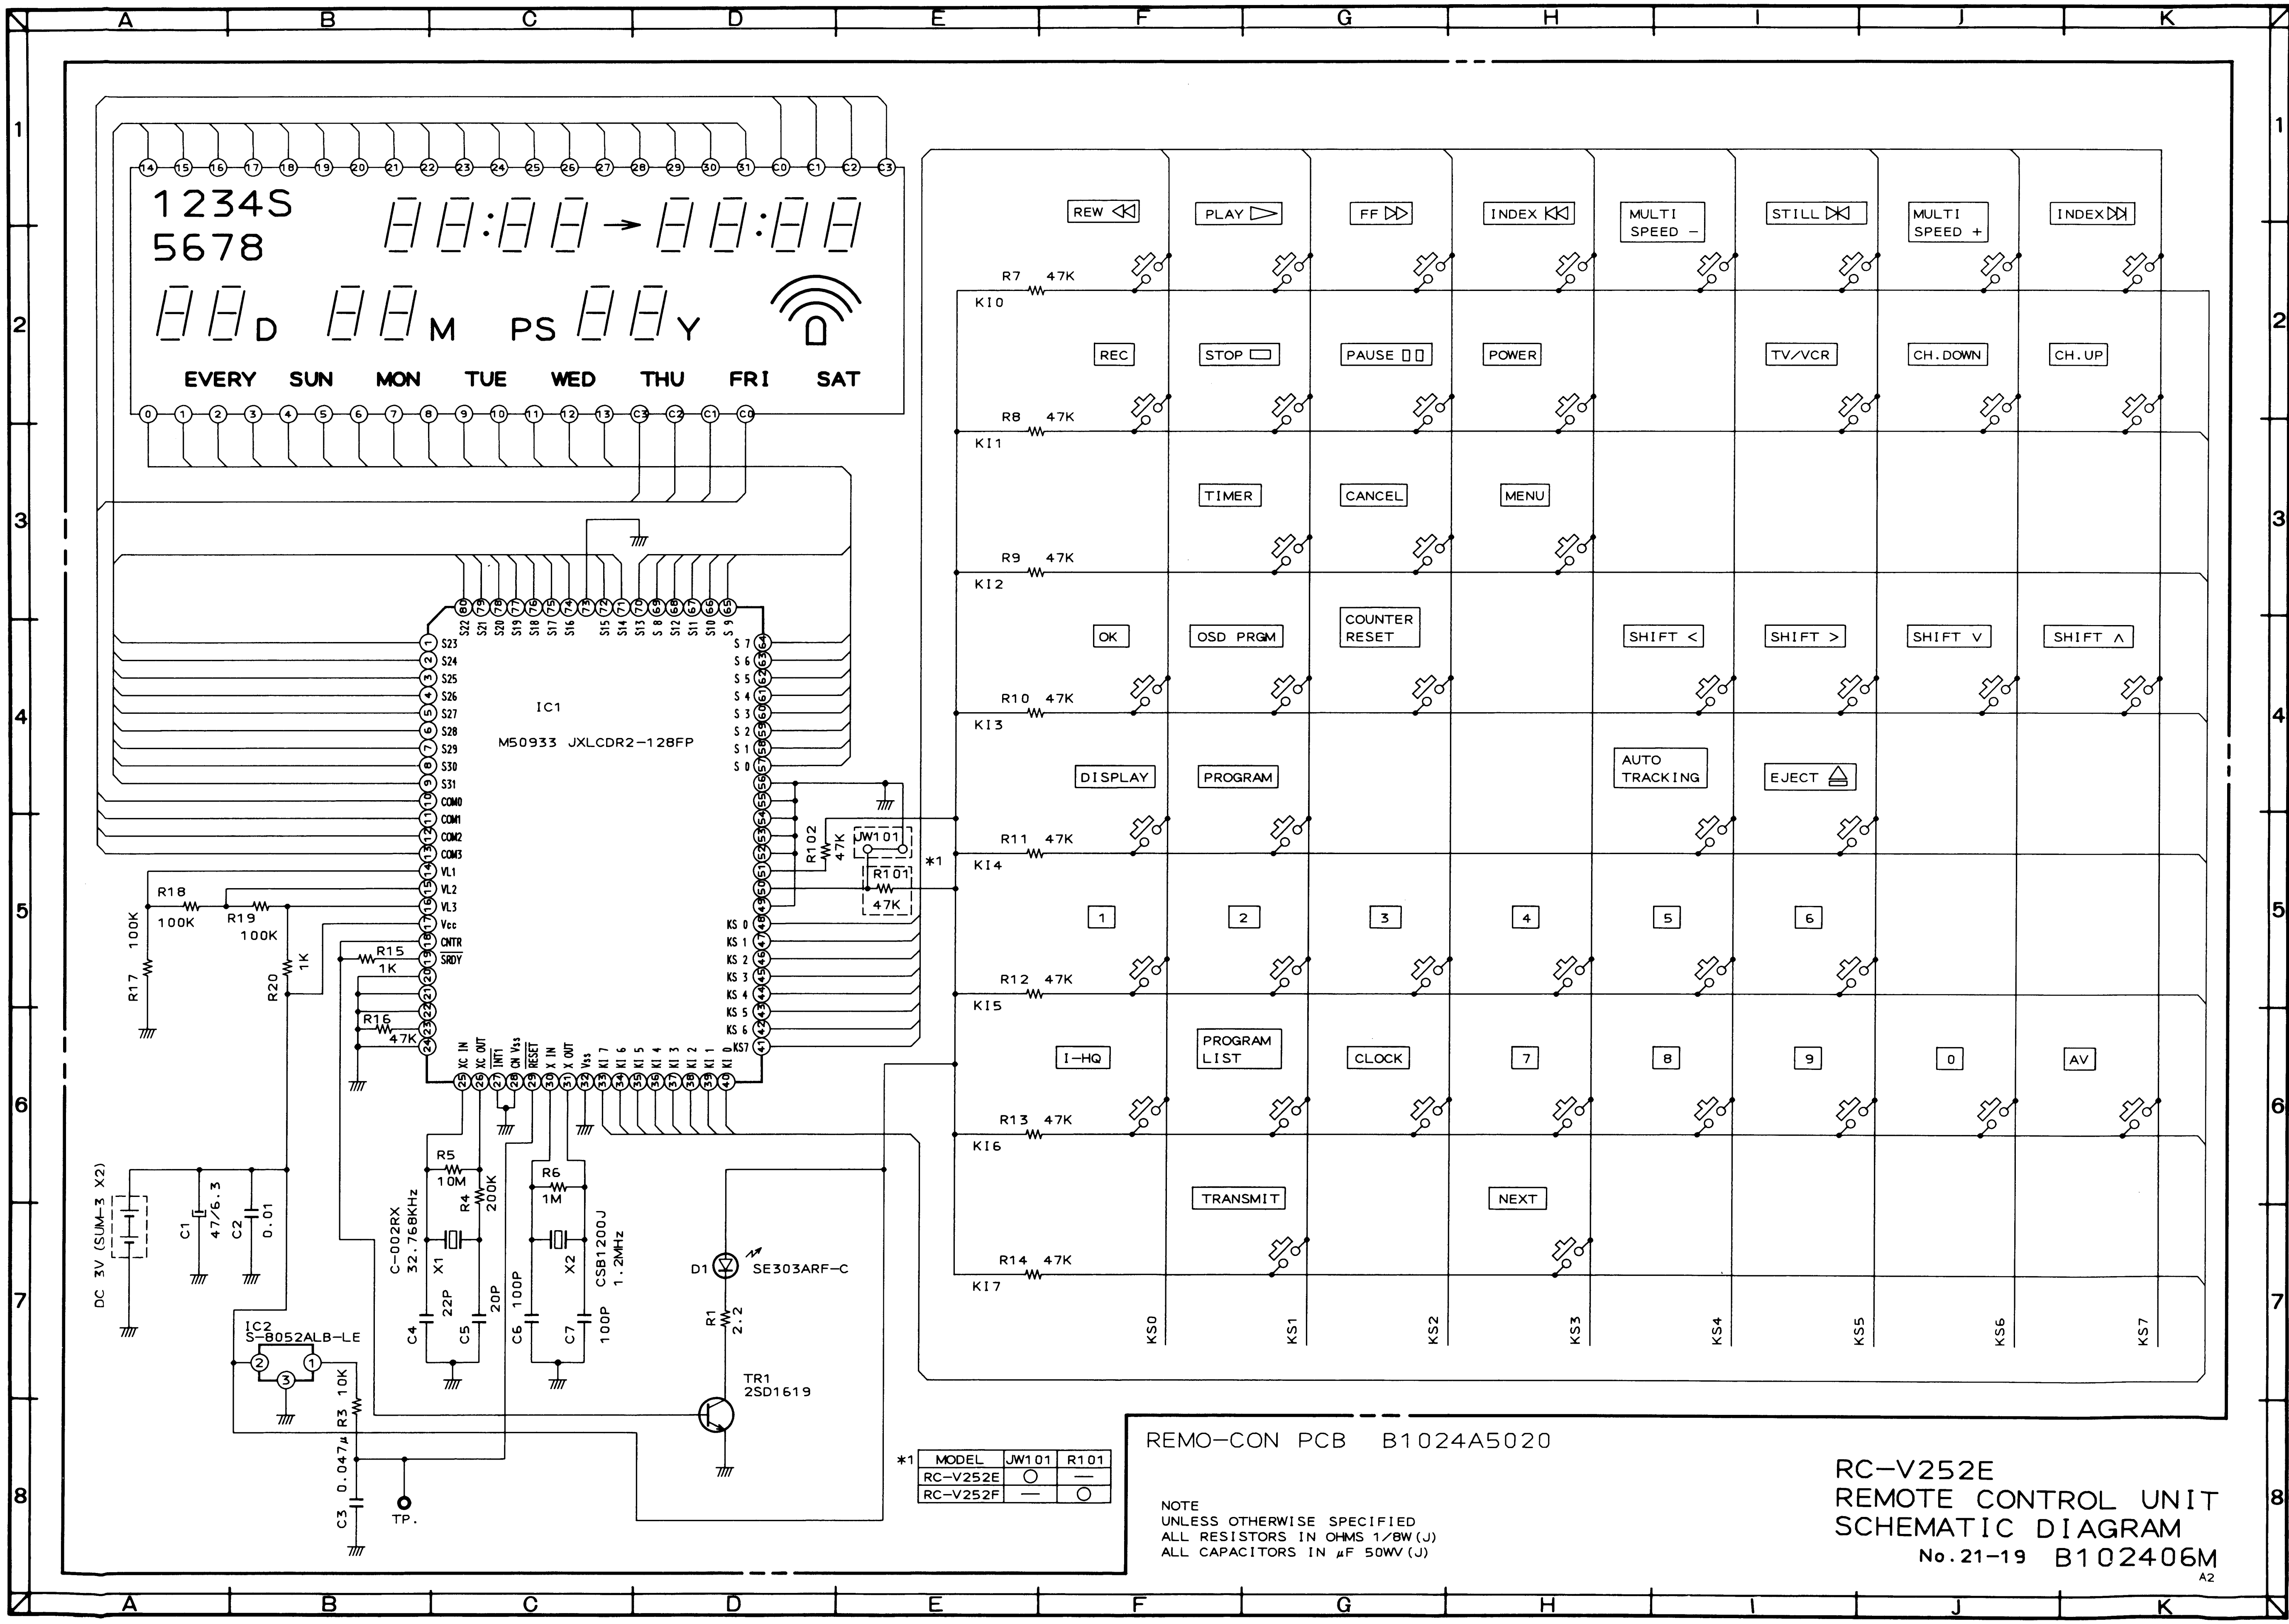
1234S
5678
D
M
PS
Y
EVERY
SUN
MON
TUE
WED
THU
FRI
SAT
IC1
M50933 JXLCDR2-128FP
S23
S24
S25
S26
S27
S28
S29
S30
S31
COM0
COM1
COM2
COM3
VL1
VL2
VL3
Vcc
CNTR
SRDY
XC IN
XC OUT
INT1
CN Vss
RESET
X IN
X OUT
Vss
KI 7
KI 6
KI 5
KI 4
KI 3
KI 2
KI 1
KI 0
KS 0
KS 1
KS 2
KS 3
KS 4
KS 5
KS 6
KS7
S 7
S 6
S 5
S 4
S 3
S 2
S 1
S 0
S22
S21
S20
S19
S18
S17
S16
S15
S14
S13
S 8
S12
S11
S10
S 9
R18
100K
R19
100K
R17
100K
R20
1K
R15
1K
R16
47K
R102
47K
JW101
R101
47K
*1
R5
10M
R4
200K
C-002RX
32.768KHz
X1
R6
1M
X2
CSB1200J
1.2MHz
C4
22P
C5
20P
C6
100P
C7
100P
DC 3V (SUM-3 X2)
C1
47/6.3
C2
0.01
IC2
S-8052ALB-LE
R3
10K
C3
0.047μ
TP.
D1
SE303ARF-C
R1
2.2
TR1
2SD1619
R7 47K
KI0
R8 47K
KI1
R9 47K
KI2
R10 47K
KI3
R11 47K
KI4
R12 47K
KI5
R13 47K
KI6
R14 47K
KI7
KS0
KS1
KS2
KS3
KS4
KS5
KS6
KS7
REW
PLAY
FF
INDEX
MULTI SPEED −
STILL
MULTI SPEED +
INDEX
REC
STOP
PAUSE
POWER
TV/VCR
CH.DOWN
CH.UP
TIMER
CANCEL
MENU
OK
OSD PRGM
COUNTER RESET
SHIFT <
SHIFT >
SHIFT V
SHIFT Λ
DISPLAY
PROGRAM
AUTO TRACKING
EJECT
1
2
3
4
5
6
I-HQ
PROGRAM LIST
CLOCK
7
8
9
0
AV
TRANSMIT
NEXT
A
B
C
D
E
F
G
H
I
J
K
1
2
3
4
5
6
7
8

*1

MODEL	JW101	R101
RC-V252E	○	—
RC-V252F	—	○

REMO-CON PCB B1024A5020

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/8W (J)
ALL CAPACITORS IN μF 50WV (J)

RC-V252E
REMOTE CONTROL UNIT
SCHEMATIC DIAGRAM

No.21-19 B102406M
A2

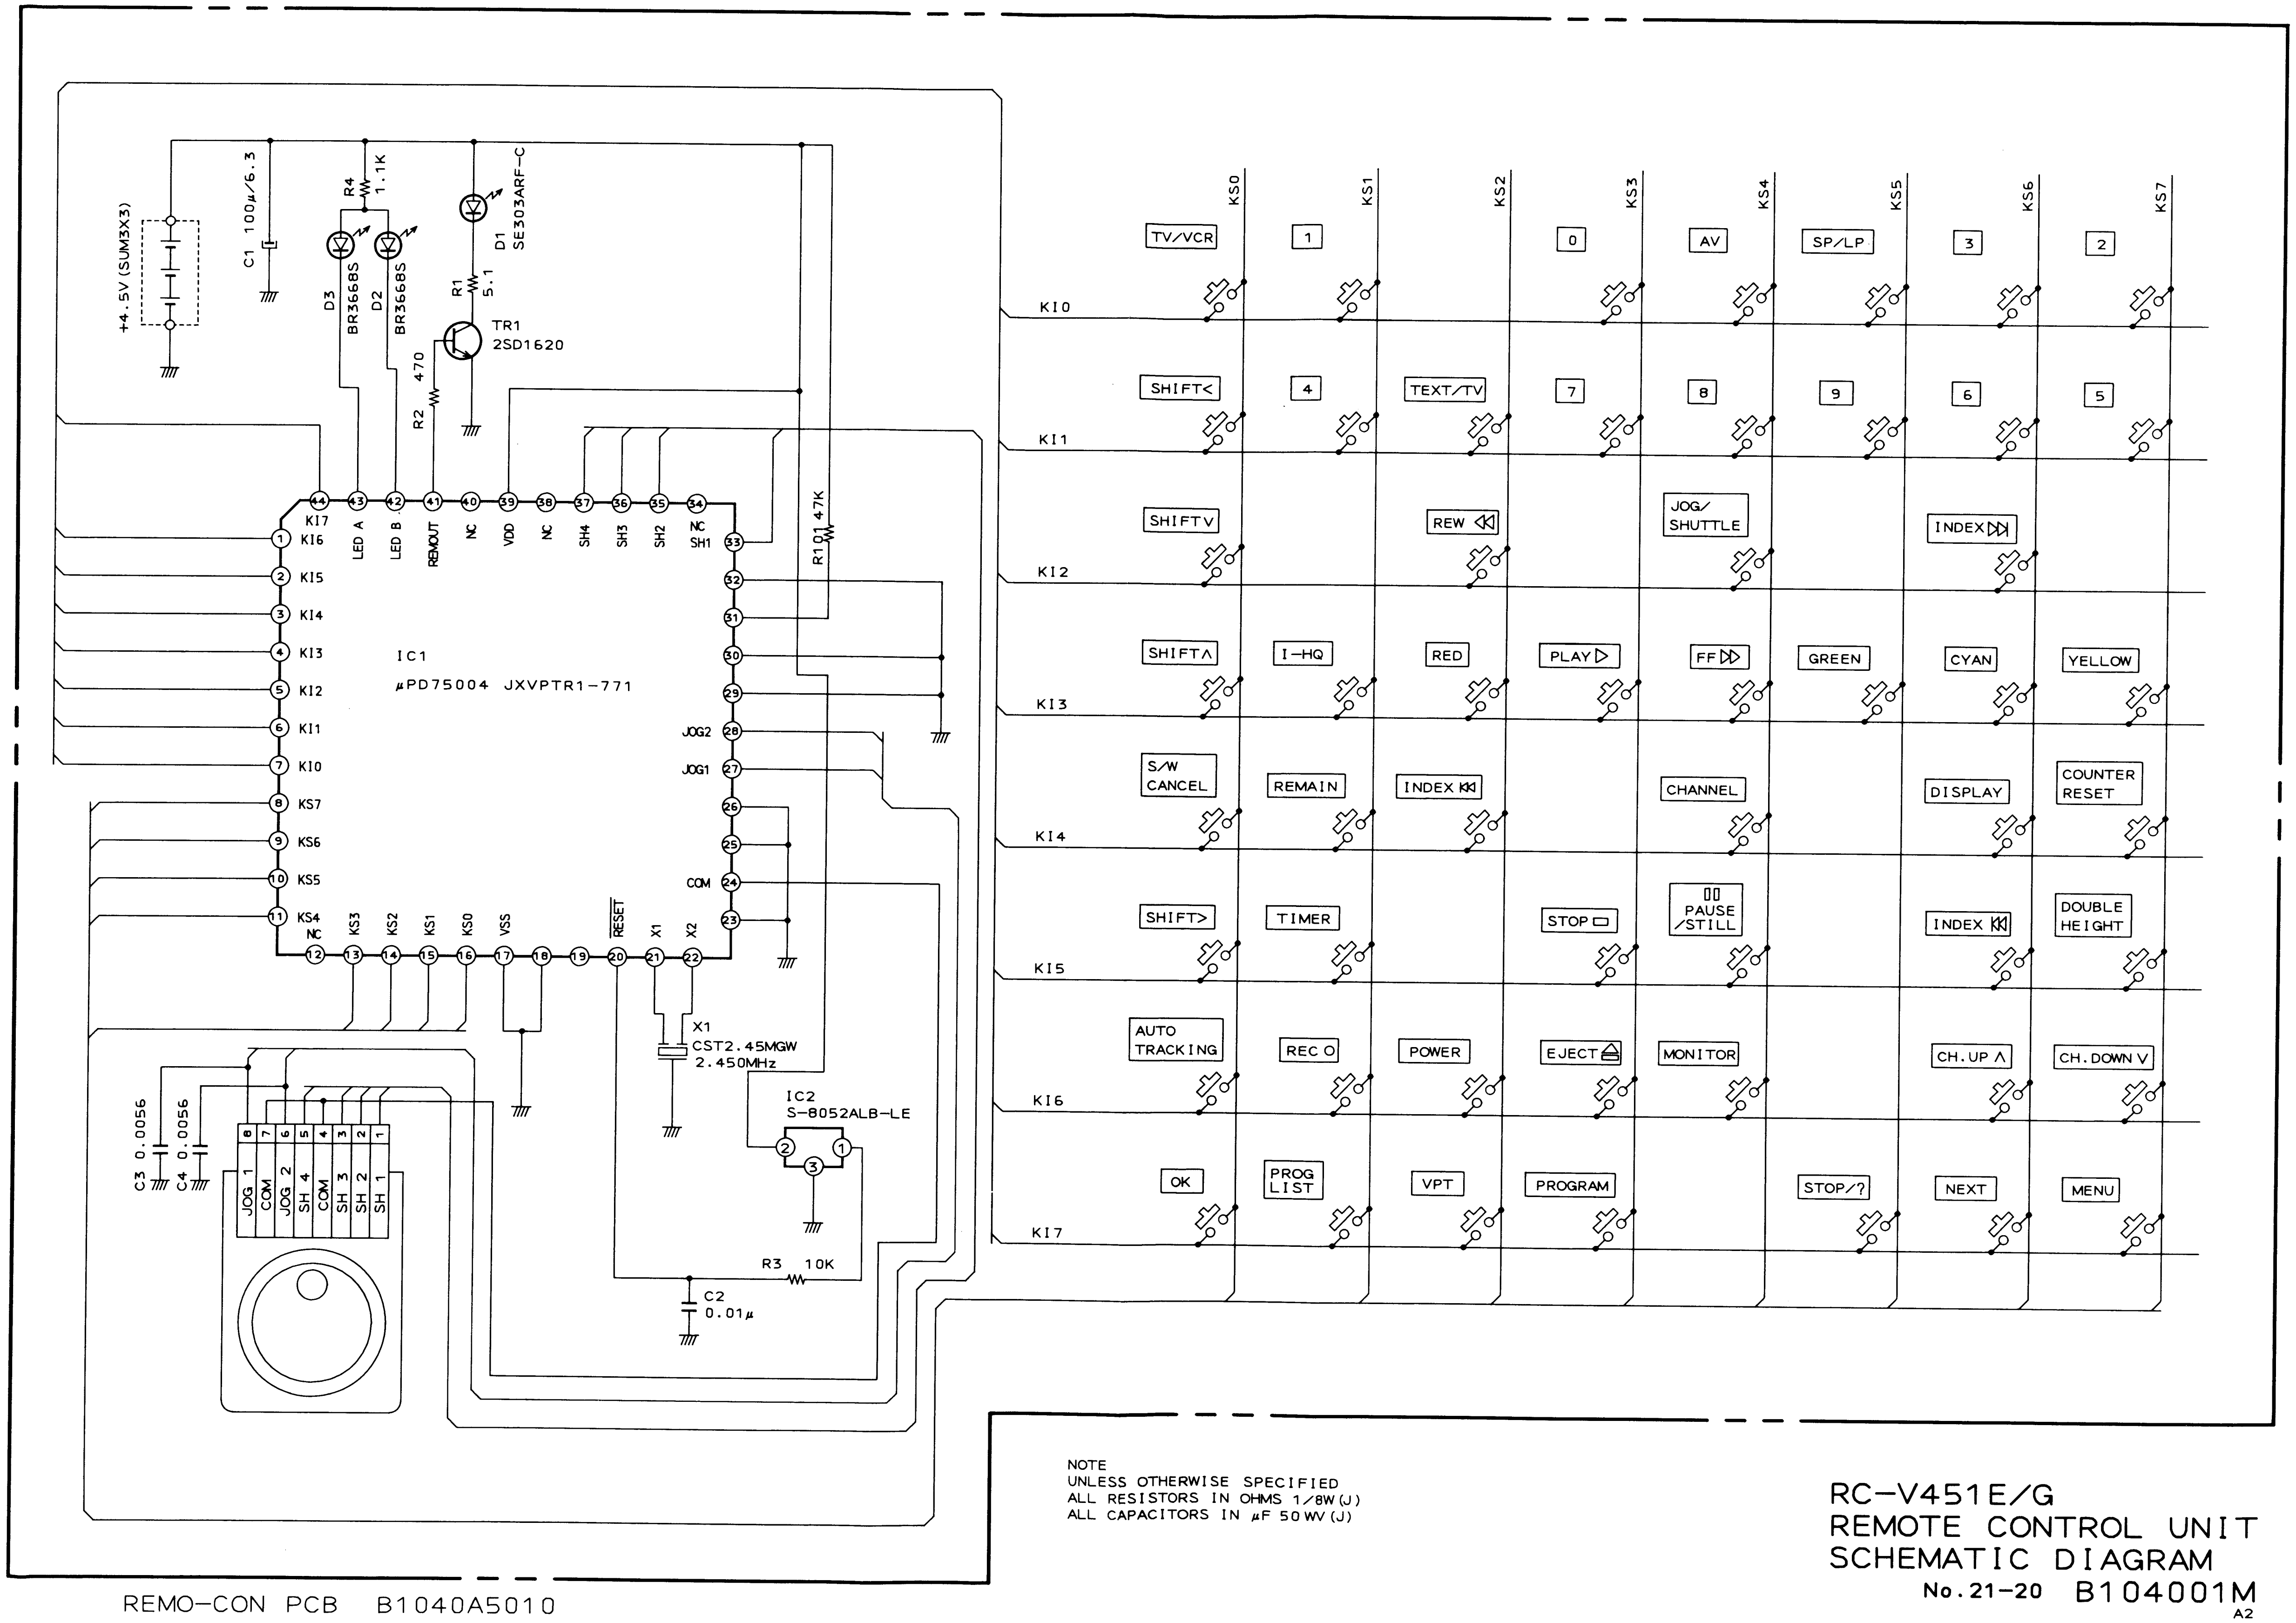
+4.5V (SUM3X3)
C1 100μ/6.3
R4 1.1K
D3 BR3668S
D2 BR3668S
D1 SE303ARF-C
R1 5.1
TR1 2SD1620
R2 470
IC1
μPD75004 JXVPTR1-771
KI7
KI6
KI5
KI4
KI3
KI2
KI1
KI0
KS7
KS6
KS5
KS4
NC
KS3
KS2
KS1
KS0
VSS
RESET
X1
X2
LED A
LED B
REMOUT
NC
VDD
NC
SH4
SH3
SH2
NC
SH1
JOG2
JOG1
COM
R10 1 47K
X1 CST2.45MGW 2.450MHz
IC2 S-8052ALB-LE
R3 10K
C2 0.01μ
C3 0.0056
C4 0.0056
JOG 1
COM
JOG 2
SH 4
COM
SH 3
SH 2
SH 1
KS0
KS1
KS2
KS3
KS4
KS5
KS6
KS7
KI0
KI1
KI2
KI3
KI4
KI5
KI6
KI7
TV/VCR
1
0
AV
SP/LP
3
2
SHIFT<
4
TEXT/TV
7
8
9
6
5
SHIFTV
REW ◁◁
JOG/ SHUTTLE
INDEX ▷▷|
SHIFT∧
I-HQ
RED
PLAY ▷
FF ▷▷
GREEN
CYAN
YELLOW
S/W CANCEL
REMAIN
INDEX |◁◁
CHANNEL
DISPLAY
COUNTER RESET
SHIFT>
TIMER
STOP ▭
PAUSE /STILL
INDEX |◁◁
DOUBLE HEIGHT
AUTO TRACKING
REC ○
POWER
EJECT ⏏
MONITOR
CH.UP ∧
CH.DOWN V
OK
PROG LIST
VPT
PROGRAM
STOP/?
NEXT
MENU
REMO-CON PCB B1040A5010

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/8W (J)
ALL CAPACITORS IN μF 50WV (J)

RC-V451E/G
REMOTE CONTROL UNIT
SCHEMATIC DIAGRAM
No.21-20 B104001M
A2

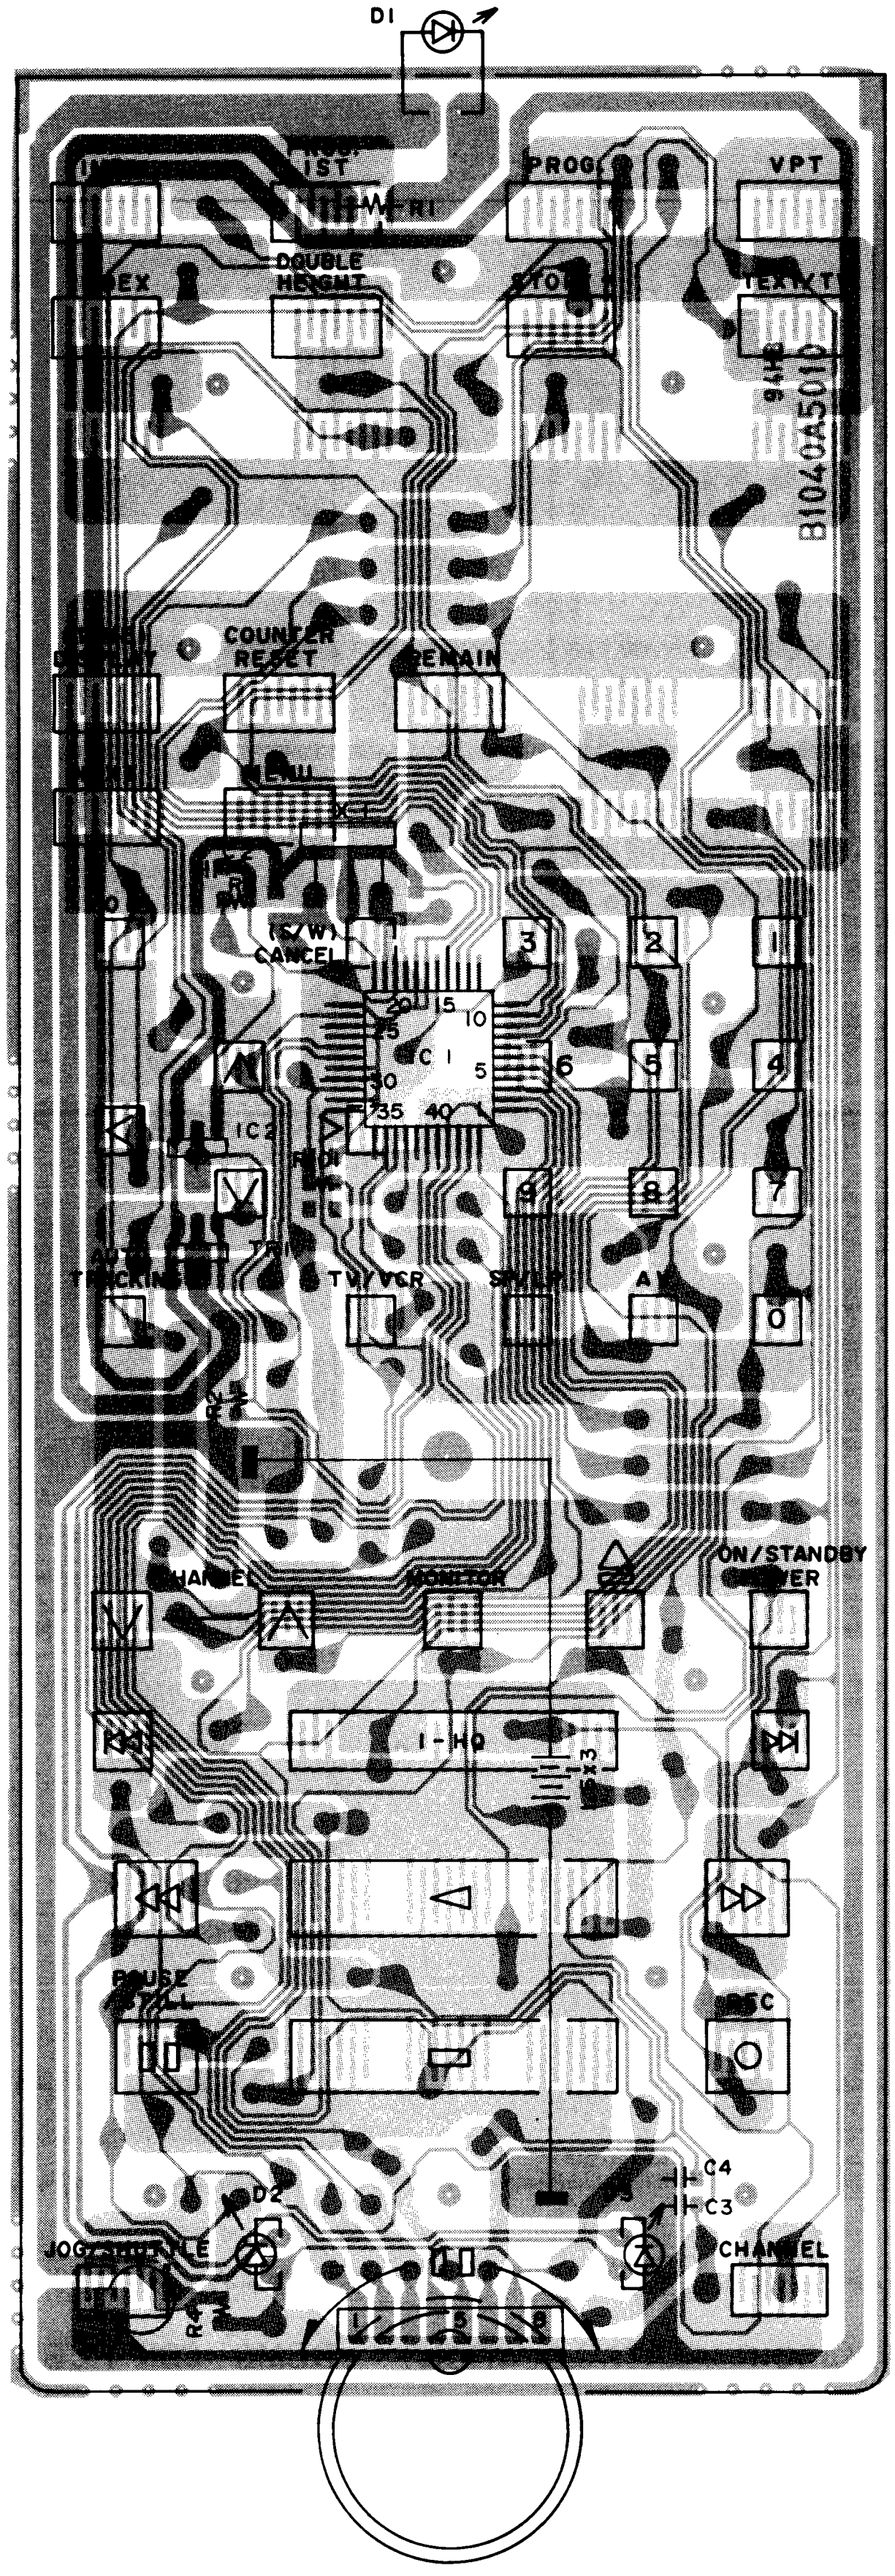
D1
PROG.
VPT
DOUBLE HEIGHT
STORE
TEXT/TV
B1040A5010
94HB
COUNTER RESET
REMAIN
MENU
X1
CANCEL
3
2
1
IC1
20
15
10
25
5
30
35
40
6
5
4
IC2
9
8
7
TR1
AUTO TRACKING
TV/VCR
AV
0
CHANNEL
MONITOR
ON/STANDBY
1-HQ
PAUSE STILL
REC
C4
C3
D2
JOG/SHUTTLE
CHANNEL
R4
1
5
8

REMO-CON PCB B1040A5010

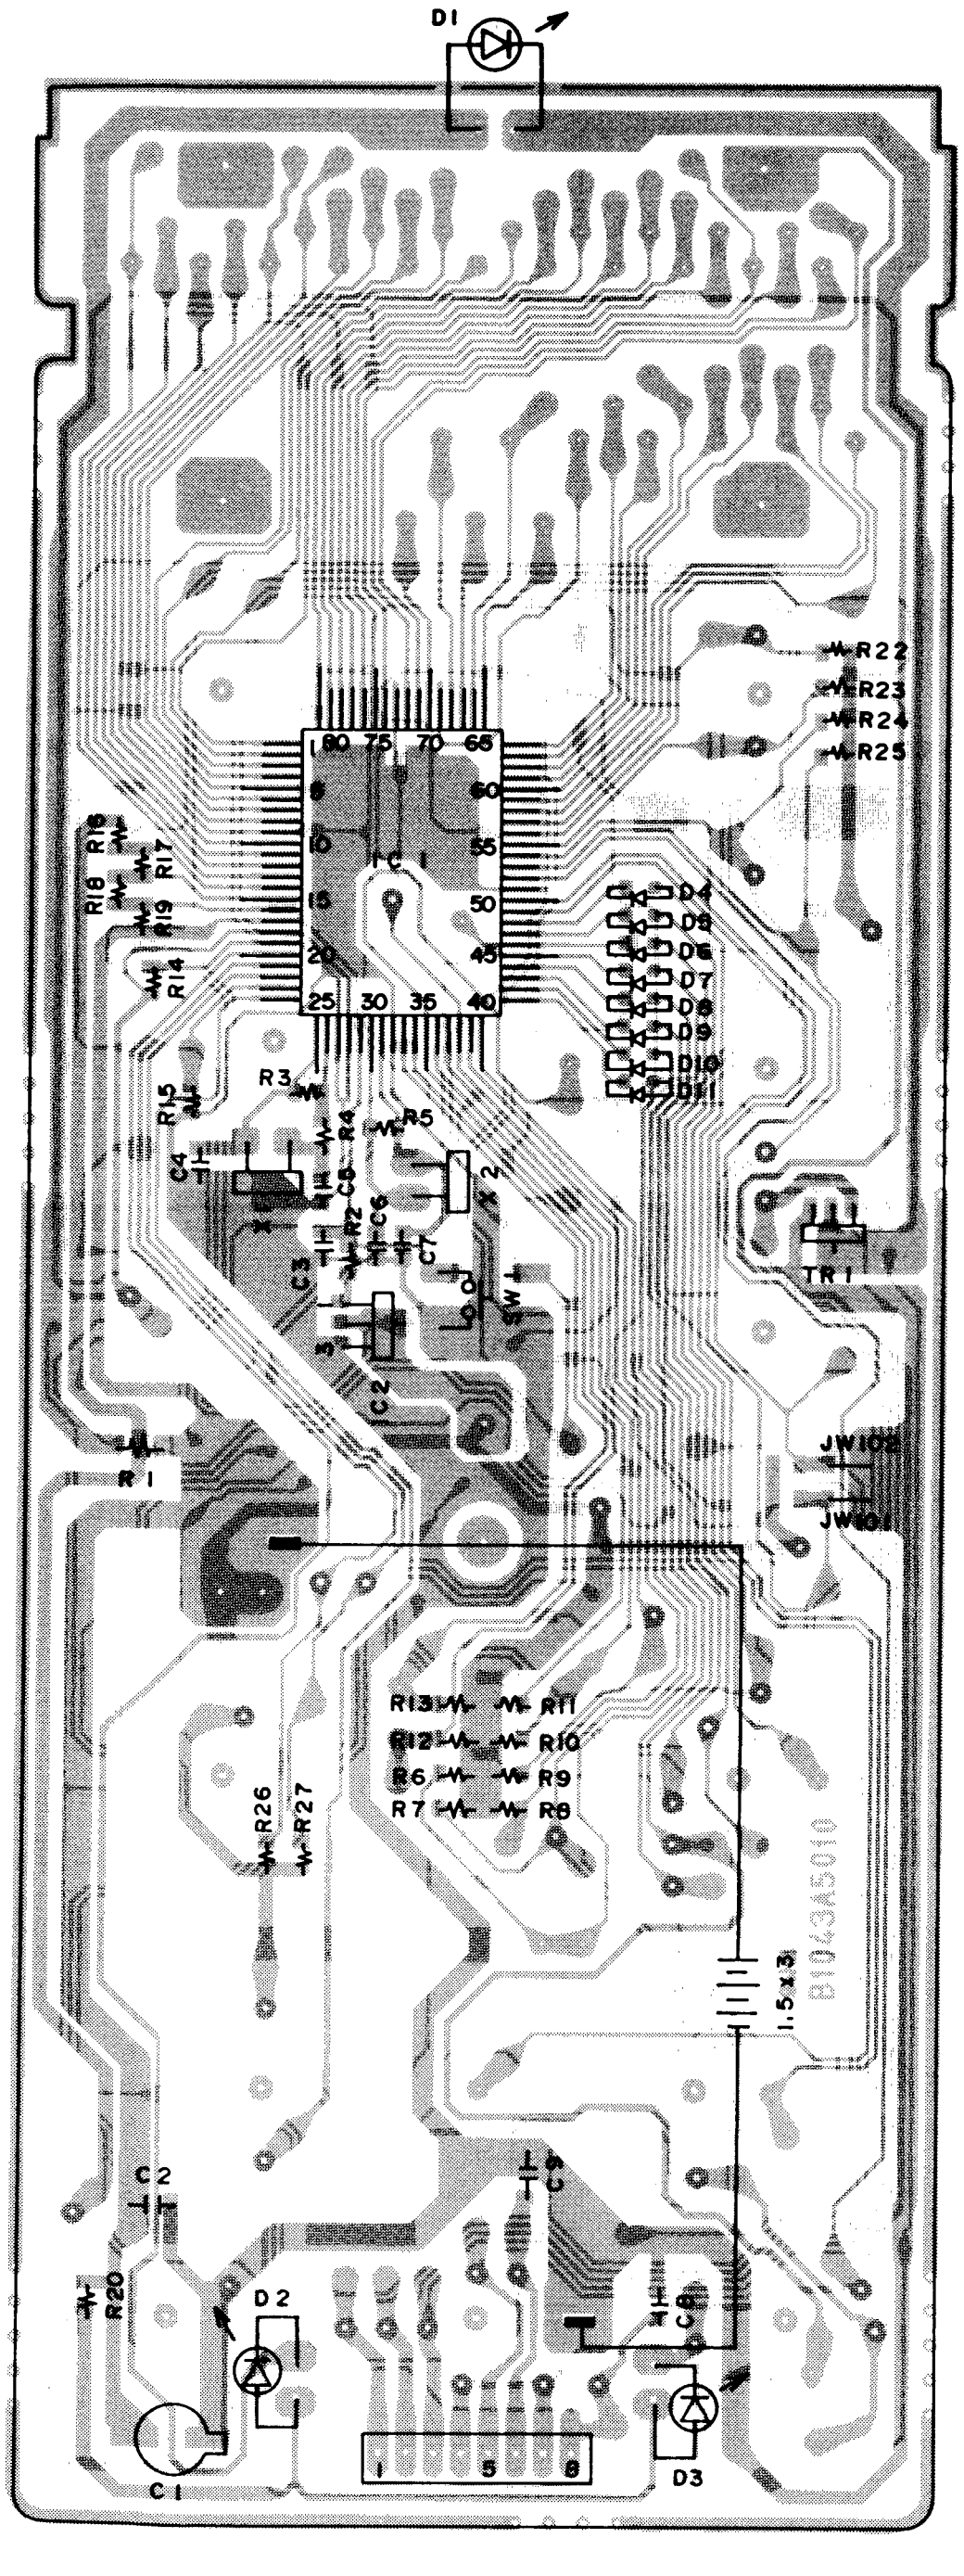
D1
R22
R23
R24
R25
IC1
1
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
R16
R17
R18
R19
R14
D4
D5
D6
D7
D8
D9
D10
D11
R15
R3
R4
R5
C4
C5
R2
C6
C3
C7
X2
SW1
C2
TR1
JW102
JW101
R1
R13
R11
R12
R10
R6
R9
R7
R8
R26
R27
B1043A5010
1.5×3
C2
C9
R20
D2
C8
C1
D3
1
5
8

REMO-CON PCB B1043A5010 (PARTS LOCATION)

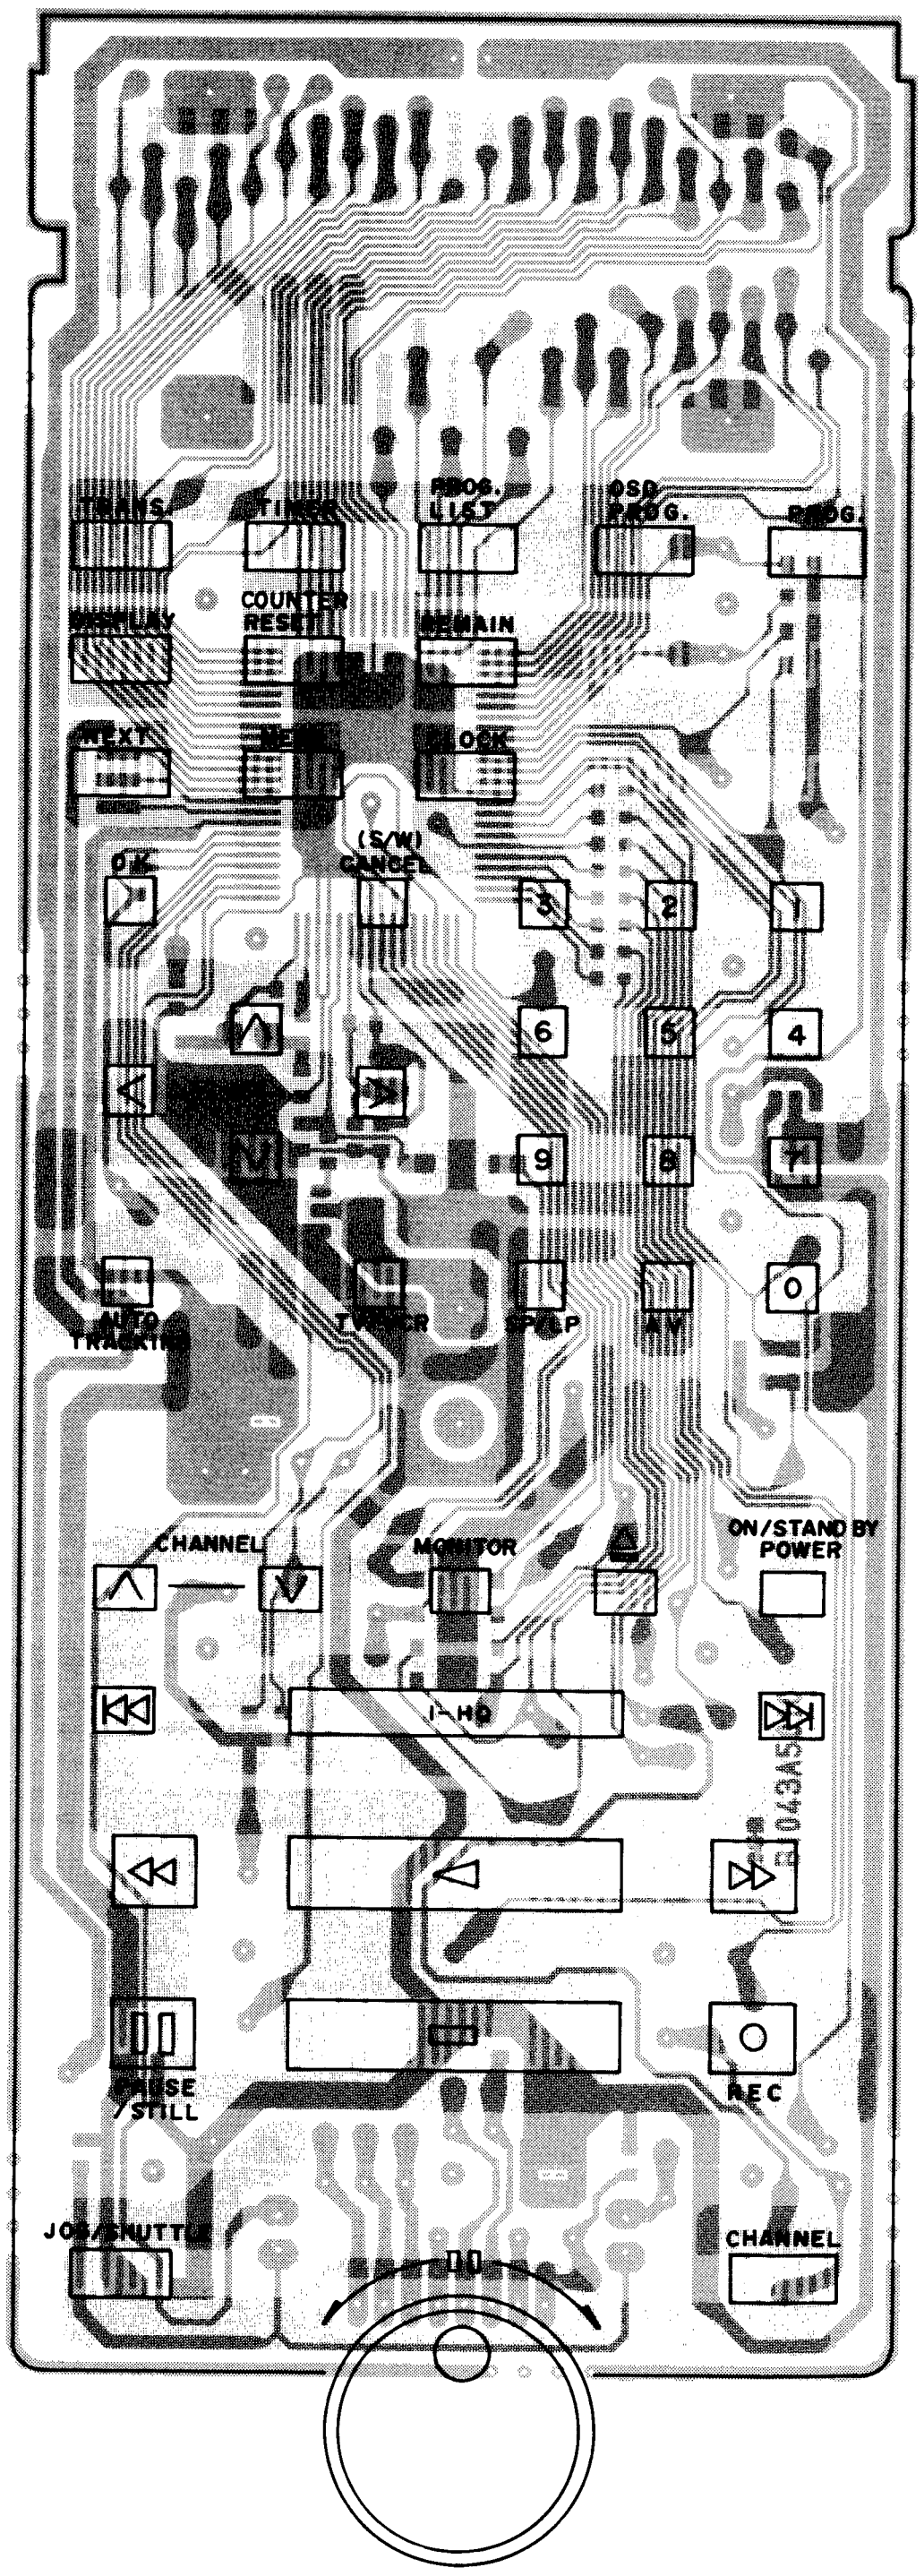
TRANS
TIMER
PROG. LIST
OSD PROG.
PROG.
DISPLAY
COUNTER RESET
REMAIN
NEXT
MENU
CLOCK
OK
(S/W) CANCEL
3
2
1
6
5
4
9
8
7
0
AUTO TRACKING
TV/VCR
SP/LP
AV
CHANNEL
MONITOR
ON/STAND BY POWER
I-HD
B1043A5
PAUSE /STILL
REC
JOG/SHUTTLE
CHANNEL

REMO-CON PCB B1043A5010 (SWITCH LOCATION)

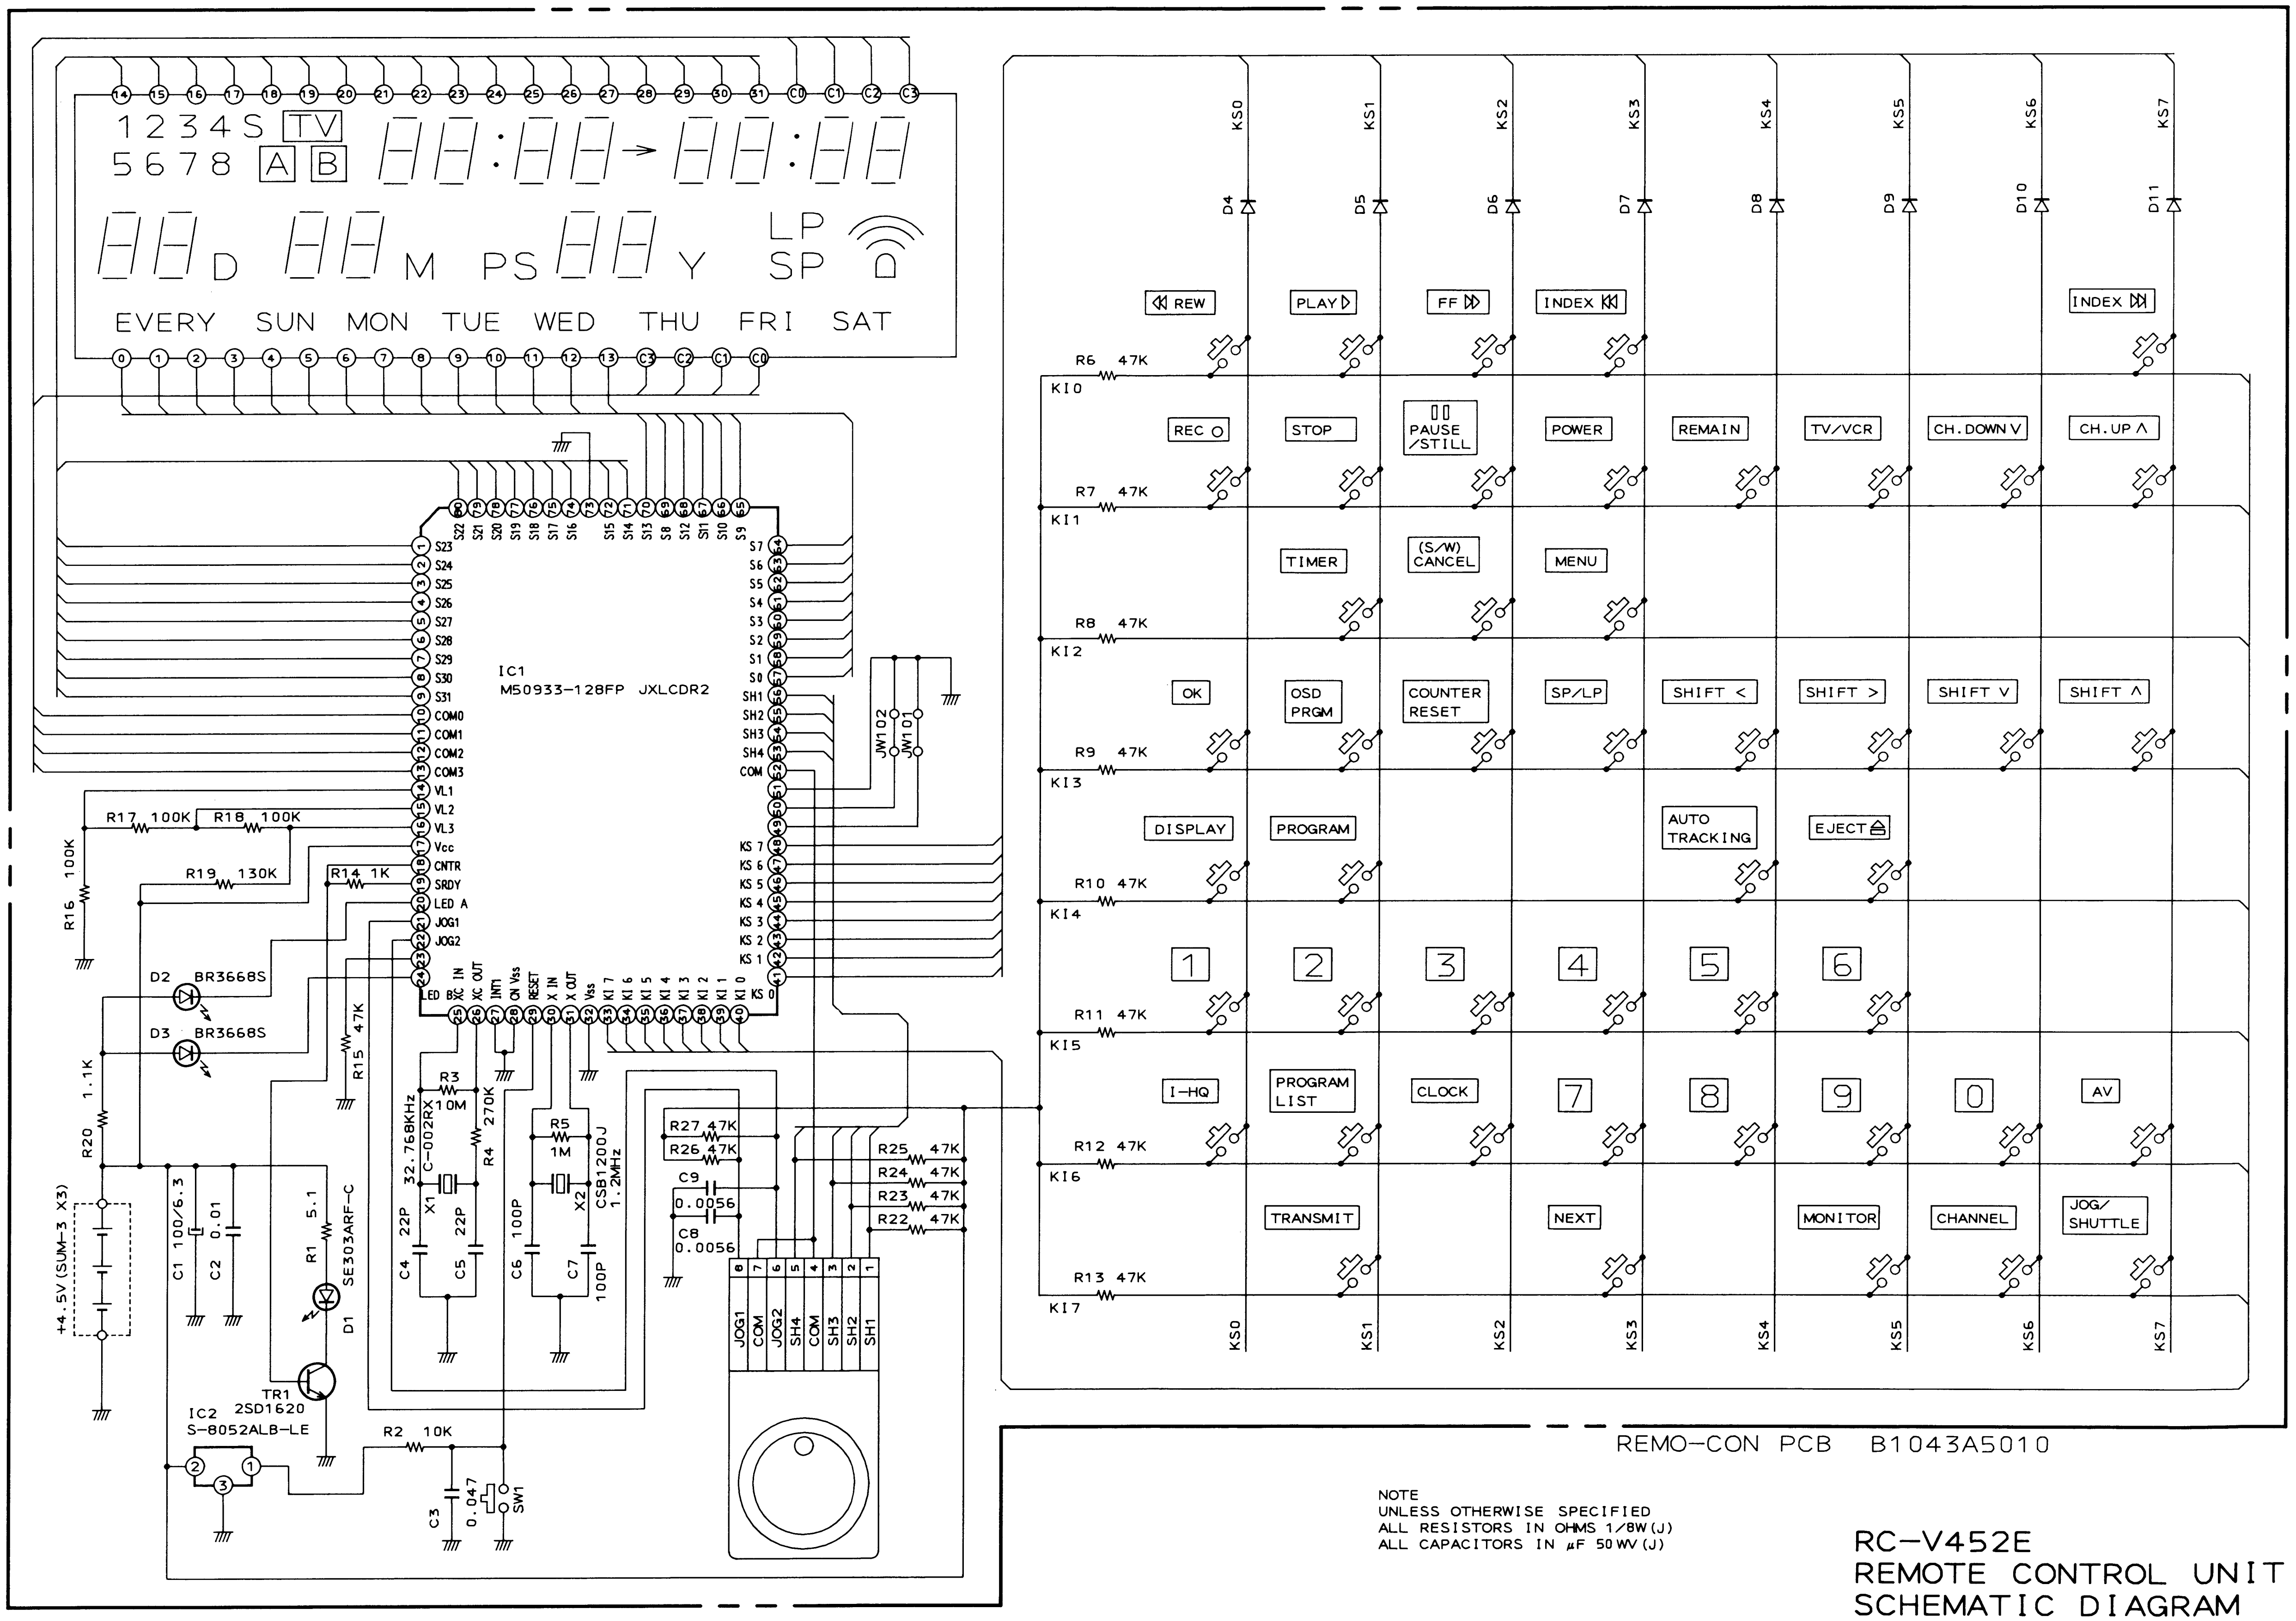
IC1
M50933-128FP JXLCDR2
IC2 S-8052ALB-LE
TR1 2SD1620
D1 SE303ARF-C
D2 BR3668S
D3 BR3668S
R1 5.1
R2 10K
R3 10M
R4 270K
R5 1M
R6 47K
R7 47K
R8 47K
R9 47K
R10 47K
R11 47K
R12 47K
R13 47K
R14 1K
R15 47K
R16 100K
R17 100K
R18 100K
R19 130K
R20 1.1K
R22 47K
R23 47K
R24 47K
R25 47K
R26 47K
R27 47K
C1 100/6.3
C2 0.01
C3 0.047
C4 22P
C5 22P
C6 100P
C7 100P
C8 0.0056
C9 0.0056
X1 32.768KHz C-002RX
X2 CSB1200J 1.2MHz
SW1
JW101
JW102
+4.5V (SUM-3 X3)
D4
D5
D6
D7
D8
D9
D10
D11
KS0
KS1
KS2
KS3
KS4
KS5
KS6
KS7
KI0
KI1
KI2
KI3
KI4
KI5
KI6
KI7
REW
PLAY
FF
INDEX
INDEX
REC
STOP
PAUSE /STILL
POWER
REMAIN
TV/VCR
CH.DOWN V
CH.UP Λ
TIMER
(S/W) CANCEL
MENU
OK
OSD PRGM
COUNTER RESET
SP/LP
SHIFT <
SHIFT >
SHIFT V
SHIFT Λ
DISPLAY
PROGRAM
AUTO TRACKING
EJECT
1
2
3
4
5
6
I-HQ
PROGRAM LIST
CLOCK
7
8
9
0
AV
TRANSMIT
NEXT
MONITOR
CHANNEL
JOG/ SHUTTLE
JOG1
COM
JOG2
SH4
COM
SH3
SH2
SH1
1234S TV
5678 A B
D M PS Y
LP SP
EVERY SUN MON TUE WED THU FRI SAT
REMO-CON PCB B1043A5010

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/8W (J)
ALL CAPACITORS IN µF 50WV (J)

RC-V452E
REMOTE CONTROL UNIT
SCHEMATIC DIAGRAM

No.21-21 B104301M
A2

BA6229 (BI-DIRECTIONAL MOTOR DRIVE)

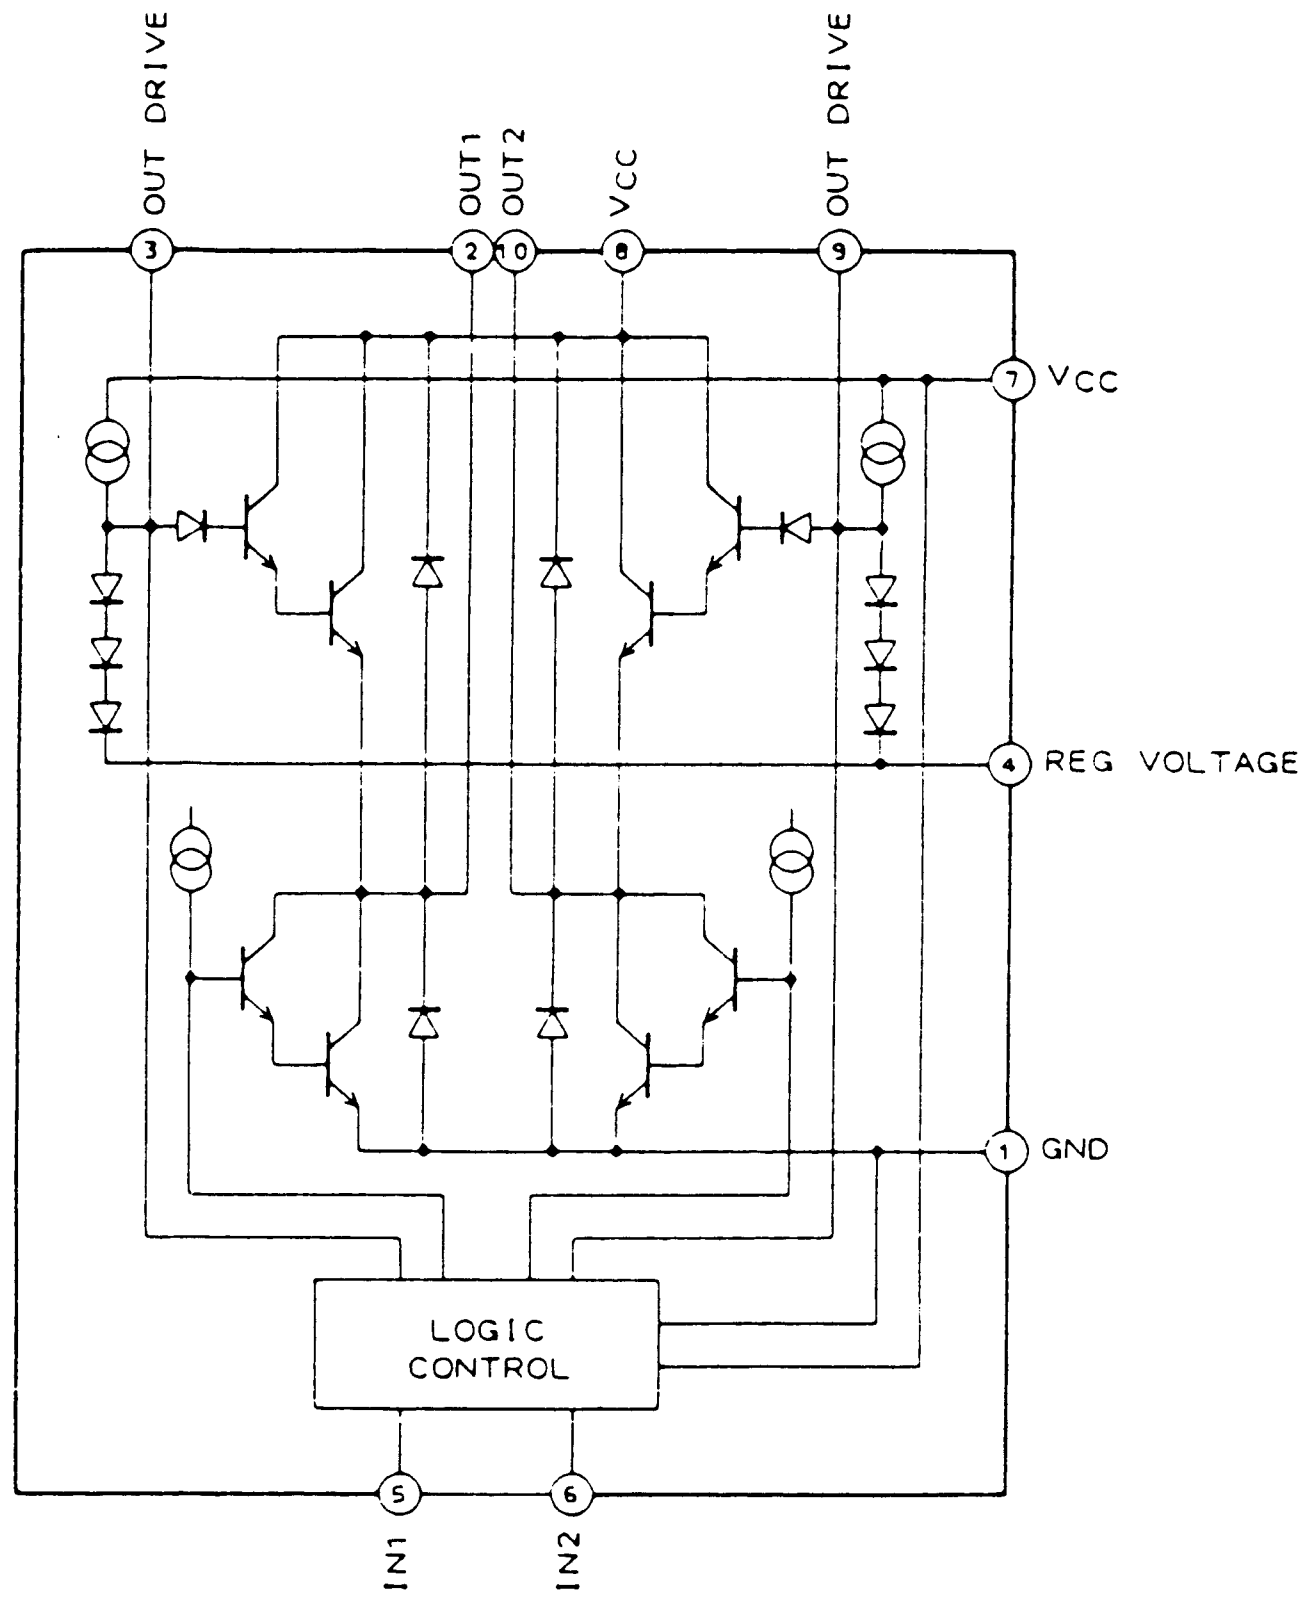
OUT DRIVE
OUT1
OUT2
VCC
OUT DRIVE
3
2
10
8
9
7 VCC
4 REG VOLTAGE
1 GND
LOGIC CONTROL
5
6
IN1
IN2

INPUT		OUTPUT		MODE
⑤	⑥	②	⑩	
H	H	L	L	BRAKE
L	H	L	H	CASSETTE & TAPE LOADING
H	L	H	L	CASSETTE & TAPE UNLOADING
L	L	OPEN	OPEN	STOP

BA7765AS (AUDIO SIGNAL REC/PB AMPLIFIER)

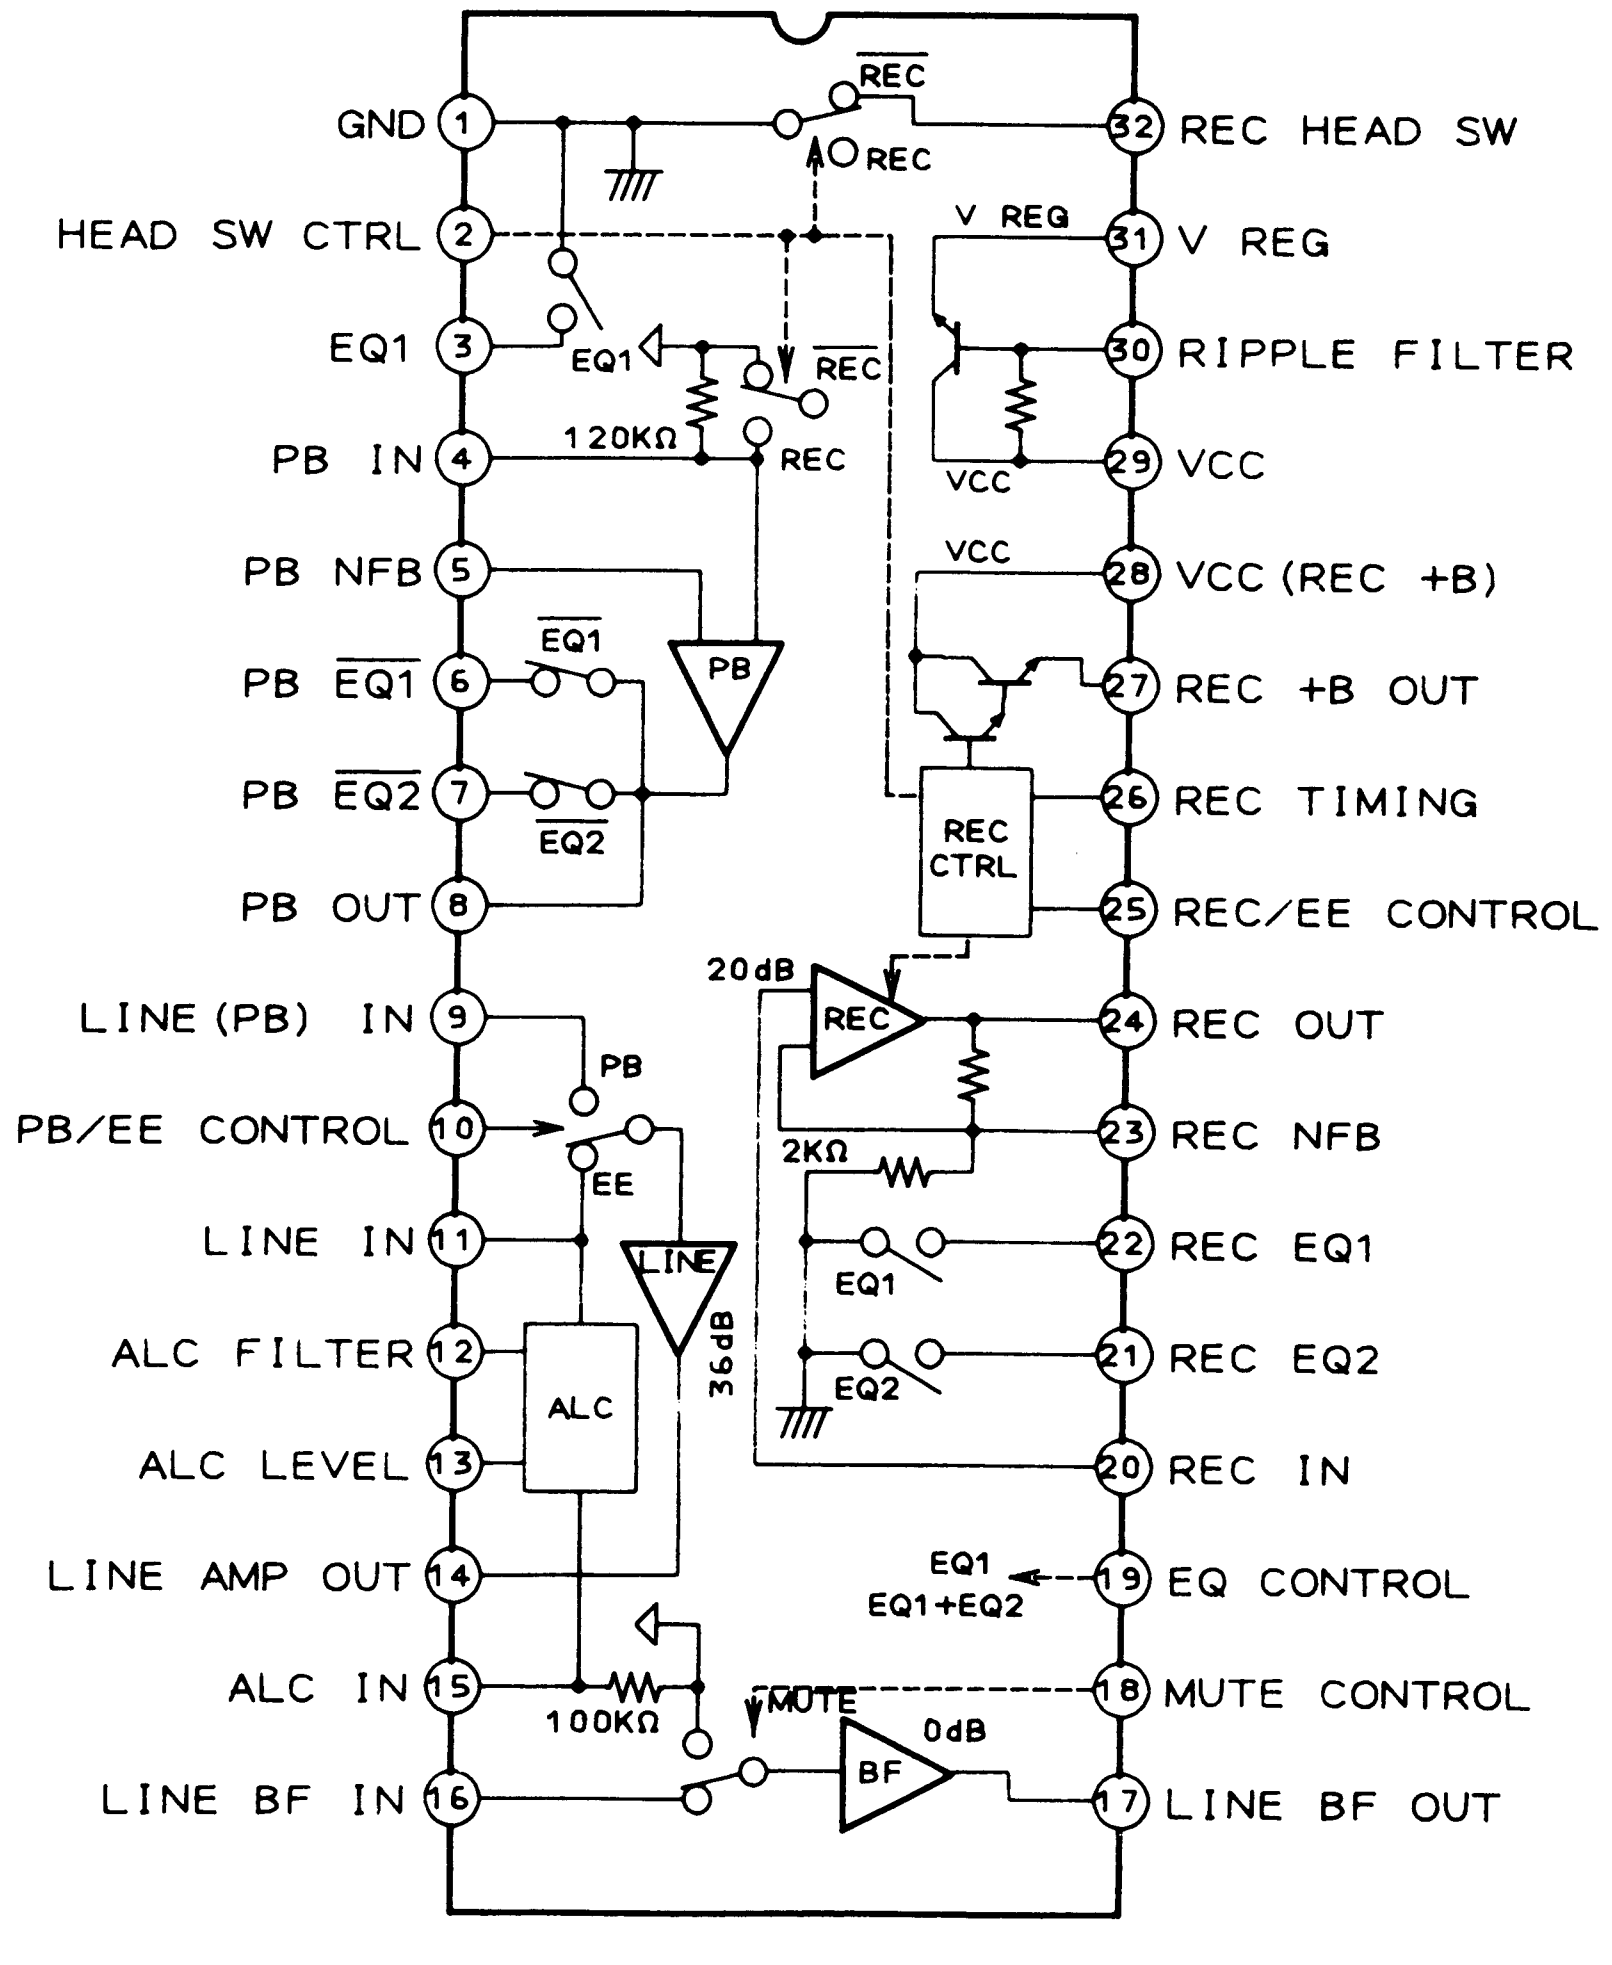
GND 1
HEAD SW CTRL 2
EQ1 3
PB IN 4
PB NFB 5
PB $\overline{EQ1}$ 6
PB $\overline{EQ2}$ 7
PB OUT 8
LINE (PB) IN 9
PB/EE CONTROL 10
LINE IN 11
ALC FILTER 12
ALC LEVEL 13
LINE AMP OUT 14
ALC IN 15
LINE BF IN 16
32 REC HEAD SW
31 V REG
30 RIPPLE FILTER
29 VCC
28 VCC (REC +B)
27 REC +B OUT
26 REC TIMING
25 REC/EE CONTROL
24 REC OUT
23 REC NFB
22 REC EQ1
21 REC EQ2
20 REC IN
19 EQ CONTROL
18 MUTE CONTROL
17 LINE BF OUT
$\overline{REC}$
REC
V REG
EQ1
$\overline{REC}$
120KΩ
REC
VCC
VCC
$\overline{EQ1}$
PB
$\overline{EQ2}$
REC CTRL
20dB
REC
PB
EE
2KΩ
LINE
36dB
EQ1
EQ2
ALC
EQ1
EQ1+EQ2
100KΩ
MUTE
0dB
BF

LC8992 (CCD 1H DELAY LINE)

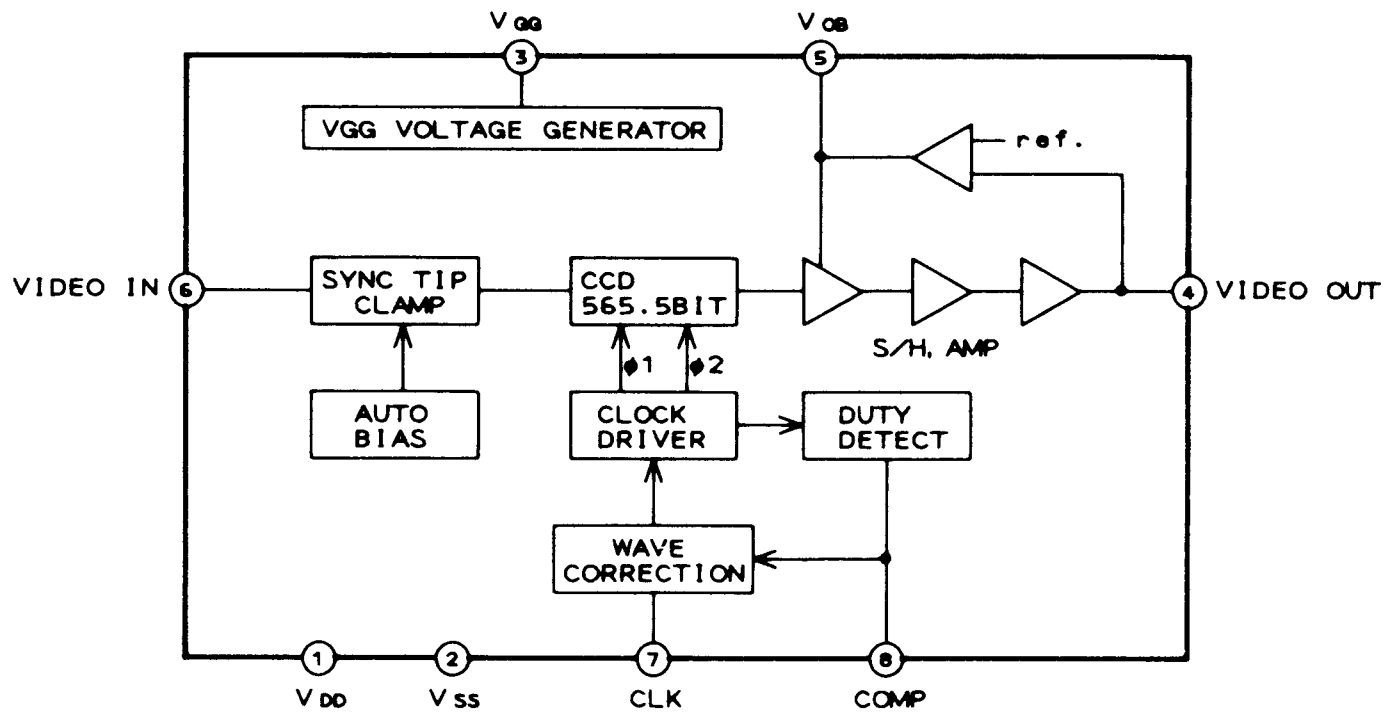
V GG
V OB
3
5
VGG VOLTAGE GENERATOR
ref.
VIDEO IN 6
SYNC TIP CLAMP
CCD 565.5BIT
φ1
φ2
S/H, AMP
4 VIDEO OUT
AUTO BIAS
CLOCK DRIVER
DUTY DETECT
WAVE CORRECTION
1
2
7
8
V DD
V SS
CLK
COMP

MM1068XS (SYNC SEPARATOR)

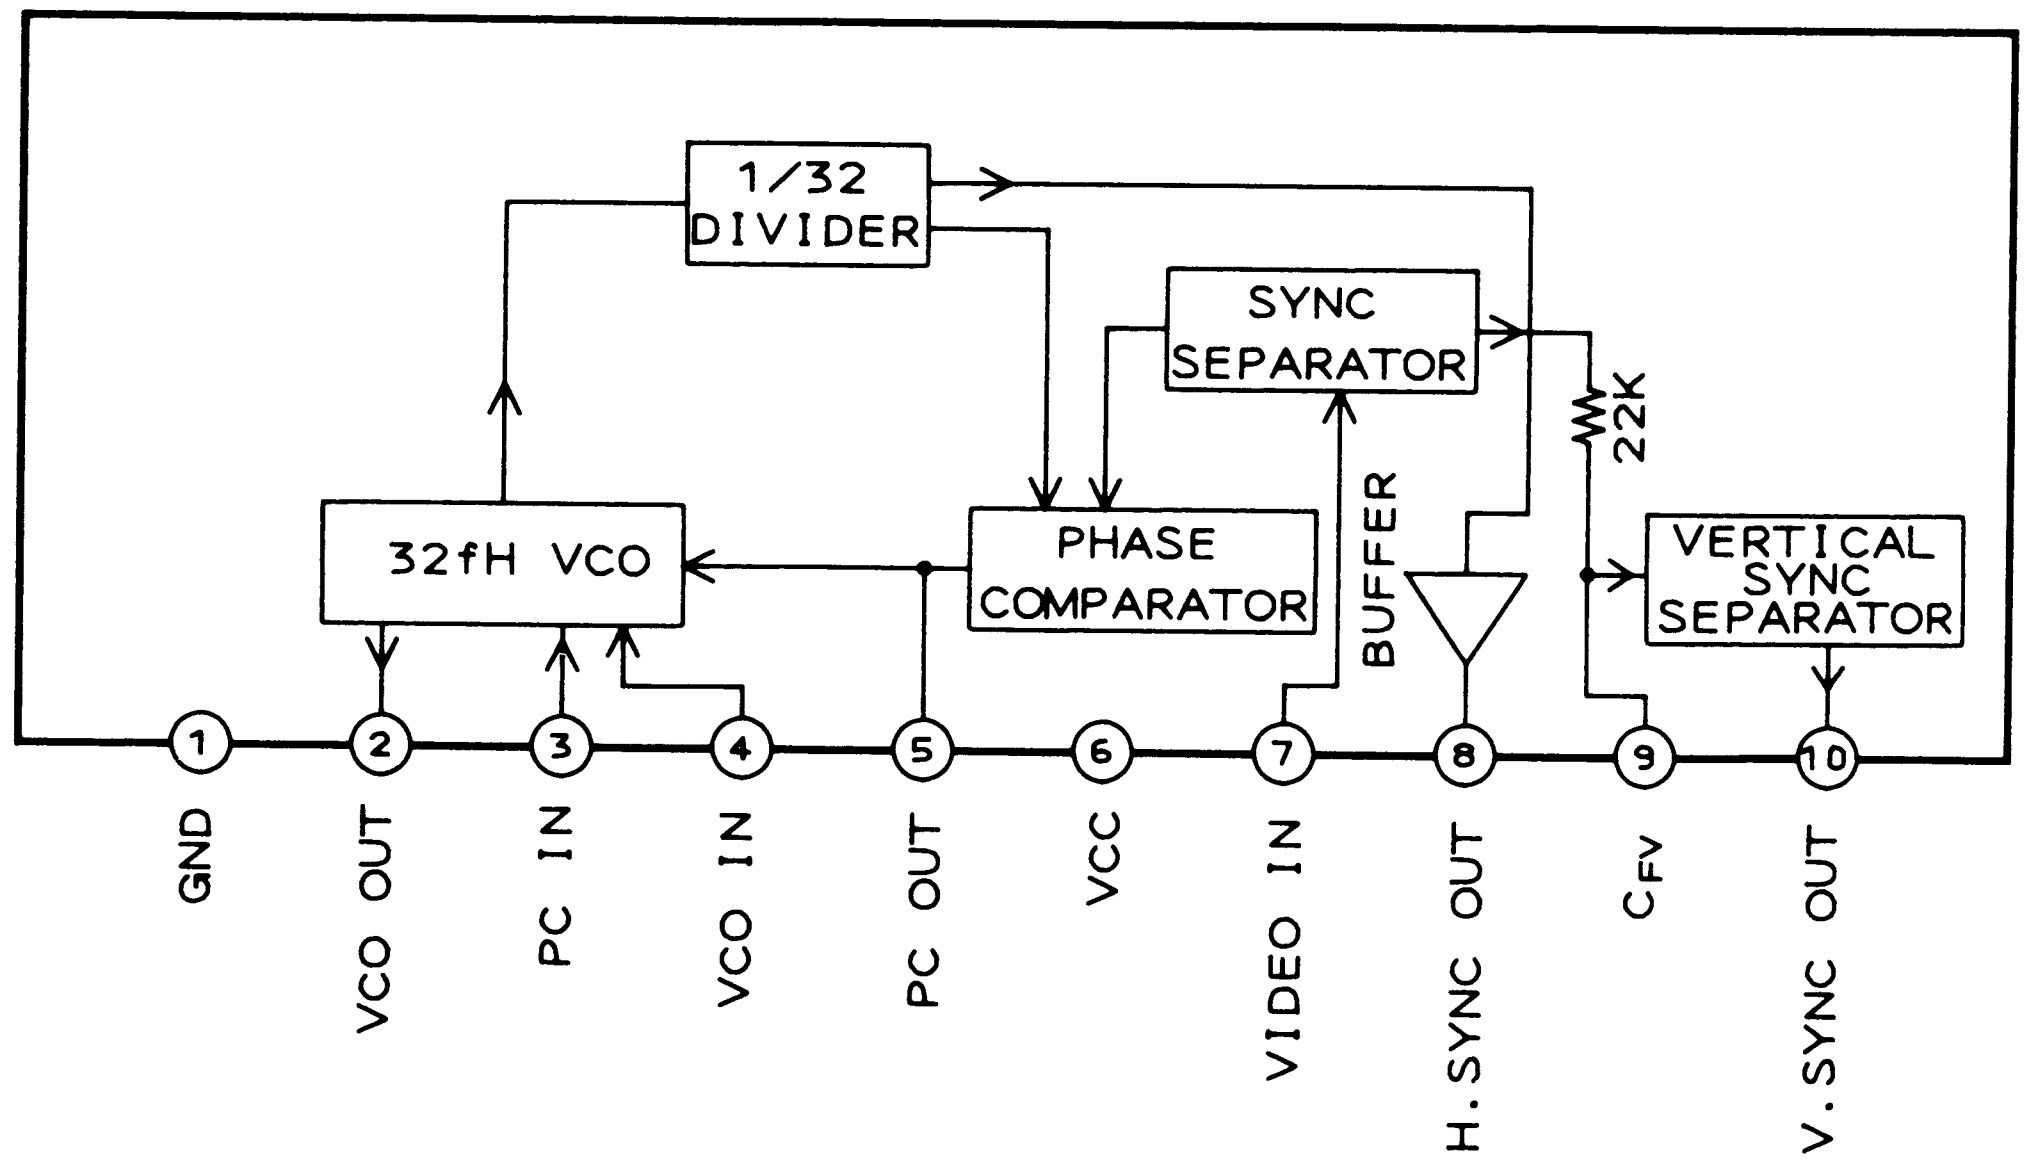
1/32 DIVIDER
SYNC SEPARATOR
22K
32fH VCO
PHASE COMPARATOR
BUFFER
VERTICAL SYNC SEPARATOR
1
2
3
4
5
6
7
8
9
10
GND
VCO OUT
PC IN
VCO IN
PC OUT
VCC
VIDEO IN
H.SYNC OUT
CFV
V.SYNC OUT

MN675201 (SERVO/SYSCON MI-COM)

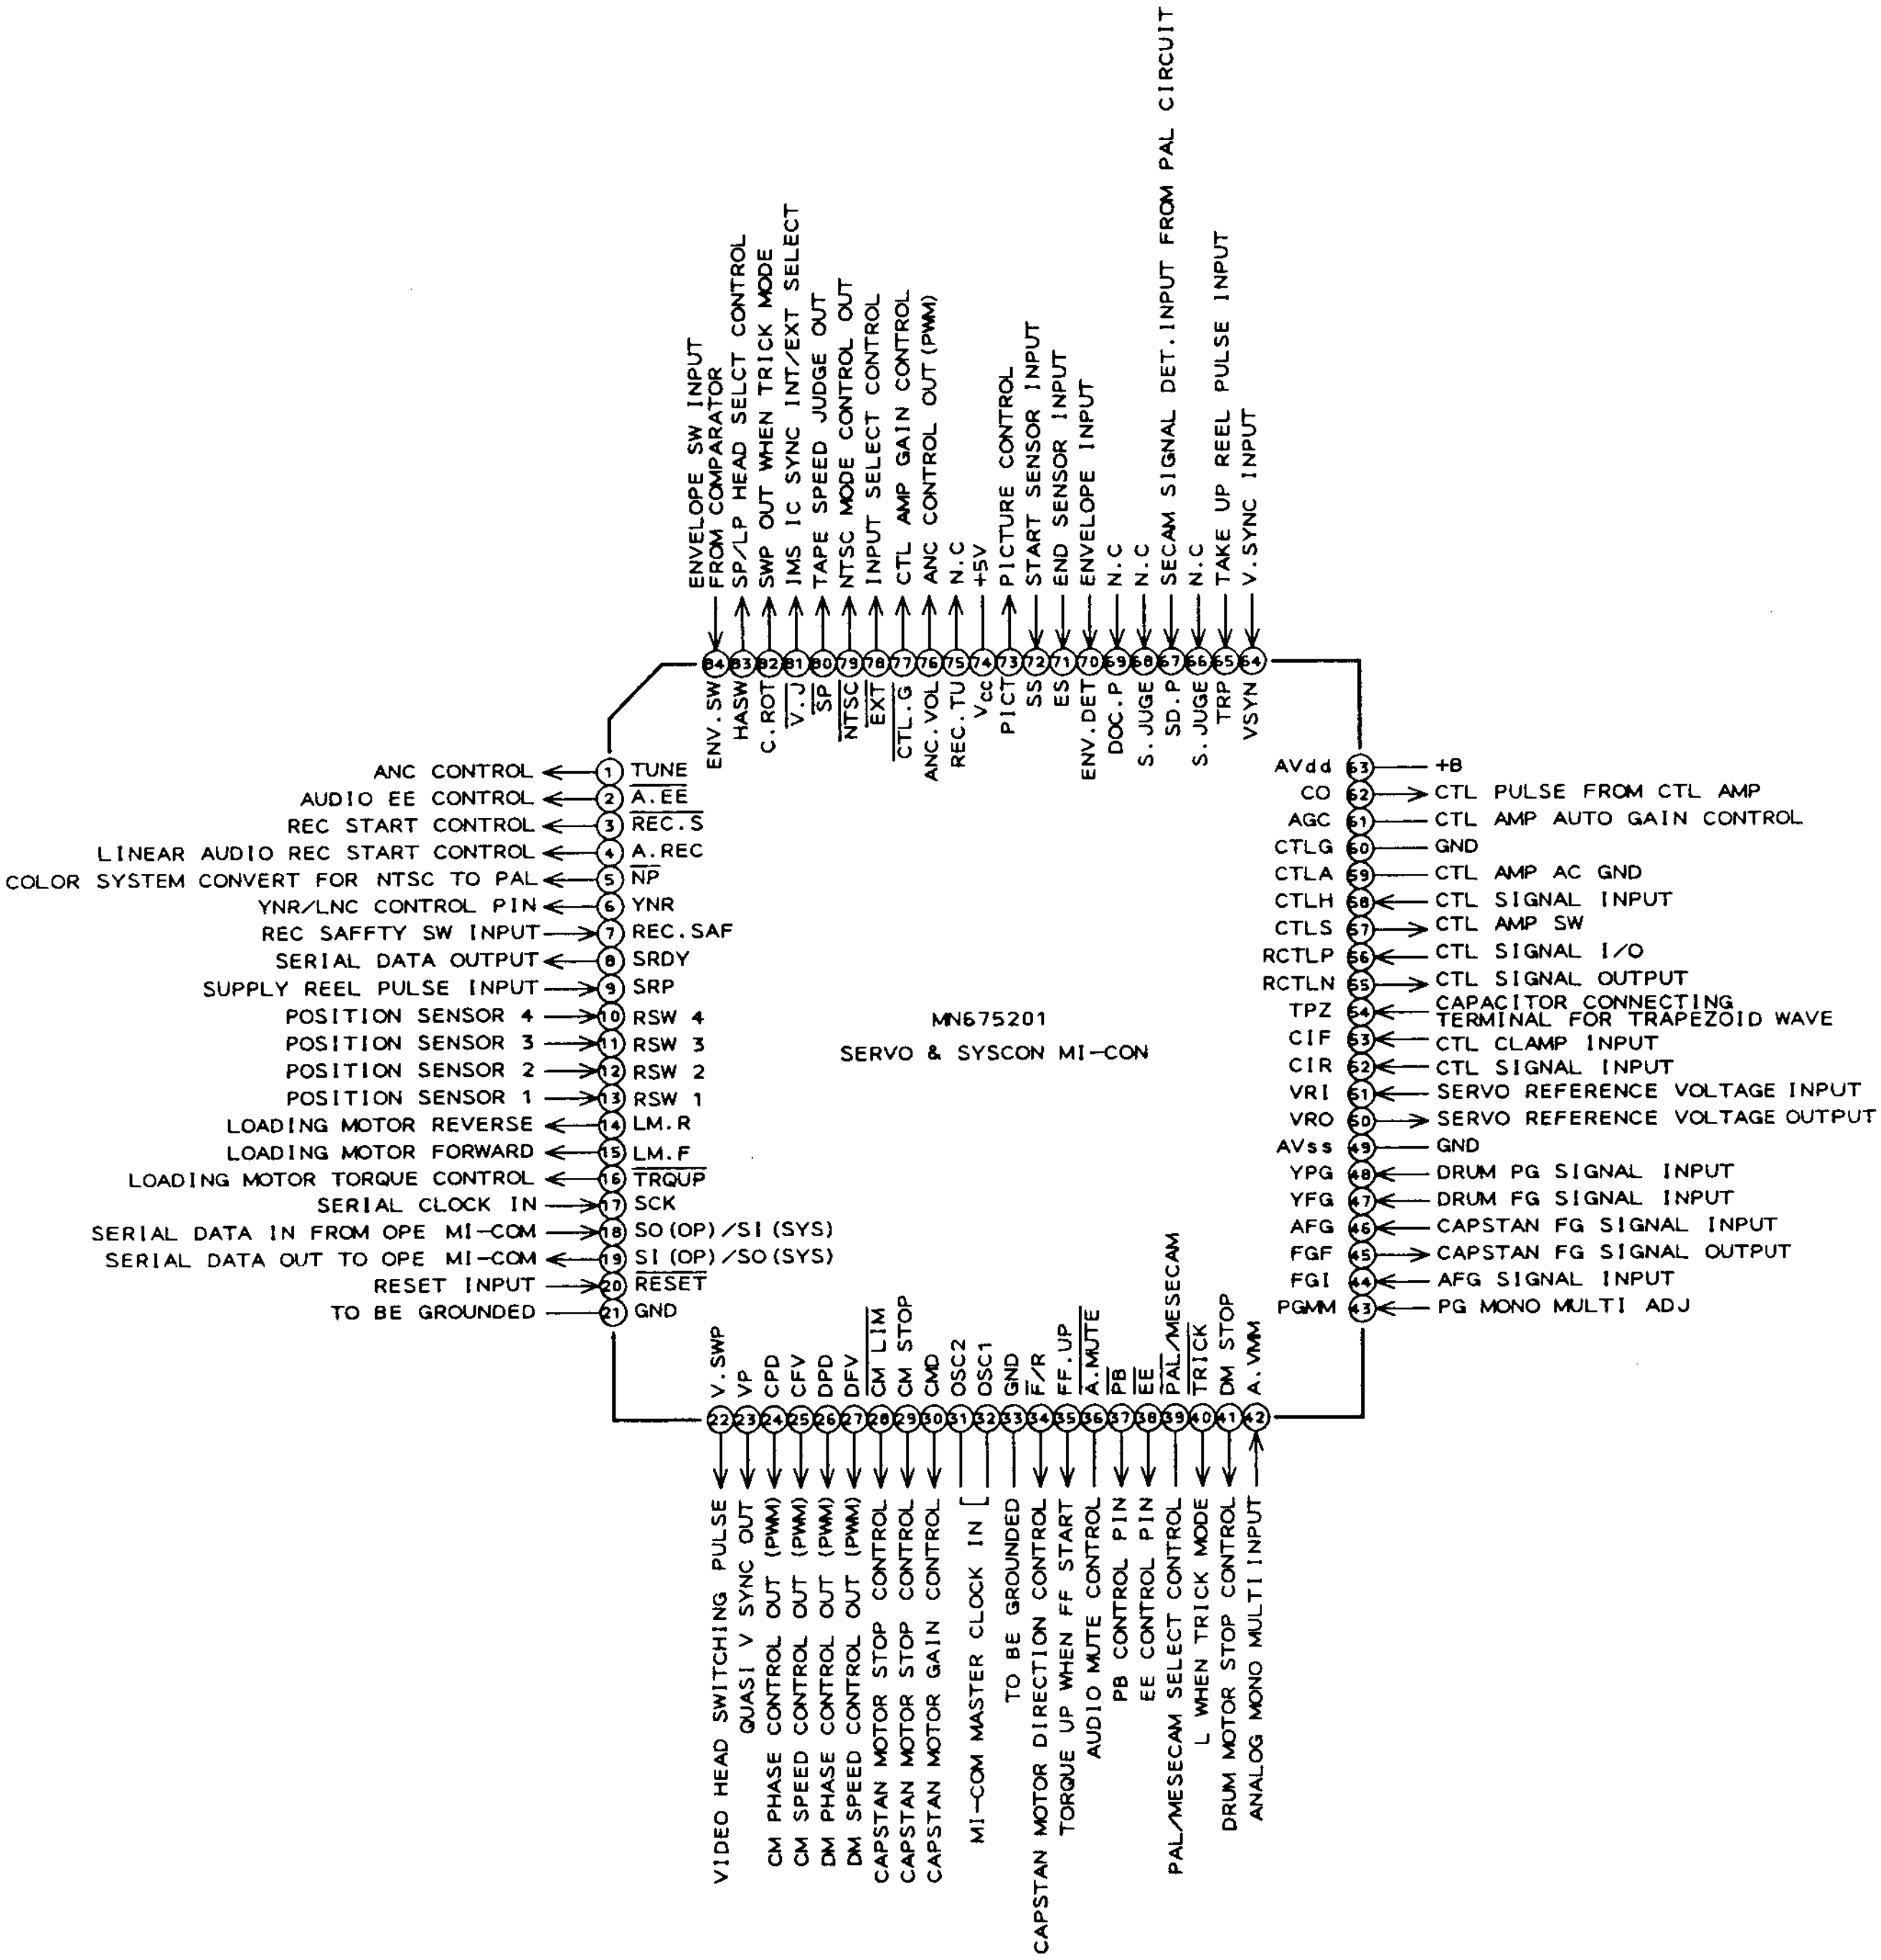
MN675201
SERVO & SYSCON MI-CON
ANC CONTROL ① TUNE
AUDIO EE CONTROL ② A.EE
REC START CONTROL ③ REC.S
LINEAR AUDIO REC START CONTROL ④ A.REC
COLOR SYSTEM CONVERT FOR NTSC TO PAL ⑤ NP
YNR/LNC CONTROL PIN ⑥ YNR
REC SAFFTY SW INPUT ⑦ REC.SAF
SERIAL DATA OUTPUT ⑧ SRDY
SUPPLY REEL PULSE INPUT ⑨ SRP
POSITION SENSOR 4 ⑩ RSW 4
POSITION SENSOR 3 ⑪ RSW 3
POSITION SENSOR 2 ⑫ RSW 2
POSITION SENSOR 1 ⑬ RSW 1
LOADING MOTOR REVERSE ⑭ LM.R
LOADING MOTOR FORWARD ⑮ LM.F
LOADING MOTOR TORQUE CONTROL ⑯ TRQUP
SERIAL CLOCK IN ⑰ SCK
SERIAL DATA IN FROM OPE MI-COM ⑱ SO(OP)/SI(SYS)
SERIAL DATA OUT TO OPE MI-COM ⑲ SI(OP)/SO(SYS)
RESET INPUT ⑳ RESET
TO BE GROUNDED ㉑ GND
V.SWP ㉒ VIDEO HEAD SWITCHING PULSE
VP ㉓ QUASI V SYNC OUT
CPD ㉔ CM PHASE CONTROL OUT (PWM)
CFV ㉕ CM SPEED CONTROL OUT (PWM)
DPD ㉖ DM PHASE CONTROL OUT (PWM)
DFV ㉗ DM SPEED CONTROL OUT (PWM)
CM LIM ㉘ CAPSTAN MOTOR STOP CONTROL
CM STOP ㉙ CAPSTAN MOTOR STOP CONTROL
CMG ㉚ CAPSTAN MOTOR GAIN CONTROL
OSC2 ㉛ OSC1 ㉜ MI-COM MASTER CLOCK IN
GND ㉝ TO BE GROUNDED
F/R ㉞ CAPSTAN MOTOR DIRECTION CONTROL
FF.UP ㉟ TORQUE UP WHEN FF START
A.MUTE ㊱ AUDIO MUTE CONTROL
PB ㊲ PB CONTROL PIN
EE ㊳ EE CONTROL PIN
PAL/MESECAM ㊴ PAL/MESECAM SELECT CONTROL
TRICK ㊵ L WHEN TRICK MODE
DM STOP ㊶ DRUM MOTOR STOP CONTROL
A.VMM ㊷ ANALOG MONO MULTI INPUT
PGMM ㊸ PG MONO MULTI ADJ
FGI ㊹ AFG SIGNAL INPUT
FGF ㊺ CAPSTAN FG SIGNAL OUTPUT
AFG ㊻ CAPSTAN FG SIGNAL INPUT
YFG ㊼ DRUM FG SIGNAL INPUT
YPG ㊽ DRUM PG SIGNAL INPUT
AVss ㊾ GND
VRO ㊿ SERVO REFERENCE VOLTAGE OUTPUT
VRI (51) SERVO REFERENCE VOLTAGE INPUT
CIR (52) CTL SIGNAL INPUT
CIF (53) CTL CLAMP INPUT
TPZ (54) CAPACITOR CONNECTING TERMINAL FOR TRAPEZOID WAVE
RCTLN (55) CTL SIGNAL OUTPUT
RCTLP (56) CTL SIGNAL I/O
CTLS (57) CTL AMP SW
CTLH (58) CTL SIGNAL INPUT
CTLA (59) CTL AMP AC GND
CTLG (60) GND
AGC (61) CTL AMP AUTO GAIN CONTROL
CO (62) CTL PULSE FROM CTL AMP
AVdd (63) +B
VSYN (64) V.SYNC INPUT
TRP (65) TAKE UP REEL PULSE INPUT
S.JUGE (66) N.C
SD.P (67) SECAM SIGNAL DET.INPUT FROM PAL CIRCUIT
S.JUGE (68) N.C
DOC.P (69) N.C
ENV.DET (70) ENVELOPE INPUT
ES (71) END SENSOR INPUT
SS (72) START SENSOR INPUT
PICT (73) PICTURE CONTROL
Vcc (74) +5V
REC.TU (75) N.C
ANC.VOL (76) ANC CONTROL OUT (PWM)
CTL.G (77) CTL AMP GAIN CONTROL
EXT (78) INPUT SELECT CONTROL
NTSC (79) NTSC MODE CONTROL OUT
SP (80) TAPE SPEED JUDGE OUT
V.J (81) IMS IC SYNC INT/EXT SELECT
C.ROT (82) SWP OUT WHEN TRICK MODE
HASW (83) SP/LP HEAD SELCT CONTROL
ENV.SW (84) ENVELOPE SW INPUT FROM COMPARATOR

MV1815 (TELETEXT DECODER FOR 625 LINE OPERATION)

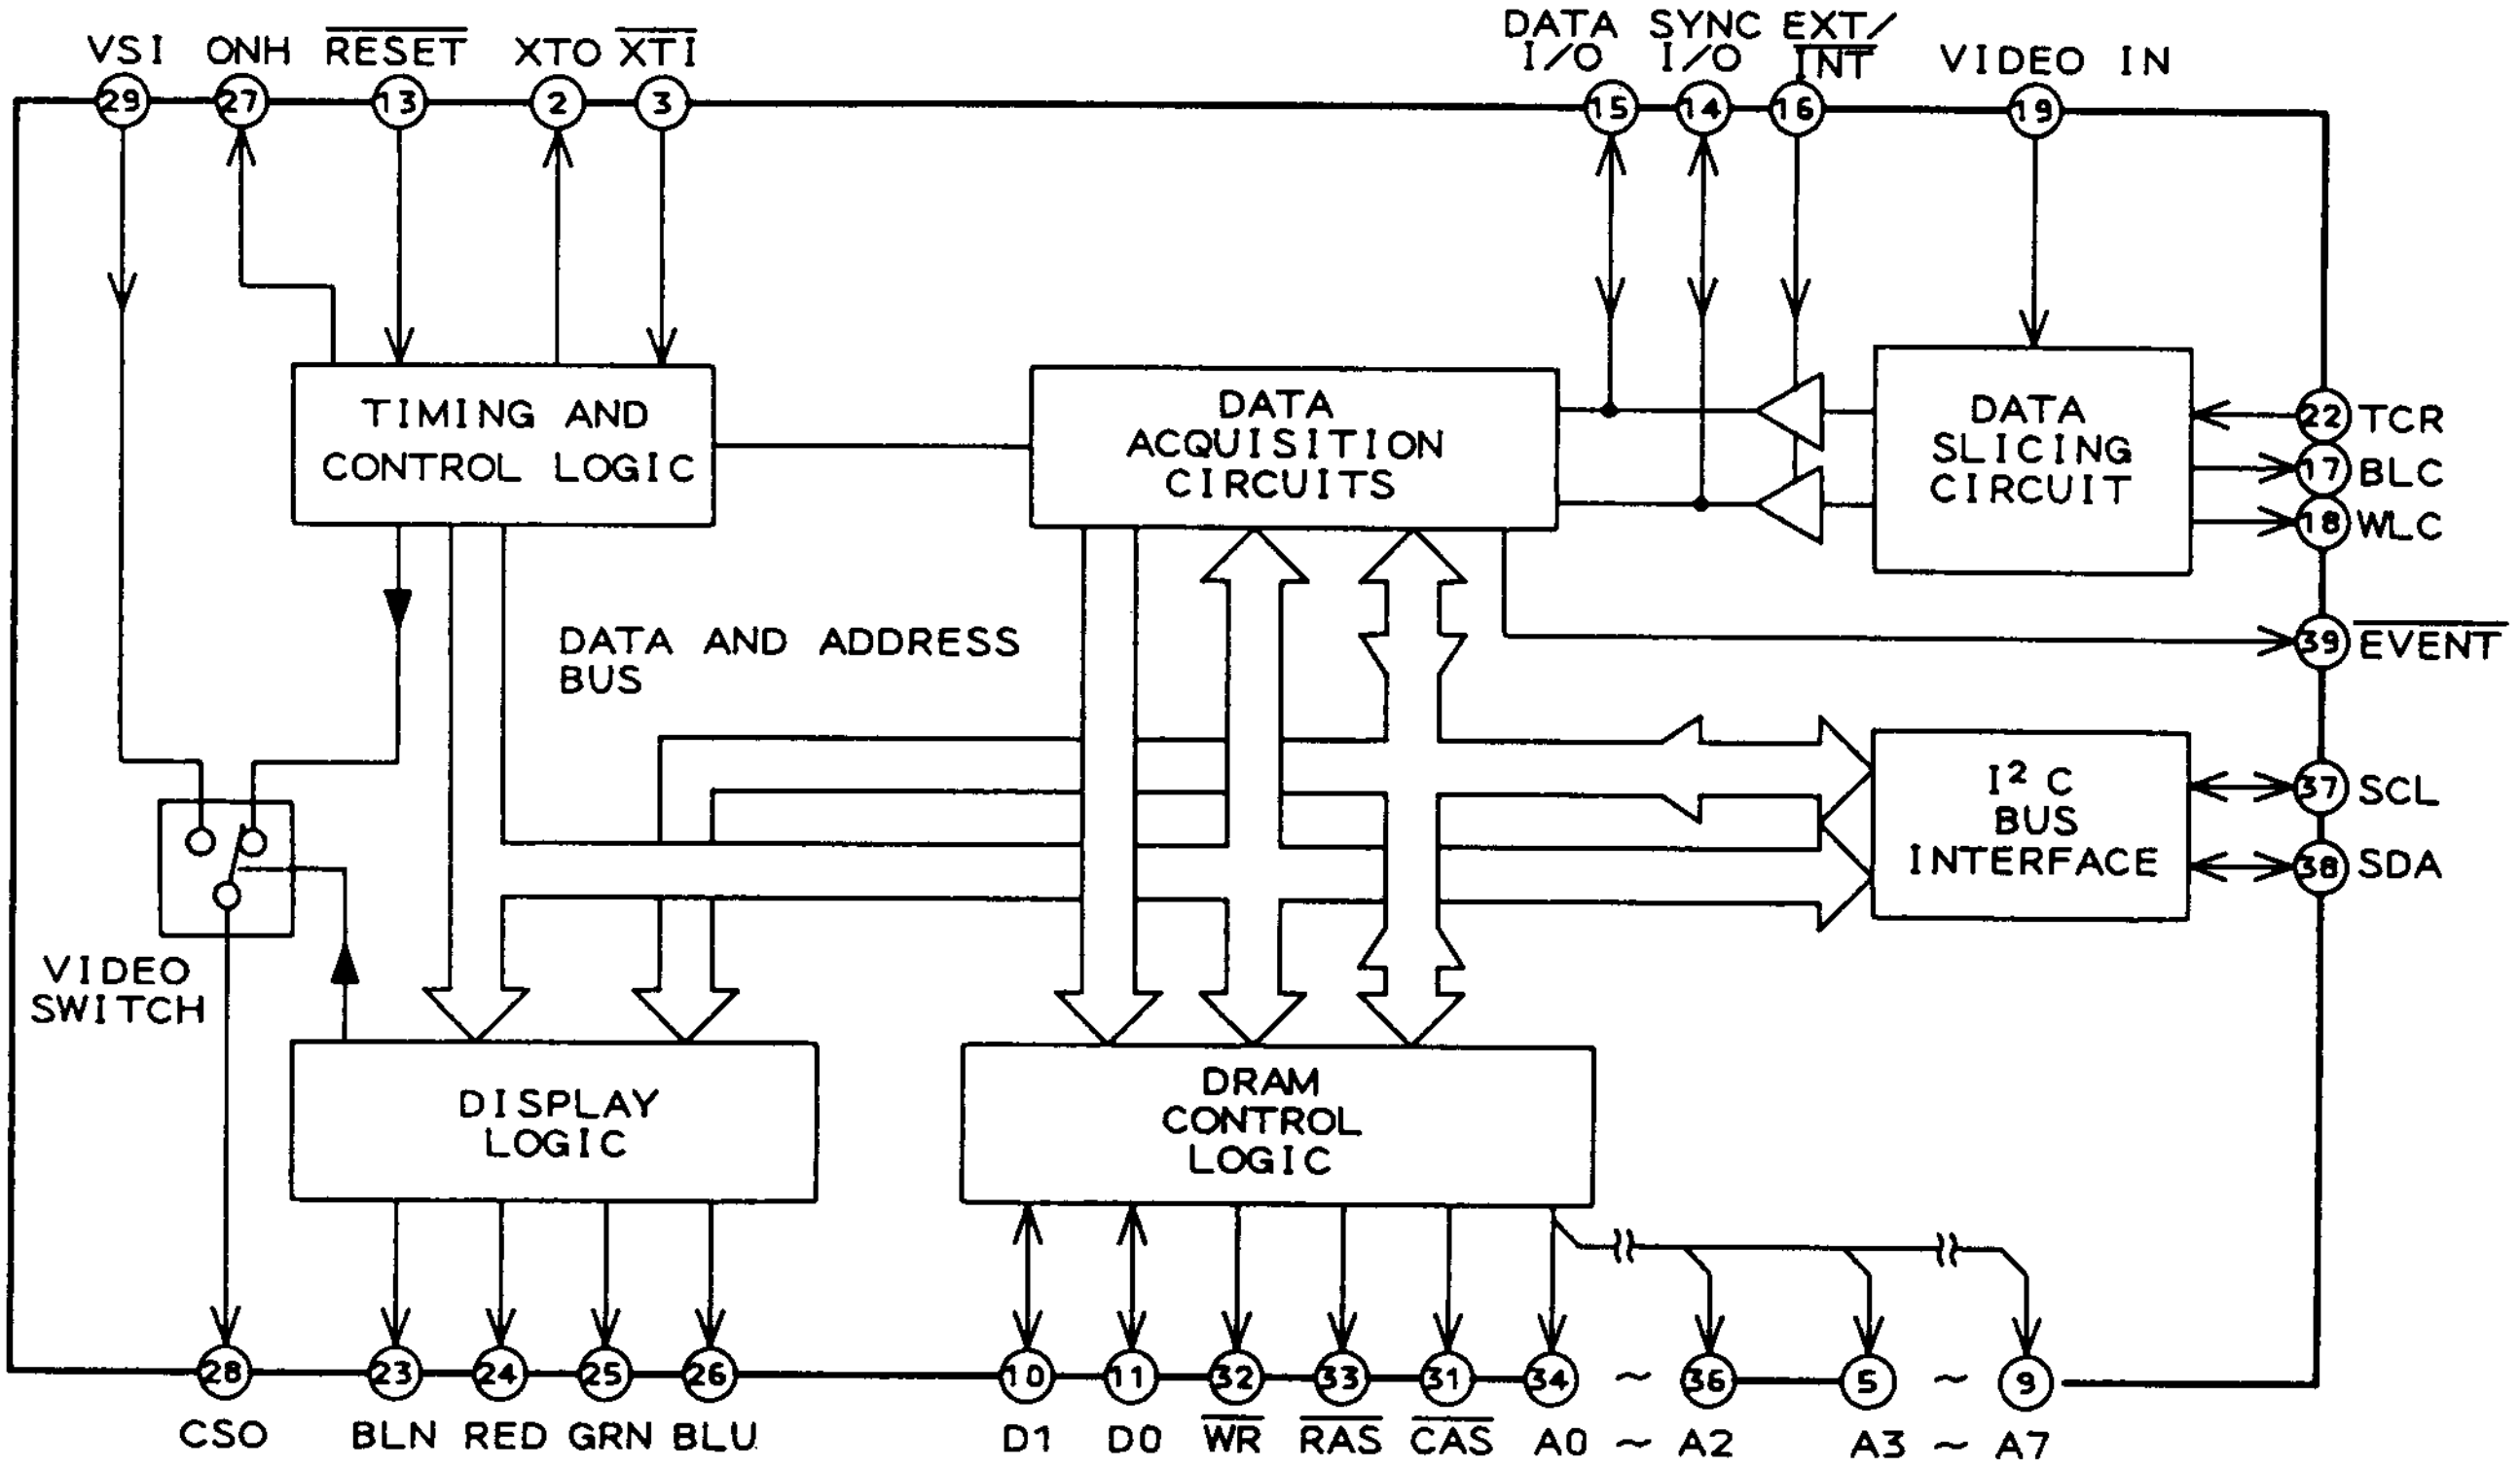
VSI
ONH
RESET
XTO
XTI
DATA I/O
SYNC I/O
EXT/INT
VIDEO IN
29
27
13
2
3
15
14
16
19
TIMING AND CONTROL LOGIC
DATA ACQUISITION CIRCUITS
DATA SLICING CIRCUIT
22 TCR
17 BLC
18 WLC
39 EVENT
DATA AND ADDRESS BUS
I²C BUS INTERFACE
37 SCL
38 SDA
VIDEO SWITCH
DISPLAY LOGIC
DRAM CONTROL LOGIC
28
23
24
25
26
10
11
32
33
31
34
36
5
9
CSO
BLN
RED
GRN
BLU
D1
D0
WR
RAS
CAS
A0 ~ A2
A3 ~ A7

SAA4700 (VPS DATALINE PROCESSOR)

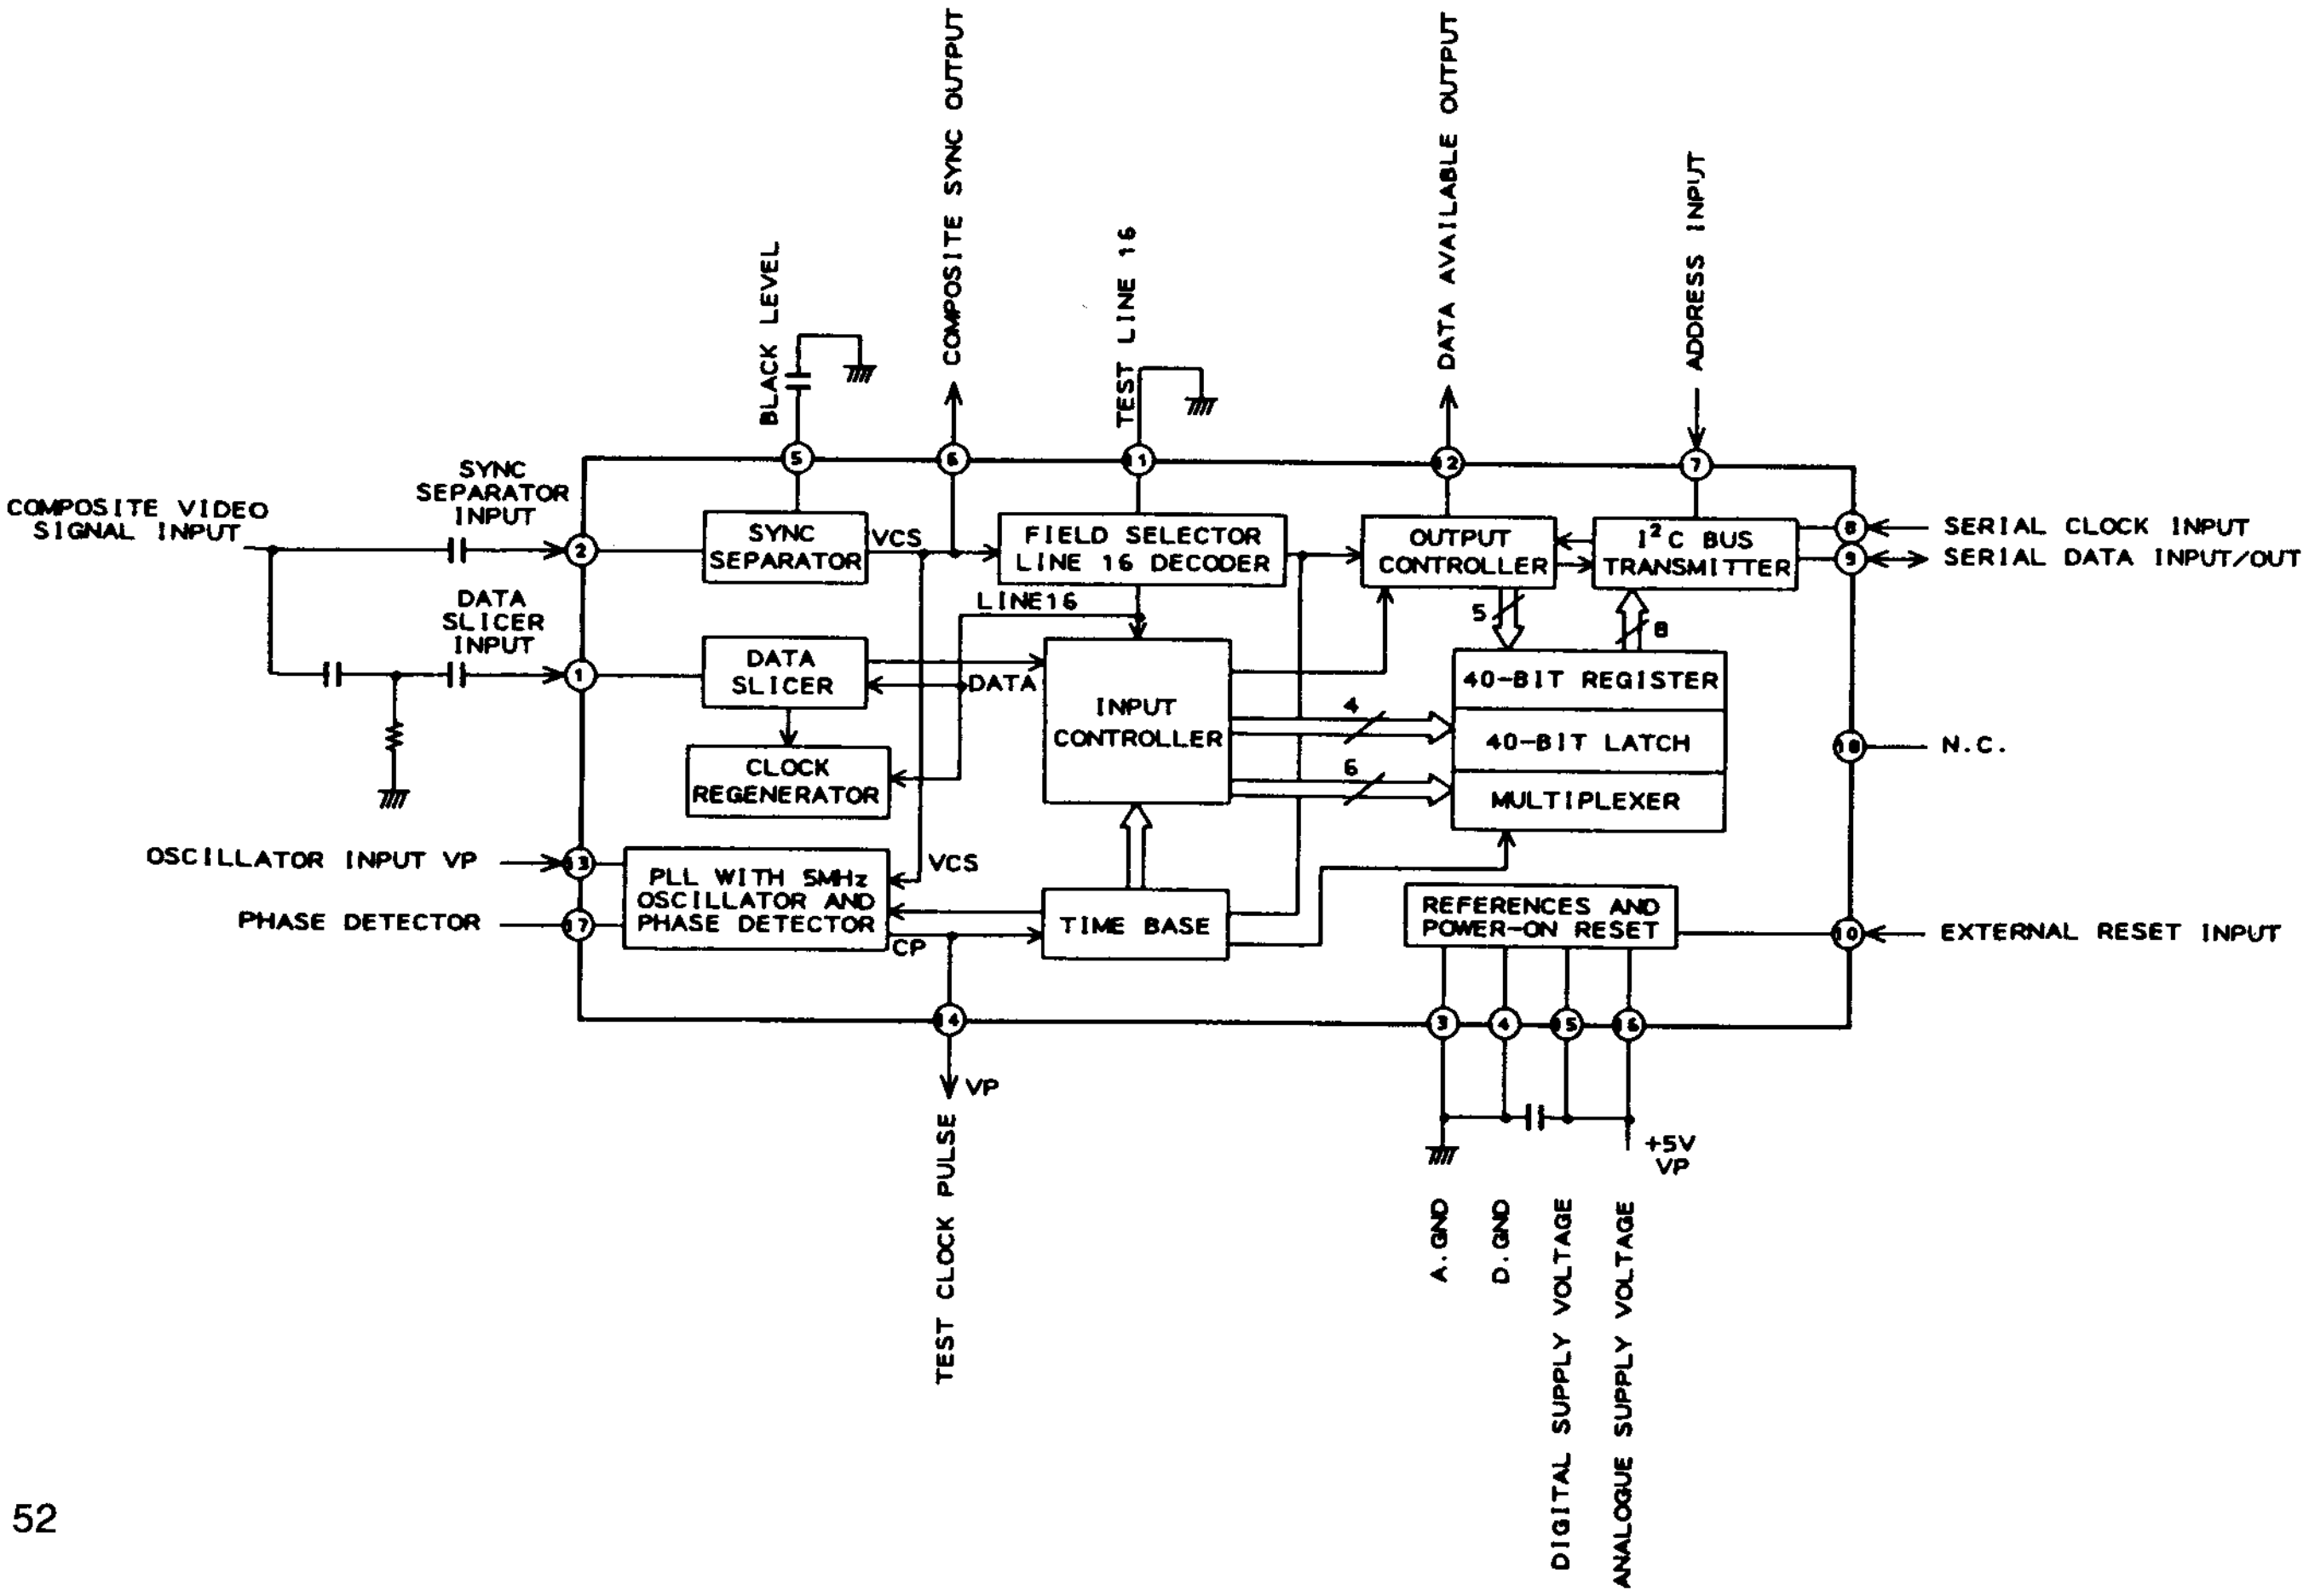
BLACK LEVEL
COMPOSITE SYNC OUTPUT
TEST LINE 16
DATA AVAILABLE OUTPUT
ADDRESS INPUT
5
6
11
12
7
COMPOSITE VIDEO SIGNAL INPUT
SYNC SEPARATOR INPUT
DATA SLICER INPUT
2
1
SYNC SEPARATOR
VCS
FIELD SELECTOR LINE 16 DECODER
OUTPUT CONTROLLER
I²C BUS TRANSMITTER
8
9
SERIAL CLOCK INPUT
SERIAL DATA INPUT/OUT
LINE16
DATA SLICER
DATA
INPUT CONTROLLER
5
8
40-BIT REGISTER
4
40-BIT LATCH
6
MULTIPLEXER
18
N.C.
CLOCK REGENERATOR
OSCILLATOR INPUT VP
PHASE DETECTOR
13
17
PLL WITH 5MHz OSCILLATOR AND PHASE DETECTOR
VCS
CP
TIME BASE
REFERENCES AND POWER-ON RESET
10
EXTERNAL RESET INPUT
14
3
4
15
16
VP
TEST CLOCK PULSE
+5V VP
A.GND
D.GND
DIGITAL SUPPLY VOLTAGE
ANALOGUE SUPPLY VOLTAGE

µPD75217ACW (OPERATION MI-COM) (OPERATION (A) ONLY)

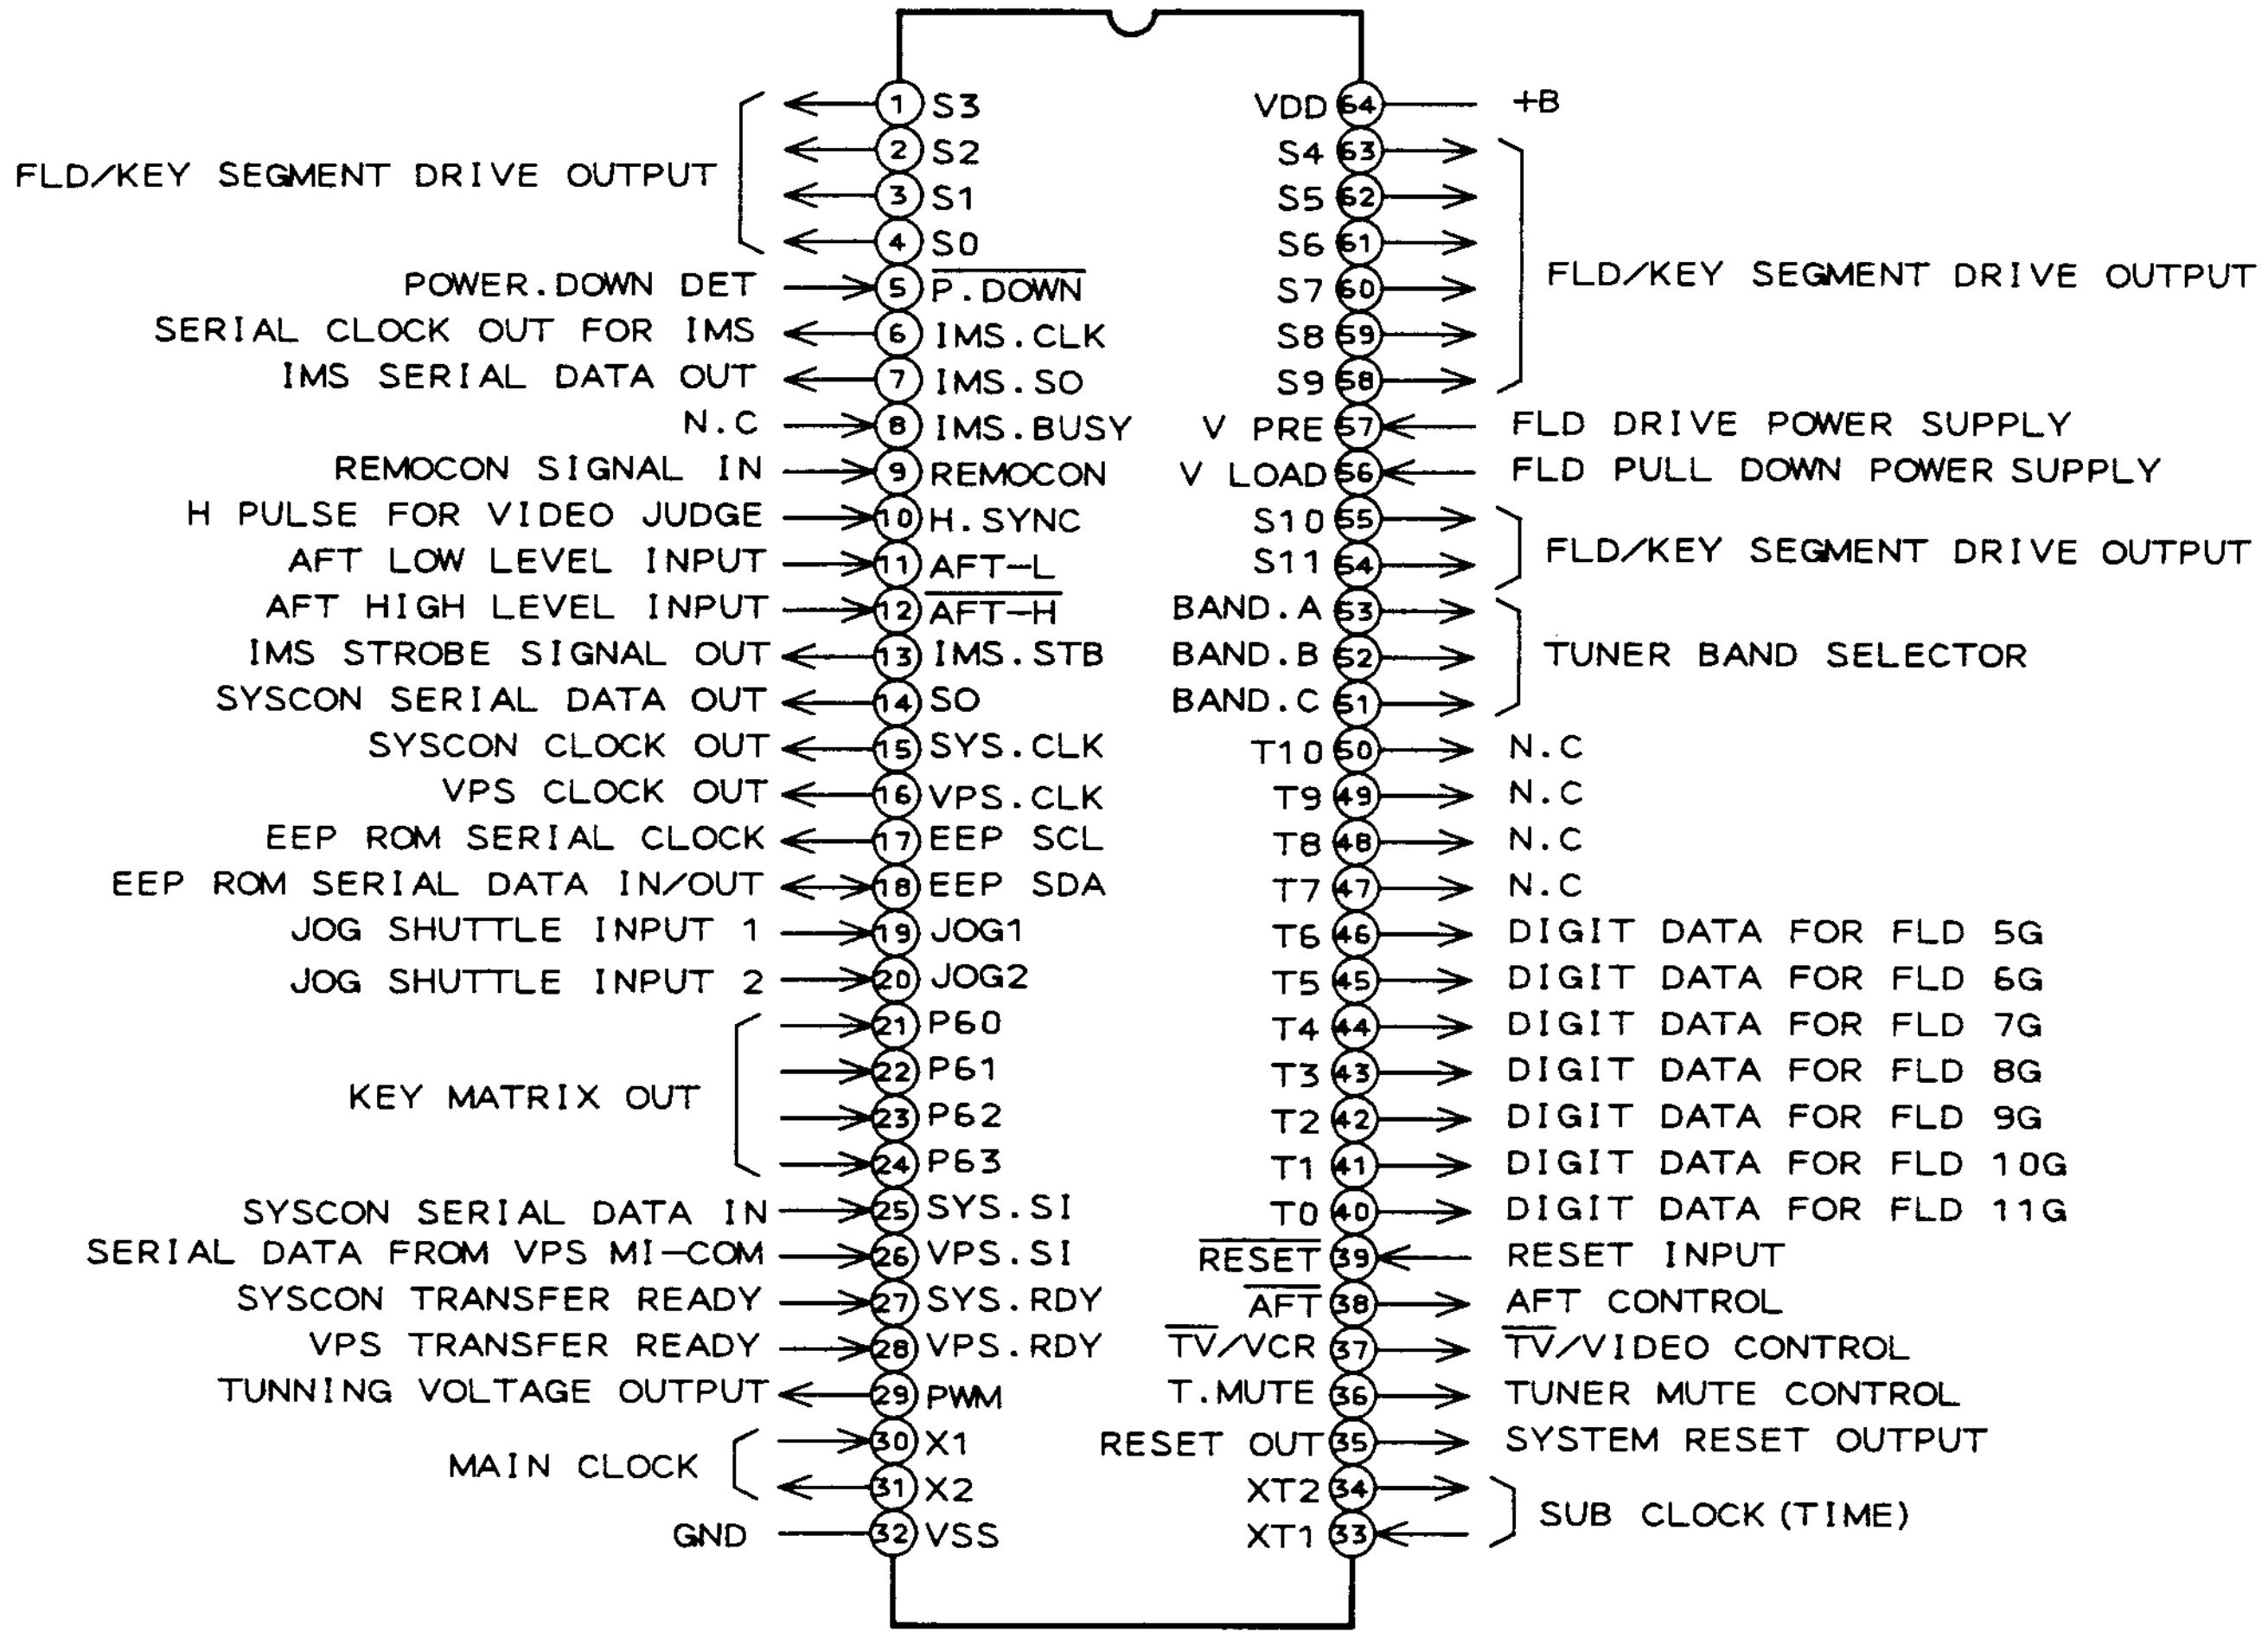
FLD/KEY SEGMENT DRIVE OUTPUT
1 S3
2 S2
3 S1
4 S0
POWER.DOWN DET 5 P.DOWN
SERIAL CLOCK OUT FOR IMS 6 IMS.CLK
IMS SERIAL DATA OUT 7 IMS.SO
N.C 8 IMS.BUSY
REMOCON SIGNAL IN 9 REMOCON
H PULSE FOR VIDEO JUDGE 10 H.SYNC
AFT LOW LEVEL INPUT 11 AFT-L
AFT HIGH LEVEL INPUT 12 AFT-H
IMS STROBE SIGNAL OUT 13 IMS.STB
SYSCON SERIAL DATA OUT 14 SO
SYSCON CLOCK OUT 15 SYS.CLK
VPS CLOCK OUT 16 VPS.CLK
EEP ROM SERIAL CLOCK 17 EEP SCL
EEP ROM SERIAL DATA IN/OUT 18 EEP SDA
JOG SHUTTLE INPUT 1 19 JOG1
JOG SHUTTLE INPUT 2 20 JOG2
KEY MATRIX OUT
21 P60
22 P61
23 P62
24 P63
SYSCON SERIAL DATA IN 25 SYS.SI
SERIAL DATA FROM VPS MI-COM 26 VPS.SI
SYSCON TRANSFER READY 27 SYS.RDY
VPS TRANSFER READY 28 VPS.RDY
TUNNING VOLTAGE OUTPUT 29 PWM
MAIN CLOCK
30 X1
31 X2
GND 32 VSS
VDD 64 +B
S4 63
S5 62
S6 61
S7 60
S8 59
S9 58
FLD/KEY SEGMENT DRIVE OUTPUT
V PRE 57 FLD DRIVE POWER SUPPLY
V LOAD 56 FLD PULL DOWN POWER SUPPLY
S10 55
S11 54
FLD/KEY SEGMENT DRIVE OUTPUT
BAND.A 53
BAND.B 52
BAND.C 51
TUNER BAND SELECTOR
T10 50 N.C
T9 49 N.C
T8 48 N.C
T7 47 N.C
T6 46 DIGIT DATA FOR FLD 5G
T5 45 DIGIT DATA FOR FLD 6G
T4 44 DIGIT DATA FOR FLD 7G
T3 43 DIGIT DATA FOR FLD 8G
T2 42 DIGIT DATA FOR FLD 9G
T1 41 DIGIT DATA FOR FLD 10G
T0 40 DIGIT DATA FOR FLD 11G
RESET 39 RESET INPUT
AFT 38 AFT CONTROL
TV/VCR 37 TV/VIDEO CONTROL
T.MUTE 36 TUNER MUTE CONTROL
RESET OUT 35 SYSTEM RESET OUTPUT
XT2 34
XT1 33
SUB CLOCK (TIME)

µPD75217ACW (OPERATION MI-COM) (OPERATION (G) ONLY)

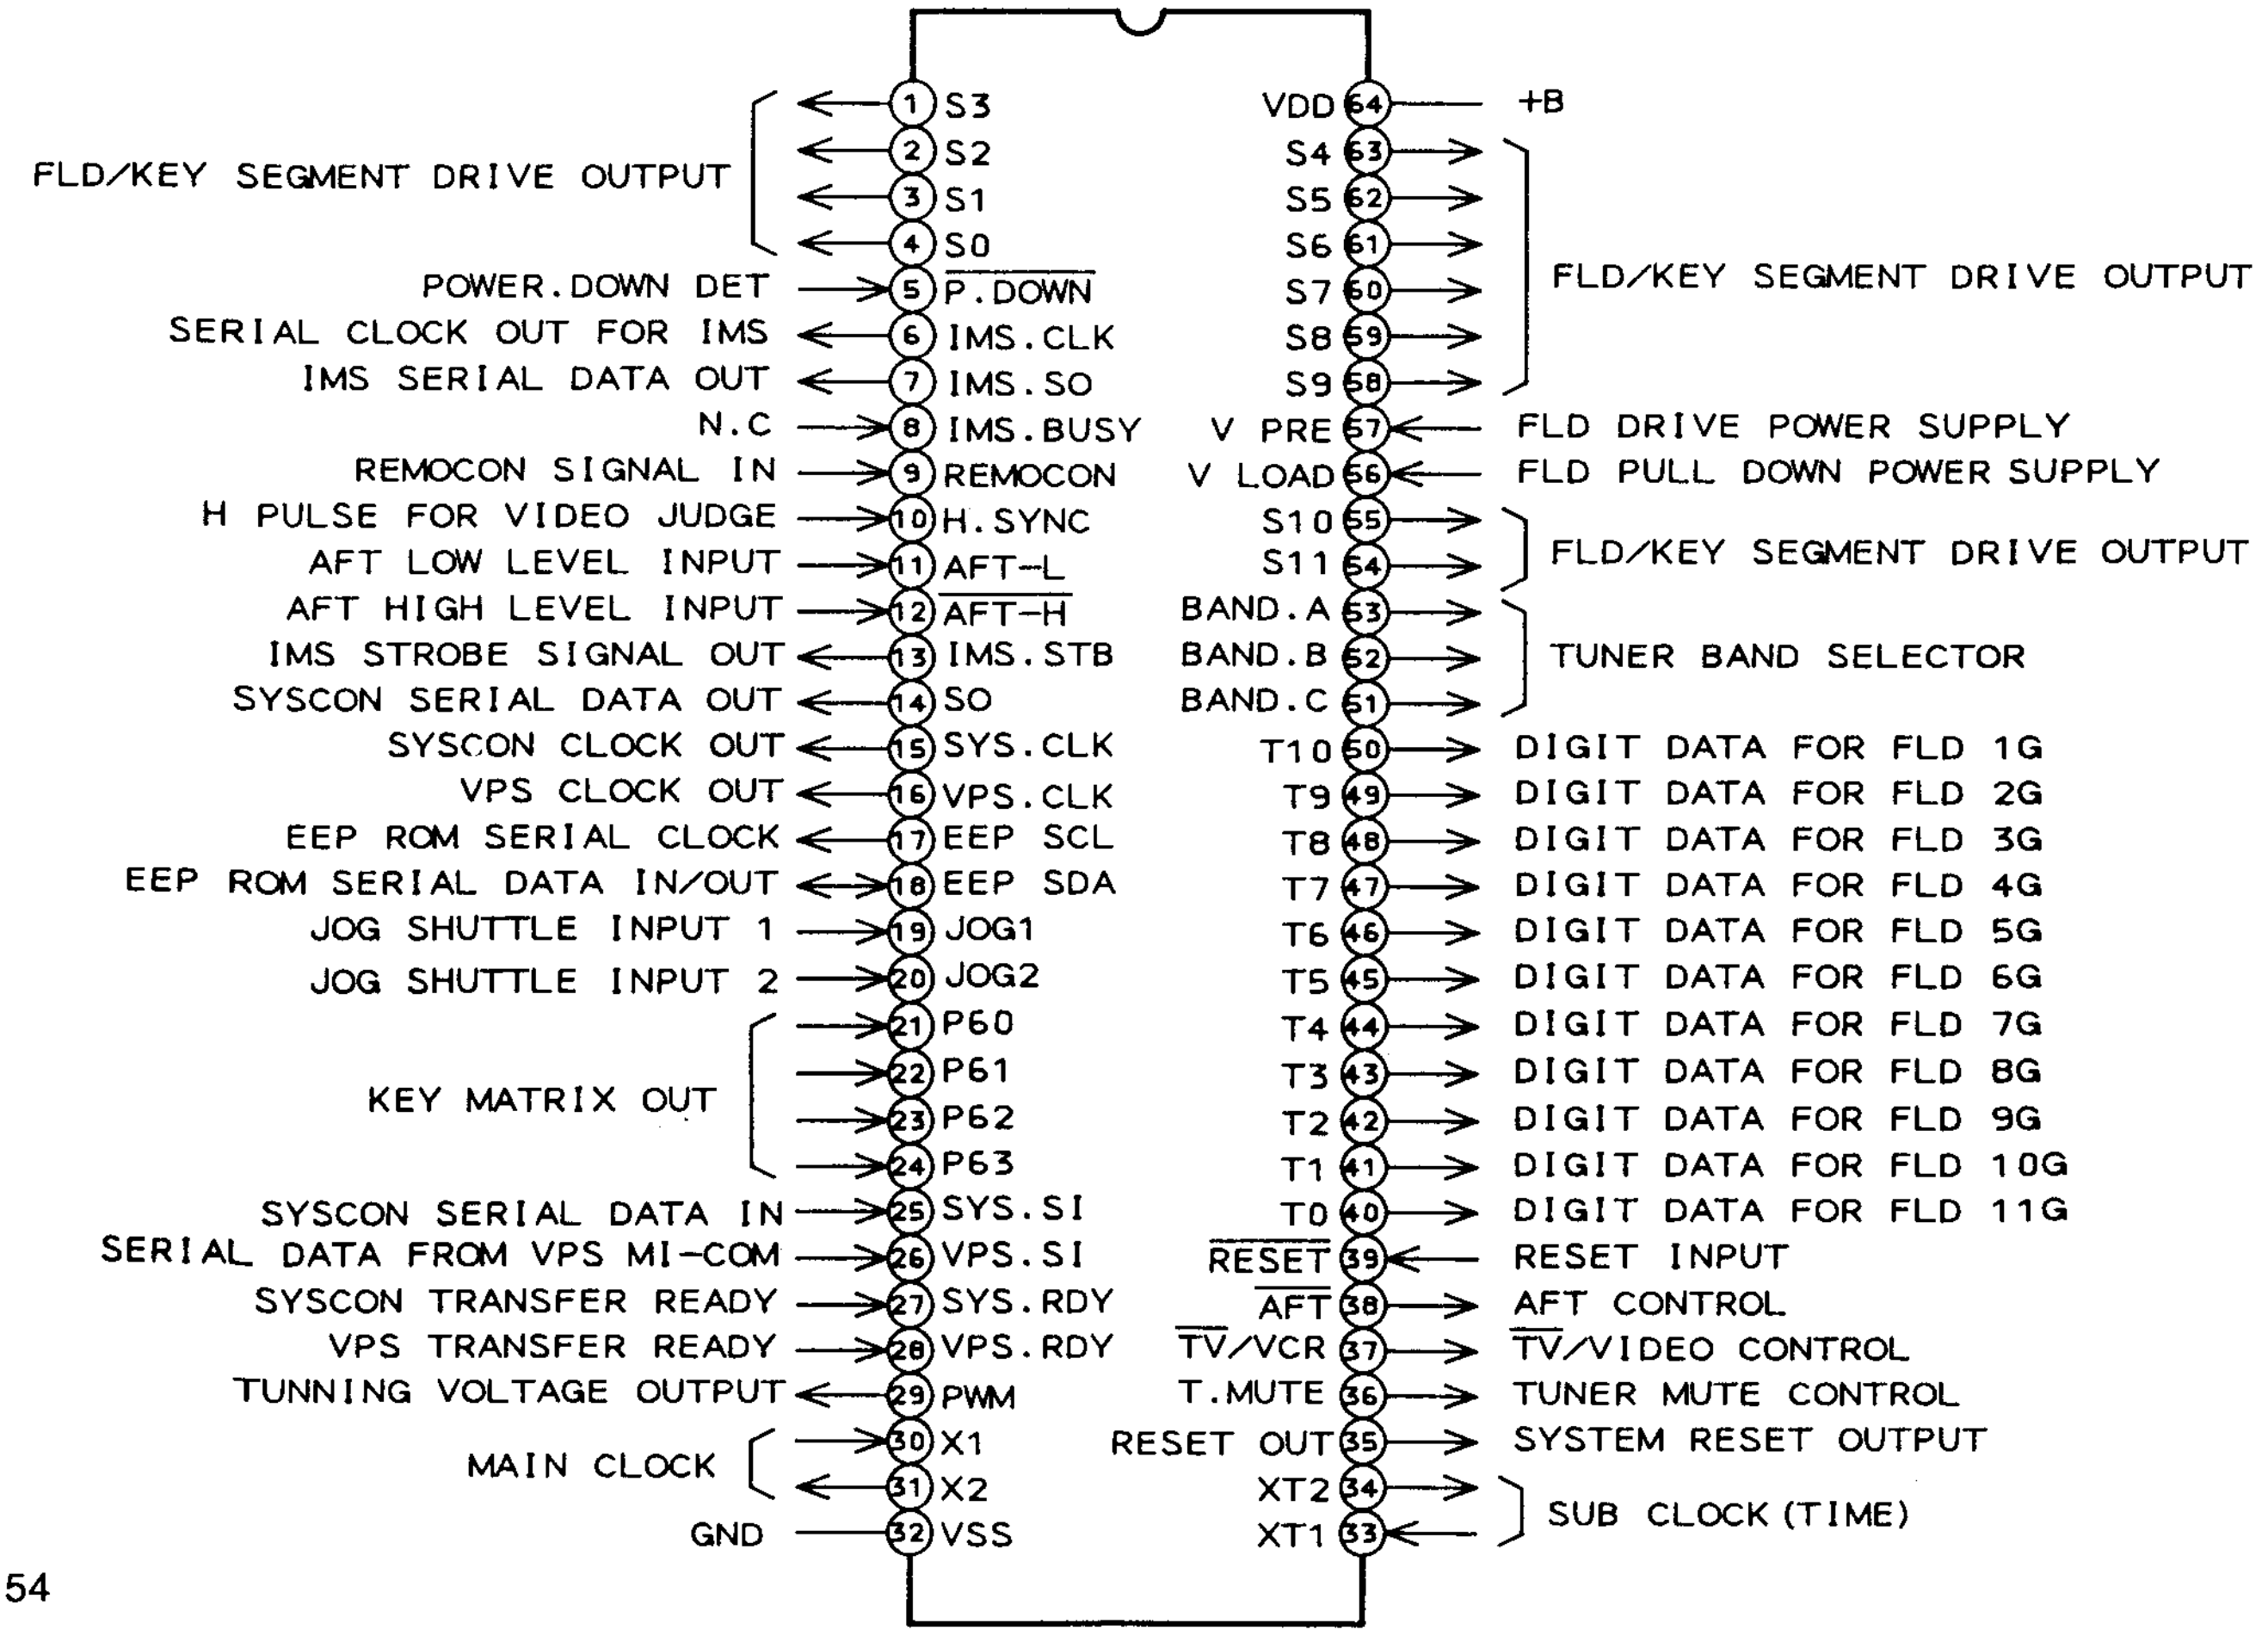
FLD/KEY SEGMENT DRIVE OUTPUT
1 S3
2 S2
3 S1
4 S0
POWER.DOWN DET 5 P.DOWN
SERIAL CLOCK OUT FOR IMS 6 IMS.CLK
IMS SERIAL DATA OUT 7 IMS.SO
N.C 8 IMS.BUSY
REMOCON SIGNAL IN 9 REMOCON
H PULSE FOR VIDEO JUDGE 10 H.SYNC
AFT LOW LEVEL INPUT 11 AFT-L
AFT HIGH LEVEL INPUT 12 AFT-H
IMS STROBE SIGNAL OUT 13 IMS.STB
SYSCON SERIAL DATA OUT 14 SO
SYSCON CLOCK OUT 15 SYS.CLK
VPS CLOCK OUT 16 VPS.CLK
EEP ROM SERIAL CLOCK 17 EEP SCL
EEP ROM SERIAL DATA IN/OUT 18 EEP SDA
JOG SHUTTLE INPUT 1 19 JOG1
JOG SHUTTLE INPUT 2 20 JOG2
KEY MATRIX OUT
21 P60
22 P61
23 P62
24 P63
SYSCON SERIAL DATA IN 25 SYS.SI
SERIAL DATA FROM VPS MI-COM 26 VPS.SI
SYSCON TRANSFER READY 27 SYS.RDY
VPS TRANSFER READY 28 VPS.RDY
TUNNING VOLTAGE OUTPUT 29 PWM
MAIN CLOCK
30 X1
31 X2
GND 32 VSS
VDD 64 +B
S4 63
S5 62
S6 61
S7 60
S8 59
S9 58
FLD/KEY SEGMENT DRIVE OUTPUT
V PRE 57 FLD DRIVE POWER SUPPLY
V LOAD 56 FLD PULL DOWN POWER SUPPLY
S10 55
S11 54
FLD/KEY SEGMENT DRIVE OUTPUT
BAND.A 53
BAND.B 52
BAND.C 51
TUNER BAND SELECTOR
T10 50 DIGIT DATA FOR FLD 1G
T9 49 DIGIT DATA FOR FLD 2G
T8 48 DIGIT DATA FOR FLD 3G
T7 47 DIGIT DATA FOR FLD 4G
T6 46 DIGIT DATA FOR FLD 5G
T5 45 DIGIT DATA FOR FLD 6G
T4 44 DIGIT DATA FOR FLD 7G
T3 43 DIGIT DATA FOR FLD 8G
T2 42 DIGIT DATA FOR FLD 9G
T1 41 DIGIT DATA FOR FLD 10G
T0 40 DIGIT DATA FOR FLD 11G
RESET 39 RESET INPUT
AFT 38 AFT CONTROL
TV/VCR 37 TV/VIDEO CONTROL
T.MUTE 36 TUNER MUTE CONTROL
RESET OUT 35 SYSTEM RESET OUTPUT
XT2 34
XT1 33
SUB CLOCK (TIME)

V53C464A (64K ×4 BIT D-RAM)

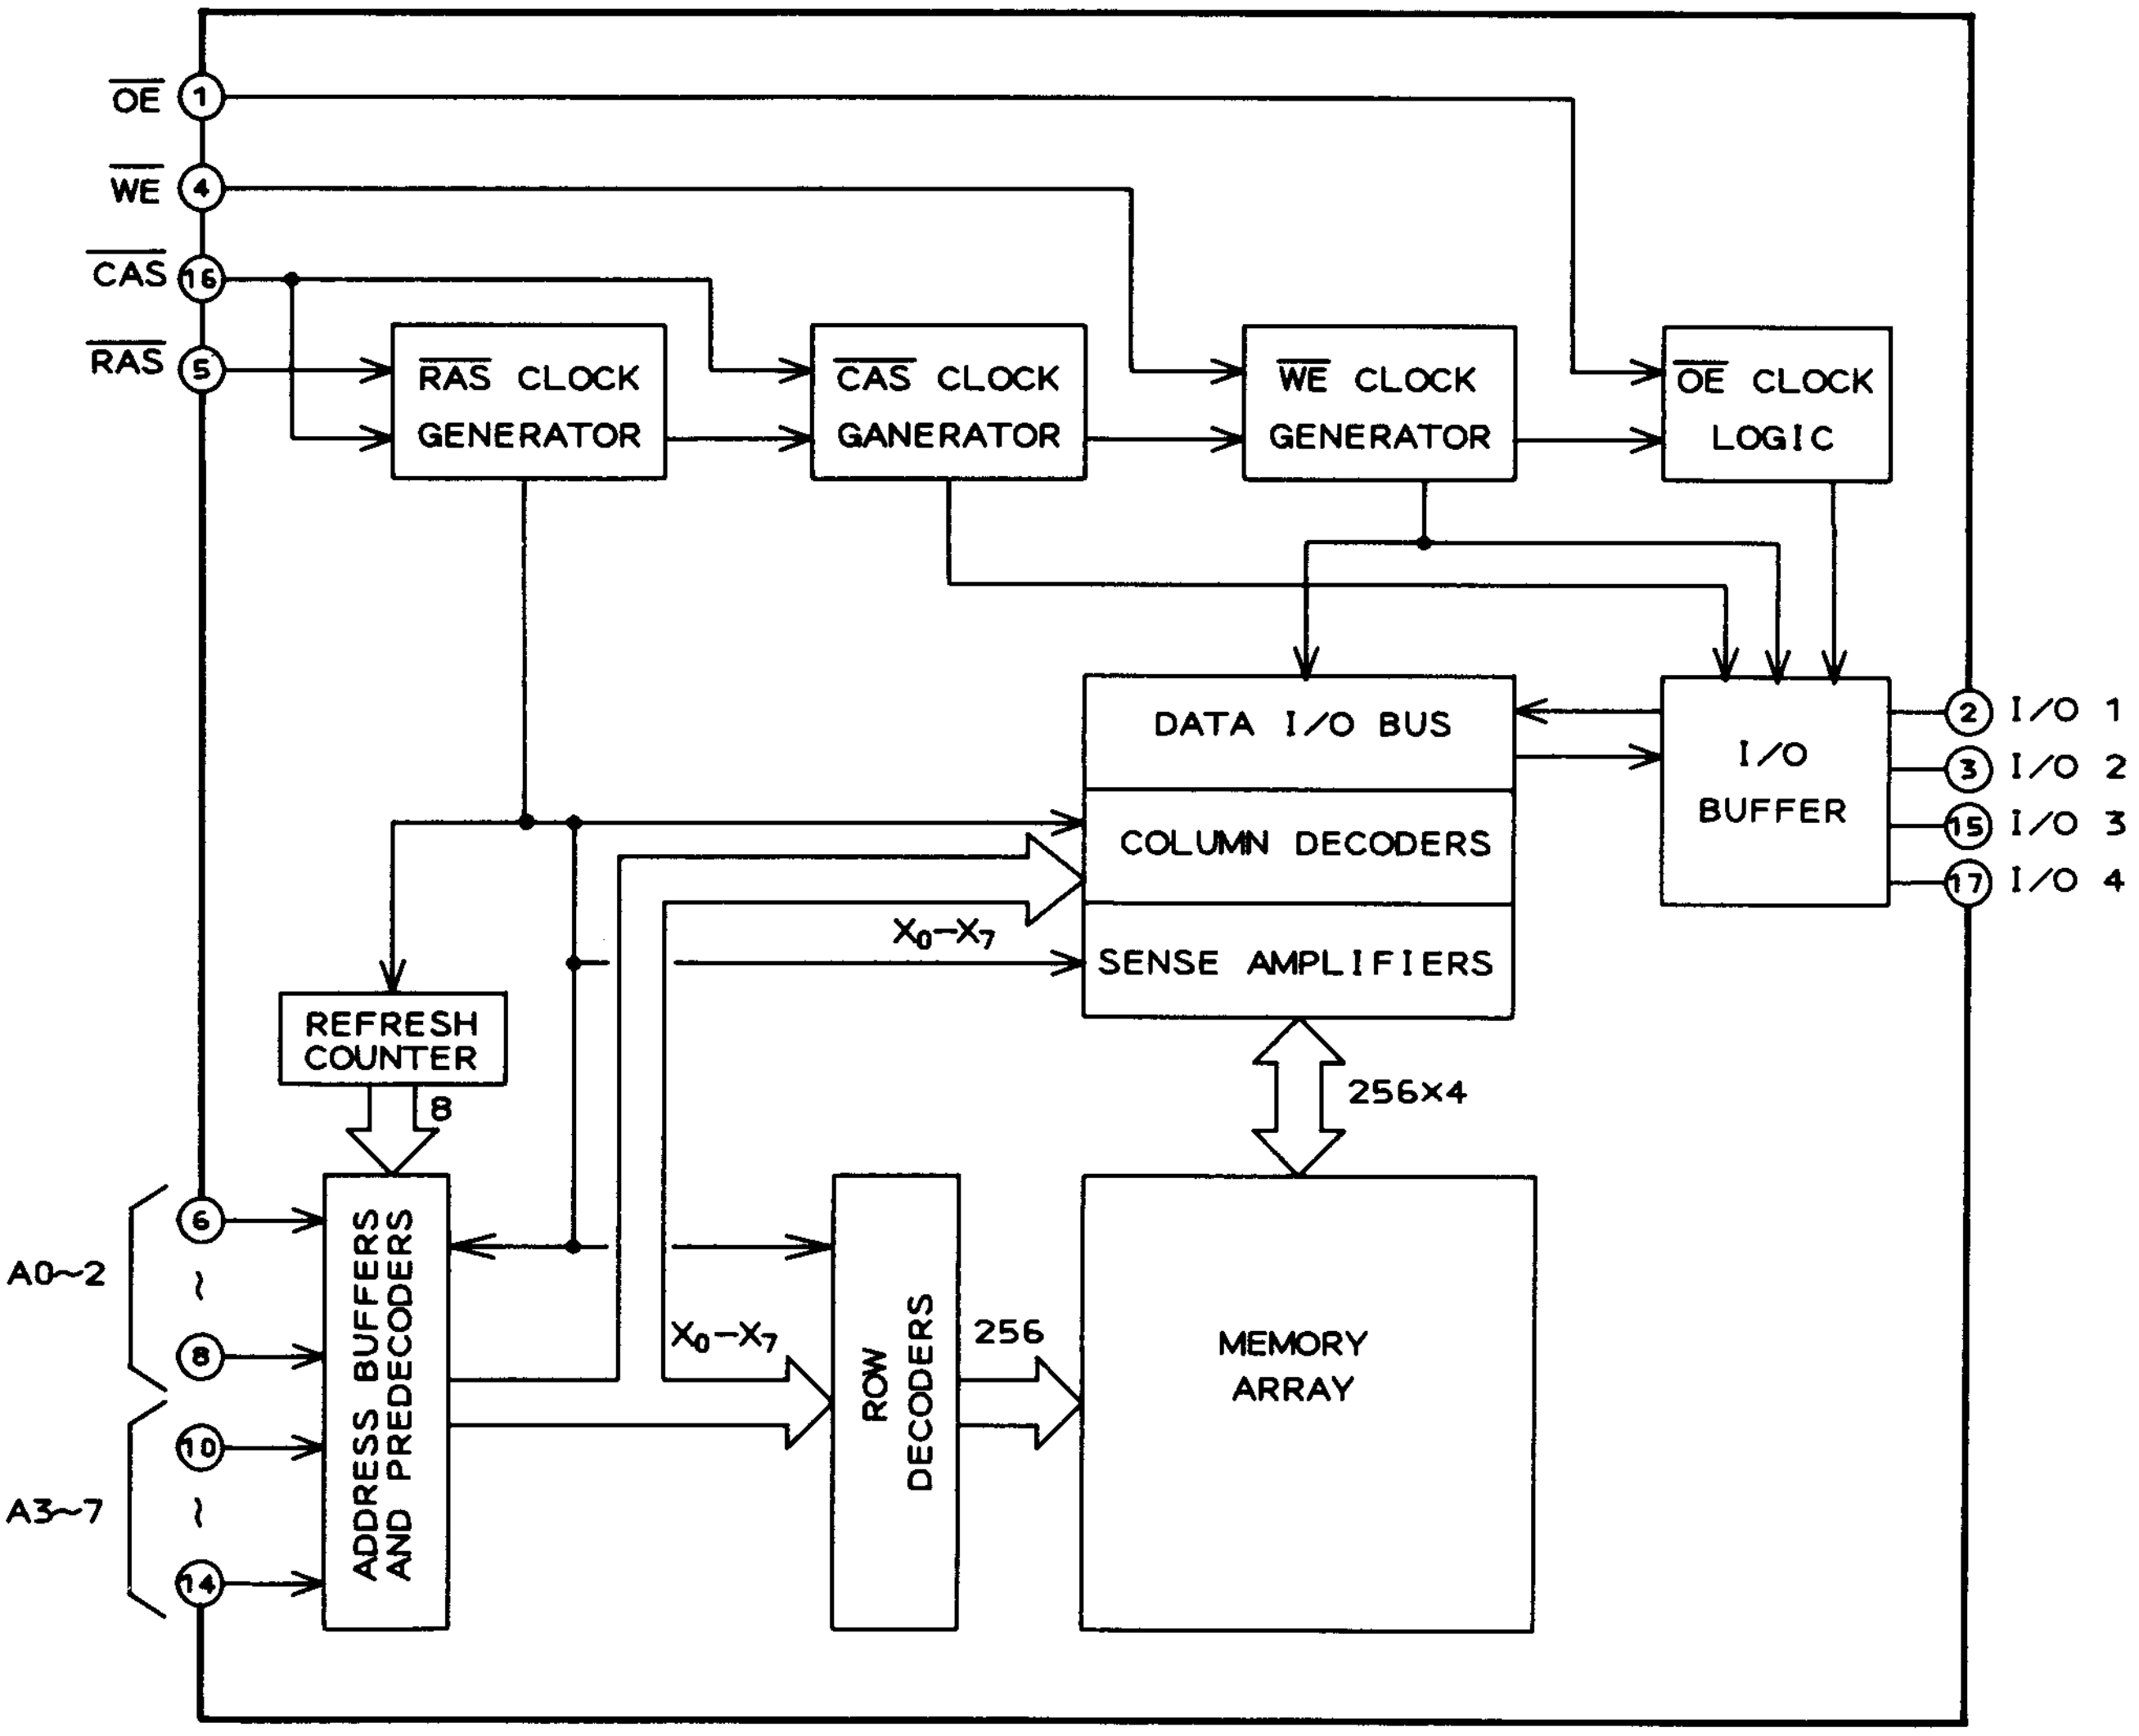
OE 1
WE 4
CAS 16
RAS 5
RAS CLOCK GENERATOR
CAS CLOCK GANERATOR
WE CLOCK GENERATOR
OE CLOCK LOGIC
DATA I/O BUS
COLUMN DECODERS
SENSE AMPLIFIERS
I/O BUFFER
2 I/O 1
3 I/O 2
15 I/O 3
17 I/O 4
X0-X7
REFRESH COUNTER
8
256×4
A0~2
6
8
A3~7
10
14
ADDRESS BUFFERS AND PREDECODERS
X0-X7
ROW DECODERS
256
MEMORY ARRAY

µPD6450 (CHARACTER GENERATOR)

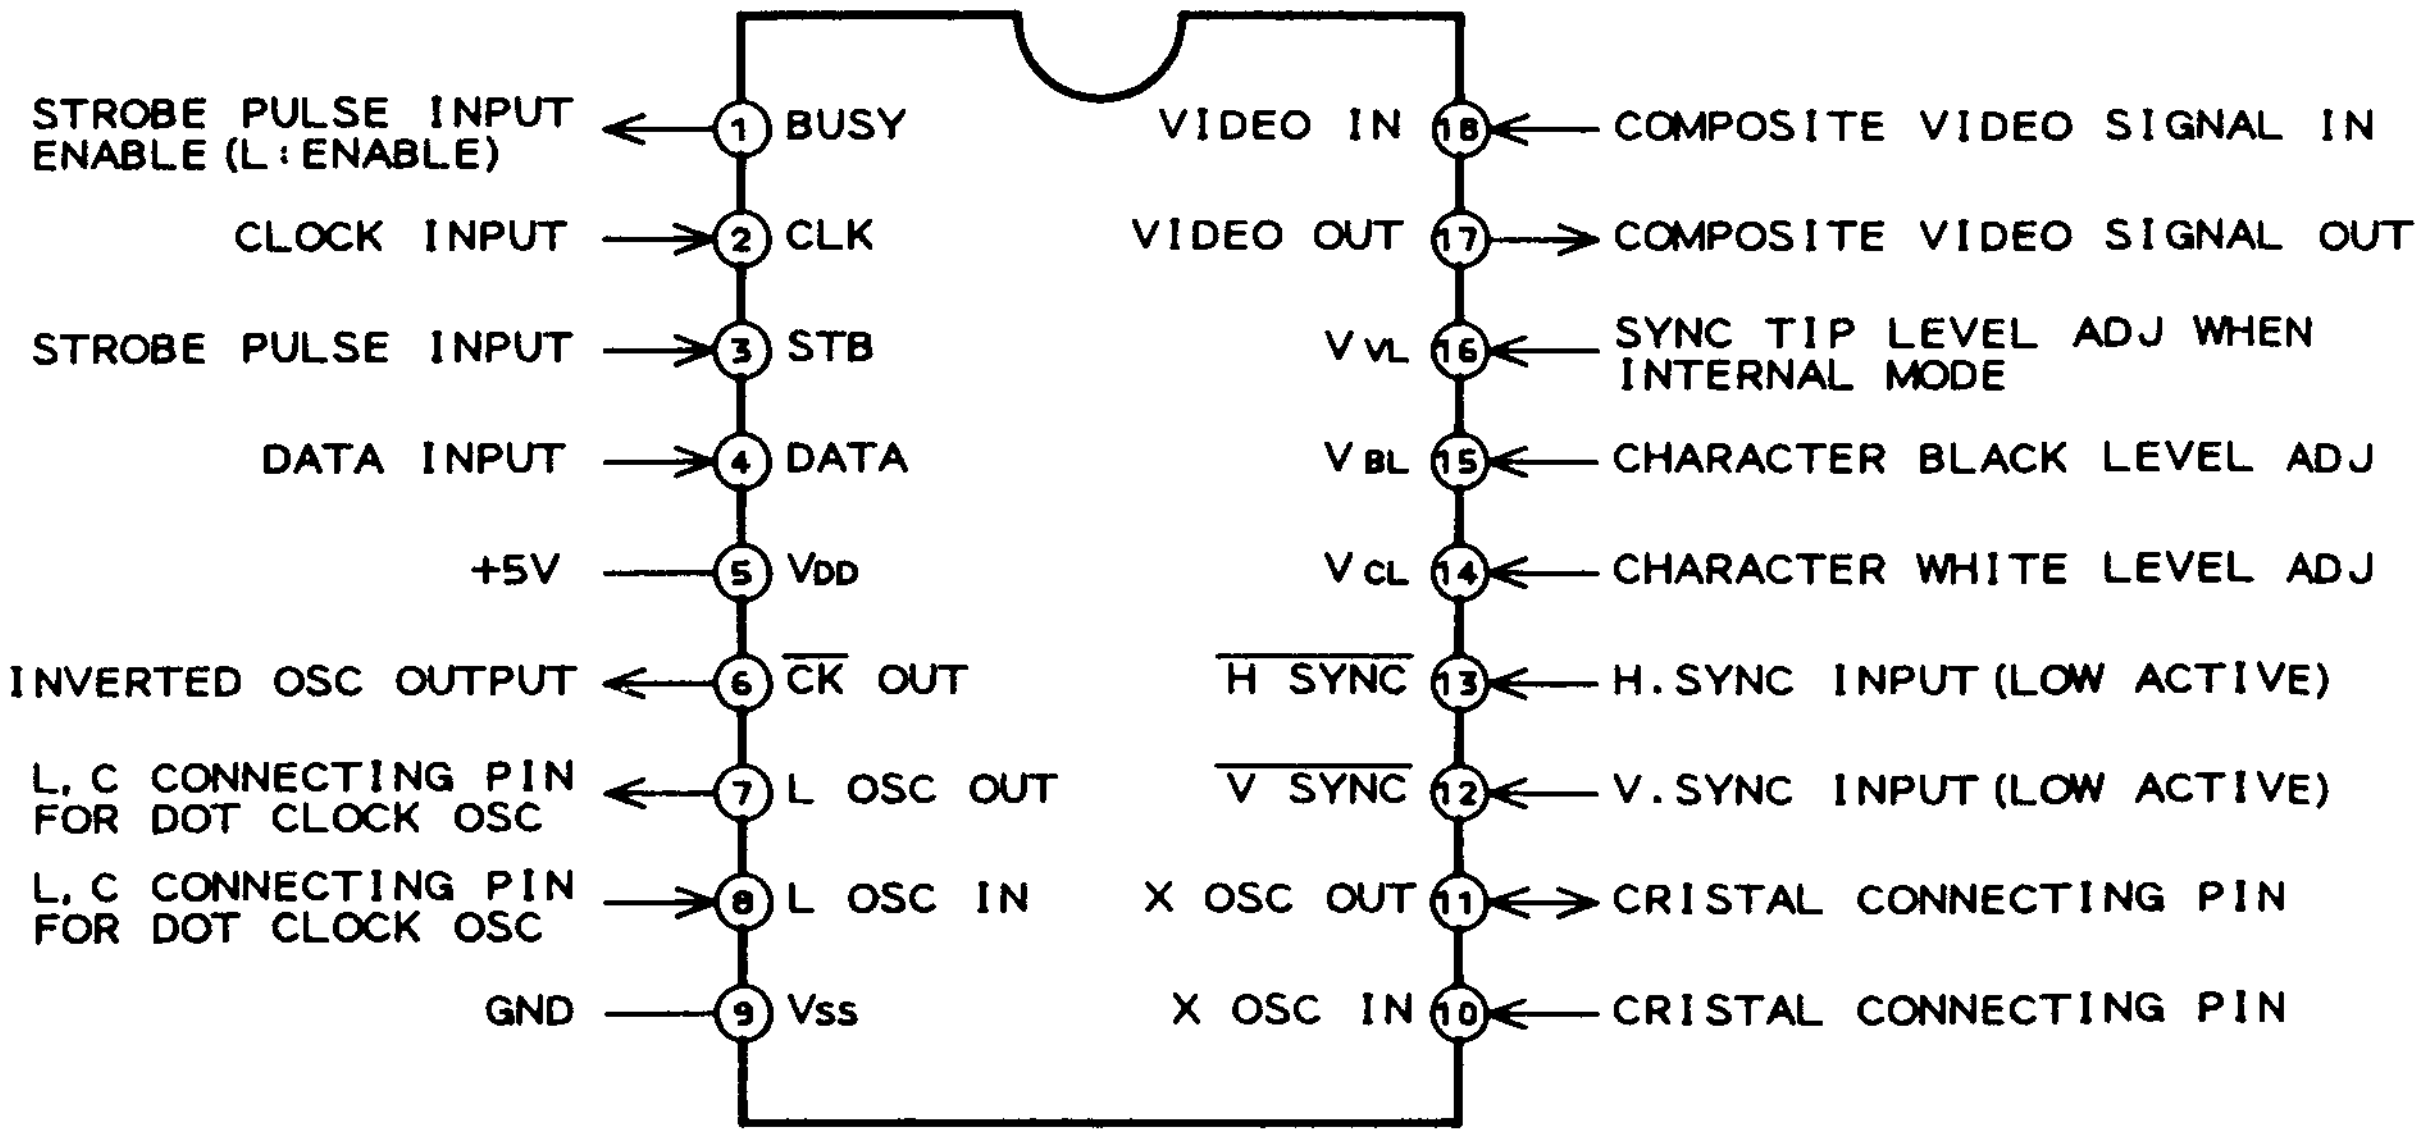
STROBE PULSE INPUT ENABLE (L: ENABLE) ← 1 BUSY
CLOCK INPUT → 2 CLK
STROBE PULSE INPUT → 3 STB
DATA INPUT → 4 DATA
+5V — 5 VDD
INVERTED OSC OUTPUT ← 6 CK OUT
L, C CONNECTING PIN FOR DOT CLOCK OSC ← 7 L OSC OUT
L, C CONNECTING PIN FOR DOT CLOCK OSC → 8 L OSC IN
GND — 9 Vss
VIDEO IN 18 ← COMPOSITE VIDEO SIGNAL IN
VIDEO OUT 17 → COMPOSITE VIDEO SIGNAL OUT
VVL 16 ← SYNC TIP LEVEL ADJ WHEN INTERNAL MODE
VBL 15 ← CHARACTER BLACK LEVEL ADJ
VCL 14 ← CHARACTER WHITE LEVEL ADJ
H SYNC 13 ← H.SYNC INPUT (LOW ACTIVE)
V SYNC 12 ← V.SYNC INPUT (LOW ACTIVE)
X OSC OUT 11 ↔ CRISTAL CONNECTING PIN
X OSC IN 10 ← CRISTAL CONNECTING PIN

µPD75218CW (VPT/PDC MI-COM)

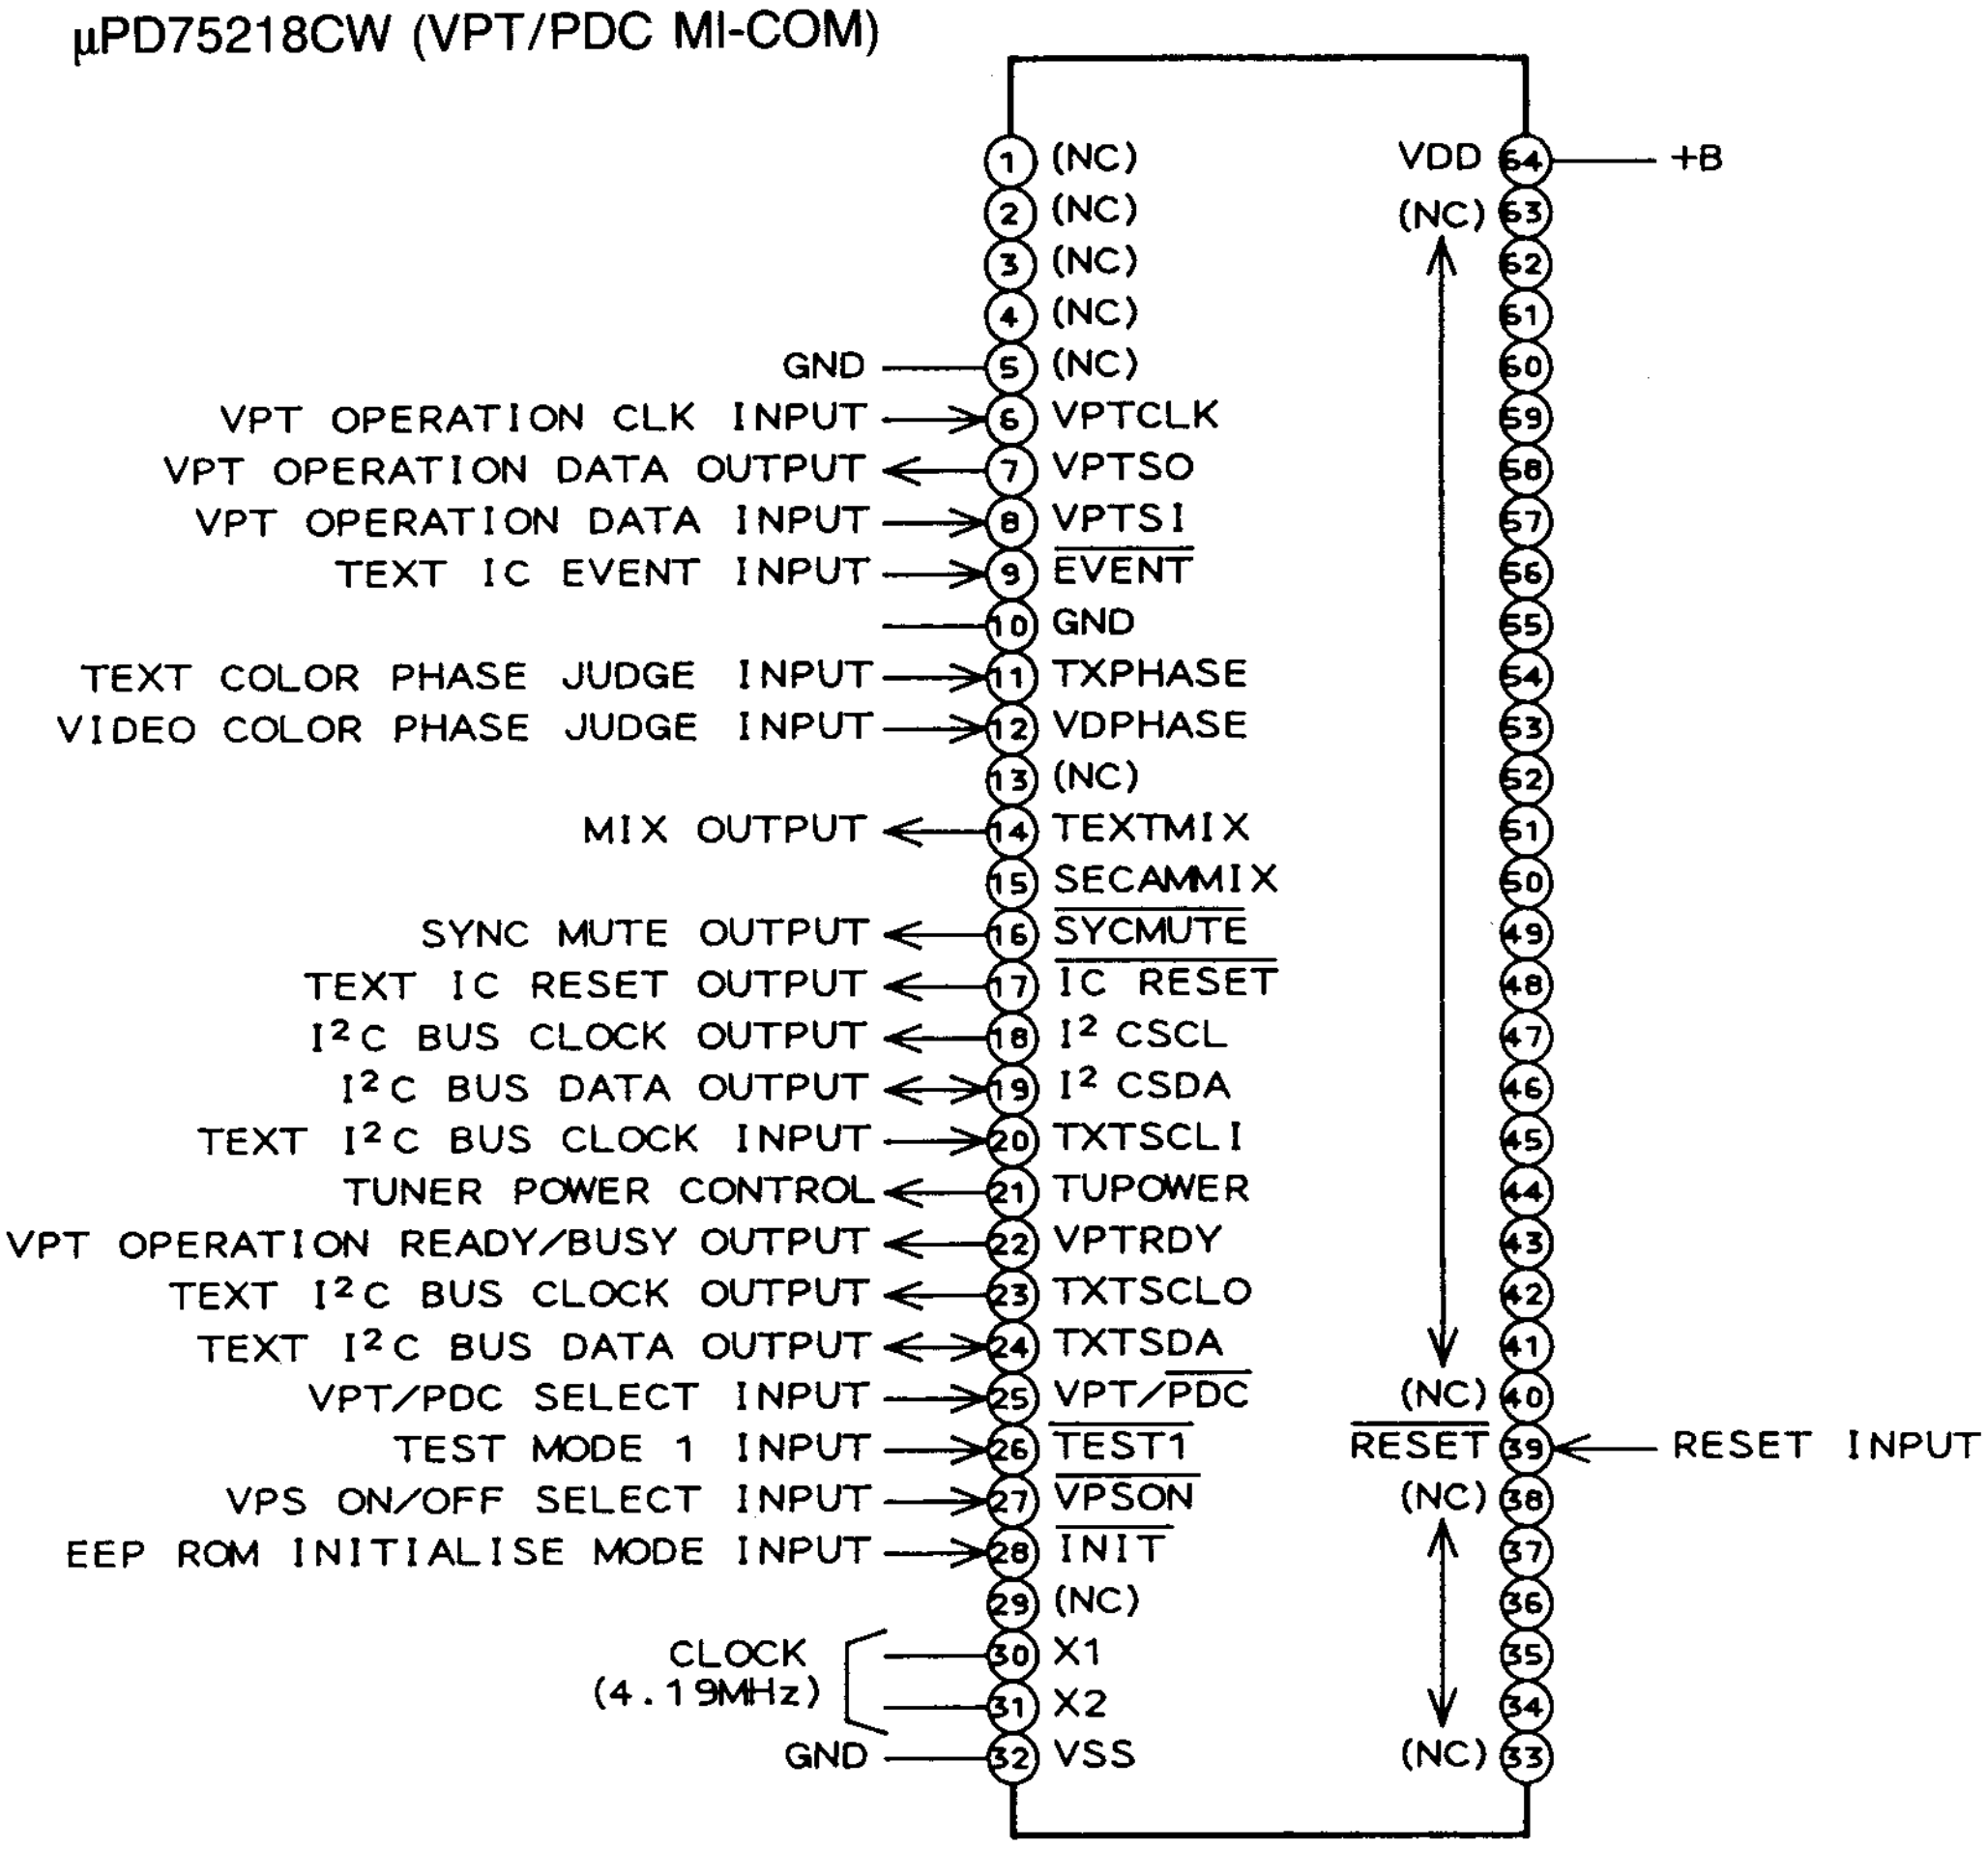
1 (NC)
2 (NC)
3 (NC)
4 (NC)
GND 5 (NC)
VPT OPERATION CLK INPUT 6 VPTCLK
VPT OPERATION DATA OUTPUT 7 VPTSO
VPT OPERATION DATA INPUT 8 VPTSI
TEXT IC EVENT INPUT 9 EVENT
10 GND
TEXT COLOR PHASE JUDGE INPUT 11 TXPHASE
VIDEO COLOR PHASE JUDGE INPUT 12 VDPHASE
13 (NC)
MIX OUTPUT 14 TEXTMIX
15 SECAMMIX
SYNC MUTE OUTPUT 16 SYCMUTE
TEXT IC RESET OUTPUT 17 IC RESET
I²C BUS CLOCK OUTPUT 18 I² CSCL
I²C BUS DATA OUTPUT 19 I² CSDA
TEXT I²C BUS CLOCK INPUT 20 TXTSCLI
TUNER POWER CONTROL 21 TUPOWER
VPT OPERATION READY/BUSY OUTPUT 22 VPTRDY
TEXT I²C BUS CLOCK OUTPUT 23 TXTSCLO
TEXT I²C BUS DATA OUTPUT 24 TXTSDA
VPT/PDC SELECT INPUT 25 VPT/PDC
TEST MODE 1 INPUT 26 TEST1
VPS ON/OFF SELECT INPUT 27 VPSON
EEP ROM INITIALISE MODE INPUT 28 INIT
29 (NC)
CLOCK (4.19MHz) 30 X1
31 X2
GND 32 VSS
VDD 64 +B
(NC) 63
62
61
60
59
58
57
56
55
54
53
52
51
50
49
48
47
46
45
44
43
42
41
(NC) 40
RESET 39 RESET INPUT
(NC) 38
37
36
35
34
(NC) 33